



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

October 22, 2014

CALL NO. 101
CONTRACT ID NO. 141054
ADDENDUM # 2

Subject: Mason County, STP 0681 (028)
Letting October 24, 2014

- (1) Revised - Traffic Control Plan - Page 48 of 155
- (2) Revised - Typical Section - Page 59 of 155

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Diana Castle Radcliffe".

Diana Castle Radcliffe
Director
Division of Construction Procurement

DR:ks
Enclosures



An Equal Opportunity Employer M/F/D

Traffic Control Plan
Mason County
US 62
Page 4 of 8

SECTION 1, PHASE IV – Final Surface Course

Using temporary lane closures, construct the final 1.25” surface course for all driving lanes and shoulders.

SECTION 1, PHASE V – Permanent Striping

After all other work is completed, place permanent striping within the project limits. Mobile operations may be utilized.

SECTION 2

Lane closures for section 2 (Phases I and II) shall be completed within 21 calendar days. Once the detour is in place on Section 2, the contractor has 21 calendar days to complete work through the final lift of asphalt base and traffic must be back in the original and ultimate lane configuration.

SECTION 2, PHASE I

Westbound US 62 traffic shall be shifted to U.S. 68 utilizing a detour. See detour sheets for configuration. Shift eastbound US 62 traffic to the existing westbound US 62 driving lane. Remove the existing pavement in half of the inside lane and the eastbound driving lane. Construct the full depth pavement through the top lift of base on half of the inside driving lane and the eastbound driving lane. Construct the eastbound US 62 header curb, sidewalk, and drainage structures where applicable.

SECTION 2, PHASE II

Westbound US 62 traffic shall be maintained on U.S. 68 utilizing a detour. See detour sheets for configuration. Shift eastbound US 62 traffic to the newly constructed eastbound driving lane. Remove the existing pavement in the remaining half of the inside lane and the westbound driving lane. Construct the full depth pavement through the top lift of base on the remaining half of the inside driving lane and the westbound driving lane. Construct the westbound US 62 header curb, sidewalk, and drainage structures where applicable.



COUNTY OF	ITEM NO.
MASON	9-2034.00

US 62

MAINTENANCE OF TRAFFIC

TYPICAL SECTIONS

SECTION 2

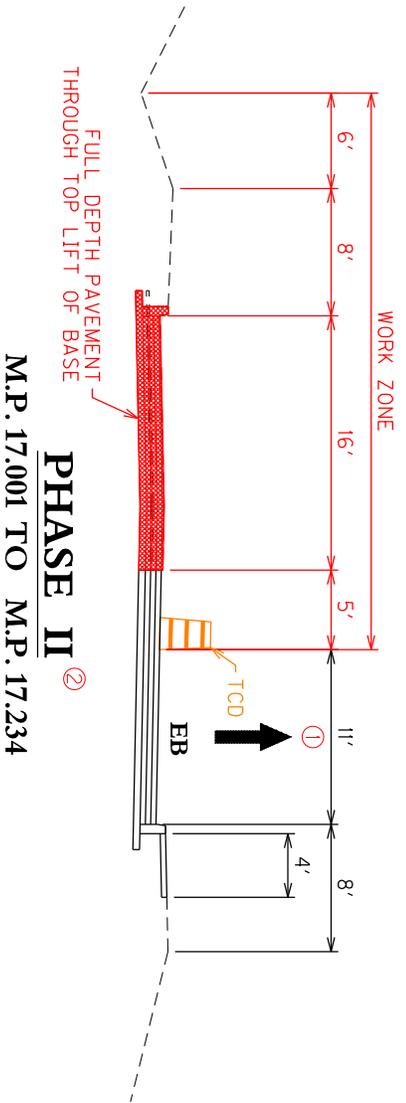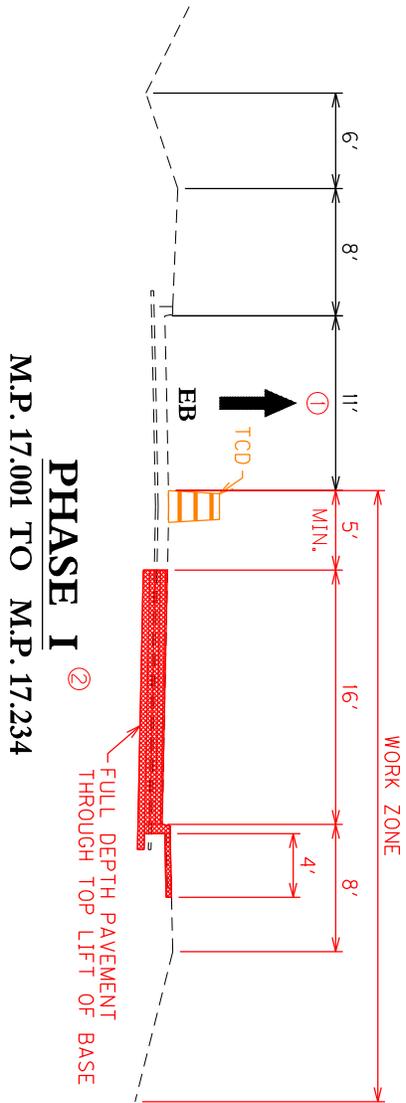

- ① WESTBOUND US 62 TRAFFIC SHALL BE SHIFTED UTILIZING A DETOUR. SEE DETOUR SHEETS FOR CONFIGURATION.
- ② LANE CLOSURES FOR SECTION 2 (PHASES I AND II) SHALL BE COMPLETED WITHIN 21 CALENDAR DAYS. ONCE THE DETOUR IS IN PLACE, THE CONTRACTOR HAS 21 CALENDAR DAYS TO COMPLETE WORK THROUGH THE FINAL LIFT OF ASPHALT BASE AND TRAFFIC MUST BE BACK IN THE ORIGINAL AND ULTIMATE CONFIGURATION.

NOT TO SCALE
 US 62 MAINTENANCE OF TRAFFIC
 TYPICAL SECTIONS 7 OF 7