



Andy Beshear  
GOVERNOR

## TRANSPORTATION CABINET

200 Mero Street  
Frankfort, Kentucky 40601

Jim Gray  
SECRETARY

July 18, 2023

CALL NO. 200  
CONTRACT ID NO. 234411  
ADDENDUM # 1

Subject: Scott County, 105GR23T026-HSIP & FD05  
Letting July 20, 2023

- (1) Revised - Material Summary - Pages 134-136 of 296
- (2) Revised - Typical Section - Page 140 of 296
- (3) Revised - Proposal Sheets - Pages 142-146 of 296
- (4) Revised - Proposal Bid Items - Pages 294-296 of 296
- (5) Revised - Omit Proposal Page 141 of 296

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

Rachel Mills,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:mr  
Enclosures

# MATERIAL SUMMARY

**CONTRACT ID: 234411**

**105GR23T026-HSIP & FD05**

**0710502272301**

STAMPING GROUND ROAD (KY 227) FROM THE INTERSECTION WITH US 460 EXTENDING NORTH TO THE INTERSECTION WITH SEBREE ROAD GRADE & DRAIN WITH ASPHALT SURFACE, A DISTANCE OF 5.87 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0110	00001	DGA BASE	294.00	TON
0115	00020	TRAFFIC BOUND BASE	9.00	TON
0120	00078	CRUSHED AGGREGATE SIZE NO 2	36.00	TON
0125	00080	CRUSHED AGGREGATE SIZE NO 23	7.00	TON
0130	00100	ASPHALT SEAL AGGREGATE	13.50	TON
0135	00103	ASPHALT SEAL COAT	1.60	TON
0140	00190	LEVELING & WEDGING PG64-22	363.00	TON
0145	00221	CL2 ASPH BASE 0.75D PG64-22	16.00	TON
0150	00307	CL2 ASPH SURF 0.38B PG64-22 - REVISED 7-18-23	173.00	TON
0155	00356	ASPHALT MATERIAL FOR TACK	3.00	TON
0160	02676	MOBILIZATION FOR MILL & TEXT - (SCOTT KY 227 HSIP)	1.00	LS
0165	02677	ASPHALT PAVE MILLING & TEXTURING	42.00	TON
0170	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	41.00	EACH
0175	02159	TEMP DITCH	4,940.00	LF
0180	02351	GUARDRAIL-STEEL W BEAM-S FACE	1,912.50	LF
0185	02360	GUARDRAIL TERMINAL SECTION NO 1	4.00	EACH
0190	02363	GUARDRAIL CONNECTOR TO BRIDGE END TY A	8.00	EACH
0195	02367	GUARDRAIL END TREATMENT TYPE 1	4.00	EACH
0200	02369	GUARDRAIL END TREATMENT TYPE 2A	2.00	EACH
0205	02381	REMOVE GUARDRAIL	2,028.00	LF
0210	02399	EXTRA LENGTH GUARDRAIL POST	40.00	EACH
0215	02483	CHANNEL LINING CLASS II	38.00	TON
0220	02562	TEMPORARY SIGNS	250.00	SQFT
0225	02603	FABRIC-GEOTEXTILE CLASS 2	177.00	SQYD
0230	02650	MAINTAIN & CONTROL TRAFFIC - (SCOTT KY 227 HSIP)	1.00	LS
0235	02671	PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH
0240	02697	EDGE LINE RUMBLE STRIPS	2,530.00	LF
0245	02701	TEMP SILT FENCE	2,470.00	LF
0250	02704	SILT TRAP TYPE B	5.00	EACH
0255	02705	SILT TRAP TYPE C	3.00	EACH
0260	02707	CLEAN SILT TRAP TYPE B	5.00	EACH
0265	02708	CLEAN SILT TRAP TYPE C	3.00	EACH
0270	02726	STAKING - (SCOTT KY 227 HSIP)	1.00	LS
0275	03236	CRIBBING	980.00	SQFT
0280	03269	TRIM & REMOVE TREES & BRUSH	1,350.00	LF
0285	05950	EROSION CONTROL BLANKET	1,100.00	SQYD
0290	05953	TEMP SEEDING AND PROTECTION	2,195.00	SQYD
0295	05963	INITIAL FERTILIZER	.20	TON
0300	05964	MAINTENANCE FERTILIZER	.30	TON
0305	05985	SEEDING AND PROTECTION	4,390.00	SQYD
0310	05992	AGRICULTURAL LIMESTONE	2.80	TON
0315	06406	SBM ALUM SHEET SIGNS .080 IN	384.81	SQFT

## MATERIAL SUMMARY

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0320	06407	SBM ALUM SHEET SIGNS .125 IN	42.12	SQFT
0325	06410	STEEL POST TYPE 1	718.00	LF
0330	06511	PAVE STRIPING-TEMP PAINT-6 IN	8,760.00	LF
0335	21373ND	REMOVE SIGN	50.00	EACH
0340	22664EN	WATER BLASTING EXISTING STRIPE	5,000.00	LF
0345	24631EC	BARCODE SIGN INVENTORY	93.00	EACH
0350	24995EC	PAVE STRIPING-SPRAY THERMO-6 IN W	4,380.00	LF
0355	24996EC	PAVE STRIPING-SPRAY THERMO-6 IN Y	4,380.00	LF
0360	26175EC	ROADSIDE REGRADING	4,935.00	LF
0365	00462	CULVERT PIPE-18 IN	31.00	LF
0370	01310	REMOVE PIPE	12.00	LF
0375	02403	REMOVE CONCRETE MASONRY	1.00	CUYD
0380	02625	REMOVE HEADWALL	3.00	EACH
0385	03262	CLEAN PIPE STRUCTURE	1.00	EACH
0390	08003	FOUNDATION PREPARATION - (4'X3.25' RCBC)	1.00	LS
0395	08100	CONCRETE-CLASS A	12.70	CUYD
0400	08150	STEEL REINFORCEMENT	1,653.00	LB
0405	26131ED	SLOPED AND MITERED HEADWALL-18 IN	3.00	EACH
0410	02569	DEMOBILIZATION	1.00	LS

# MATERIAL SUMMARY

**CONTRACT ID: 234411**


**105GR23T026-HSIP & FD05**

**MP10502272301**

STAMPING GROUND ROAD ( KY 227) FROM US 460 EXTENDING NORTH TO 1,070 FEET SOUTH OF DUVALL STATION ROAD ASPHALT RESURFACING, A DISTANCE OF 2.98 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	400.00	TON
0010	00190	LEVELING & WEDGING PG64-22	242.00	TON
0020	00356	ASPHALT MATERIAL FOR TACK	23.00	TON
0025	02562	TEMPORARY SIGNS	250.00	SQFT
0030	02650	MAINTAIN & CONTROL TRAFFIC - (SCOTT KY 227 FD05)	1.00	LS
0035	02676	MOBILIZATION FOR MILL & TEXT - (SCOTT KY 227 FD05)	1.00	LS
0040	02677	ASPHALT PAVE MILLING & TEXTURING	70.00	TON
0045	02697	EDGE LINE RUMBLE STRIPS	25,170.00	LF
0050	06510	PAVE STRIPING-TEMP PAINT-4 IN	15,000.00	LF
0055	06542	PAVE STRIPING-THERMO-6 IN W	31,500.00	LF
0060	06543	PAVE STRIPING-THERMO-6 IN Y	31,500.00	LF
0065	06568	PAVE MARKING-THERMO STOP BAR-24IN	56.00	LF
0070	06569	PAVE MARKING-THERMO CROSS-HATCH	140.00	SQFT
0075	06574	PAVE MARKING-THERMO CURV ARROW	4.00	EACH
0080	10020NS	FUEL ADJUSTMENT	5,015.00	DOLL
0085	10030NS	ASPHALT ADJUSTMENT	12,597.00	DOLL
0090	24955ED	REMOVE SIGNAL EQUIPMENT	1.00	EACH
0095	26119EC	INSTALL RADAR PRESENCE DETECTOR TYPE A	4.00	EACH
0100	26120EC	INSTALL RADAR ADVANCE DETECTOR TYPE B	2.00	EACH
0105	02569	DEMOBILIZATION	1.00	LS
0110	00307	CL2 ASPH SURF 0.38B PG64-22 - REVISED 7-18-23	2,980.00	TON

**Scott COUNTY**  
**FD05 105 0227 000-003**  
**TYPICAL SECTION**  
**MILEPOINTS 0 to 2.98**

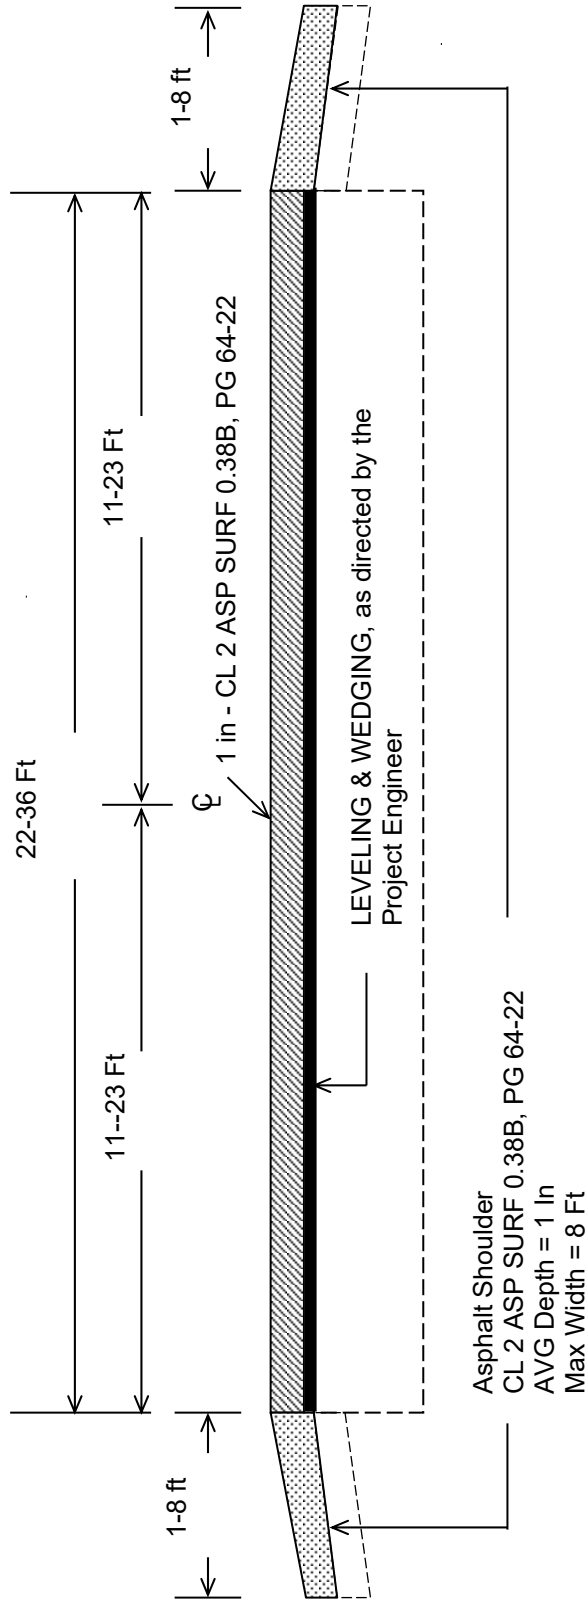


**\*Where Existing Site Conditions Permit**  
DGA Base to be placed where shoulder drop off is in excess of 3 inches, as Directed by the Project Engineer

KY 227 @ US 460



3 LT arrows  
space per spec

KY 227 @ Betsy Way

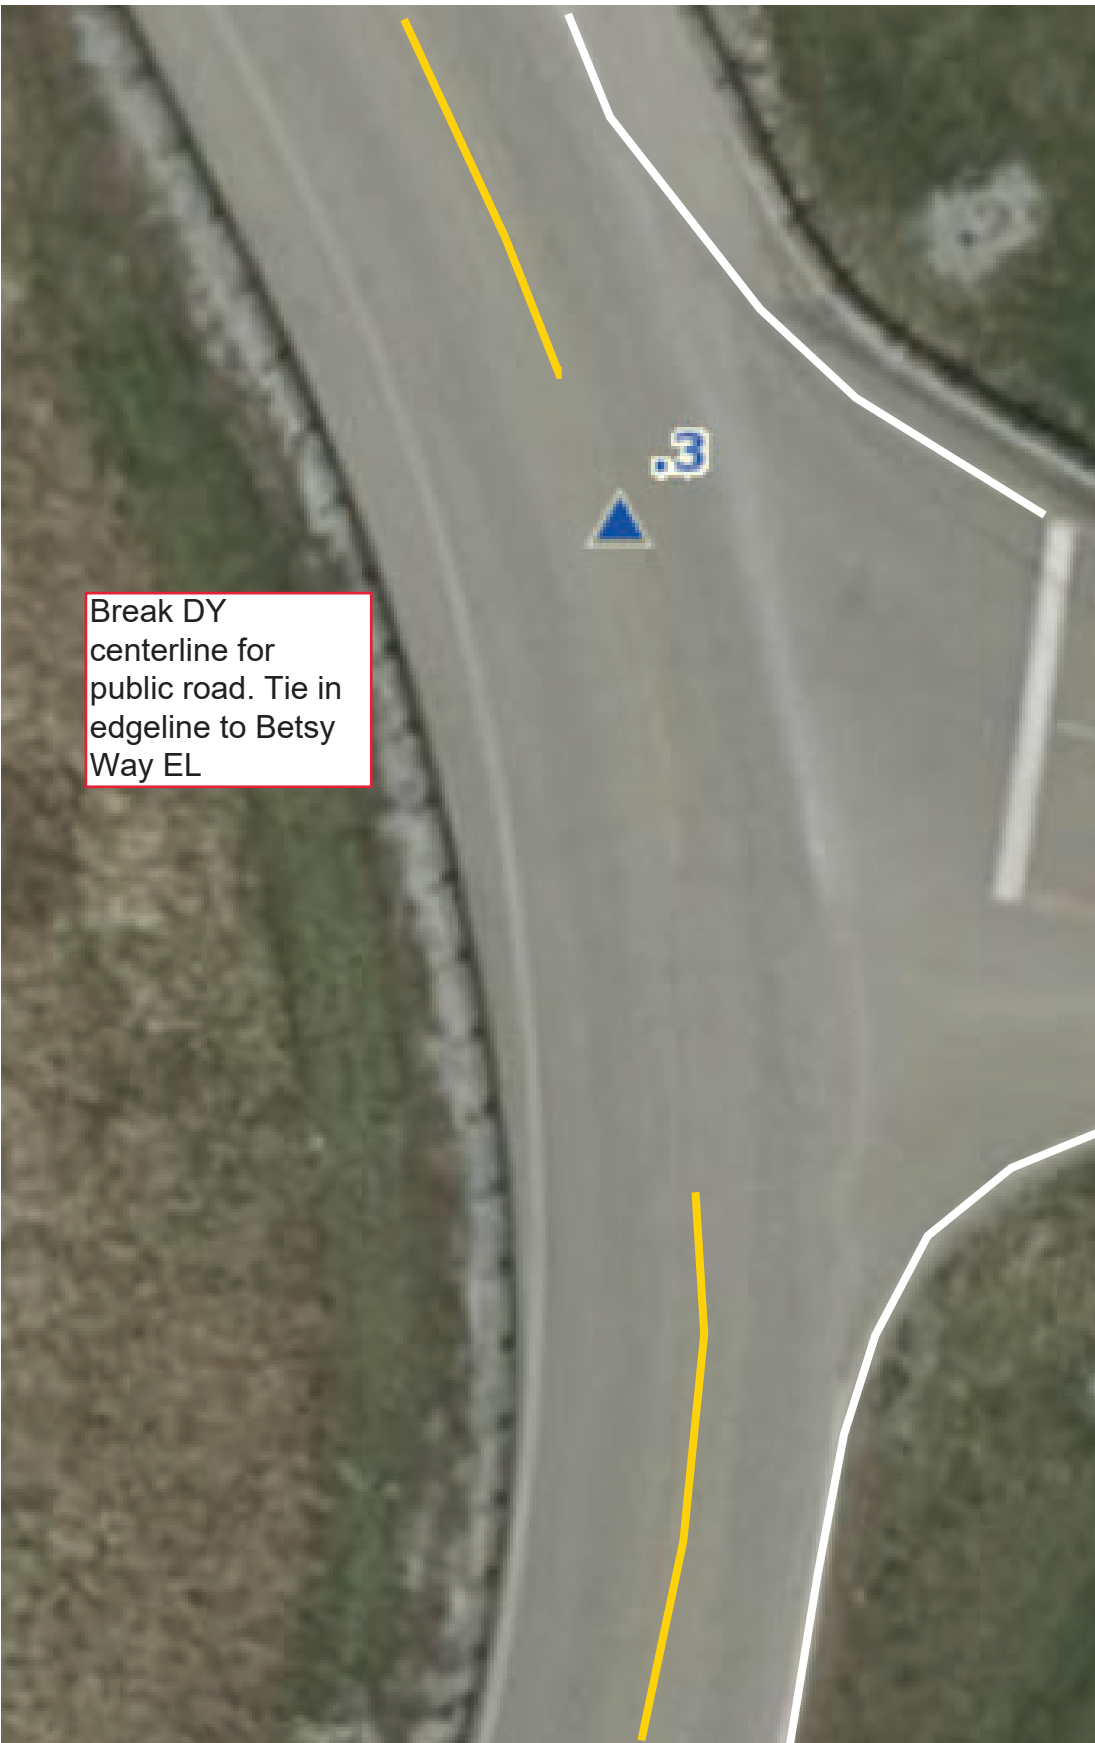

Break DY  
centerline for  
public road. Tie in  
edgeline to Betsy  
Way EL

KY 227 @ Lloyd Rd



break edgeline and  
DY centerline for  
public roads





close passing zone  
from MP 0.651 to  
MP 0.713

KY 227 @ Viley Ln



**PROPOSAL BID ITEMS**

Report Date 7/18/23

**Section: 0001 - PAVING**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	294.00	TON		\$	
0020	00020		TRAFFIC BOUND BASE	9.00	TON		\$	
0030	00078		CRUSHED AGGREGATE SIZE NO 2	36.00	TON		\$	
0040	00080		CRUSHED AGGREGATE SIZE NO 23	7.00	TON		\$	
0050	00100		ASPHALT SEAL AGGREGATE	13.50	TON		\$	
0060	00103		ASPHALT SEAL COAT	1.60	TON		\$	
0070	00190		LEVELING & WEDGING PG64-22	363.00	TON		\$	
0080	00221		CL2 ASPH BASE 0.75D PG64-22	16.00	TON		\$	
0090	00307		CL2 ASPH SURF 0.38B PG64-22 REVISED 7-18-23	3,153.00	TON		\$	
0100	00356		ASPHALT MATERIAL FOR TACK	3.00	TON		\$	
0110	02676		MOBILIZATION FOR MILL & TEXT (SCOTT KY 227 HSIP)	1.00	LS		\$	
0120	02677		ASPHALT PAVE MILLING & TEXTURING	42.00	TON		\$	

**Section: 0002 - ROADWAY**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0130	00001		DGA BASE	400.00	TON		\$	
0140	00190		LEVELING & WEDGING PG64-22	242.00	TON		\$	
0160	00356		ASPHALT MATERIAL FOR TACK	23.00	TON		\$	
0170	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	41.00	EACH		\$	
0180	02159		TEMP DITCH	4,940.00	LF		\$	
0190	02351		GUARDRAIL-STEEL W BEAM-S FACE	1,912.50	LF		\$	
0200	02360		GUARDRAIL TERMINAL SECTION NO 1	4.00	EACH		\$	
0210	02363		GUARDRAIL CONNECTOR TO BRIDGE END TY A	8.00	EACH		\$	
0220	02367		GUARDRAIL END TREATMENT TYPE 1	4.00	EACH		\$	
0230	02369		GUARDRAIL END TREATMENT TYPE 2A	2.00	EACH		\$	
0240	02381		REMOVE GUARDRAIL	2,028.00	LF		\$	
0250	02399		EXTRA LENGTH GUARDRAIL POST	40.00	EACH		\$	
0260	02483		CHANNEL LINING CLASS II	38.00	TON		\$	
0270	02562		TEMPORARY SIGNS	500.00	SQFT		\$	
0280	02603		FABRIC-GEOTEXTILE CLASS 2	177.00	SQYD		\$	
0290	02650		MAINTAIN & CONTROL TRAFFIC (SCOTT KY 227 FD05)	1.00	LS		\$	
0300	02650		MAINTAIN & CONTROL TRAFFIC (SCOTT KY 227 HSIP)	1.00	LS		\$	
0310	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0320	02676		MOBILIZATION FOR MILL & TEXT (SCOTT KY 227 FD05)	1.00	LS		\$	
0330	02677		ASPHALT PAVE MILLING & TEXTURING	70.00	TON		\$	
0340	02697		EDGELINE RUMBLE STRIPS	27,700.00	LF		\$	
0350	02701		TEMP SILT FENCE	2,470.00	LF		\$	
0360	02704		SILT TRAP TYPE B	5.00	EACH		\$	
0370	02705		SILT TRAP TYPE C	3.00	EACH		\$	
0380	02707		CLEAN SILT TRAP TYPE B	5.00	EACH		\$	

**PROPOSAL BID ITEMS**

Report Date 7/18/23

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0390	02708		CLEAN SILT TRAP TYPE C	3.00	EACH		\$	
0400	02726		STAKING (SCOTT KY 227 HSIP)	1.00	LS		\$	
0410	03236		CRIBBING	980.00	SQFT		\$	
0420	03269		TRIM & REMOVE TREES & BRUSH	1,350.00	LF		\$	
0430	05950		EROSION CONTROL BLANKET	1,100.00	SQYD		\$	
0440	05953		TEMP SEEDING AND PROTECTION	2,195.00	SQYD		\$	
0450	05963		INITIAL FERTILIZER	.20	TON		\$	
0460	05964		MAINTENANCE FERTILIZER	.30	TON		\$	
0470	05985		SEEDING AND PROTECTION	4,390.00	SQYD		\$	
0480	05992		AGRICULTURAL LIMESTONE	2.80	TON		\$	
0490	06406		SBM ALUM SHEET SIGNS .080 IN	384.81	SQFT		\$	
0500	06407		SBM ALUM SHEET SIGNS .125 IN	42.12	SQFT		\$	
0510	06410		STEEL POST TYPE 1	718.00	LF		\$	
0520	06510		PAVE STRIPING-TEMP PAINT-4 IN	15,000.00	LF		\$	
0530	06511		PAVE STRIPING-TEMP PAINT-6 IN	8,760.00	LF		\$	
0540	06542		PAVE STRIPING-THERMO-6 IN W	31,500.00	LF		\$	
0550	06543		PAVE STRIPING-THERMO-6 IN Y	31,500.00	LF		\$	
0560	06568		PAVE MARKING-THERMO STOP BAR-24IN	56.00	LF		\$	
0570	06569		PAVE MARKING-THERMO CROSS-HATCH	140.00	SQFT		\$	
0580	06574		PAVE MARKING-THERMO CURV ARROW	4.00	EACH		\$	
0590	10020NS		FUEL ADJUSTMENT	5,015.00	DOLL	\$1.00	\$	\$5,015.00
0600	10030NS		ASPHALT ADJUSTMENT	12,597.00	DOLL	\$1.00	\$	\$12,597.00
0610	21373ND		REMOVE SIGN	50.00	EACH		\$	
0620	22664EN		WATER BLASTING EXISTING STRIPE	5,000.00	LF		\$	
0630	24631EC		BARCODE SIGN INVENTORY	93.00	EACH		\$	
0640	24955ED		REMOVE SIGNAL EQUIPMENT	1.00	EACH		\$	
0650	24995EC		PAVE STRIPING-SPRAY THERMO-6 IN W	4,380.00	LF		\$	
0660	24996EC		PAVE STRIPING-SPRAY THERMO-6 IN Y	4,380.00	LF		\$	
0670	26119EC		INSTALL RADAR PRESENCE DETECTOR TYPE A	4.00	EACH		\$	
0680	26120EC		INSTALL RADAR ADVANCE DETECTOR TYPE B	2.00	EACH		\$	
0690	26175EC		ROADSIDE REGRADING	4,935.00	LF		\$	

**Section: 0003 - DRAINAGE**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0700	00462		CULVERT PIPE-18 IN	31.00	LF		\$	
0710	01310		REMOVE PIPE	12.00	LF		\$	
0720	02403		REMOVE CONCRETE MASONRY	1.00	CUYD		\$	
0730	02625		REMOVE HEADWALL	3.00	EACH		\$	
0740	03262		CLEAN PIPE STRUCTURE	1.00	EACH		\$	
0750	08003		FOUNDATION PREPARATION (4'X3.25' RCBC)	1.00	LS		\$	
0760	08100		CONCRETE-CLASS A	12.70	CUYD		\$	
0770	08150		STEEL REINFORCEMENT	1,653.00	LB		\$	
0780	26131ED		SLOPED AND MITERED HEADWALL-18 IN	3.00	EACH		\$	

## PROPOSAL BID ITEMS

Report Date 7/18/23

### Section: 0004 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0790	02569		DEMOBILIZATION	1.00	LS		\$	