



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

June 18, 2015

CALL NO. 323
CONTRACT ID NO. 152222
ADDENDUM # 1

Subject: Scott County, FD05 105 0062 010-014
Letting June 26, 2015

- (1) Revised - Note - Pages 12-15 of 107
- (2) Deleted - Pages 16-25 of 107
- (3) Revised - Bid Items - Page 107 of 107

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Robert C. Lewis".

Robert C. Lewis, P.E.
Acting Director
Division of Construction Procurement

RL:ks
Enclosures



An Equal Opportunity Employer M/F/D

SPECIAL NOTE FOR INLAID PAVEMENT MARKERS

I. DESCRIPTION

Except as provided herein, perform all work in accordance with the Department's Standard and Supplemental Specifications and applicable Standard and Sepia Drawings, current editions. Article references are to the Standard Specifications. This work shall consist of:

- (1) Maintain and Control Traffic; and (2) Furnish and install Inlaid Pavement Markers (IPMs) in recessed grooves; and (3) Any other work as specified by these notes and the Contract.

II. MATERIALS

The Department will sample all materials in accordance with the Department's Sampling Manual. Make the materials available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing unless otherwise specified in these Notes.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Markers. Provide reflective lenses with depth control breakaway positioning tabs. Before furnishing the markers, provide to the Engineer the manufacturer's current recommendations for adhesives and installation procedures. Use one brand and design throughout the project. Use markers meeting the specifications in the table below.

| SPECIFICATIONS FOR HOUSING AND REFLECTOR | |
|--|----------------------------|
| Material: | Polycarbonate Plastic |
| Weight: | Housing 2.00 oz. |
| | Reflector 2.00oz. |
| Housing Size: | 5.00" x 3.00" x 0.70" high |
| Specific Intensity of Reflectivity at 0.2° Observation Angle | |
| White: | 3.0 at 0°entrance angle |
| | 1.2 at 20°entrance angle |
| Yellow: | 60% of white values |
| Red: | 25% of white values |

C. Adhesives. Use adhesives that conform to the manufacturer's recommendations.


III. CONSTRUCTION

A. Experimental Evaluation. The University of Kentucky Transportation Center will be evaluating this installation of IPMs. Notify the Engineer a minimum of 14 calendar days prior to beginning work. The Engineer will coordinate the University’s activities with the Contractor’s work.

B. Maintain and Control Traffic. See Traffic Control Plan.

C. Installation. Install IPMs in recessed grooves cut into the final course of asphalt pavement according to the manufacturer’s recommendations. Do not cut the grooves until the pavement has cured sufficiently to prevent tearing or raveling. Cut installation grooves using diamond blades on saws that accurately control groove dimensions. Remove all dirt, grease, oil, loose or unsound layers, and any other material from the marker area which would reduce the bond of the adhesive. Maintain pavement surfaces in a clean condition until placing markers.


Prepare the pavement surfaces, and install the markers in the recessed groove according to the drawing below. Use an approved snowplowable epoxy adhesive. Ensure that the adhesive bed area is equal to the bottom area of the marker, and apply adhesive in sufficient quantity to force excess out around the entire perimeter of the marker. Use materials, equipment, and construction procedures that ensure proper adhesion of the markers to the pavement surface according to the manufacturer’s recommendations. Remove all excess adhesive from in front of the reflective faces. If any adhesive or foreign matter cannot be removed from the reflective faces, or if any marker fails to properly adhere to the pavement surface, remove and replace the marker at no additional cost to the Department.

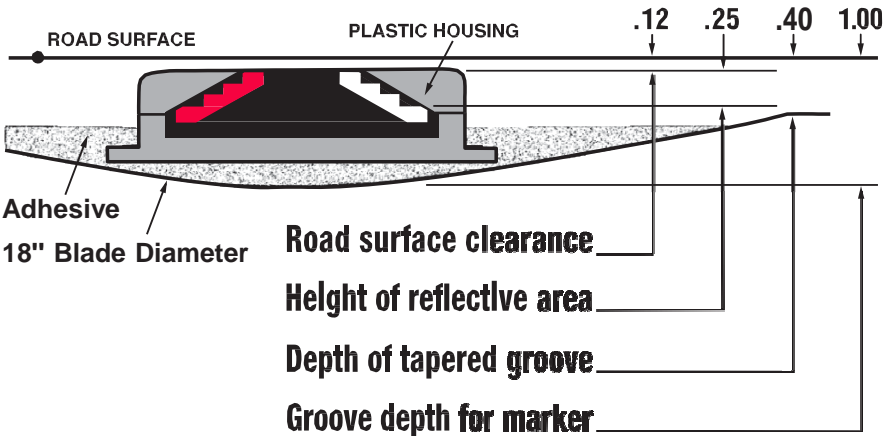

D. Location and Spacing. Install the markers in the pattern for high reflectivity with two (2) IPMs per groove. Locate and space markers as shown in the current standard drawings or sepias (note: use Inlaid Pavement Markers wherever Type V Pavement

Inlaid Pavement Markers
Page 3 of 4

Markers are called for). Do not install markers on bridge decks. Do not install a marker on top of a pavement joint or crack. Offset the recessed groove a minimum of 2 inches from any longitudinal pavement joint or crack and at least one inch from the painted stripe, ensuring that the finished line of markers is straight with minimal lateral deviation. Give preference to maintaining the 2-inch offset between recessed groove and joint as opposed to keeping the line of markers straight.

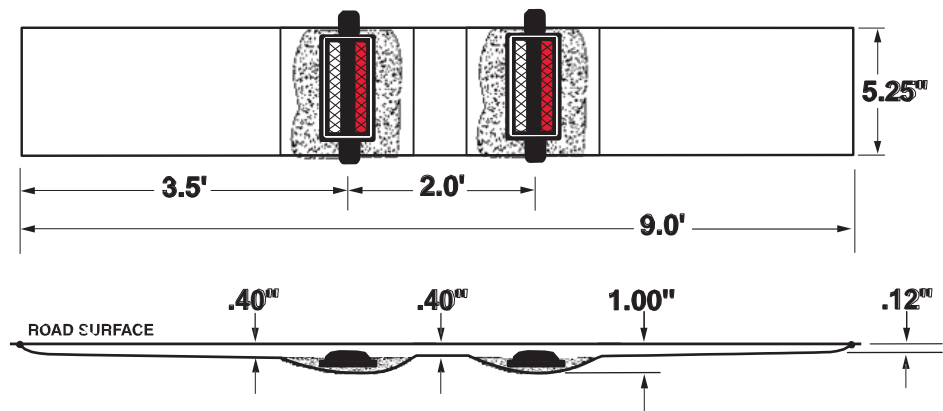

Place inlaid markers as much in line with existing pavement striping as possible. Place markers installed along an edge line or channelizing line so that the near edge of the plastic housing is no more than one inch from the near edge of the line. Place markers installed along a lane line between and in line with the dashes. Do not place markers over the lines except where the lines deviate visibly from their correct alignment, and then only after obtaining the Engineer’s prior approval of the location.

If conflicts between recessed groove placement in relation to pavement joint and striping cannot be resolved, obtain the Engineer’s approval to eliminate the marker or revise the alignment.

E. Disposal of Waste. Dispose of all removed asphalt pavement, debris, and other waste at sites off the right of way obtained by the Contractor at no additional cost to the Department. See Special Note for waste and Borrow.

F. Restoration. Be responsible for all damage to public and/or private property resulting from the work. Restore all damaged features in like kind materials and design at no additional cost to the Department.

G. On-Site Inspection. Make a thorough inspection of the site prior to submitting a bid and be thoroughly familiar with existing conditions so that the work can be expeditiously performed after a contract is awarded. The Department will consider submission of a bid as evidence of this inspection having been made and will not honor any claims for money or grant Contract time extensions resulting from site conditions.

Inlaid Pavement Markers
Page 4 of 4

H. Caution. Do not take information shown on the drawings and in this proposal and the types and quantities of work listed as an accurate or complete evaluation of the material and conditions to be encountered during construction, but consider the types and quantities of work listed as approximate only. The bidder must draw his own conclusion as to the conditions encountered. The Department does not give any guarantee as to the accuracy of the data and no claim will be considered for additional compensation or extension of Contract time if the conditions encountered are not in accordance with the information shown.

IV. MEASUREMENT

A. Maintain and Control Traffic. See Traffic Control Plan.

B. "INLAID PAYMENT MARKER" shall be measured as each. One (1) installation of "INLAID PAVEMENT MARKER" will consist of grooving the pavement, removing asphalt cuttings and debris, preheating pavement to remove moisture, adhesives, and installation of two (2) markers with all lenses in accordance with this note.

Note: Each pay item of Inlaid Pavement Marker will require two markers.

V. PAYMENT

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Inlaid Pavement Markers. The Department will make payment for the completed and accepted quantity of completely installed "INLAID PAVEMENT MARKERS" at the Contract unit price, each. Accept payment as full compensation for all labor, equipment, materials, and incidentals to accomplish this work to the satisfaction of the Engineer. A system of one (1) groove and two (2) markers shall be paid as one "INLAID PAVEMENT MARKER". The bid item "INLAID PAVEMENT MARKER" shall be used regardless of the color and type of lenses required.

PROPOSAL BID ITEMS

Report Date 6/18/15

Page 1 of 1

Section: 0001 - PAVING

| LINE | BID CODE | ALT | DESCRIPTION | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|------------|-----|--|------------|------|-----------|----|-------------|
| 0010 | 00190 | | LEVELING & WEDGING PG64-22 | 1,060.00 | TON | | \$ | |
| 0020 | 02562 | | TEMPORARY SIGNS | 450.00 | SQFT | | \$ | |
| 0030 | 02650 | | MAINTAIN & CONTROL TRAFFIC | 1.00 | LS | | \$ | |
| 0040 | 02671 | | PORTABLE CHANGEABLE MESSAGE SIGN | 2.00 | EACH | | \$ | |
| 0050 | 02676 | | MOBILIZATION FOR MILL & TEXT | 1.00 | LS | | \$ | |
| 0060 | 02677 | | ASPHALT PAVE MILLING & TEXTURING | 10,100.00 | TON | | \$ | |
| 0070 | 02696 | | SHOULDER RUMBLE STRIPS-SAWED | 28,800.00 | LF | | \$ | |
| 0080 | 02775 | | ARROW PANEL | 2.00 | EACH | | \$ | |
| 0090 | 04793 | | CONDUIT-1 1/4 IN | 260.00 | LF | | \$ | |
| 0100 | 04811 | | ELECTRICAL JUNCTION BOX TYPE B | 9.00 | EACH | | \$ | |
| 0110 | 04820 | | TRENCHING AND BACKFILLING | 260.00 | LF | | \$ | |
| 0120 | 04830 | | LOOP WIRE | 19,695.00 | LF | | \$ | |
| 0130 | 04850 | | CABLE-NO. 14/1 PAIR | 16,030.00 | LF | | \$ | |
| 0140 | 04895 | | LOOP SAW SLOT AND FILL | 8,980.00 | LF | | \$ | |
| 0150 | 06510 | | PAVE STRIPING-TEMP PAINT-4 IN | 101,000.00 | LF | | \$ | |
| 0160 | 06514 | | PAVE STRIPING-PERM PAINT-4 IN | 101,000.00 | LF | | \$ | |
| 0170 | 06565 | | PAVE MARKING-THERMO X-WALK-6 IN | 1,190.00 | LF | | \$ | |
| 0180 | 06568 | | PAVE MARKING-THERMO STOP BAR-24IN | 935.00 | LF | | \$ | |
| 0190 | 06573 | | PAVE MARKING-THERMO STR ARROW | 5.00 | EACH | | \$ | |
| 0200 | 06574 | | PAVE MARKING-THERMO CURV ARROW | 106.00 | EACH | | \$ | |
| 0210 | 06575 | | PAVE MARKING-THERMO COMB ARROW | 3.00 | EACH | | \$ | |
| 0220 | 06600 | | REMOVE PAVEMENT MARKER TYPE V | 450.00 | EACH | | \$ | |
| 0230 | 10020NS | | FUEL ADJUSTMENT | 20,469.00 | DOLL | \$1.00 | \$ | \$20,469.00 |
| 0240 | 10030NS | | ASPHALT ADJUSTMENT | 51,411.00 | DOLL | \$1.00 | \$ | \$51,411.00 |
| 0250 | 22906ES403 | | CL3 ASPH SURF 0.38A PG64-22 | 11,616.00 | TON | | \$ | |
| 0260 | 23625EC | | PAVE MARK THERMO-6 IN W CAT TRAXX | 250.00 | LF | | \$ | |
| 0270 | 24489EC | | INLAID PAVEMENT MARKER (REVISED: 6-18-15) | 508.00 | EACH | | \$ | |

Section: 0002 - DEMOBILIZATION

| LINE | BID CODE | ALT | DESCRIPTION | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|----------|-----|----------------|----------|------|-----------|----|--------|
| 0280 | 02569 | | DEMOBILIZATION | 1.00 | LS | | \$ | |