



COMMONWEALTH OF KENTUCKY

Matthew G. Bevin  
Governor

February 12, 2016

CALL NO. 403  
CONTRACT ID NO. 162038  
ADDENDUM # 1

Subject: Meade County, 082GR16P016-FD05  
Letting February 19, 2016

- (1) Revised - Special Note for Pavement Wedge Monolithic 14 of 85
- (2) Added - Special Note for Pavement Wedge Separate - Page 14(a) of 85
- (3) Revised - Material Summary - Pages 24-25 of 85
- (4) Revised - Typical Sections - Pages 33-35 of 85
- (5) Revised - Bid Items - Page 85 of 85

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:ks  
Enclosures



An Equal Opportunity Employer M/F/D

**KY 710**  
**KY 228 MP 21.796 – 23.812**  
**SPECIAL NOTE FOR PAVEMENT WEDGE AND SHOULDER  
MONOLITHIC OPERATION**


**1.0 MATERIALS.** Provide an Asphalt Surface Mixture conforming to Section 403 of the Standard Specifications, as applicable to the project, for the pavement wedge.

**2.0 CONSTRUCTION.** Place the specified Asphalt Surface Mixture on shoulders monolithically with the driving lane. Prime the existing shoulder with tack material as the Engineer directs before placing the wedge. Construct according to Section 403.03 of the Standard Specifications.

Equip the paver with a modified screed that extends the full width of the wedge being placed and is tapered to produce a wedge. Obtain the Engineer's approval of the modified screed before placing shoulder wedge monolithically with the driving lane.

The wedge may vary in thickness at the edge of the milled area in the shoulder. If the area to receive the shoulder wedge is milled prior to placement, during rolling operations pinch the outside edge of the new inlay wedge to match the existing shoulder elevation not being resurfaced. Unless required otherwise by the Contract, construct rolled or sawed rumble strips according to Section 403.03.08, as applicable.

The following sketch is primarily for the computation of quantities; however, the wedge will result in a similar cross-section where sufficient width exists. Do not construct a shoulder for placing the wedge unless specified elsewhere in the Contract.

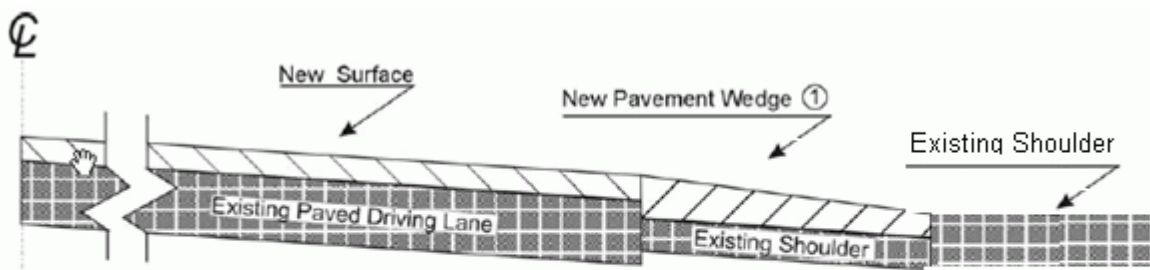

① Slope varies, but is down from the driving lanes except on outside of some curves where superelevation controls.

**3.0 MEASUREMENT.** The Department will measure Asphalt Surface Mixture placed as the pavement wedge according to Section 403.

**4.0 PAYMENT.** The Department will make payment for the completed and accepted quantities of Asphalt Surface Mixtures on pavement wedges according to Section 403.

**KY 228 MP 15.713 – 21.796**  
**SPECIAL NOTE FOR PAVEMENT WEDGE AND SHOULDER  
SEPARATE OPERATION**


**1.0 MATERIALS.** Provide an Asphalt Mixture for Pavement Wedge conforming to Section 407 of the Standard Specifications or an Asphalt Surface Mixture conforming to Section 403 of the Standard Specifications, as applicable to the project, for the pavement wedge.

**2.0 CONSTRUCTION.** Place the Asphalt Mixture for Pavement Wedge or Asphalt Surface Mixture as a separate operation from the driving lane. Prime the existing shoulder with tack material as the Engineer directs before placing the wedge. Construct according to Sections 407.03 and 403.03 as applicable.

When the Engineer deems it appropriate to pave both the driving lane and the adjoining wedge monolithically, equip the paver with a modified screed that extends the full width of the wedge being placed and is tapered to produce a wedge. Obtain the Engineer’s approval of the modified screed before placing shoulder wedge monolithcly with the driving lane.

The wedge may vary in thickness at the edge of the driving lanes. Where existing site conditions permit, limit the outside edge thickness of the new paving limits to one inch above the existing shoulder wedge elevation. If an Asphalt Surface Mixture is furnished for the pavement wedge, texture according to Section 403.03.08.

The following sketch is primarily for the computation of quantities; however, the wedge will result in a similar cross-section where sufficient width exists. Do not construct a shoulder for placing the wedge unless specified elsewhere in the Contract.

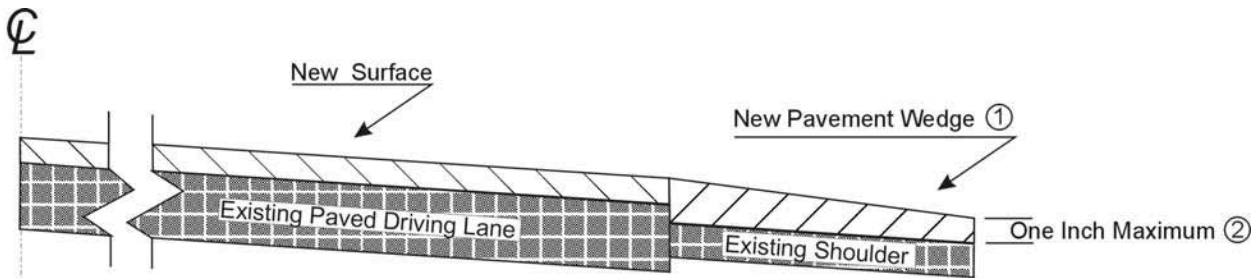

- ① Slope varies, but is down from the driving lanes except on outside of some curves where superelevation controls.
- ② Where existing site conditions permit.

**3.0 MEASUREMENT.** The Department will measure Asphalt Mixture for Pavement Wedge or Asphalt Surface Mixture placed as the pavement wedge according to Sections 403 and 407 as applicable.

**4.0 PAYMENT.** The Department will make payment for the completed and accepted quantities of Asphalt Surface Mixtures placed as pavement wedge according to Section 403. The Department will make payment for the completed and accepted quantities of Asphalt Mixture for Pavement Wedge according to Section 407.

# MATERIAL SUMMARY

**CONTRACT ID: 162038**

**082GR16P016-FD05**

**MP08202281601**

BATTLETOWN ROAD-LAWRENCE STREET (KY 228) FROM KY 1844 EXTENDING EAST TO KY 448 ASPHALT RESURFACING, A DISTANCE OF 8.1 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	350.00	TON
0010	00190	LEVELING & WEDGING PG64-22	1,528.00	TON
0015	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 2-12-16)	5,795.00	TON
0020	02562	TEMPORARY SIGNS	270.00	SQFT
0025	02650	MAINTAIN & CONTROL TRAFFIC - (KY 228)	1.00	LS
0030	02676	MOBILIZATION FOR MILL & TEXT - (KY 228)	1.00	LS
0035	02677	ASPHALT PAVE MILLING & TEXTURING	290.00	TON
0040	02720	SIDEWALK-4 IN CONCRETE	24.00	SQYD
0045	06510	PAVE STRIPING-TEMP PAINT-4 IN	78,250.00	LF
0050	06514	PAVE STRIPING-PERM PAINT-4 IN	78,250.00	LF
0055	06567	PAVE MARKING-THERMO STOP BAR-12IN	60.00	LF
0060	06574	PAVE MARKING-THERMO CURV ARROW	4.00	EACH
0065	06575	PAVE MARKING-THERMO COMB ARROW	4.00	EACH
0070	10020NS	FUEL ADJUSTMENT	12,333.00	DOLL
0075	10030NS	ASPHALT ADJUSTMENT	30,976.00	DOLL
0080	23158ES505	DETECTABLE WARNINGS - (NEW)	50.00	SQFT
0085	02569	DEMOBILIZATION	1.00	LS
0090	00263	ASPHALT MIX FOR PAVEMENT WEDGE - (ADDED: 2-12-16)	600.00	TON

# MATERIAL SUMMARY

**CONTRACT ID: 162038**


**082GR16P016-FD05**

**MP08207101601**

OLD STATE ROAD (KY 710) FROM KY 1051 EXTENDING NORTH TO KY 448 ASPHALT RESURFACING, A DISTANCE OF 1.18 MILES.


Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00190	LEVELING & WEDGING PG64-22	62.00	TON
0010	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 2-12-16)	1,030.00	TON
0015	02562	TEMPORARY SIGNS	270.00	SQFT
0020	02650	MAINTAIN & CONTROL TRAFFIC - (KY 710)	1.00	LS
0025	02676	MOBILIZATION FOR MILL & TEXT - (KY 710)	1.00	LS
0030	02677	ASPHALT PAVE MILLING & TEXTURING	1,030.00	TON
0035	02720	SIDEWALK-4 IN CONCRETE	43.00	SQYD
0040	06510	PAVE STRIPING-TEMP PAINT-4 IN	11,830.00	LF
0045	06514	PAVE STRIPING-PERM PAINT-4 IN	11,830.00	LF
0050	06565	PAVE MARKING-THERMO X-WALK-6 IN	50.00	LF
0055	06567	PAVE MARKING-THERMO STOP BAR-12IN	30.00	LF
0060	06574	PAVE MARKING-THERMO CURV ARROW	2.00	EACH
0065	06575	PAVE MARKING-THERMO COMB ARROW	2.00	EACH
0070	10020NS	FUEL ADJUSTMENT	1,700.00	DOLL
0075	10030NS	ASPHALT ADJUSTMENT	4,269.00	DOLL
0080	23158ES505	DETECTABLE WARNINGS - (NEW)	60.00	SQFT
0085	02569	DEMOBILIZATION	1.00	LS

**TYPICAL SECTION**  
MEADE COUNTY  
FD05 082 0228 015-024  
KY 228  
MP 15.713 - 21.796

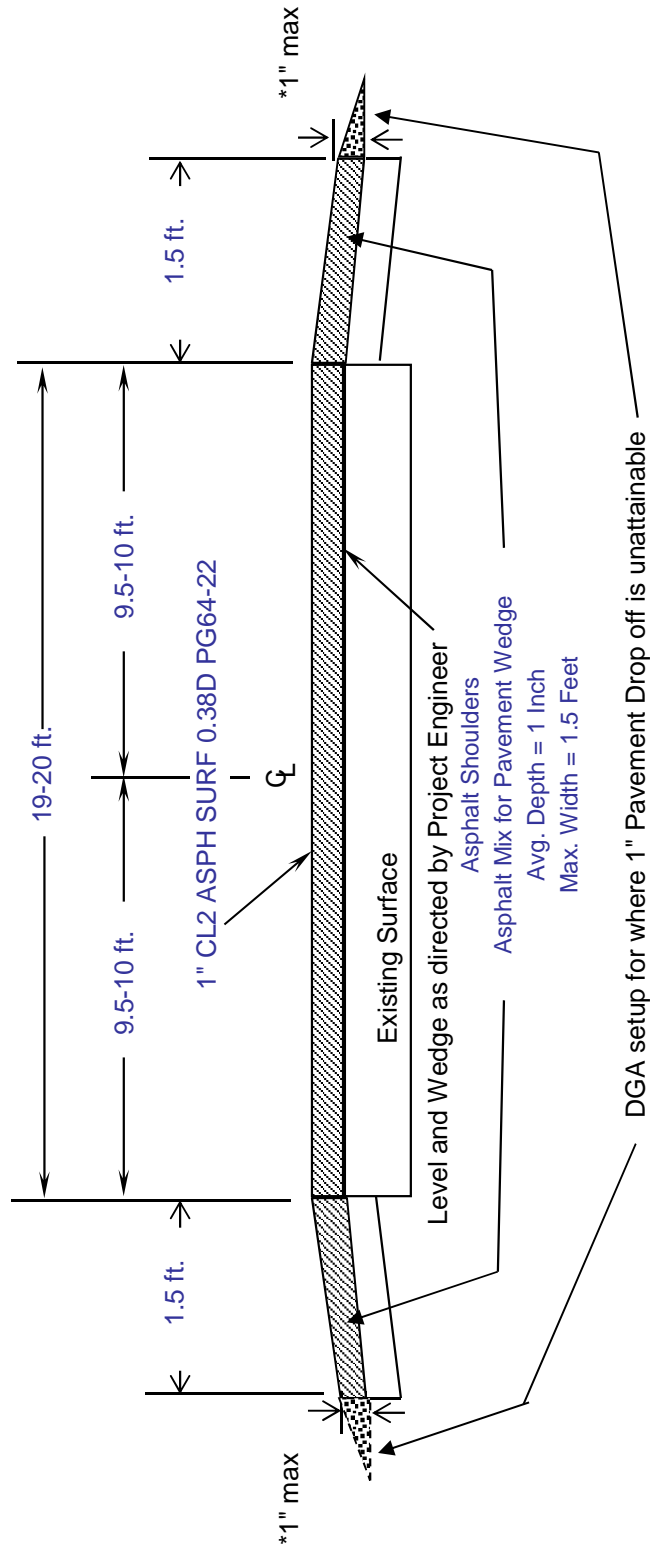


**\*1" Max. Drop-off Where Existing Site Conditions Permit**

**TYPICAL SECTION**  
MEADE COUNTY  
FD05 082 0228 015-024  
KY 228  
MP 21.796 - 21.928

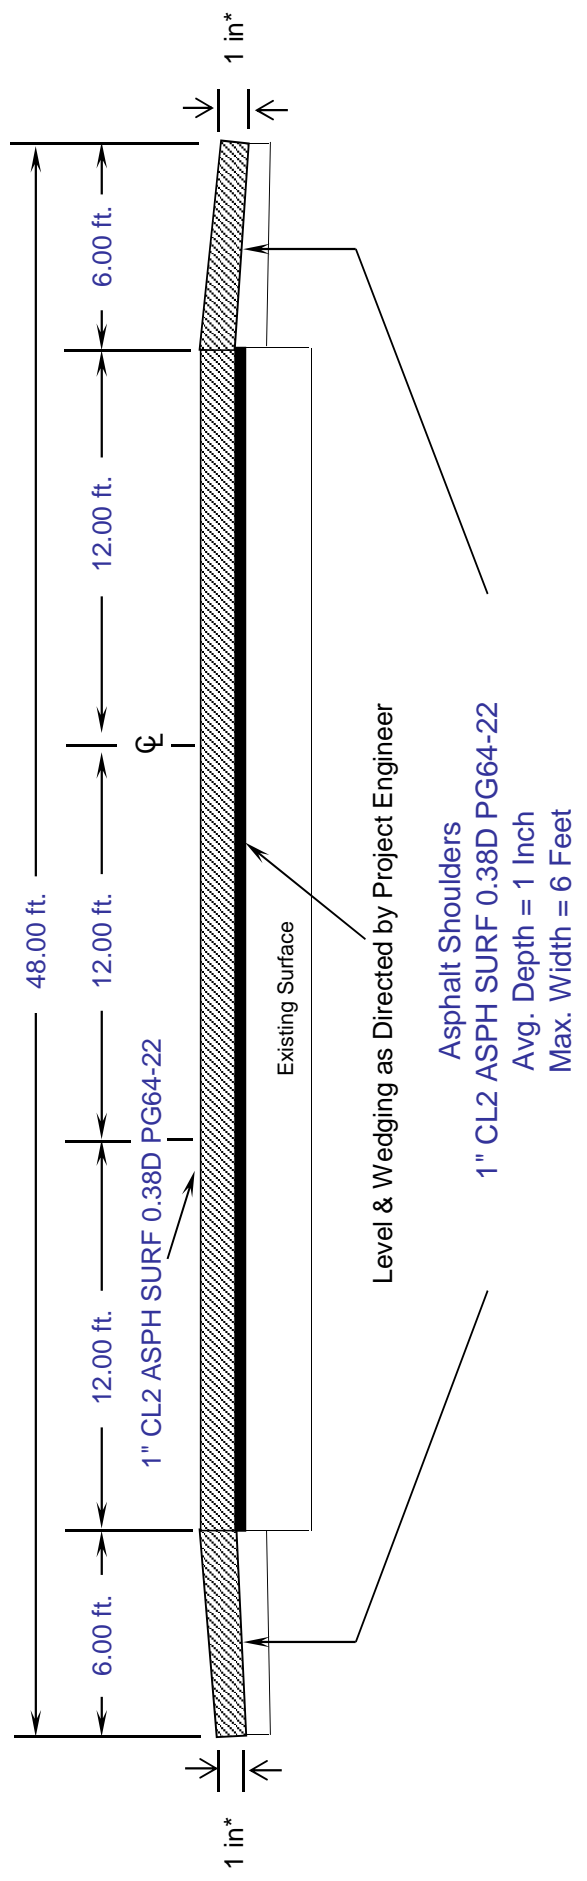

**\*1" Max. Drop-off Where Existing Site Conditions Permit**

**TYPICAL SECTION**  
MEADE COUNTY  
FD05 082 0228 015-024  
KY 228  
MP 21.928 - 23.812

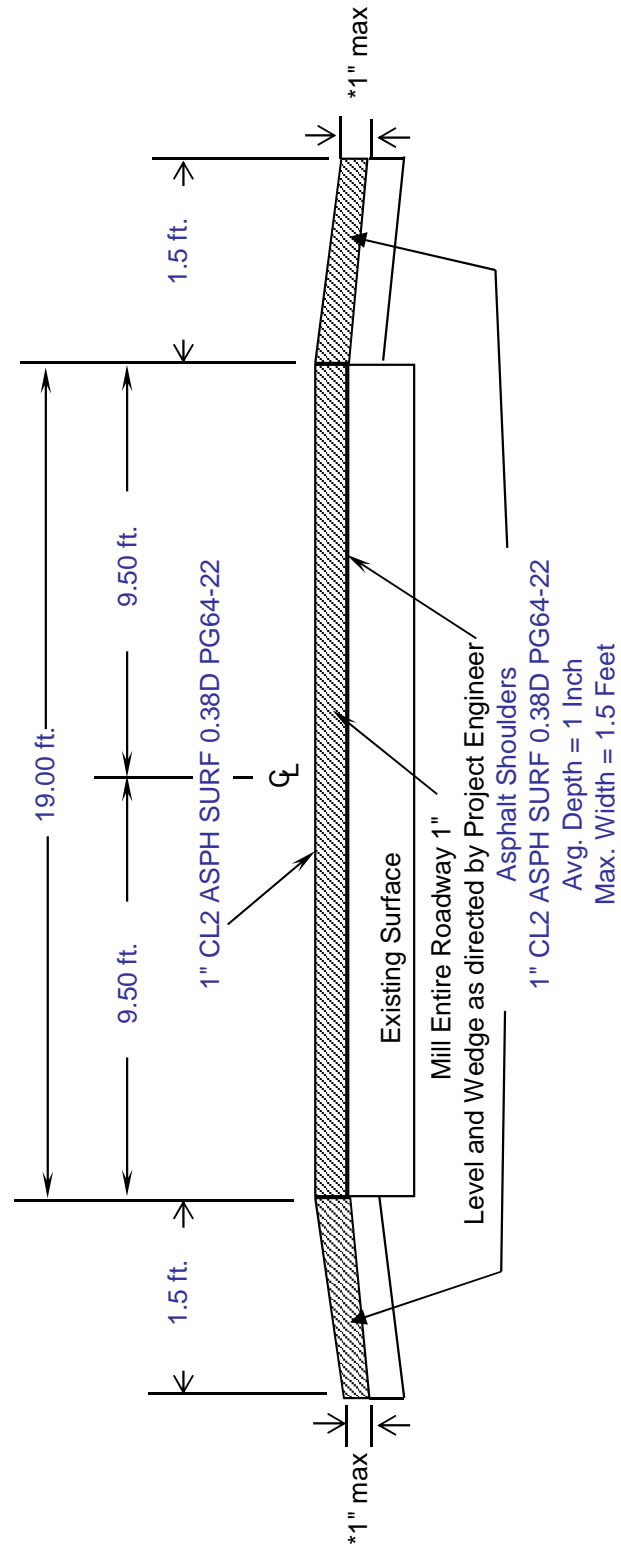

**\*1" Max. Drop-off Where Existing Site Conditions Permit**



**PROPOSAL BID ITEMS**

162038

Page 1 of 1

Report Date 2/12/16

**Section: 0001 - PAVING**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	350.00	TON		\$	
0020	00190		LEVELING & WEDGING PG64-22	1,590.00	TON		\$	
0021	00263		ASPHALT MIX FOR PAVEMENT WEDGE (ADDED: 2-12-16)	600.00	TON		\$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22 (REVISED: 2-12-16)	6,825.00	TON		\$	
0040	02562		TEMPORARY SIGNS	540.00	SQFT		\$	
0050	02650		MAINTAIN & CONTROL TRAFFIC (KY 710)	1.00	LS		\$	
0060	02650		MAINTAIN & CONTROL TRAFFIC (KY 228)	1.00	LS		\$	
0070	02676		MOBILIZATION FOR MILL & TEXT (KY 710)	1.00	LS		\$	
0080	02676		MOBILIZATION FOR MILL & TEXT (KY 228)	1.00	LS		\$	
0090	02677		ASPHALT PAVE MILLING & TEXTURING	1,320.00	TON		\$	
0100	02720		SIDEWALK-4 IN CONCRETE	67.00	SQYD		\$	
0110	06510		PAVE STRIPING-TEMP PAINT-4 IN	90,080.00	LF		\$	
0120	06514		PAVE STRIPING-PERM PAINT-4 IN	90,080.00	LF		\$	
0130	06565		PAVE MARKING-THERMO X-WALK-6 IN	50.00	LF		\$	
0140	06567		PAVE MARKING-THERMO STOP BAR-12IN	90.00	LF		\$	
0150	06574		PAVE MARKING-THERMO CURV ARROW	6.00	EACH		\$	
0160	06575		PAVE MARKING-THERMO COMB ARROW	6.00	EACH		\$	
0170	10020NS		FUEL ADJUSTMENT	14,033.00	DOLL	\$1.00	\$	\$14,033.00
0180	10030NS		ASPHALT ADJUSTMENT	35,245.00	DOLL	\$1.00	\$	\$35,245.00
0190	23158ES505		DETECTABLE WARNINGS (NEW)	110.00	SQFT		\$	

**Section: 0002 - DEMOBILIZATION**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0200	02569		DEMOBILIZATION	1.00	LS		\$	