



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

March 26, 2014

CALL NO. 312
CONTRACT ID NO. 142044
ADDENDUM # 2

Subject: Garrard County, FD05 040 0052 005-006
Letting March 28, 2014

- (1) Added - Option A - Page 11 of 60
- (2) Revised - Typical Section - Page 27 of 60
- (3) Revised - Bid Items - Page 60 of 60

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Diana Castle Radcliffe".

Diana Castle Radcliffe
Director
Division of Construction Procurement

DR:ks
Enclosures



An Equal Opportunity Employer M/F/D

DEFERRED PAYMENT: The successful bidder on this project may request a work order with an effective date prior to June 15, 2014. The successful bidder must make the request in writing to the Department. The Department will issue a work at the request of the Contractor with the distinct understanding that payment for any Work Performed Estimates may be delayed until July 15, 2014. Unless the successful bidder requests an earlier work order date, the Department will issue a work order on June 15, 2014 for this project.

SURFACING AREAS

The Department estimates the mainline surfacing width to be 38 feet.

The Department estimates the total mainline area to be surfaced to be 12,703 square yards.

ASPHALT MIXTURE

Unless otherwise noted, the Department estimates the rate of application for all asphalt mixtures to be 110 lbs/sy per inch of depth.

INCIDENTAL SURFACING


The Department has included in the quantities of asphalt mixtures established in the proposal estimated quantities required for resurfacing or surfacing mailbox turnouts, farm field entrances, residential and commercial entrances, curve widening, ramp gores and tapers, and road and street approaches, as applicable. Pave these areas to the limits as shown on Standard Drawing RPM-110-06 or as directed by the Engineer. In the event signal detectors are present in the intersecting streets or roads, pave the crossroads to the right of way limit or back of the signal detector, whichever is the farthest back of the mainline. Surface or resurface these areas as directed by the Engineer. The Department will not measure placing and compacting for separate payment but shall be incidental to the Contract unit price for the asphalt mixtures.

OPTION A

Be advised that the Department will accept compaction of asphalt mixtures furnished for driving lanes and ramps, at 1 inch (25mm) or greater, on this project according to OPTION A in accordance with Section 402 and Section 403 of the current Standard Specifications. The Department will require joint cores as described in Section 402.03.02 for surface mixtures only. The Department will accept compaction of all other asphalt mixtures according to OPTION B.

TYPICAL SECTION

Garrard County
FD05 040 0052 005 006

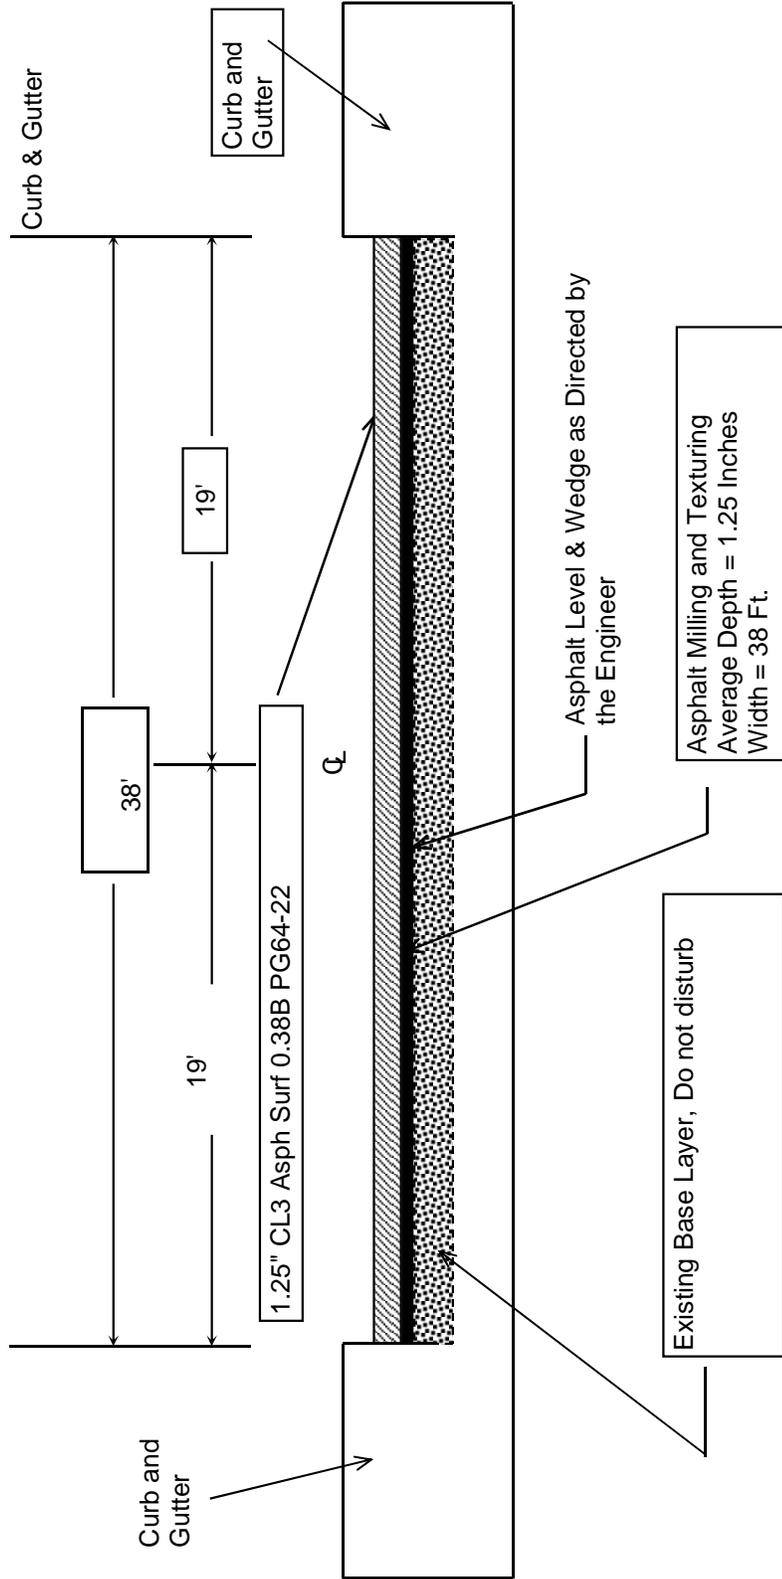

PROPOSAL BID ITEMS

142044

Page 1 of 1

Report Date 3/26/14

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	FP	AMOUNT
0010	00190		LEVELING & WEDGING PG64-22	24.00	TON		\$	
0020	00388		CL3 ASPH SURF 0.38B PG64-22 REVISED: 3-26-14	875.00	TON		\$	
0030	02562		TEMPORARY SIGNS	290.00	SQFT		\$	
0040	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0050	02676		MOBILIZATION FOR MILL & TEXT	1.00	LS		\$	
0060	02677		ASPHALT PAVE MILLING & TEXTURING REVISED: 3-26-14	875.00	TON		\$	
0070	02720		SIDEWALK-4 IN CONCRETE	12.00	SQYD		\$	
0080	04793		CONDUIT-1 1/4 IN	60.00	LF		\$	
0090	04820		TRENCHING AND BACKFILLING	60.00	LF		\$	
0100	04830		LOOP WIRE	920.00	LF		\$	
0110	04850		CABLE-NO. 14/1 PAIR	340.00	LF		\$	
0120	04895		LOOP SAW SLOT AND FILL	380.00	LF		\$	
0130	06510		PAVE STRIPING-TEMP PAINT-4 IN	5,470.00	LF		\$	
0140	06514		PAVE STRIPING-PERM PAINT-4 IN	5,470.00	LF		\$	
0150	06566		PAVE MARKING-THERMO X-WALK-12 IN	140.00	LF		\$	
0160	06568		PAVE MARKING-THERMO STOP BAR-24IN	63.00	LF		\$	
0170	06574		PAVE MARKING-THERMO CURV ARROW	1.00	EACH		\$	
0180	06600		REMOVE PAVEMENT MARKER TYPE V	70.00	EACH		\$	
0190	23158ES505		DETECTABLE WARNINGS(NEW SIDEWALK RAMPS)	20.00	SQFT		\$	
0200	23158ES505		DETECTABLE WARNINGS(RETROFIT EXISTING RAMPS)	110.00	SQFT		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	FP	AMOUNT
0210	02569		DEMOBILIZATION	1.00	LS		\$	