

R/W MONUMENT
TYPE 1 OR 1A




WITNESS R/W
MONUMENT
TYPE 2




R/W MONUMENT
TYPE 3 OR 3A




WITNESS R/W
MONUMENT
TYPE 4

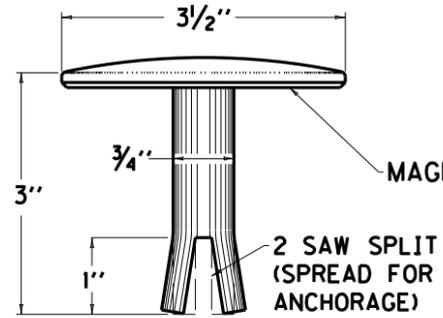

ELEVATION VIEW
R/W MONUMENT
TYPE 1A AND 3A

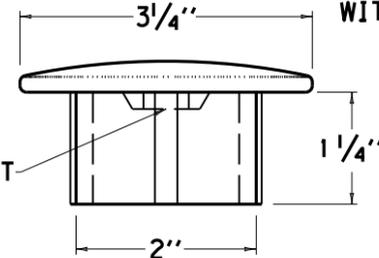

ELEVATION VIEW
R/W MONUMENT
TYPE 1 AND 3

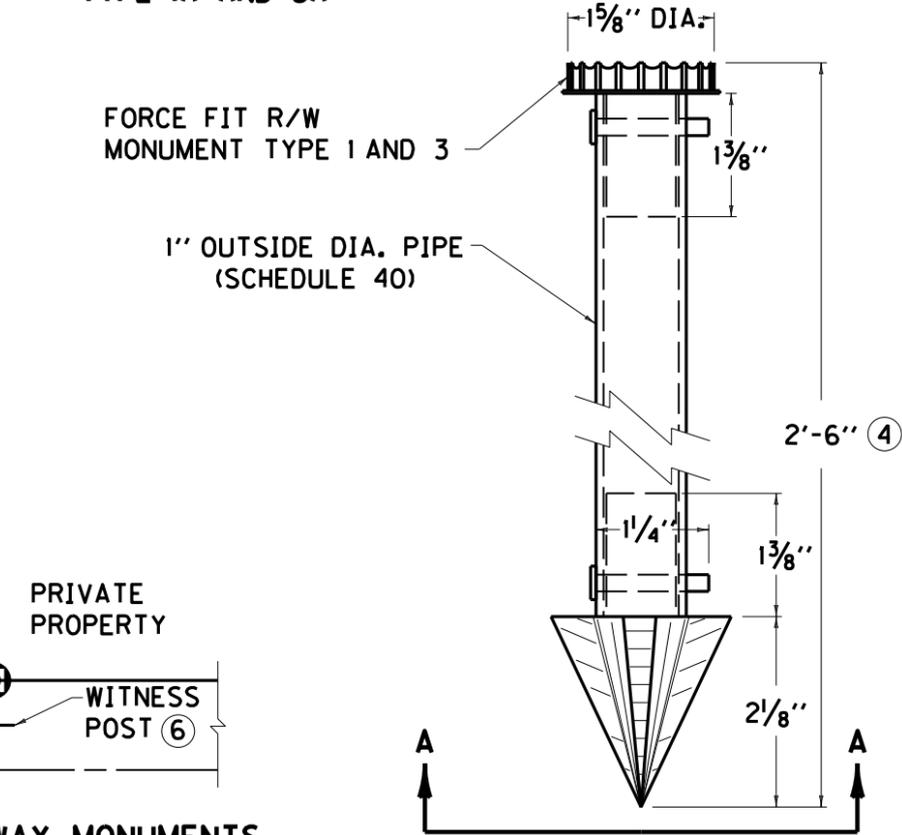


ELEVATION VIEW
R/W MONUMENT
TYPE 1 AND 3


ORANGE
FIBERGLASS
WITNESS POST



ELEVATION WITNESS POST

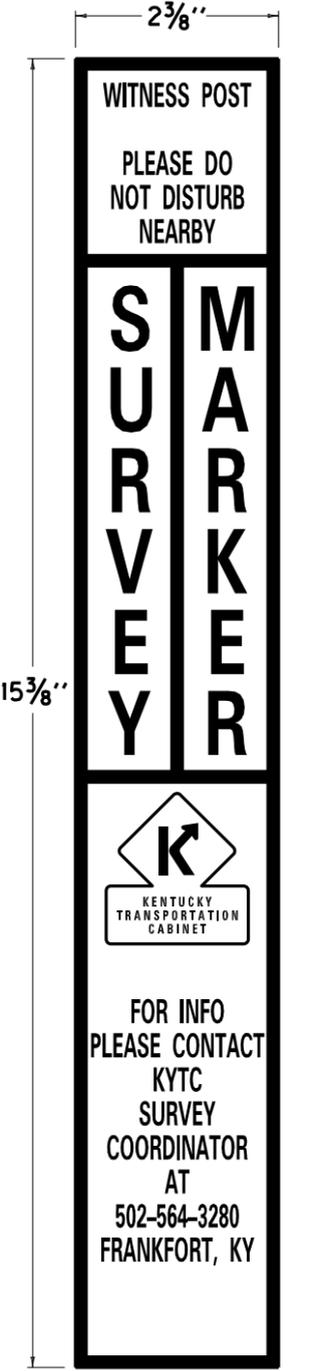


WITNESS POST DECAL

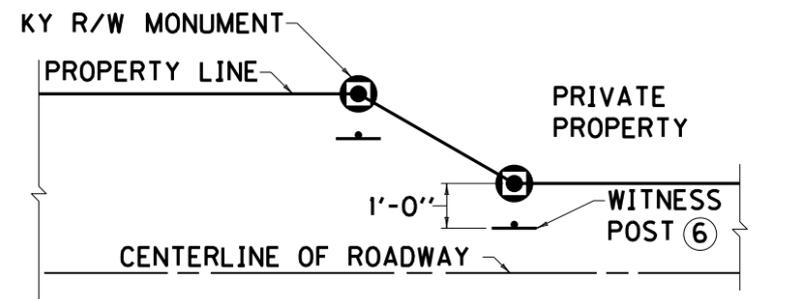

LAYOUT OF RURAL RIGHT-OF-WAY MONUMENTS

NOTES

1. MANUFACTURE R/W MONUMENTS FROM ALUMINUM ALLOY.
2. TYPE 1A AND 3A MONUMENTS SHALL BE MOUNTED FLUSH IN EXISTING PAVEMENT, DRAINAGE BOXES, ETC. DRILL A 1 1/16" DIAMETER HOLE AND EPOXY (COMMERCIAL GRADE) INTO EXISTING CONCRETE.
- ③ WITNESS POST SHALL BE BURIED 1'-6" TO 2'-0" IN GROUND.
- ④ WHEN ROCK IS ENCOUNTERED LENGTH MAY BE REDUCED.
5. SET ALL R/W MONUMENTS FLUSH WITH GROUND OR ADJOINING SURFACE.
- ⑥ THE LAND SURVEYOR IN CHARGE OF MONUMENTATION IS ENCOURAGED TO PLACE A WITNESS POST FOR THE RIGHT-OF-WAY MONUMENTS WHERE PRACTICAL AND FEASIBLE. IF POSSIBLE, A MINIMUM OF THREE WITNESS POSTS PER PROJECT SHOULD BE PLACED.



SECTION A-A

KENTUCKY
DEPARTMENT OF HIGHWAYS

RIGHT-OF-WAY
MONUMENTS

SUBMITTED: *Jeff Jasper* 6-03-12
DIRECTOR DIVISION OF HIGHWAY DESIGN DATE

FILE NAME: C:\PWORK\JEFF.LAIL\051263\NSEPIA.005.DGN
 USER: jeff.lail
 DATE PLOTTED: March 19, 2013
 E-SHEET NAME:
 MicroStation v8.11.7.180