



**SQUARE PATTERN**

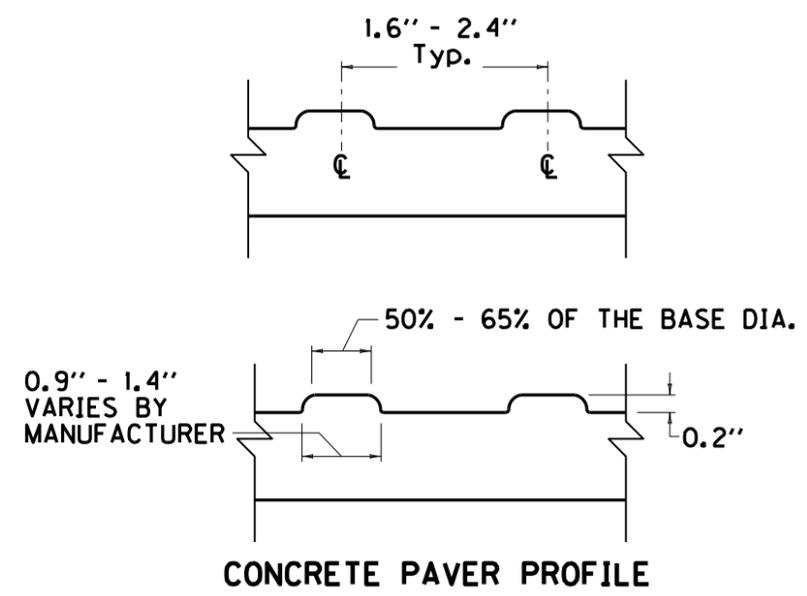

**CONCRETE PAVER PROFILE**

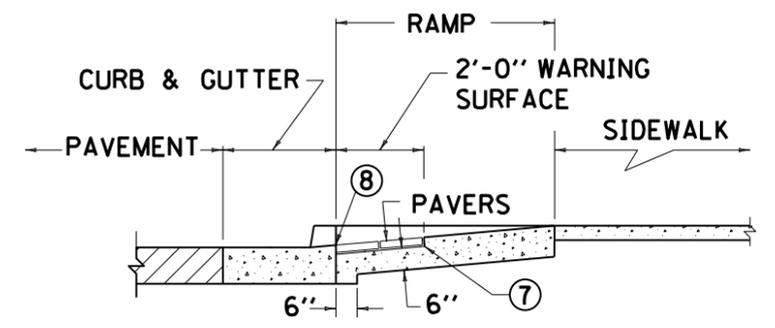

**TYPICAL CONCRETE PAVER DETECTABLE WARNING INSTALLATION**

**NOTES**

- BID ITEM AND UNIT TO BID.  
 DETECTABLE WARNINGS - SQ. FT.
1. LANDINGS WILL PROVIDE A LEVEL AREA (MAX. 2% GRADE OR CROSS SLOPE) AT APPROXIMATE STREET ELEVATION. A 4 FOOT SQUARE LEVEL LANDING IS THE REQUIRED MINIMUM.
  2. DETECTABLE WARNINGS SHALL BE INSTALLED USING CONCRETE PAVERS IN ACCORDANCE WITH THE CURRENT EDITION OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
  3. JOINTS AROUND PAVERS SHALL BE FILLED WITH DRY MORTAR. MORTAR SHALL BE BRUSHED IN WITH A COURSE BROOM. SAND WILL NOT BE ALLOWED.
  4. COMMERCIAL DRIVEWAYS WITH TRAFFIC CONTROL DEVICES REQUIRE ADA SIDEWALK TREATMENTS WITH DETECTABLE WARNINGS.
  5. CONCRETE PAVERS SHALL BE CONCRETE WITH A MINIMUM THICKNESS OF 2".
  6. CONCRETE PAVERS SHALL BE A COLOR HOMOGENOUS THROUGHOUT THE PAVER, THAT COLOR SHALL CONTRAST VISUALLY WITH THE ADJOINING SURFACES, EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT. THE DEPARTMENT WILL ALLOW EITHER YELLOW OR RED AS COLORS.
- ⑦ CONCRETE PAVERS TO BE SET IN MORTAR.  
 ⑧ DETECTABLE WARNING SURFACE BEGINS AT BACK OF CURB.

USE WITH CUR. STD. DWGS.  
 RPM-170, RPM-172

KENTUCKY DEPARTMENT OF HIGHWAYS	
<b>DETECTABLE WARNINGS</b>	
SUBMITTED <i>William S. Hall</i>	11-21-14 DATE
028	

FILE NAME: C:\USERS\JEFF.LAIL\DESKTOP\DETECTABLE WARNINGS DRAFT.DGN  
 USER: jeff.lail  
 DATE PLOTTED: June 18, 2014  
 E-SHEET NAME:  
 MicroStation v8.11.7.443