




COMPOST FILTER SOCK  
INLET PROTECTION (TYPE 7)

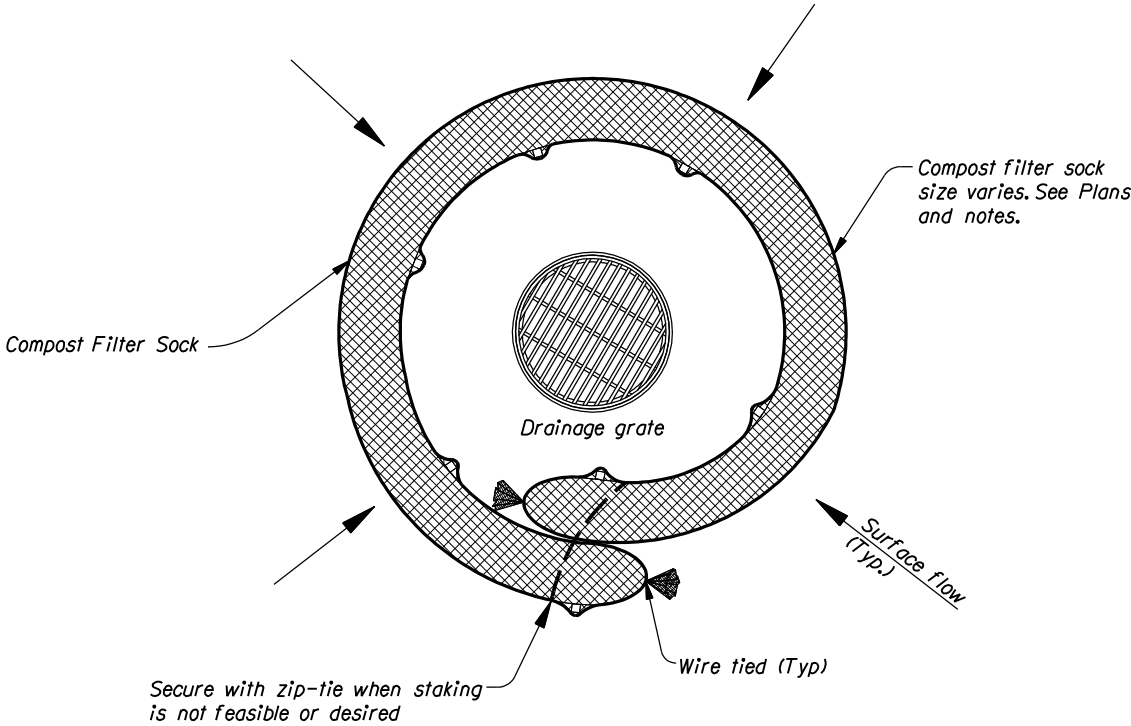

DROP INLET  
PLAN  
N.T.S.

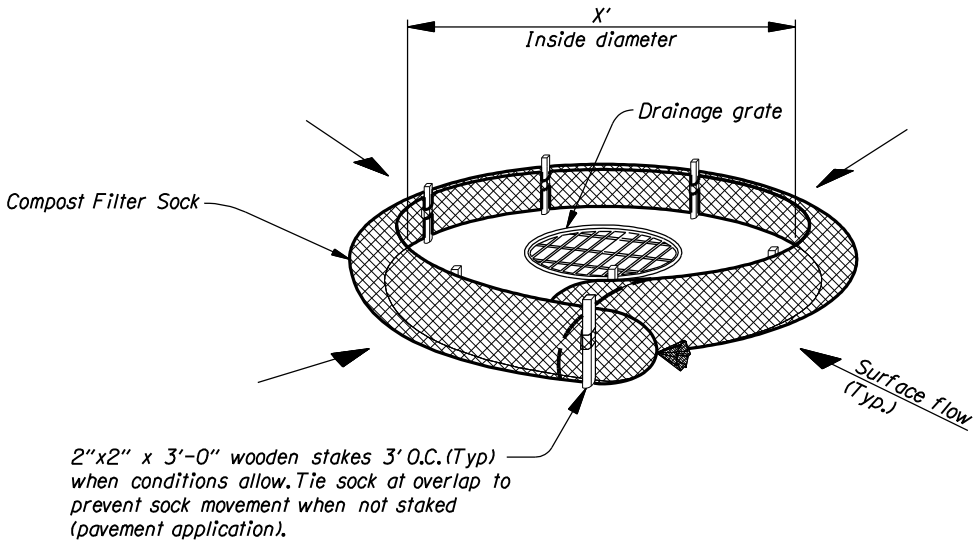

DROP INLET  
PERSPECTIVE VIEW  
N.T.S.

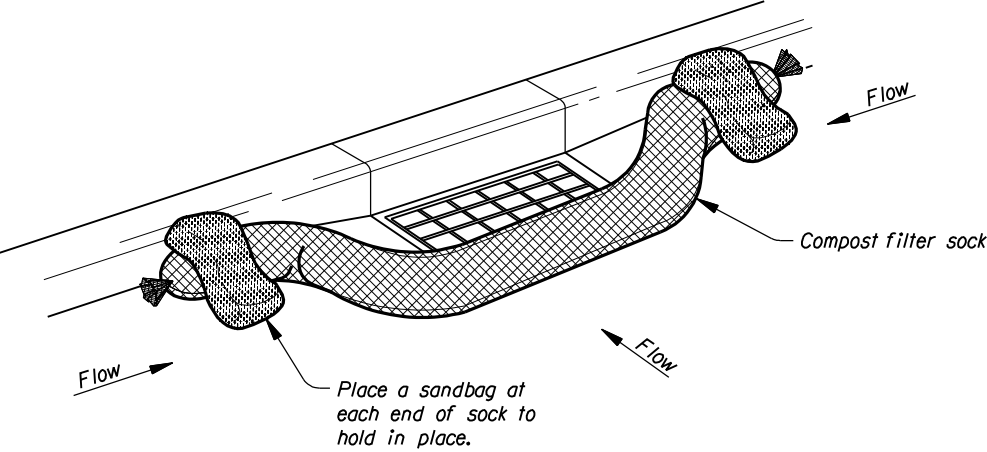

CURB INLET  
PERSPECTIVE VIEW  
N.T.S.

- Notes:
1. Anchoring stakes shall be sized, spaced, and be of a material that effectively secures the filter sock. Stake spacing shall be a maximum of three feet.
  2. Overlap ends of sock per manufacturers recommendations. (1' min. 3' max.)
  3. Use 8" to 12" dia. sock on curbside in traffic areas.
  4. Use 12" - 18" dia. sock in non-traffic areas or areas where safety is not a concern.

The selection and use of this detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

**OREGON DEPARTMENT OF TRANSPORTATION**  
TECHNICAL SERVICES  
DETAILS

COMPOST FILTER SOCK  
INLET PROTECTION (TYPE 7)

DETAIL NO.  
DET6016