



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Jim Gray
SECRETARY

August 13, 2024

CALL NO. 317
CONTRACT ID NO. 242277
ADDENDUM # 1

Subject: Taylor County, FD05 109 0210 013-017
Letting August 22, 2024

- (1) Added - Summary Sheet - Page 38A of 56
- (2) Revised - Typical Page - Page 39 of 56

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

Milling Summary FD05 109 0210 013-017


			TOTAL
Milepoint	Comment	Length	Width
13.19	Edge Key	200	30
14.148	KY 883	12	95
14.148	Salem Church Road	12	82
14.520	Fairway Drive	8	90
14.730	School Entrance, Bor	25	50
14.909	KY 3212	12	65
14.909	School Entrance, Bor	25	40
15.042	Forest Hill Drive	12	75
15.342	Bridge Edge Key	125	42
15.384	Bridge Edge Key	125	45
15.405	Curb and Gutter	250	38
15.417	Curb and Gutter	800	65
15.557	Curb and Gutter	500	65
15.639	Curb and Gutter	600	80
15.739	Curb and Gutter	300	80
15.777	Curb and Gutter	550	80
15.861	Curb and Gutter	250	80
15.879	Curb and Gutter	500	65
15.956	Curb and Gutter	400	80
16.022	Curb and Gutter	1300	80
16.236	Curb and Gutter	250	80
16.264	Curb and Gutter	700	65
16.391	Curb and Gutter	250	80
16.429	Curb and Gutter	600	65
16.528	Curb and Gutter	250	65
16.559	Curb and Gutter	300	85
16.607	Curb and Gutter	150	90
16.626	Curb and Gutter	75	100

*BOR, BACK OF RADIUS

*ADDITIONAL QUANTITY HAS BEEN ADDED TO MILL/OVERLAY ALL APPROACHES WITHIN THE CURB AND GUTTER SECTION TO THE BACK OF RADIUS OR EXISTING PAVEMENT JOINT AS MARKED BY THE ENGINEER.

**THIS MILLING SUMMARY IS TO SERVE AS A GUIDE FOR THE CONTRACTOR ONLY.
 ACTUAL AREAS TO BE MILLED AS DIRECTED BY THE ENGINEER.**

Taylor County
TYPICAL SECTION
FD05 109 0210 013-016
MP's 13.225 to 15.384

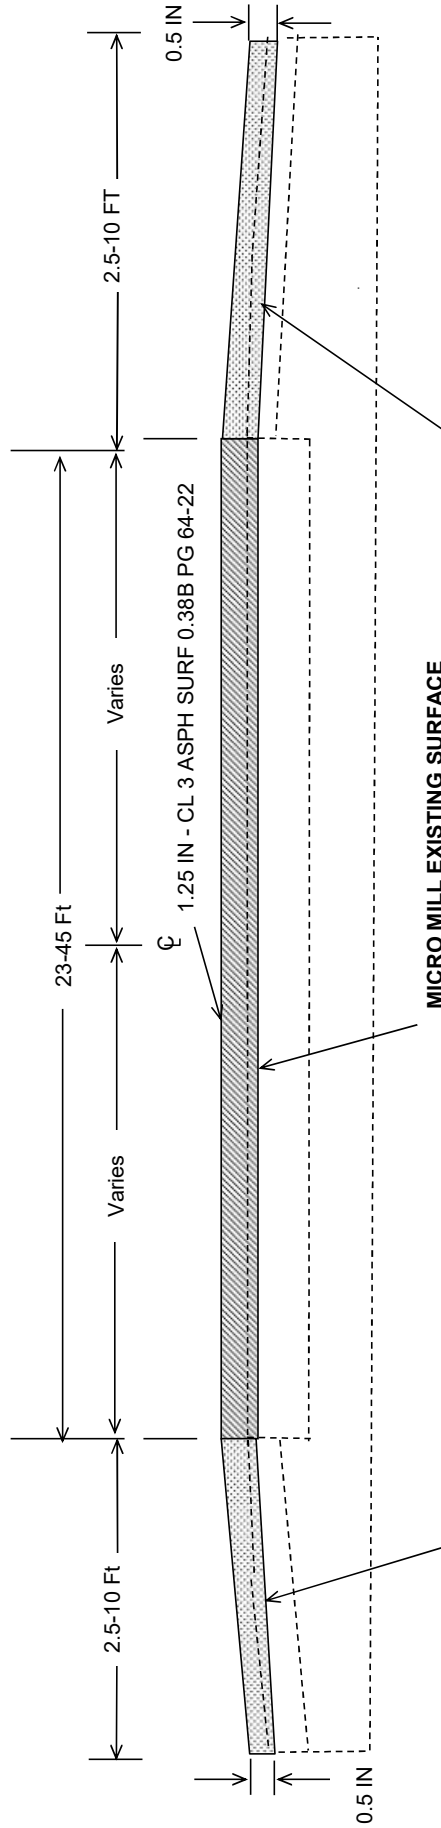

ASPHALT SHOULDERS

- CL2 ASPH SURF 0.38D, PG 64-22
- Width = 2.5 - 10 FT
- Shoulder Milling and Texturing by SQYD, to match Fine Mill while maintaining existing slopes and breaks.
- Pinch outside of shoulder down to 0.5" to minimize drop
- Average depth 7/8"

MICRO MILL EXISTING SURFACE

- Fine Mill Mainline
- See Special Note for Fine Milling

ASPHALT SHOULDERS

- CL2 ASPH SURF 0.38D, PG 64-22
- Width = 2.5 - 10 FT
- Shoulder Milling and Texturing by SQYD, to match Fine Mill while maintaining existing slopes and breaks.
- Pinch outside of shoulder down to 0.5" to minimize drop
- Average depth 7/8"

NOTES

- Centerline and Shoulder Rumblestrips to be placed as per Standard Drawing.
- Milling shall be performed so that the existing slopes and breaks are maintained.
- Some road approaches will require milled edge key, see milling summary

***Where Existing Site Conditions Permit**