



CALL NO. 102

CONTRACT ID. 265417

MARSHALL COUNTY

FED/STATE PROJECT NUMBER STP BRZ 9030 (535)

DESCRIPTION KY 795 OVER CHESTNUT CREEK

WORK TYPE BRIDGE REPLACEMENT

PRIMARY COMPLETION DATE 11/1/2027

LETTING DATE: October 22,2026

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN DAYLIGHT TIME October 22,2026. Bids will be publicly announced at 10:00 AM EASTERN DAYLIGHT TIME.

PLANS AVAILABLE FOR THIS PROJECT.

DBE CERTIFICATION REQUIRED - 0%

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I	SCOPE OF WORK • PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES • CONTRACT NOTES • STATE CONTRACT NOTES • FEDERAL CONTRACT NOTES • SPECIAL NOTE(S) APPLICABLE TO PROJECT • LIQUIDATED DAMAGES • TREE REMOVAL • BRIDGE DEMOLITION, RENOVATION AND ASBESTOS ABATEMENT • ASBESTOS ABATEMENT REPORT • RIGHT OF WAY CERTIFICATION • UTILITY IMPACT & RAIL CERTIFICATION NOTES • DEPT OF ARMY - NATIONWIDE PERMIT • GEOTECHNICAL NOTES
PART II	SPECIFICATIONS AND STANDARD DRAWINGS • STANDARD AND SUPPLEMENTAL SPECIFICATIONS • [SN-1I] PORTABLE CHANGEABLE MESSAGE SIGNS • [SP-69] EMBANKMENT AT BRIDGE END BENT STRUCTURES
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS • LABOR AND WAGE REQUIREMENTS • EXECUTIVE BRANCH CODE OF ETHICS • KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY / STATE • PROJECT WAGE RATES LOCALITY 1 / FEDERAL • PROJECT WAGE RATES / STATE FUNDED
PART IV	BID ITEMS

PART I

SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 01

CONTRACT ID - 265417
STP BRZ 9030 (535)
COUNTY - MARSHALL
PCN - BR07907952600
STP BRZ 9030 (535)

KY 795 OVER CHESTNUT CREEK (MP 2.85) ADDRESS DEFICIENCIES OF KY 795 OVER CHESTNUT CREEK
BRIDGE (079B00014N) (MP 3.30), A DISTANCE OF 0.45 MILES.BRIDGE REPLACEMENT SYP NO. 01-10171.00.
GEOGRAPHIC COORDINATES LATITUDE 36:54:52.00 LONGITUDE 88:23:30.00
ADT 355

COMPLETION DATE(S):
COMPLETED BY 11/01/2027 APPLIES TO ENTIRE CONTRACT

CONTRACT NOTES

INSURANCE

Refer to Kentucky Standard Specifications for Road and Bridge Construction, current edition.

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by [KRS 14A.9-010](#) to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under [KRS 14A.9-030](#) unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the

foreign entity is not required to obtain a certificate as provided in [KRS 14A.9-010](#), the foreign entity should identify the applicable exception. Foreign entity is defined within [KRS 14A.1-070](#).

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at <https://secure.kentucky.gov/sos/ftbr/welcome.aspx>.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/construction-procurement). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The state agency certifies that it is in compliance with the provisions of KRS 45A.150, "Access to contractor's books, documents, papers, records, or other evidence directly pertinent to the contract." The Contractor, as defined in KRS 45A.030, agrees that the contracting agency, the

Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this agreement for the purpose of financial audit or program review. The Contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884. Records and other prequalification information confidentially disclosed as part of the bid process shall not be deemed as directly pertinent to the agreement and shall be exempt from disclosure as provided in KRS 61.878(1)(c).

BOYCOTT PROVISIONS

If applicable, the contractor represents that, pursuant to [KRS 45A.607](#), they are not currently engaged in, and will not for the duration of the contract engage in, the boycott of a person or an entity based in or doing business with a jurisdiction with which Kentucky can enjoy open trade. **Note:** The term Boycott does not include actions taken for bona fide business or economic reasons, or actions specifically required by federal or state law.

If applicable, the contractor verifies that, pursuant to KRS 41.480, they do not engage in, and will not for the duration of the contract engage in, in energy company boycotts as defined by KRS 41.472.

LOBBYING PROHIBITIONS

The contractor represents that they, and any subcontractor performing work under the contract, have not violated the agency restrictions contained in [KRS 11A.236](#) during the previous ten (10) years, and pledges to abide by the restrictions set forth in such statute for the duration of the contract awarded.

The contractor further represents that, pursuant to [KRS 45A.328](#), they have not procured an original, subsequent, or similar contract while employing an executive agency lobbyist who was convicted of a crime related to the original, subsequent, or similar contract within five (5) years of the conviction of the lobbyist.

Revised: 1/1/2025

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

RECIPROCAL PREFERENCE TO BE GIVEN BY PUBLIC AGENCIES TO RESIDENT BIDDERS

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the electronic bidding software. Submittal of the Affidavit should be done along the bid in Bid Express.

April 30, 2018

FEDERAL CONTRACT NOTES

The Kentucky Department of Highways, in accordance with the Regulations of the United States Department of Transportation 23 CFR 635.112 (h), hereby notifies all bidders that failure by a bidder to comply with all applicable sections of the current Kentucky Standard Specifications, including, but not limited to the following, may result in a bid not being considered responsive and thus not eligible to be considered for award:

- | | |
|--------------------------------|--|
| 102.02 Current Rating | 102.08 Preparation and Delivery of Proposals |
| 102.13 Irregular Bid Proposals | 102.14 Disqualification of Bidders |
| 102.09 Proposal Guaranty | |

CIVIL RIGHTS ACT OF 1964

The Kentucky Transportation Cabinet, Department of Highways, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. §§ 2000d to 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, national origin, sex, age (over 40), religion, sexual orientation, gender identity, veteran status, disability, income- level, or Limited English Proficiency (LEP) in consideration for an award.

NOTICE TO ALL BIDDERS

To report bid rigging activities call: 1-800-424-9071.

The U.S. Department of Transportation (DOT) operates the above toll-free “hotline” Monday through Friday, 8:00 a.m. to 5:00 p.m. eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the “hotline” to report such activities.

The “hotline” is part of the DOT’s continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

SECOND TIER SUBCONTRACTS

Second tier subcontracts are acceptable per Section 108.01 of the Standard Specifications for Road and Bridge Construction. Sub-Contractors fulfilling a disadvantaged business enterprise goal on a project may enter into a 2nd tier subcontract with a Non-DBE Subcontractor. However, in this instance, none of the work subcontracted to the Non-DBE Contractor will count toward fulfilling the established Disadvantaged Goal for the project.

DISADVANTAGED BUSINESS ENTERPRISE PROGRAM

It is the policy of the Kentucky Transportation Cabinet (“the Cabinet”) that Disadvantaged Business Enterprises (“DBE”) shall have the opportunity to participate in the performance of highway construction projects financed in whole or in part by Federal Funds in order to create a level playing field for all businesses who wish to contract with the Cabinet. To that end, the Cabinet will comply with the regulations found in 49 CFR Part 26, and the definitions and requirements contained therein shall be adopted as if set out verbatim herein.

The Cabinet, contractors, subcontractors, and sub-recipients shall not discriminate on the basis of race, color, national origin, or sex in the performance of work performed pursuant to Cabinet contracts. The contractor shall carry out applicable requirements of 49 CFR 26 in the award and administration of federally assisted highway construction projects. The contractor will include this provision in all its subcontracts and supply agreements pertaining to contracts with the Cabinet.

Failure by the contractor to carry out these requirements is a material breach of its contract with the Cabinet, which may result in the termination of the contract or such other remedy as the Cabinet deems necessary.

DBE GOAL

The Disadvantaged Business Enterprise (DBE) goal established for this contract, as listed on the front page of the proposal, is the percentage of the total value of the contract.

The contractor shall exercise all necessary and reasonable steps to ensure that Disadvantaged Business Enterprises participate in a least the percent of the contract as set forth above as goals for this contract.

OBLIGATION OF CONTRACTORS

Each contractor prequalified to perform work on Cabinet projects shall designate and make known to the Cabinet a liaison officer who is assigned the responsibility of effectively administering and promoting an active program for utilization of DBEs.

If a formal goal has not been designated for the contract, all contractors are encouraged to consider DBEs for subcontract work as well as for the supply of material and services needed to perform this work.

Contractors are encouraged to use the services of banks owned and controlled by minorities and women.

CERTIFICATION OF CONTRACT GOAL

Contractors shall include the following certification in bids for projects for which a DBE goal has been established. BIDS SUBMITTED WHICH DO NOT INCLUDE CERTIFICATION OF DBE PARTICIPATION WILL NOT BE ACCEPTED. These bids will not be considered for award by the Cabinet and they will be returned to the bidder.

“The bidder certifies that it has secured participation by Disadvantaged Business Enterprises (“DBE”) in the amount of _____ percent of the total value of this contract and that the DBE participation is in compliance with the requirements of 49 CFR 26 and the policies of the Kentucky Transportation Cabinet pertaining to the DBE Program.”

The certification statement is located in the electronic bid file. All contractors must certify their DBE participation on that page. DBEs utilized in achieving the DBE goal must be certified and prequalified for the work items at the time the bid is submitted.

DBE PARTICIPATION PLAN

Lowest responsive bidders must submit the *DBE Plan/ Subcontractor Request*, form TC 14-35 DBE, within **5** days of the letting. This is necessary before the Awards Committee will review and make a recommendation. **The project will not be considered for award prior to submission and approval of the apparent low bidder’s DBE Plan/Subcontractor Request.**

The DBE Participation Plan shall include the following:

1. Name and address of DBE Subcontractor(s) and/or supplier(s) intended to be used in the proposed project;
2. Description of the work each is to perform including the work item, unit, quantity, unit price and total amount of the work to be performed by the individual DBE. The Proposal Line Number, Category Number, and the Project Line Number can be found in the “material listing” on the Construction Procurement website under the specific letting;
3. The dollar value of each proposed DBE subcontract and the percentage of total project contract value this represents. DBE participation may be counted as follows:
 - a) If DBE suppliers and manufactures assume actual and contractual responsibility, the dollar value of materials to be furnished will be counted toward the goal as follows:
 - The entire expenditure paid to a DBE manufacturer;
 - 60 percent of expenditures to DBE suppliers that are not manufacturers provided the supplier is a regular dealer in the product involved. A regular dealer must be engaged in, as its principal business and in its own name, the sale of products to the public, maintain an inventory and own and operate distribution equipment; and
 - The amount of fees or commissions charged by the DBE firms for a bona fide service, such as professional, technical, consultant, or managerial services and assistance in the procurement of essential personnel, facilities, equipment, materials, supplies, delivery of materials and supplies or for furnishing bonds, or insurance, providing such fees or commissions are determined to be reasonable and customary.
 - b) The dollar value of services provided by DBEs such as quality control testing, equipment repair and maintenance, engineering, staking, etc.;

- c) The dollar value of joint ventures. DBE credit for joint ventures will be limited to the dollar amount of the work actually performed by the DBE in the joint venture;
- 4. Written and signed documentation of the bidder's commitment to use a DBE contractor whose participation is being utilized to meet the DBE goal; and
- 5. Written and signed confirmation from the DBE that it is participating in the contract as provided in the prime contractor's commitment.

AFTER PROJECT AWARD AND BEFORE NOTICE TO PROCEED/WORK ORDER IS ISSUED (SEE SECTION 103.06, STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION)

Prime Contractors awarded a federally funded project with a DBE Goal greater than zero will be required to submit a fully executed DBE Subcontract, along with the attached FHWA 1273 and Certificate of Liability Insurance for each DBE Firm submitted as part of the previously approved DBE Utilization Plan (TC 14-35). A signed quote or purchase order shall be attached when the DBE subcontractor is a material supplier or broker.

The Certificate of Liability Insurance submitted must meet the requirements outlined in Section 107.18 of the Standard Specifications for Road and Bridge Construction.

Changes to **APPROVED** DBE Participation Plans must be approved by the Office for Civil Rights & Small Business Development. The Cabinet may consider extenuating circumstances including, but not limited to, changes in the nature or scope of the project, the inability or unwillingness of a DBE to perform the work in accordance with the bid, and/or other circumstances beyond the control of the prime contractor.

CONSIDERATION OF GOOD FAITH EFFORTS REQUESTS

If the DBE participation submitted in the bid by the apparent lowest responsive bidder does not meet or exceed the DBE contract goal, the apparent lowest responsive bidder must submit a Good Faith Effort Package to satisfy the Cabinet that sufficient good faith efforts were made to meet the contract goals prior to submission of the bid. Efforts to increase the goal after bid submission will not be considered in justifying the good faith effort, unless the contractor can show that the proposed DBE was solicited prior to the letting date. DBEs utilized in achieving the DBE goal must be certified and prequalified for the work items at the time the bid is submitted. One complete set (hard copy along with an electronic copy) of this information must be received in the Division of Contract Procurement no later than 12:00 noon of the tenth calendar day after receipt of notification that they are the apparent low bidder.

Where the information submitted includes repetitious solicitation letters it will be acceptable to submit a sample representative letter along with a distribution list of the firms solicited. Documentation of DBE quotations shall be a part of the good faith effort submittal as necessary to demonstrate compliance with the factors listed below which the Cabinet considers in judging good faith efforts. This documentation may include written subcontractors' quotations, telephone log notations of verbal quotations, or other types of quotation documentation.

The Good Faith Effort Package shall include, but may not be limited to information showing evidence of the following:

1. Whether the bidder attended any pre-bid meetings that were scheduled by the Cabinet to inform DBEs of subcontracting opportunities;
2. Whether the bidder provided solicitations through all reasonable and available means;
3. Whether the bidder provided written notice to all DBEs listed in the DBE directory at the time of the letting who are prequalified in the areas of work that the bidder will be subcontracting;
4. Whether the bidder followed up initial solicitations of interest by contacting DBEs to determine with certainty whether they were interested. If a reasonable amount of DBEs within the targeted districts do not provide an intent to quote or no DBEs are prequalified in the subcontracted areas, the bidder must notify the Disadvantaged Enterprise Business Liaison Officer (DEBLO) in the Office for Civil Rights and Small Business Development to give notification of the bidder's inability to get DBE quotes;
5. Whether the bidder selected portions of the work to be performed by DBEs in order to increase the likelihood of meeting the contract goals. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise perform these work items with its own forces;
6. Whether the bidder provided interested DBEs with adequate and timely information about the plans, specifications, and requirements of the contract;
7. Whether the bidder negotiated in good faith with interested DBEs not rejecting them as unqualified without sound reasons based on a thorough investigation of their capabilities. Any rejection should be so noted in writing with a description as to why an agreement could not be reached;
8. Whether quotations were received from interested DBE firms but were rejected as unacceptable without sound reasons why the quotations were considered unacceptable. The fact that the DBE firm's quotation for the work is not the lowest quotation received will not in itself be considered as a sound reason for rejecting the quotation as unacceptable. The fact that the bidder has the ability and/or desire to perform the contract work with its own forces will not be considered a sound reason for rejecting a DBE quote. Nothing in this provision shall be construed to require the bidder to accept unreasonable quotes in order to satisfy DBE goals;
9. Whether the bidder specifically negotiated with subcontractors to assume part of the responsibility to meet the contract DBE goal when the work to be subcontracted includes potential DBE participation;
10. Whether the bidder made any efforts and/or offered assistance to interested DBEs in obtaining the necessary equipment, supplies, materials, insurance and/or bonding to satisfy the work requirements of the bid proposal; and
11. Any other evidence that the bidder submits which may show that the bidder has made reasonable good faith efforts to include DBE participation.

FAILURE TO MEET GOOD FAITH REQUIREMENT

Where the apparent lowest responsive bidder fails to submit sufficient participation by DBE firms to meet the contract goal and upon a determination by the Good Faith Committee based upon the information submitted that the apparent lowest responsive bidder failed to make sufficient reasonable efforts to meet the contract goal, the bidder will be offered the opportunity to meet in person for administrative reconsideration. The bidder will be notified of the Committee's decision within 24 hours of its decision. The bidder will have 24 hours to request reconsideration of the Committee's decision. The reconsideration meeting will be held within two days of the receipt of a request by the bidder for reconsideration.

The request for reconsideration will be heard by the Office of the Secretary. The bidder will have the opportunity to present written documentation or argument concerning the issue of whether it met the goal or made an adequate good faith effort. The bidder will receive a written decision on the reconsideration explaining the basis for the finding that the bidder did or did not meet the goal or made adequate Good Faith efforts to do so.

The result of the reconsideration process is not administratively appealable to the Cabinet or to the United States Department of Transportation.

The Cabinet reserves the right to award the contract to the next lowest responsive bidder or to rebid the contract in the event that the contract is not awarded to the low bidder as the result of a failure to meet the good faith requirement.

SANCTIONS FOR FAILURE TO MEET DBE REQUIREMENTS OF THE PROJECT

Failure by the prime contractor to fulfill the DBE requirements of a project under contract or to demonstrate good faith efforts to meet the goal constitutes a breach of contract. When this occurs, the Cabinet will hold the prime contractor accountable, as would be the case with all other contract provisions. Therefore, the contractor's failure to carry out the DBE contract requirements shall constitute a breach of contract and as such the Cabinet reserves the right to exercise all administrative remedies at its disposal including, but not limited to the following:

- Suspension of Prequalification;
- Disallow credit toward the DBE goal;
- Withholding progress payments;
- Withholding payment to the prime in an amount equal to the unmet portion of the contract goal; and/or
- Termination of the contract.

PROMPT PAYMENT

The prime contractor will be required to pay the DBE and Non-DBE Subcontractors within seven (7) working days after he or she has received payment from the Kentucky Transportation Cabinet for work performed or materials furnished.

CONTRACTOR REPORTING

All contractors must keep detailed records and provide reports to the Cabinet on their progress in meeting the DBE requirement on any highway contract. These records may include, but shall not be limited to payroll, lease agreements, cancelled payroll checks, executed subcontracting agreements, etc. Prime contractors will be required to complete and submit a **signed and notarized** Affidavit of Subcontractor Payment (TC 18-7) and copies of checks for any monies paid to each DBE subcontractor or supplier utilized to meet a DBE goal. These documents must be completed and signed within 7 days of being paid by the Cabinet.

Payment information that needs to be reported includes date the payment is sent to the DBE, check number, Contract ID, amount of payment and the check date. Before Final Payment is made on this contract, the Prime Contractor will certify that all payments were made to the DBE subcontractor and/or DBE suppliers.

***** IMPORTANT *****

Please mail the original, signed and completed TC (18-7) Affidavit of Subcontractor Payment form and all copies of checks for payments listed above to the following address:

Office for Civil Rights and Small Business Development
6th Floor West 200 Mero Street
Frankfort, KY 40622

The prime contractor should notify the KYTC Office for Civil Rights and Small Business Development seven (7) days prior to DBE contractors commencing work on the project. The contact in this office is Mr. Tony Youssefi. Mr. Youssefi's current contact information is email address – tyousseffi@ky.gov and the telephone number is (502) 564-3601.

DEFAULT OR DECERTIFICATION OF THE DBE

If the DBE subcontractor or supplier is decertified or defaults in the performance of its work, and the overall goal cannot be credited for the uncompleted work, the prime contractor may utilize a substitute DBE or elect to fulfill the DBE goal with another DBE on a different work item. If after exerting good faith effort in accordance with the Cabinet's Good Faith Effort policies and procedures, the prime contractor is unable to replace the DBE, then the unmet portion of the goal may be waived at the discretion of the Cabinet.

PROHIBITION ON TELECOMMUNICATIONS EQUIPMENT OR SERVICES

In accordance with the FY 2019 National Defense Authorization Act (NDAA), 2 CFR 200.216, and 2 CFR 200.471, Federal agencies are prohibited, after August 13, 2020, from obligating or expending financial assistance to obtain certain telecommunications and video surveillance services and equipment from specific producers. As a result of these regulations, contractors and subcontractors are prohibited, on projects with federal funding participation, from providing telecommunication or video surveillance equipment, services, or systems produced by:

- Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities)
- Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities)

Revised: 2/29/2024

**LEGAL REQUIREMENTS AND RESPONSIBILITY TO THE PUBLIC – CARGO
PREFERENCE ACT (CPA).**

(REV 12-17-15) (1-16)

SECTION 7 is expanded by the following new Article:

102.10 Cargo Preference Act – Use of United States-flag vessels.

Pursuant to Title 46CFR Part 381, the Contractor agrees

- To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.
- To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph 1 of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.
- To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract.



**Clarks River NWR
General Activity
Special Use Permit**
(For Official Use Only)

Permit #: 2026_10_updated

Permit Term:

From: 09/01/2026 To: 12/31/2029

Permittee Name/Business: Kentucky Transportation Department / Natalie House-Lewis Project Manager

Permit Activity Type: Other

Permit Activity Type (Other/Not Listed): Replace Chestnut Creek Bridge-Ky 795, Marshall County KY

Permit Status: Approved

If approved, provide special conditions (if any) in the text box below. If denied, provide justification below.

1. Permittee agrees to hold the U.S. Government, including Clarks River NWR and its employees, volunteers, officers etc., harmless from any claim that might result from actions authorized by this permit such as accident, injury, property damage, etc.
2. The permittee is authorized to replace an existing bridge along KY 795 over Chestnut Creek. The permittee, after consulting the refuge manager, may remove trees within the existing ROW. Any work required outside existing ROW or the Special Conditions of this permit will require additional consultation with Refuge Manager.
3. Any ROW activities or needs not addressed in this permit will require additional approval through the refuge manager prior to their implementation.
4. The Refuge Manager will conduct a post construction inspection. All post-construction sites will be returned to equal or better condition than pre-construction as evaluated by the Refuge Manager. This includes grading and seeding as appropriate. Permittee must not cause undue disturbance to wildlife, wildlife habitat or the visiting public. Rutting or deterioration should be minimized.

Special Conditions

-Prior to beginning construction, KYTC shall provide proof that all other required Federal and state permits have been received.

-KYTC shall ensure full compliance with all terms and conditions within, or attached to, the ROW SUP and all modifications or amendments thereof prior to construction, all associated parties (Service, KYTC, and the contractor) will agree with the guidelines associated with the SUP. During construction, erosion control measures such as silt fencing, installation of hay bales, and other Best Management Practices (BMPs) will be used on road shoulders to prevent erosion and sedimentation in drainage ditches. (<https://eec.ky.gov/Environmental-Protection/Water/PermitCert/KPDES/Documents/Kentucky%20Best%20Management%20Practices%20for%20Construction%20Activities.pdf>)

-Disturbed area will be maintained by the KYTC or contractor until stabilized by seeding or other BMPs.

The contractor and subcontractors must notify their workers to watch for the presence of any prehistoric or historic remains, including but not limited to arrowheads, pottery, ceramics, flakes, bones, graves, gravestones, or brick concentrations, during the construction phase of the project. If any such remains are encountered, the Resident Construction Engineer and the refuge manager will be immediately notified and all work in the vicinity of the discovered materials shall cease until the KYTC Archaeologist directs otherwise.

-Permittee is authorized to remove/clear small trees/shrubs (less than 8" dbh) and trim limbs overhanging the work area on the remaining standing tree per approval of acting refuge manager on the temporary ROW (15' outside KYTC's defined ROW) in order to replace the bridge. Additional needs, if required, on the temporary ROW or up to 15' outside of existing ROW will need consultation with Refuge Manager.

1.

Are there additional special conditions attached to the permit?

☒ Yes

☐ No

☐ N/A
2.

Are other licenses/ permits required, and have they been verified?

☐ Yes

☒ No

☐ N/A
3.

Are insurance and/or certification(s) required, and have they been verified?

☐ Yes

☒ No

☐ N/A
4.

Record of Payments:

☐ Full

☐ Partial

☒ Exempt
5.

Is a surely bond or security deposit required?

☐ Yes

☐ No

☒ N/A

This permit is issued by the U.S. Fish and Wildlife Service and accepted by the applicant signed below, subject to the terms, covenants, obligations, and reservations, expressed or implied therein, and to the notice, conditions, and requirements included or attached. A copy of this permit should be kept on-hand so that it may be shown at any time to any refuge staff

Permit approved/issued by: (Signature and title)

Kimberly L. Sykes

Date: 04/28/2026

Permit accepted by: (Signature of permittee)

N.K. House-Lewis

Date: 05/11/2026

SPECIAL NOTE FOR TRAFFIC CONTROL ON BRIDGE REPAIR CONTRACTS

I. TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the current standard specifications, section 112. The contractor will be responsible for developing and implementing the maintenance of traffic details with guidance through standard drawings and the MUTCD current editions. The developed traffic control plan must be approved by the Engineer prior to implementation. The contractor is expected to provide at a minimum the items listed in this note, however this note does not relieve the contractor of other items that may be necessary to comply with current standards.

Contrary to section 106.01, traffic control devices used on this project may be new or used in new condition, at the beginning of the work and maintained in like new condition until completion of the work.

The contractor must notify the engineer and public information officer at least 14 calendar days prior to the beginning work. Please see the Special Note for Liquidated Damages for additional information.

For projects where full closure of the roadway has been specified in the contract closure signs, detour signs, and bi-directional lane closure signs should be placed no sooner than two weeks prior to the closing of the bridge (when applicable) or placing lane closures.

Wayfinding detour signs should be placed a maximum of 2 miles apart unless specified by the engineer. Signs shall be covered or removed within 24 hours of opening the bridge to traffic.

II. PROJECT PHASING & CONSTRUCTION PROCEDURES

Project phasing shall be as directed by the plans, special notes, and the approved Traffic Control Plan prepared by the contractor. Maintain traffic over the bridge as long as possible. Once work on the structure begins that impacts traffic, ensure work progresses to minimize the effected time to the public. All materials that must be made specific for the project should be ordered and made prior to closure of the bridge or implementation of bi-directional lane closures so that delivery does not delay progress of the work, unless approved by the Engineer.

For projects which require an on-site diversion to be constructed to maintain traffic, the traffic control plan and project schedule prepared by the contractor shall include provisions such that traffic is not switched to the diversion until all materials that must be made specific for the project are ordered and made so that use of the diversion is minimized, unless approved by the Engineer.

III. PAVEMENT DROP-OFF

Less than two inches - no protection required. Warning signs should be placed in advance and throughout the drop-off area.

Two to four inches - plastic drums, vertical panels or barricades every 100 feet on tangent sections for speeds of 50 mph or greater. Cones may be used in place of plastic drums, panels, and barricades during daylight hours. For tangent sections with speeds less than 50 mph and curves devices should be placed every 50 feet. Spacing of devices on tapered sections should be in accordance with the manual on uniform traffic control devices, current edition.

Greater than four inches - positive separation or wedge with 3:1 or flatter slope needed. If there is five feet or more distance between the edge of the pavement and the drop-off, then drums, panel, or barricades may be used. If the drop-off is greater than 12 inches, positive separation is strongly encouraged. If concrete barriers are used, special reflective devices or steady burn lights should be used for overnight installations.

For temporary conditions, drop-offs greater than four inches may be protected with plastic drums, vertical panels or barricades for short distances during daylight hours while work is being done in the drop-off area.

IV. DETOUR AND ON-SITE DIVERSIONS

For projects which allow a full closure of the bridge, or if necessary to detour trucks, the traffic control plan proposed by the contractor shall include a signed detour route for the road closure. The traffic control plan along with the proposed detour plan will be delivered to the engineer 7 days prior to the pre-construction meeting. The proposed detour route shall meet the following requirements:

- 1) Detour routes must remain at minimum on the same classification of roadway (i.e. AA, AAA, state, county, etc.) Unless written approval is obtained through the owner of the facility.
- 2) The contractor must coordinate with other projects along the detour route to avoid ongoing construction projects along those routes.
- 3) It may be determined that two detour routes would be needed if the first selected route cannot accommodate truck traffic. If this occurs, the contractor is expected to sign both detours per the standard drawings and MUTCD. Additional clarification signage between the detours may be needed at points where they diverge.
- 4) For projects that involve the use of bi-directional lane closures and the temporary lane width per the plans or as proposed by the contractor is less than 10 feet, the contractor shall be required to provide a signed detour for oversized vehicles.

The traffic control plan must be submitted and approved to allow for coordination of the KYTC District public information officer with the closure notification. The public must be notified of the proposed detour route when they are notified of the closure, 2 weeks before closure. All

time and expenses necessary for the development of the detour plan(s) will be incidental to the lump sum bid item "Maintain and Control Traffic".

For projects with an on-site diversion included in the construction, the preparation of traffic control plans for a detour and implementation of a detour will not be required, unless specified in the plans.

IV. PAYMENT

Unless otherwise noted in this Special Note and contract documents, payment for Maintenance and Control of Traffic during construction shall be in accordance with Section 112 of the Kentucky Transportation Cabinet, Department of Highways Standard Specifications for Road and Bridge Construction, (latest edition).

SPECIAL NOTE FOR CONCRETE SEALING

These Notes or designated portions thereof, apply where so indicated on the plans, proposals or bidding instruction.

- I. DESCRIPTION.** Perform all work in accordance with the Department's current Standard Specifications, and applicable Supplemental Specifications, the attached sketches, and these Notes. Section references are to the Standard Specifications.

This work consists of:

1. Furnish all labor, materials, tools, equipment, and incidental items necessary to complete the work.
2. Provide safe access to the bridge, in accordance with Section 107.01.01, for the Engineer to sound possible repair areas and for workers to complete the construction.
3. Repair cracks as applicable in accordance with the Special Note for Epoxy Injection Crack Repair.
4. Repair delaminated or spalled areas as applicable in accordance with the Special Note for Concrete Patching.
5. Apply Ordinary Surface Finish
6. Prepare the surfaces to receive sealing.
7. Apply concrete sealing.
8. Maintain & control traffic.
9. Any other work as specified as part of this contract.

II. MATERIALS.

- A. Sealer.** Use a sealer from the KYTC list of approved materials.
- B. Coverage Rate:** Follow all manufacturers recommendations for coverage rates except the application rate must not exceed the square footage coverage rate per gallon of sealer as given in the chart below. If the manufacturer recommends a coverage rate greater than given in the table below, apply sealer at the rate given in the table below for the chosen sealers silane percentage.

% Silane	Coverage rate (ft ² /gallon)
100	300
40	120
20	60

III. CONSTRUCTION.

- A. Perform Concrete Repairs.** Repair concrete surface in accordance with the Special Note for Epoxy Injection Crack Repair and/or the Special Note for Concrete Patching Repair if included in the contract documents.

- B. Curing Compound.** Contrary to Section 609.03.12 of the specifications, curing compound is not to be used on the deck due to potentially causing issues with the concrete sealer. During the deck pour, finishing, and tining operations the Class AA concrete shall be kept continuously moist with the use of a mister until burlap or curing blankets are applied to the surface. At no point should water be pooling or running off the surface or the surface of the concrete be allowed to become dry. After the burlap or curing blankets are installed, cure in accordance with the specifications. Include all costs in the unit price bid for Class AA concrete. Failure to properly cure the concrete in accordance with this note and the specifications may result in weakened or cracked concrete. If the concrete is weakened or cracked due to improper curing, the contractor will be responsible for providing alternates to fix the issues to the Engineer for review and the contractor will be solely responsible for all costs to do so, up to complete replacement. Do not begin any construction on fixing any issues without approval of the Engineer.
- C. Apply Ordinary Surface Finish.** In addition to new concrete, areas receiving epoxy injection, concrete patching, and other surface imperfections, including areas of minor cracking, should receive Ordinary Surface Finish in accordance with Section 601.03.18 of the Standard Specifications. Existing structural items not newly placed, patched, or repaired may be exempt from Ordinary Surface Finish. Use mortar of the same cement and fine aggregate as the concrete patching, or as directed by the Engineer. Payment will be incidental to Concrete Sealing. Finish surface of bridge decks in accordance with Section 609 of the Standard Specifications.
- D. Areas to Receive Concrete Sealing:**
1. Every exposed surface above a point 6" below ground or fill line of abutments, wing walls, end bent and pier caps, pedestals, back walls, columns, and exposed footings.
 2. All exposed surfaces of concrete deck, barrier walls, parapets, curbs, and plinths.
 3. Prestressed Concrete I-Girders, Concrete Beams, and Spread Prestressed Concrete Box Beams: The underneath surfaces of slab overhangs outside of exterior concrete girders and to the exterior side and bottom of exterior concrete girders and beams.
 4. Adjacent Prestressed Concrete Composite Box Beams: Full length of the exterior face of all exterior beams from the top of the box beam to 1'-0" underneath the beams.
 5. Prestressed Non-Composite Box Beams: All faces of all beams, excluding surfaces to be covered with a waterproofing membrane. Take care to ensure that the grout pockets are not sealed.
 6. If the contract documents include the Special Note for Concrete Coating, do not apply concrete sealer to the areas where Concrete Coating is specified.

- E. Contract Time.** Concrete Sealing may need to be installed after contract time has elapsed in a separate mobilization and after the Engineer has declared the project otherwise complete. Liquidated damages shall not be charged provided Concrete Sealing is complete within 60 days after the last concrete pour on the structure. When the Contractor has not completed Concrete Sealing within the time frame allotted, Liquidated Damages shall be charged at 25 percent of the original contract daily charge from the expiration of the time allowed until the Contractor completes the work except the Department will not deduct liquidated damages when weather limitations prohibit the Contractor from performing the work.
- F. Cleaning the Concrete Surfaces to be sealed.** Dry clean the concrete to remove all loose debris. Remove all visible hydrocarbons from the surface with detergent approved by the manufacturer of the deck sealant. Pressure wash all surfaces to be sealed at 2000 to 3000 psi. Install pressure gauges at each wand to verify pressure. Use 30° fan tip or as recommended by the manufacturer of the sealant. Hold pressure washing wand a minimum of 45° from the surfaces with a maximum stand-off distance of 12 inches.
- G. Sealing the Concrete.** Allow new concrete to cure a minimum 28 days prior to application of sealer. Monitor weather conditions prior to sealer application. Refer to manufacturer's recommendations for proper ambient conditions. Do not apply sealer if precipitation is anticipated within the time stated by the manufacturer. Allow the concrete to dry 24 hours (after washing or rain event) before sealer application. The bridge deck can be reopened to traffic while drying. Sealer must be applied within 48 hours of washing or the concrete must be rewashed. Divide the concrete into predefined areas of specific square footage to aid in determining usage. Comply with manufacturer's usage recommendation. Using a low-pressure pump, apply sealer and spread evenly with broom or squeegee; do not allow pooling to remain. When each predefined area is complete, measure the amount of sealer used to verify proper usage. After sealing, follow manufacturer's recommended cure time before opening to traffic. On vertical surfaces, apply the sealer in a flooding application from the bottom up, so the material runs down 6 to 8 inches below the spray pattern.
- H. Inspection:** Monitor all aspects of the project to assure compliance to this specification. Observe and document general conditions during the entirety of the project. Verify that each phase of work has been satisfactorily completed prior to beginning the next phase. Phases are described as follows:
1. Dry cleaning to remove loose debris, verify and document:
 - a. All debris has been removed and disposed of properly.
 2. Removal of hydrocarbons, verify and document:
 - a. The manufacturer's recommended detergent is used for removal.
 - b. Hydrocarbons have been satisfactorily removed.

3. Pressure washing, verify and document:
 - a. Washing pressure at the wand.
 - b. Tip size used.
 - c. Wash angle and stand-off distance.
 - d. The concrete is satisfactorily cleaned.
4. Sealer application, verify and document:
 - a. Proper cure time for new concrete.
 - b. Concrete surface is dry.
 - c. Document time since washed.
 - d. Was the bridge deck opened to traffic after washing?
 - e. Document ambient temperature, surface temperature, relative humidity, and dew point.
 - f. Application and distribution method.
 - g. Coverage to be complete and even.
 - h. Material is not allowed to remain pooled.
 - i. Monitor material usage.
 - j. No traffic on the bridge decks until proper cure time is allowed.

IV. MEASUREMENT

- A. **Concrete Sealing.** The Department will measure the quantity per square feet of each area sealed.
- B. **Mobilization For Concrete Surf Treatment.** The Department will pay the lump sum bid for an additional mobilization when Concrete Sealing must be performed after the Engineer has deemed the project complete except for Concrete Sealing and the structure is opened to traffic.

V. PAYMENT

- A. **23378EC - Concrete Sealing – Sq. Ft.** Payment at the contract unit price per square feet is full compensation for the following: (1) Furnish all labor, materials, tools, and equipment; (2) Clean the bridge deck; (3) Seal the bridge deck; (4) Maintain & control traffic; and, (5) Any other work specified as part of this contract.
- B. **26233EC - Mobilization – For Concrete Surface Treatment – L.S.** Payment at the contract lump sum price bid shall be full compensation for the Contractor to remobilize on the project to perform Concrete Sealing as detailed herein this special note.

SPECIAL NOTE FOR TRUSS SCREEDS ON
CONCRETE OVERLAYS

This Special Note will apply where indicated on the plans or in the proposal. Section references herein are to the Department’s Current Standard Specifications for Road and Bridge Construction.

1.0 DESCRIPTION. This specification covers the use of vibratory truss screed use on side-by-side composite box beams with designed slab thickness equal to a nominal five inches. Contrary to Kentucky Transportation Cabinet Department of Highways Standard Specifications for Road and Bridge Construction, latest edition, the use of a Vibratory Truss Screed in lieu of a self-propelled finishing machine equipped as detailed in Section 609.02.09 of the Specifications will be considered for use provided the following requirements of this Special Note are met:

2.0 EQUIPMENT AND QUALIFYING PROJECTS.

2.1 Vibratory Truss Screed. The contractor shall submit for approval, prior to use, the manufacturer’s literature confirming that the vibratory truss screed proposed shall be able to meet the required cross slope of bridge and provide a minimum of 8,000 vibration cycle modes per minute (VPM). The Central Office Division of Construction will make the determination of use for each project.

2.2 Qualifying Structures. The vibratory truss screed can only be considered on structures meeting the following criteria:

- A. Bridge design consists of side-by-side composite box beams with concrete overlay.
- B. The design for the thickness of concrete for the bridge deck shall be 5-inch depth as detailed on the typical section of the bridge plans.
- C. The actual maximum nominal depth thickness must be less than 8” at any point on the deck.
- D. The side-by-side box beam bridge deck shall have only a single mat of reinforcement steel.

3.0 CONSTRUCTION.

3.1 Submittal. Submit, to the Central Office, Division of Construction, manufacturer’s specifications of equipment proposed for use.

3.2 Sampling and Testing. If approved, the bridge deck may be cored to verify density and voids, at the discretion of the Director of the Division of Construction. Failure to meet proper density and consolidation will incur a penalty up to removal and replacement.

4.0 MEASUREMENT. The Department will not measure for the use of vibratory truss screeds and are incidental to the work being performed.

5.0 PAYMENT. The Department will not make payment for the use of the vibratory truss screed and shall be incidental to the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
08104	CONCRETE-CLASS AA	Cubic Yard

SPECIAL NOTE FOR BARCODE LABEL ON PERMANENT SIGNS

1.0 DESCRIPTION. Install barcode label on sheeting signs. Section references herein are to the Department's Standard Specifications for Road and Bridge Construction, current edition.

2.0 MATERIALS. The Department will provide the Contractor with a 2-inch x 1 inch foil barcode label for each permanent sheeting sign. A unique number will be assigned to each barcode label.

The Contractor shall contact the Operations and Pavement Management Branch in the Division of Maintenance at (502) 564-4556 to obtain the barcode labels.

3.0 CONSTRUCTION. Apply foil barcode label in the lower right quadrant of the sign back. Signs where the bottom edge is not parallel to the ground, the lowest corner of the sign shall serve as the location to place the barcode label. The barcode label shall be placed no less than one inch and no more than three inches from any edge of the sign. The barcode must be placed so that the signpost does not cover the barcode label.

Barcodes shall be applied in an indoor setting with a minimum air temperature of 50°F or higher. Prior to application of the barcode label, the back of the sign must be clean and free of dust, oil, etc. If the sign is not clean, an alcohol swab shall be used to clean the area. The area must be allowed to dry prior to placement of the barcode label.

Data for each sign shall include the barcode number, MUTCD reference number, sheeting manufacturer, sheeting type, manufacture date, color of primary reflective surface, installation date, latitude and longitude using the North American Datum of 1983 (NAD83) or the State Plane Coordinates using an x and y ordinate of the installed location.

Data should be provided electronically on the TC 71-229 Sign Details Information and TC 71-230 Sign Assembly Information forms. The Contractor may choose to present the data in a different format provided that the information submitted to the Department is equivalent to the information required on the Department TC forms. The forms must be submitted in electronic format regardless of which type of form is used. The Department will not accept PDF or handwritten forms. These completed forms must be submitted to the Department prior to final inspection of the signs. The Department will not issue formal acceptance for the project until the TC 71-229 and TC-230 electronic forms are completed for all signs and sign assemblies on the project.

4.0 MEASUREMENT. The Department will measure all work required for the installation of the barcode label and all work associated with completion and submission of the sign inventory data (TC 71-229 and TC 71-230).

The installation of the permanent sign will be measured in accordance with Section 715.

5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:



<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
24631EC	Barcode Sign Inventory	Each

The Department will not make payment for this item until all barcodes are installed and sign inventory is complete on every permanent sign installed on the project. The Department will make payment for installation of the permanent sign in accordance with Section 715. The Department will consider payment as full compensation for all work required under this special note.





One Sign Post





↑
2" Wide Post

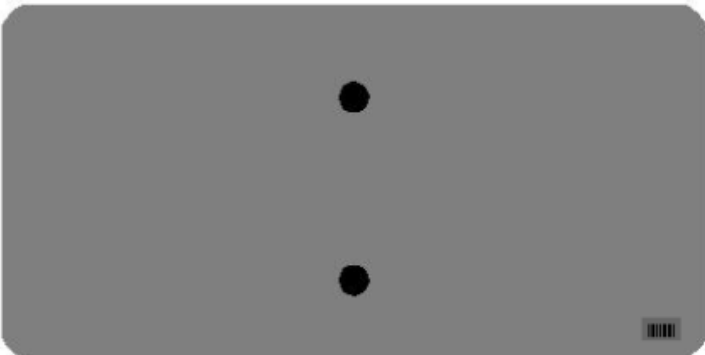


One Sign Post

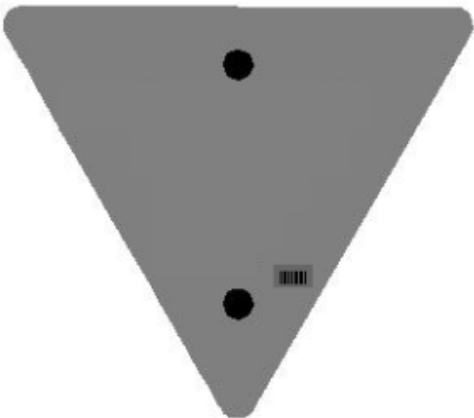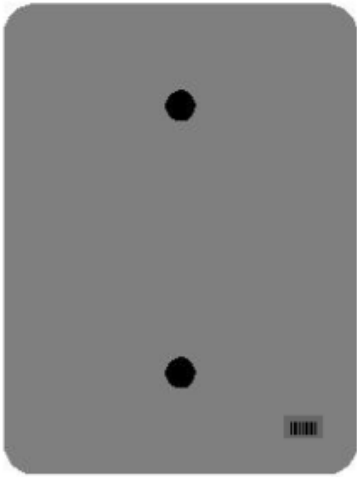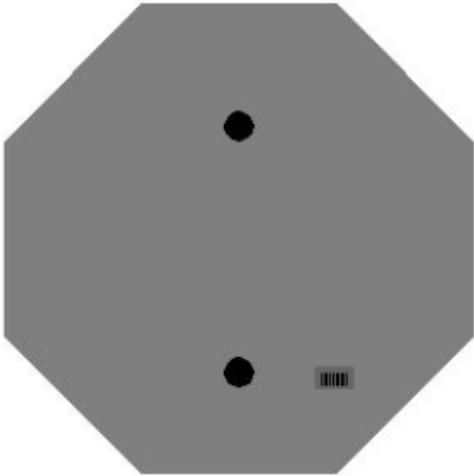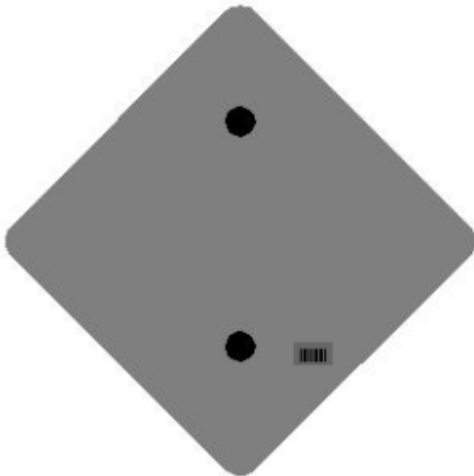


One Sign Post

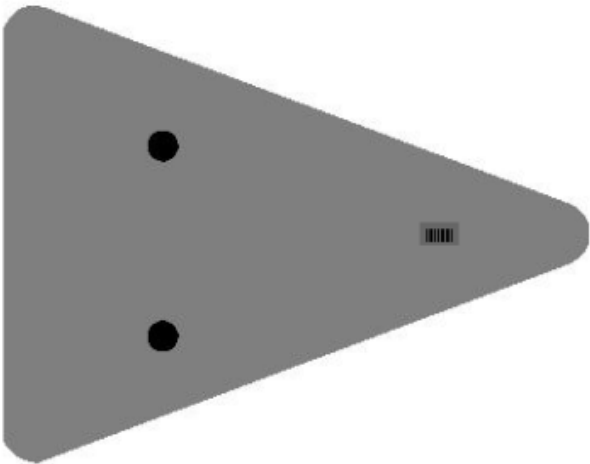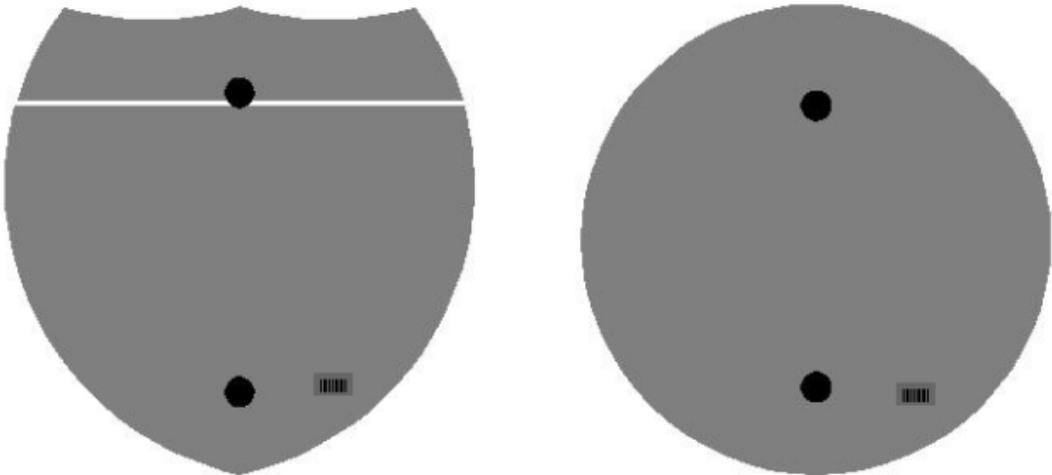

Double Sign Post

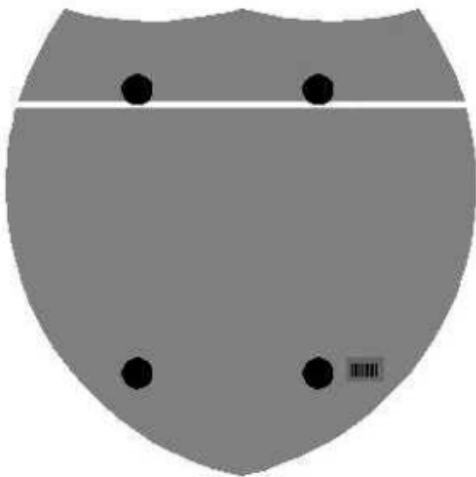

Interstate
Shield

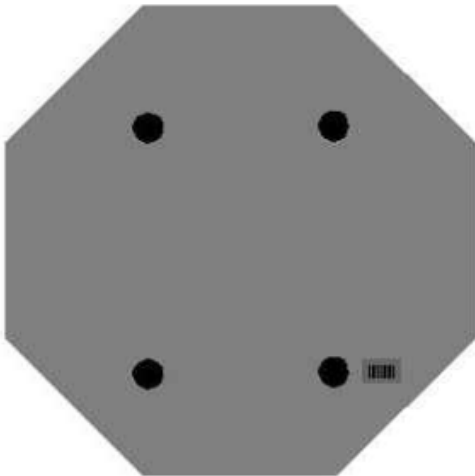


48" Stop

2 Post Signs



↑
2" Wide Post

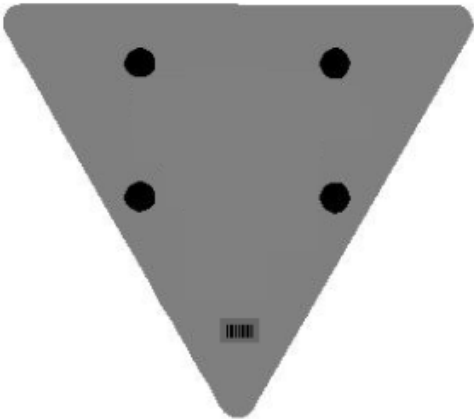

SPECIAL PROVISION FOR EMBANKMENT AT BRIDGE END BENT STRUCTURES

This Special Provision will apply when indicated on the plans or in the proposal. Section references herein are to the Department's Standard Specifications for Road and Bridge Construction, Current Edition.

1.0 DESCRIPTION. Construct a soil, granular, or rock embankment with soil, granular or cohesive pile core and place structure granular backfill, as the Plans require. Construct the embankment according to the requirements of this Special Provision, the Plans, Standard Drawing RGX 100 and 105, and the Standard Specifications, Current Edition.

2.0 MATERIALS.

2.1 Granular Embankment. Conform to Subsection 805.10. When Granular Embankment materials are erodible or unstable according to Subsection 805.03.04, use the Special Construction Methods found in 3.2 of the Special Provision.

2.2 Rock Embankment. Provide durable rock from roadway excavation that consists principally of Unweathered Limestone, Durable Shale (SDI equal to or greater than 95 according to KM 64-513), or Durable Sandstone.

2.3 Pile Core. Provide a pile core in the area of the embankments where deep foundations are to be installed unless otherwise specified. The Pile Core is the zone indicated on Standard Drawings RGX 100 and 105 designated as Pile Core. Material control of the pile core area during embankment construction is always required. Proper Pile Core construction is required for installation of foundation elements such as drilled or driven piles or drilled shafts. The type of material used to construct the pile core is as directed in the plans or below. Typically, the pile core area will be constructed from the same material used to construct the surrounding embankment. Pile Core can be classified as one of three types:

A) Pile Core - Conform to Section 206 of the Standard Specifications. Provide pile core material consisting of the same material as the adjacent embankment except the material in the pile core area shall be free of boulders or particle sizes larger than 4 inches in any dimension or any other obstructions that may hinder pile driving operations. If the pile core material hinders pile driving operations, take the appropriate means necessary to reach the required pile tip elevation, at no expense to the Department.

B) Granular Pile Core. Granular pile core is required only when specified in the plans. Select a gradation of durable rock to facilitate pile driving that conforms to Subsection 805.11. If granular pile core material hinders pile driving operations, take appropriate means necessary to reach the required pile tip elevation, at no expense to the Department.

C) Cohesive Pile Core. Cohesive Pile Core is required only when specified in the plans. Conform to Section 206 of the Standard Specifications and use soil with at least 50 percent passing a No. 4 sieve having a minimum Plasticity Index (PI) of 10. In addition, keep the cohesive pile core free of boulders, larger than 4 inches in any dimension, or any other obstructions, which would interfere with drilling operations. If cohesive pile core material interferes with drilling operations, take appropriate means necessary to maintain excavation stability, at no expense to the Department.

2.4 Structure Granular Backfill. Conform to Subsection 805.11

2.5 Geotextile Fabric. Conform to Class 1 or Class 2 in Section 214 and 843.

3.0 CONSTRUCTION.

3.1 General. Construct roadway embankments at end bents according to Section 206 and in accordance with the Special Provision, the Plans, and Standard Drawings for the full embankment section. In some instances, granular or rock embankment will be required for embankment construction for stability purposes, but this special provision does not prevent the use of soil when appropriate. Refer to the plans for specific details regarding material requirements for embankment construction.

Place and compact the pile core and structure granular backfill according to the applicable density requirements for the project. If the embankment and pile core are dissimilar materials (i.e., a granular pile core is used with a soil embankment or a cohesive pile core is used with a granular embankment), a Geotextile Fabric, will be required between the pile core and embankment in accordance with Sections 214 and 843 of the Standard Specifications.

When granular or rock embankment is required for embankment construction, conform to the general requirements of Subsection 206.03.02 B. In addition, place the material in no greater than 2-foot loose lifts and compact with a vibrating smooth wheel roller capable of producing a minimum centrifugal force of 15 tons. Apply these requirements to the full width of the embankment for a distance of half the embankment height or 50 feet, whichever is greater, as shown on Standard Drawing RGX-105.

When using granular pile core, install 8-inch perforated underdrain pipe at or near the elevation of the original ground in the approximate locations depicted on the standard drawing, and as the Engineer directs, to ensure positive drainage of the embankment. Wrap the perforated pipe with a fabric of a type recommended by the pipe manufacturer.

After constructing the embankment, excavate for the end bent cap, drive piling, install shafts or other foundation elements, place the mortar bed, construct the end bent, and complete the embankment to finish grade according to the construction sequence shown on the Plans or Standard Drawings and as specified hereinafter.

Certain projects may require widening of existing embankments and the removal of substructures. Construct embankment according to the plans. Substructure removal shall be completed according to the plans and Section 203. Excavation may be required at the existing embankment in order to place the structure granular backfill as shown in the Standard Drawings.

After piles are driven or shafts installed (see design drawings), slope the bottom of the excavation towards the ends of the trench as noted on the plans for drainage. Using a separate pour, place concrete mortar, or any class concrete, to provide a base for forming and placing the cap. Place side forms for the end bent after the mortar has set sufficiently to support workmen and forms without being disturbed.

Install 4-inch perforated pipe in accordance with the plans and Standard Drawings. In the event slope protection extends above the elevation of the perforated pipe, extend the pipe through the slope protection.

After placing the end bent cap and achieving required concrete cylinder strengths, remove adjacent forms and fill the excavation with compacted structure granular backfill material (maximum 1' loose lifts) to the level of the berm prior to placing beams for the bridge. Place a geotextile fabric between embankment material and structure granular backfill. After completing the end bent backwall, or after completing the span end wall, place the compacted structure granular backfill (maximum 1'

loose lifts) to subgrade elevation. If the original excavation is enlarged, fill the entire volume with compacted structure granular backfill (maximum 1' loose lifts) at no expense to the Department. Do not place backfill before removing adjacent form work. Place structure granular backfill material in trench ditches at the ends of the excavation. Place Geotextile Fabric, over the surface of the compacted structure granular backfill prior to placing aggregate base course.

Tamp the backfill with hand tampers, pneumatic tampers, or other means approved by the Engineer. Thoroughly compact the backfill under the overhanging portions of the structure to ensure that the backfill is in intimate contact with the sides of the structure.

Do not apply seeding, sodding, or other vegetation to the exposed granular embankment.

3.2 Special Construction Methods. Erodible or unstable materials may erode even when protected by riprap or channel lining; use the special construction method described below when using these materials.

Use fine aggregates or friable sandstone granular embankment at "dry land" structures only. Do not use them at stream crossings or locations subject to flood waters.

For erodible or unstable materials having 50 percent or more passing the No. 4 sieve, protect with geotextile fabric. Extend the fabric from the original ground to the top of slope over the entire area of the embankment slopes on each side of, and in front of, the end bent. Cover the fabric with at least 12 inches of non-erodible material.

For erodible or unstable materials having less than 50 percent passing a No. 4 sieve, cover with at least 12 inches of non-erodible material.

Where erodible or unstable granular embankment will be protected by riprap or channel lining, place a geotextile fabric between the embankment and the specified slope protection.

4.0 MEASUREMENT.

4.1 Granular Embankment. The Department will measure the quantity in cubic yards using the plan quantity, increased or decreased by authorized adjustments as specified in Section 204. The Department will not measure for payment any Granular Embankment that is not called for in the plans.

The Department will not measure for payment any special construction caused by using erodible or unstable materials and will consider it incidental to the Granular Embankment regardless of whether the erodible or unstable material was specified or permitted.

4.2 Rock Embankment. The Department will not measure for payment any rock embankment and will consider it incidental to roadway excavation or embankment in place, as applicable. Rock embankments will be constructed using granular embankment on projects where there is no available rock present within the excavation limits of the project.

4.3 Pile Core. Pile core will be measured and paid under roadway excavation or embankment in place, as applicable. The Department will not measure the pile core for separate payment. The Department will not measure for payment the 8-inch perforated underdrain pipe and will consider it incidental to the Pile Core.

4.4 Structure Granular Backfill. The Department will measure the quantity in cubic yards using the plan quantity, increased or decreased by authorized adjustments as specified in Section 204. The

Department will not measure any additional material required for backfill outside the limits shown on the Plans and Standard Drawings for payment and will consider it incidental to the work.

The Department will not measure for payment the 4-inch perforated underdrain pipe and will consider it incidental to the Structure Granular Backfill.

4.5 Geotextile Fabric. The Department will not measure the quantity of fabric used for separating dissimilar materials when constructing the embankment and pile core and will consider it incidental to embankment construction.

The Department will not measure for payment the Geotextile Fabric used to separate the Structure Granular Backfill from the embankment and aggregate base course and will consider it incidental to Structure Granular Backfill.

The Department will not measure for payment the Geotextile Fabric required for construction with erodible or unstable materials and will consider it incidental to embankment construction.

4.6 End Bent. The Department will measure the quantities according to the Contract. The Department will not measure furnishing and placing the 2-inch mortar or concrete bed for payment and will consider it incidental to the end bent construction.

4.7 Structure Excavation. The Department will not measure structure excavation on new embankments for payment and will consider it incidental to the Structure Granular Backfill or Concrete as applicable.

5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
02223	Granular Embankment	Cubic Yards
02231	Structure Granular Backfill	Cubic Yards

The Department will consider payment as full compensation for all work required in this provision.

August 5, 2019

SPECIAL NOTE

For Additional Environmental Commitments

IN ADDITION TO OTHER ENVIRONMENTAL COMMITMENTS LISTED IN THIS CONTRACT AND IN CONJUNCTION WITH KENTUCKY STANDARD SPECIFICATIONS 205.2, THE FOLLOWING COMMITMENTS ALSO APPLY, AS THIS IS A FEDERALLY FUNDED UNDERTAKING AS DEFINED IN SECTION 106 OF THE NATIONAL HISTORIC PRESERVATION ACT, [36 CFR 800.16\(Z\)](#):

- 1) The KYTC has completed a Phase 1 archaeological survey for a site-specific area surrounding the bridge. The cleared area is shown as “Archaeologically Cleared Area” or “Environmentally Cleared Area” on the concept plans and/or the map attached to this note or included elsewhere in the proposal. Likewise, any areas that must be avoided have been labeled “Do Not Disturb.”

If the Contractor deems it necessary to use additional areas outside the Archaeologically/ Environmentally Cleared Area for any purposes—e.g., laydown yards, parking cranes, delivering beams, borrow areas, waste areas, etc.—the Contractor must:

- Get a written agreement with the landowner (assuming the additional area is outside the right-of-way).
- Seek preliminary approval of the use of the site by the KYTC Section Supervisor, the KYTC Director of Environmental Analysis (or their designee).
 - The KYTC has the right to deny the use of the proposed site.
- The Contractor shall provide a map of the proposed area(s) to be used, including access points, and property-owner agreements.
- The contract must then obtain all necessary environmental approvals per Section 205.04 of the 2026 KYTC Standard Specifications.
 - Because archaeology approval will almost always be required, this would be obtained by submitting a request through the KY Heritage Council’s “INHERIT” portal: <https://heritage.ky.gov/compliance/Pages/overview.aspx>

A penalty in the form of Liquidated Damages of \$50,000 will be assessed whenever the Contractor has used any restricted areas. The fee will be assessed on a *per bridge* basis, whether the contract involves bridge bundles or a single bridge. In addition, all fines, fees, penalties, remediation costs, and other damages related to breaches of Threatened and Endangered Species Act Section 7, National Historic Preservation Act Section 106, Clean Water Act Sections 401 and 404, Kentucky General Permit for Stormwater Discharges KYR10, Environmental Protection Agency requirements, State Historic Preservation Office requirements, and other related permitting agencies will be paid by the Contractor, including all associated costs and burdens placed upon the Kentucky Transportation Cabinet.

- 2) If human remains are encountered during project activities, all work should be immediately stopped in the area. The area should be cordoned off, and, in accordance with KRS 72.020, the county coroner and local law enforcement must be contacted immediately. Upon confirmation that the human remains are not of forensic interest, the unanticipated discovery must be reported to KYTC DEA archaeologists at (502) 564-7250.

For guidance regarding inadvertent discovery and treatment of human remains, refer to the KYTC's [*Right of Way Guidance Manual*](#) (Section ROW-1202), and the Advisory Council on Historic Preservation's (ACHP) [*Policy Statement Regarding Treatment of Human Remains and Grave Goods*](#) (adopted by ACHP February 23, 2007).

- 3) If, during the implementation of The Project, a previously unidentified historic/ archaeological property is discovered or a previously identified historic/archaeological property is affected in an unanticipated manner, the contractor shall call KYTC DEA archaeologists at (502) 564-7250, and ensure that all work within a reasonable area of the discovery shall cease until such time as a treatment plan can be developed and implemented.

SPECIAL NOTE

FOR SEDIMENT PREVENTION AND EROSION CONTROL

FOR IMPACT REGARDLESS OF SIZE OF THE DISTURBED AREA

Potential impacts to gray bat foraging habitat and habitat for federally listed fish and mussel species will be minimized by implementing erosion prevention and sediment control measures.

As required under Section 213 of the KYTC Standard Specifications, prior to onsite activities a **site-specific Erosion Control Plan including BMPs** to ensure continuous erosion control throughout the construction and post construction period. The plan will identify individual Disturbed Drainage Areas (DDA) where storm water from the construction area will be discharged off site or into waters of the Commonwealth.

Should the Contractor fail to create a BMP Plan or provide and maintain the necessary erosion control, Liquidated Damages will apply at the rate specified in the contract. If no rate is specified, Liquidated Damages will be applied at the rate specified in Section 108 of the Standard Specifications.

The erosion prevention and sediment controls proposed are presented below.

- The location of the individual erosion prevention/sediment control measures will be identified by the Resident Engineer and Contractor. The Contractor will place erosion control devices as identified in the site-specific BMP Plan prior to beginning work.
- Mulch will be placed, during grade and drain activities, across all areas where no work will be conducted for a period of 14 consecutive days.
- Tree clearing within the riparian zone will be minimized. Trees to be removed will be determined by the resident engineer and the contractor prior to disturbance. (Note: Any "Special Note for Tree Clearing Restrictions" must be adhered to.)
- Silt fence, or other approved method as appropriate, will be installed at the edge of waters within the project corridors to eliminate the deposition of rock and debris in the streams during construction activities. In the unforeseen event that unintended debris does enter the streams, the resident engineer will halt the contributing activity until appropriate remedial actions have been implemented.
- To the maximum extent plausible, construction activities will take place during low-flow periods.
- Equipment staging and cleaning areas will be located to eliminate direct inputs to waters of the Commonwealth. These areas will be located such that effluent will be filtered through vegetated areas and appropriate sediment controls prior to discharge offsite.
- Concrete will be poured in a manner to avoid spills into the streams. In the unforeseen event that a spill does occur, the USFWS will be notified, and the resident engineer

will immediately halt the activity until remedial measures have been implemented.

- KYTC proposes to stabilize areas disturbed during construction activities through vegetation establishment and placement of riprap and geotextile fabric. Re-vegetation of the disturbed areas will allow thermoregulation of water within the streams, establish long-term, regenerative stabilization of the stream banks, and provide nutrients to the aquatic macroinvertebrate community through inputs of organic material.
- Areas disturbed during construction and not stabilized with rip rap and erosion blanket will be seeded using a standard seed mix. Depending on project slope and project location, application rates and seed mix types will vary. The Contractor shall perform all final seeding and protection, in accordance with the plans and Section 212 of KYTC Standard Specifications.
- Contrary to Section 213.03.03, paragraph 2, the Engineer shall conduct inspections as needed to verify compliance with Section 221 of KYTC Standard Specifications. The Engineer's inspections shall be performed a minimum of once per month and within seven (7) days after a storm of ½ inch or greater. Copies of the Engineer's inspections shall not be provided to the Contractor unless improvements to the BMPs are required. The Contractor shall initiate corrective action within 24 hours of any reported deficiency and complete the work within five (5) days. The Engineer shall use Form TC 63-61 A for this report. Inspections performed by the Engineer do not relieve the Contractor of any responsibility for compliance. If corrections are not made within the five (5) days specified, the liquidated damages will apply at the rate specified in the Liquidated Damages note in the contract.
- Contrary to Sections 212.05 and 213.05, unless listed in the proposal, bid items for temporary BMPs and items for permanent erosion control will not be measured for payment and will be replaced with one lump sum item for the services. Payment will be pro-rated based on the Project Schedule as submitted by the Contractor and as agreed to by the Engineer.
- The Contractor shall be responsible for applying "good engineering practices." The Contractor may use any temporary BMPs and permanent BMPs that fall within the guidance of the current Standard Specifications, KYTC's Best Management Practices manual, and with the approval of the KYTC Engineer.

FOR IMPACT GREATER THAN 1.0 ACRE

When the total disturbed area for a project, including laydown and waste/borrow areas, is greater than 1.0 acre, the Contractor shall be responsible for filing the Kentucky Pollution discharge Elimination System (KPDES) KYR10 permit Notice of Intent (NOI) with the Kentucky Division of Water (DOW). The Contractor will be responsible for following the KPDES requirements of local Municipal Separate Storm Sewer System (MS4) programs with jurisdiction. Required NOI shall name the Contractor as the Facility Operator and include the KYTC Contract ID Number (CID) for reference. For grouped contracts with more than one structure, each structure will be treated independently in regard to disturbed area unless another structure is within 0.25 mile of the structure. For structures within 0.25 mile of each

other, the total disturbed area will be the sum of the combined disturbed areas. The Contractor shall be responsible for filing the KPDES permit Notice of Termination (NOT) with the Kentucky DOW and any local MS4 Program that has jurisdiction. The NOT shall be filed after the Engineer agrees the project is stabilized or the project has been formally accepted.

The Contractor shall perform all temporary erosion/sediment control functions including providing a Best Management Practice (BMP) Plan, conducting required inspections, modifying the BMP Plan documents as construction progresses, and documenting the installation and maintenance of BMPs in conformance with the KPDES KYR10 permit effective on August 1, 2009, or a permit re-issued to replace that KYR10 permit. This work shall be conducted in conformance with the requirements of Section 213 of the KYTC current Department of Highways, Standard Specifications for Road and Bridge Construction (Standard Specifications).

The Contractor shall be responsible for the examination of the soils to be encountered and make his own independent determination of the temporary BMPs that will be required to accomplish effective erosion prevention and sediment control. The Contractor shall provide the Engineer copies of all documents required by the KPDES permit at the time they are prepared.

They KYR10 web page, which includes the General Permit and eNOI application is here:
<https://eec.ky.gov/Environmental-Protection/Water/PermitCert/KPDES/Documents/KYR10PermitPage.pdf>

If there are any questions regarding this note, please contact Danny Peake, Director, Division of Environmental Analysis, 200 Mero Street, Frankfort, KY 40601, Phone (502) 564-7250.

SPECIAL NOTE

For Compliance with KDOW WQC

County: Marshall
Item No: 1-10171
Bridge No: 079B00014N
Permit AI No: 188215

It is the responsibility of the contractor and KYTC to read and comply with all conditions the KDOW issued permit. The following are highlighted conditions unique to this bridge:

- Notify KYTC DEA with the attached form, so they can notify KDOW at least 2 weeks before start of construction (Condition S-1)
- Notify KYTC DEA with the attached form, so they can notify KDOW no later than 2 weeks after substantial completion of construction (Condition S-2)
- Submit as-built drawing to KYTC DEA within 90 days of substantial completion so they can submit them to KDOW (Condition S-3)
- No instream construction during the fish spawning season of **April 1 - June 30** (Condition T-4)

If there are any questions regarding this note, please contact Danny Peake, Director, Division of Environmental Analysis, 200 Mero Street, Frankfort, KY 40601, Phone (502) 564-7250.

CONSTRUCTION REPORT PER KDOW PERMIT

The Contactor will notify the Kentucky Transportation Cabinet Division of Environmental Analysis (KYTC DEA), twenty-eight (28) calendar days prior to mobilization to the site by sending the *Notice of Mobilization* (attached) to **David Harmon** Dave.Harmon@ky.gov (502) 782-5016, and **Andrew Logsdon** Andrew.Logsdon@ky.gov (502) 782-5021, with a copy to the project's Section Engineer.

CID Number: _____

DOW AI Number: 188215

Bridge Number: 079B00014N

KYTC Item Number: 1-10171

Route: KY 795 over Chestnut Creek

County: Marshall

Date: _____

Contractor: _____

This Form must be submitted at the Initial Mobilization, and at the project completion. Please check the appropriate submittal type:

Submittal Type: ☐ Notice of Mobilization ☐ Notice of Completion

1 - Sediment and erosion control measures utilized during construction to protect streams/wetlands, and descriptions of in-stream activities (attach photos of use):

2 - Post-construction stream restoration activities, i.e., restoration of work pads and construction access in the stream, restoration of areas used for temporary diversions, bank restoration and tree planting, bank armoring and erosion control measures implemented. Note if any sediment controls are being left on site. (Attach photos of pre- and post-construction with an emphasis on the impacted streams.) (Complete at end of project.):

3 - Attach As-Built Drawings, i.e., redline drawings, photos (complete at end of project), and description of restoration work completed.

KyTC BMP Plan for Project CID ## - #####



Kentucky Transportation Cabinet

Highway District 1

And

_____ (2), Construction

**Kentucky Pollutant Discharge Elimination System
Permit KYR10
Best Management Practices (BMP) plan**

Groundwater protection plan

For Highway Construction Activities

For

Replacement

Project: CID ## - #####

KyTC BMP Plan for Project CID ## -

Project Information

Note – (1) = Design (2) = Construction (3) = Contractor

1. Owner – Kentucky Transportation Cabinet, District 1 (1)
2. Resident Engineer: (2)
3. Contractor Name: (2)
Address: (2)

Phone number: (2)
Contact: (2)
Contractor's agent responsible for compliance with KPDES permit requirements: (3)
4. Project Control Number: (2)
5. Route (Address): KY 795 over Chestnut Creek (1)
6. Latitude/Longitude (project mid-point): 36°54'49.2"N 88°23'29.7"W (1)
7. County (project mid-point): Marshall County (1)
8. Project start date (date work will begin): (2)
9. Projected completion date: (2)

KyTC BMP Plan for Project CID ## -

A. Site Description

1. **Nature of Construction Activity (from letting project description):** Address deficiencies of KY 759 Bridge over Chestnut Creek (079B00014N), from MP 3.045. SYP No. 01-10171.00. (1)
2. **Order of major soil disturbing activities:** (2) and (3)
3. **Projected volume of material to be moved:** (3)
4. **Estimate of total project area (acres):** (3)
5. **Estimate of area to be disturbed (acres):** (3)
6. **Post construction runoff coefficient** will be included in the project drainage folder. Persons needing information pertaining to the runoff coefficient will contact the resident engineer to request this information. (1)
7. **Data describing existing soil condition:** The soils mapped for the location by the USDA-NRCS consist of one soil type: Collins-luka complex (Ci) (Soil Survey Staff 2019). Ci is considered prime farmland if not frequently flooded during the growing season. It is moderately to well-drained with 0 to 2 percent slopes. (<https://websoilsurvey.sc.egov.usda.gov/App/WebSoilSurvey.aspx>) (1) and (2)
8. **Data describing existing discharge water quality (if any):** (2)
9. **Receiving water name:** Chestnut Creek (1)
10. **TMDLs and Pollutants of Concern in Receiving Waters:** (1 DEA)
11. **Site map:** Project layout sheet plus the erosion control sheets in the project plans that depict Disturbed Drainage Areas (DDAs) and related information. These sheets depict the existing project conditions with areas delineated by DDA (drainage area bounded by watershed breaks and right of way limits), the storm water discharge locations (either as a point discharge or as overland flow) and the areas that drain to each discharge point. These plans define the limits of areas to be disturbed and the location of control measures. Controls will be either site specific as designated by the designer or will be annotated by the contractor and resident engineer before disturbance commences. The project layout sheet shows the surface waters and wetlands.
12. **Potential sources of pollutants:** The primary source of pollutants is solids that are mobilized during storm events. Other sources of pollutants include oil/fuel/grease from servicing and operating construction equipment, concrete

KyTC BMP Plan for Project CID ## -

washout water, sanitary wastes and trash/debris. (3)

B. Sediment and Erosion Control Measures

1. Plans for highway construction projects will include erosion control sheets that depict Disturbed Drainage Areas (DDAs) and related information. These plan sheets will show the existing project conditions with areas delineated by DDA within the right of way limits, the discharge points and the areas that drain to each discharge point. Project managers and designers will analyze the DDAs and identify Best Management Practices (BMPs) that are site specific. The balance of the BMPs for the project will be listed in the bid documents for selection and use by the contractor on the project with approval by the resident engineer.

Projects that do not have DDAs annotated on the erosion control sheets will employ the same concepts for development and managing BMP plans.

2. Following award of the contract, the contractor and resident engineer will annotate the erosion control sheets showing location and type of BMPs for each of the DDAs that will be disturbed at the outset of the project. This annotation will be accompanied by an order of work that reflects the order or sequence of major soil moving activities. The remaining DDAs are to be designated as "Do Not Disturb" until the contractor and resident engineer prepare the plan for BMPs to be employed. The initial BMP's shall be for the first phase (generally Clearing and Grubbing) and shall be modified as needed as the project changes phases. The BMP Plan will be modified to reflect disturbance in additional DDA's as the work progresses. All DDA's will have adequate BMP's in place before being disturbed.
3. As DDAs are prepared for construction, the following will be addressed for the project as a whole or for each DDA as appropriate:
 - **Construction Access**—This is the first land-disturbing activity. As soon as construction begins, bare areas will be stabilized with gravel and temporary mulch and/or vegetation.
 - **Sources**—At the beginning of the project, all DDAs for the project will be inspected for areas that are a source of storm water pollutants. Areas that are a source of pollutants will receive appropriate cover or BMPs to arrest the introduction of pollutants into storm water. Areas that have not been opened by the contractor will be inspected periodically (once per month) to determine if there is a need to employ BMPs to keep pollutants from entering storm water.
 - **Clearing and Grubbing**—The following BMP's will be considered and used where appropriate.
 - Leaving areas undisturbed when possible.

KyTC BMP Plan for Project CID ## -

- Silt basins to provide silt volume for large areas.
 - Silt Traps Type A for small areas.
 - Silt Traps Type C in front of existing and drop inlets which are to be saved.
 - Diversion ditches to catch sheet runoff and carry it to basins or traps or to divert it around areas to be disturbed.
 - Brush and/or other barriers to slow and/or divert runoff.
 - Silt fences to catch sheet runoff on short slopes. For longer slopes, multiple rows of silt fence may be considered.
 - Temporary mulch for areas which are not feasible for the fore mentioned types of protections.
 - Non-standard or innovative methods.
- **Cut and Fill and Placement of Drainage Structures**—The BMP Plan will be modified to show additional BMP's such as:
- Silt Traps Type B in ditches and/or drainways as they are completed.
 - Silt Traps Type C in front of pipes after they are placed.
 - Channel Lining.
 - Erosion Control Blanket.
 - Non-standard or innovative methods.
- **Profile and X-Section in Place**—The BMP Plan will be modified to show elimination of BMP's which had to be removed and the addition of new BMP's as the roadway was shaped. Probably changes include:
- Silt Trap Type A, Brush and/or other barriers, Temporary mulch, and any other BMP which had to be removed for final grading to take place.
 - Additional Silt Traps Type B and Type C to be placed as final drainage patterns are put in place.
 - Additional Channel Lining and/or Erosion Control Blanket.
 - Temporary mulch for areas where Permanent Seeding and Protection cannot be done within 21 days.
 - Special BMP's such as Karst Policy.
- **Finish Work (Paving, Seeding, Protect, etc.)**—A final BMP Plan will result from modifications during this phase of construction. Probable changes include:
- Removal of Silt Traps Type B from ditches and drainways if they are protected with other BMP's which are sufficient to control erosion, i.e. Erosion Control Blanket, or Permanent Seeding and Protection on moderate grades.

KyTC BMP Plan for Project CID ## -

- Permanent Seeding and Protection.
 - Placing Sod.
 - Planting trees and/or shrubs where they are included in the project.
- BMP's, including Storm Water Management Devices such as velocity dissipation devices and Karst policy BMP's, to be installed during construction to control the pollutants in storm water discharges that will occur after construction has been completed are: (3)

C. Other Control Measures

1. Solid Materials

No solid materials, including building materials, shall be discharged to waters of the commonwealth, except as authorized by a Section 404 permit.

2. Waste Materials

All waste materials that may leach pollutants (paint and paint containers, caulk tubes, oil/grease containers, liquids of any kind, soluble materials, etc.) will be collected and stored in appropriate covered waste containers. Waste containers shall be removed from the project site on a sufficiently frequent basis as to not allow wastes to become a source of pollution. All personnel will be instructed regarding the correct procedure for waste disposal. Wastes will be disposed in accordance with appropriate regulations. Notices stating these practices will be posted in the office.

3. Hazardous Waste

All hazardous waste materials will be managed and disposed of in the manner specified by local or state regulation. The contractor shall notify the Section Engineer if there any hazardous wastes being generated at the project site and how these wastes are being managed. Site personnel will be instructed with regard to proper storage and handling of hazardous wastes when required. The Transportation Cabinet will file for generator, registration when appropriate, with the Division of Waste Management and advise the contractor regarding waste management requirements.

4. Spill Prevention

The following material management practices will be used to reduce the risk of spills or other exposure of materials and substances to the weather and/or runoff.
(3)

➤ **Good Housekeeping**

The following good housekeeping practices will be followed onsite during the construction project.

KyTC BMP Plan for Project CID ## -

- An effort will be made to store only enough product required to do the job.
- All materials stored onsite will be stored in a neat, orderly manner in their appropriate containers and, if possible, under a roof or other enclosure.
- Products will be kept in their original containers with the original manufacturer's label.
- Substances will not be mixed with one another unless recommended by the manufacturer.
- Whenever possible, all of the product will be used up before disposing of the container.
- Manufacturers' recommendations for proper use and disposal will be followed.
- The site contractor will inspect daily to ensure proper use and disposal of materials onsite.

➤ **Hazardous Products**

These practices will be used to reduce the risks associated with any and all hazardous materials.

- Products will be kept in original containers unless they are not resealable.
- Original labels and material safety data sheets (MSDS) will be reviewed and retained.
- Contractor will follow procedures recommended by the manufacturer when handling hazardous materials.
- If surplus product must be disposed of, manufacturers' or state/local recommended methods for proper disposal will be followed.

5. **Product-specific Practices**

The following product-specific practices will be followed onsite:

➤ **Petroleum Products**

- Vehicles and equipment that are fueled and maintained on site will be monitored for leaks, and receive regular preventative maintenance to reduce the chance of leakage. Petroleum products onsite will be stored in tightly sealed containers, which are clearly labeled and will be protected from exposure to weather.
- The contractor shall prepare an Oil Pollution Spill Prevention Control and Countermeasure plan when the project that involves

KyTC BMP Plan for Project CID ## -

the storage of petroleum products in 55 gallon or larger containers with a total combined storage capacity of 1,320 gallons. This is a requirement of 40 CFR 112.

- This project (will / will not) (3) have over 1,320 gallons of petroleum products with a total capacity, sum of all containers 55 gallon capacity and larger.

➤ **Fertilizers**

Fertilizers will be applied at rates prescribed by the contract, standard specifications or as directed by the resident engineer. Once applied, fertilizer will be covered with mulch or blankets or worked into the soil to limit exposure to storm water. Storage will be in a covered shed. The contents of any partially used bags of fertilizer will be transferred to a sealable plastic bin to avoid spills.

➤ **Paints**

All containers will be tightly sealed and stored indoors or under roof when not being used. Excess paint or paint wash water will not be discharged to the drainage or storm sewer system but will be properly disposed of according to manufacturers' instructions or state and local regulations.

➤ **Concrete Truck Washout**

Concrete truck mixers and chutes will not be washed on pavement, near storm drain inlets, or within 75 feet of any ditch, stream, wetland, lake, or sinkhole. Where possible, excess concrete and wash water will be discharged to areas prepared for pouring new concrete, flat areas to be paved that are away from ditches or drainage system features, or other locations that will not drain off site. Where this approach is not possible, a shallow earthen wash basin will be excavated away from ditches to receive the wash water.

➤ **Spill Control Practices**

In addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices will be followed for spill prevention and cleanup:

- Manufacturers' recommended methods for spill cleanup will be clearly posted. All personnel will be made aware of procedures and the location of the information and cleanup supplies.
- Materials and equipment necessary for spill cleanup will be kept in the material storage area. Equipment and materials will include as appropriate, brooms, dust pans, mops, rags, gloves, oil absorbents, sand, sawdust, and plastic and metal trash containers.

KyTC BMP Plan for Project CID ## -

- All spills will be cleaned up immediately after discovery.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- Spills of toxic or hazardous material will be reported to the appropriate state/local agency as required by KRS 224 and applicable federal law.
- The spill prevention plan will be adjusted as needed to prevent spills from reoccurring and improve spill response and cleanup.
- Spills of products will be cleaned up promptly. Wastes from spill clean-up will be disposed in accordance with appropriate regulations.

D. Other State and Local Plans

This BMP plan shall include any requirements specified in sediment and erosion control plans, storm water management plans or permits that have been approved by other state or local officials. Upon submittal of the NOI, other requirements for surface water protection are incorporated by reference into and are enforceable under this permit (even if they are not specifically included in this BMP plan). This provision does not apply to master or comprehensive plans, non-enforceable guidelines or technical guidance documents that are not identified in a specific plan or permit issued for the construction site by state or local officials. (1)

E. Maintenance

1. The BMP plan shall include a clear description of the maintenance procedures necessary to keep the control measures in good and effective operating condition.
2. Maintenance of BMPs during construction shall be a result of weekly and post rain event inspections with action being taken by the contractor to correct deficiencies.
3. Post Construction maintenance will be a function of normal highway maintenance operations. Following final project acceptance by the cabinet, district highway crews will be responsible for identification and correction of deficiencies regarding ground cover and cleaning of storm water BMPs. The project manager shall identify any BMPs that will be for the purpose of post construction storm water management with specific guidance for any non-routine maintenance. (1)

F. Inspections

KyTC BMP Plan for Project CID ## -

Inspection and maintenance practices that will be used to maintain erosion and sediment controls:

- All erosion prevention and sediment control measures will be inspected at least once each week and following any rain of one-half inch or more.
- Inspections will be conducted by individuals that have successfully completed KEPSC-RI course as required by Section 213.02.02 of the Standard Specifications for Road and Bridge Construction, current edition.
- Inspection reports will be written, signed, dated, and kept on file.
- Areas at final grade will be seeded and mulched within 14 days.
- Areas that are not at final grade where construction has ceased for a period of 21 days or longer and soil stock piles shall receive temporary mulch no later than 14 days from the last construction activity in that area.
- All measures will be maintained in good working order. If a repair is necessary, it will be initiated within 24 hours of being reported.
- Built-up sediment will be removed from behind the silt fence before it has reached halfway up the height of the fence.
- Silt fences will be inspected for bypassing, overtopping, undercutting, depth of sediment, tears, and to ensure attachment to secure posts.
- Sediment basins will be inspected for depth of sediment, and built-up sediment will be removed when it reaches 50 percent of the design capacity and at the end of the job.
- Diversion dikes and berms will be inspected and any breaches promptly repaired. Areas that are eroding or scouring will be repaired and re-seeded / mulched as needed.
- Temporary and permanent seeding and mulching will be inspected for bare spots, washouts, and healthy growth. Bare or eroded areas will be repaired as needed.
- All material storage and equipment servicing areas that involve the management of bulk liquids, fuels, and bulk solids will be inspected weekly for conditions that represent a release or possible release of pollutants to the environment.

G. Non–Storm Water Discharges

KyTC BMP Plan for Project CID ## -

It is expected that non-storm water discharges may occur from the site during the construction period. Examples of non-storm water discharges include:

- Water from water line flushings.
- Water form cleaning concrete trucks and equipment.
- Pavement wash waters (where no spills or leaks of toxic or hazardous materials have occurred).
- Uncontaminated groundwater and rain water (from dewatering during excavation).

All non-storm water discharges will be directed to the sediment basin or to a filter fence enclosure in a flat vegetated infiltration area or be filtered via another approved commercial product.

H. Groundwater Protection Plan (3)

This plan serves as the groundwater protection plan as required by 401 KAR 5:037.

- Contractors statement: (3)

The following activities, as enumerated by 401 KAR 5:037 Section 2, require the preparation and implementation of a groundwater protection plan, and will or may be may be conducted as part of this construction project:

_____2. (e) Land treatment or land disposal of a pollutant;

_____2. (f) Storing...or related handling of hazardous waste, solid waste or special waste...in tanks, drums, or other containers, or in piles (does not include wastes managed in a container placed for collection and removal of municipal solid waste for disposal off site);

_____2. (g) ...handling of materials in bulk quantities (equal or greater than 55 gallons or 100 pounds net dry weight transported held in an individual container) that, if released to the environment, would be a pollutant;

_____2. (j) Storing or related handling of road oils, dust suppressants at a central location;

_____2. (k) Application or related handling of road oils, dust suppressants or deicing materials (does not include use of chloride-based deicing materials applied to roads or parking lots);

_____2. (m) Installation, construction, operation, or abandonment of wells, bore holes, or core holes (does not include bore holes for the purpose of explosive demolition);

KyTC BMP Plan for Project CID ## -

Or, check the following only if there are no qualifying activities:

_____ There are no activities for this project as listed in 401 KAR 5:037 Section 2 that require the preparation and implementation of a groundwater protection plan.

The contractor is responsible for the preparation of a plan that addresses the 401 KAR 5:037 Section 3. (3) Elements of site specific groundwater protection plan:

- (a) General information about this project is covered in the Project information;
- (b) Activities that require a groundwater protection plan have been identified above;
- (c) Practices that will protect groundwater from pollution are addressed in *Section C: Other Control Measures*.
- (d) Implementation schedule—all practices required to prevent pollution of groundwater are to be in place prior to conducting the activity;
- (e) Training is required as a part of the ground water protection plan. All employees of the contractor, sub-contractor, and resident engineer personnel will be trained to understand the nature and requirements of this plan as they pertain to their job function(s). Training will be accomplished within one week of employment and annually thereafter. A record of training will be maintained by the contractor with a copy provided to the resident engineer.
- (f) Areas of the project and groundwater plan activities will be inspected as part of the weekly sediment and erosion control inspections
- (g) Certification (see signature page).

KyTC BMP Plan for Project CID ## - #####

Contractor and Resident Engineer Plan Certification

The contractor that is responsible for implementing this BMP plan is identified in the Project Information section of this plan.

The following certification applies to all parties that are signatory to this BMP plan:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. Further, this plan complies with the requirements of 401 KAR 5:037. By this certification, the undersigned state that the individuals signing the plan have reviewed the terms of the plan and will implement its provisions as they pertain to ground water protection.

Resident Engineer and Contractor Certification:

(2) Resident Engineer signature

Signed _____	_____	_____
Typed or printed name ²	Title	Signature

(3) Signed _____	_____	_____
Typed or printed name ¹	Title	Signature

- 1. Contractors Note: to be signed by a person who is the owner, a responsible corporate officer, a general partner or the proprietor or a person designated to have the authority to sign reports by such a person in accordance with 401 KAR 5:060 Section 9. This delegation shall be in writing to: Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort, Kentucky 40601. Reference the Project Control Number (PCN) and KPDES number when one has been issued.
- 2. KYTC note: to be signed by the Chief District Engineer or a person designated to have the authority to sign reports by such a person (usually the resident engineer) in accordance with 401 KAR 5:060 Section 9. This delegation shall be in writing to: Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort, Kentucky 40601. Reference the Project Control Number (PCN) and KPDES number when one has been issued.

KyTC BMP Plan for Project CID ## - #####

Sub-Contractor Certification

The following sub-contractor shall be made aware of the BMP plan and responsible for implementation of BMPs identified in this plan as follows:

Subcontractor Name:

Address:

Phone:

The part of BMP plan this subcontractor is responsible to implement is:

I certify under penalty of law that I understand the terms and conditions of the general Kentucky Pollutant Discharge Elimination System permit that authorizes the storm water discharges, the BMP plan that has been developed to manage the quality of water to be discharged as a result of storm events associated with the construction site activity and management of non-storm water pollutant sources identified as part of this certification.

Signed

Typed or printed name¹

Title

Signature

1. Sub-Contractor Note: to be signed by a person who is the owner, a responsible corporate officer, a general partner or the proprietor or a person designated to have the authority to sign reports by such a person in accordance with 401 KAR 5:060 Section 9. This delegation shall be in writing to: Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort, Kentucky 40601. Reference the Project Control Number (PCN) and KPDES number when one has been issued.

SPECIAL NOTE FOR CONTRACT COMPLETION DATE AND LIQUIDATED DAMAGES ON BRIDGE REPAIR CONTRACTS

I. COMPLETION DATE.

Upon Notice to Proceed, the Contractor has the option of selecting the Begin Work date. Once selected, notify the Department in writing of the date selected at least two weeks prior to beginning work and provide a proposed project schedule. All work is to be completed by the specified contract completion date. The Contractor is allotted 120 calendar days once the bridge is closed to complete all work to safely reopen the structure with no lane closures. At a minimum, prior to reopening the bridge to traffic, all strength requirements and curing for materials used shall be completed per Division 600 of the Standard Specifications. Guardrail shall be installed to the satisfaction of the Engineer prior to reopening the bridge to traffic unless prior approval is obtained from the engineer for use of temporary railing.

The Engineer will begin charging calendar days for a structure on the day the Contractor closes the structure to traffic, regardless of holidays or seasonal weather limitations.

II. LIQUIDATED DAMAGES.

Liquidated damages will be assessed to the Contractor in accordance with the Transportation Cabinet, Department of Highway's current Standard Specifications for Road and Bridge Construction, Section 108.09, when either the allotted number of calendar days or the specified completion date is exceeded.

-Contrary to the Standard Specifications, liquidated damages will be assessed to the Contractor during the months of December, January, February and March when the contract time has expired on any individual bridge. Contract time will be charged during these months. All construction must be completed in accordance with the weather limitations specified in Section 606 and/or Section 601 as applicable. No extension of Contract time will be granted due to inclement weather or temperature limitations that occur due to starting work on the Contract or a structure late in the construction season.

Any approval of cold weather plans or allowance of construction operations to occur outside Section 606 and/or Section 601 does not alleviate the 120 day maximum bridge closure. In the event the closure lasts longer than 120 calendar days as specified, liquidated damages will apply to all excess days regardless of weather limitations.

SPECIAL NOTE

Seasonal Tree Clearing Restriction

**DUE TO THE RECOVERY PLAN FOR ENDANGERED BATS, NO TREE CLEARING
IS PERMITTED FROM MAY 15 THROUGH JULY 31.**

**If there are any questions regarding this note, please contact Danny Peake,
Director, Division of Environmental Analysis, 200 Mero Street, Frankfort, KY
40601, Phone (502) 564-7250.**

Special Note for Bridge Demolition, Renovation and Asbestos Abatement

If the project includes any bridge demolition or renovation, the successful bidder is required to notify Kentucky Division for Air Quality (KDAQ) via filing of form (DEP 7036) a minimum of 10 working days prior to commencement of any bridge demolition or renovation work.

Any available information regarding possible asbestos containing materials (ACM) on or within bridges to be affected by the project has been included in the bid documents. These are to be included with the Contractor's notification filed with the KDAQ. If not included in the bid documents, the Department will provide that information to the successful bidder for inclusion in the KDAQ notice as soon as possible. If there are no documents stating otherwise, the bidders should assume there are no asbestos containing materials that will in any way affect the work.



Asbestos Inspection Report

To: Tom Springer, QK4, Inc.

Date: June 9, 2025

Conducted By: Russell H. Brooks, LFI, Inc.
Kentucky Accredited Asbestos Inspector #71841

Project and Structure Identification

Project: Marshall County Item No 1-10171

Structure ID: #079B00014N

Structure Location: KY-795 Bridge over Chestnut Creek, Marshall County, Kentucky

Sample Description: Fiber material on bridge deck

Inspection Date: May 30, 2025

Results and Recommendations

The asbestos inspection was performed in accordance with current United States Environmental Protection Agency (US EPA) regulations, specifically 40 CFR Part 61, Asbestos National Emissions Standards for Hazardous Air Pollutants (NESHAP) revision, final rule effective November 20, 1990.

It is recommended that this report accompany the 10-Day Notice of Intent for Demolition ([DEP7036 Form](#)) which is to be submitted to the Kentucky Division of Air Quality prior to abatement, demolition, or renovation of any building or structure in the Commonwealth through the e-portal at <https://dep.gateway.ky.gov/eForms/Account/Home.aspx>.

No asbestos-containing materials (ACM) were detected above regulatory screen limits of 1%.

MRS, Inc. Analytical Laboratory Division

(502) 568 - 2088 or (502) 495 - 1212
Fax: (502) 495 - 0566

BULK SAMPLE ASBESTOS ANALYSIS

Analysis N #	# 3506053 F	Address:	Marshall 1-10171
Client Name:	L F I		
Sampled By:	Sam Rice		LFI Project # 168 - 18

[illegible]

Methodology : EPA Method 600/R-93-116

Date Analyzed :

Analyst : Winterford Mensah

Reviewed By: Winters Mena
Signature

The test relates only to the items tested. This report does not represent endorsement by NVLAP or any agency of the U.S. Government. Partial Reproduction of any part of this report is strictly prohibited. Samples shall be retained for (30) days.

AIHA # 102459

AJHA #1 02459

MRS, Inc.
P.O. Box 19424
Louisville, Kentucky 40259-0424

Phon (502) 495 - 1212
Fax (502) 491 - 7111

Client : Linebach Funkhouser, Inc.

Project : LFI Project 168-18

CHAIN OF CUSTODY RECORD

PROJECT: _____

LOCATION: Marshall 1-10171

SAMPLED BY: S. Rice

DATE: 5/30/2025

COMMENTS AND/OR INSTRUCTIONS:

Point count <4%

Stop first positive

SAMPLE NUMBER	LOCATION	MATRIX	COLOR	SIZE	COMMENTS	T/L W/C	PLM
1 A/B	Bridge Deck - Fabric						X
2 A/B							x
3 A/B							x
4 A/B							x
5 A/B							x
6 A/B							x
7 A/B							x
8 A/B							x
9 A/B							x
10 A/B							x
11 A/B							x

Relinquished By: (Signature) <i>Russell A. Brooks</i>	Date <i>6/04/25</i>	Time	Received By: (Signature) <i>Steph Meroy</i>
Relinquished By: (Signature)	Date	Time	Received By: (Signature)

Commonwealth of Kentucky
Department for Environmental Protection
Division for Air Quality

Russell Henry Brooks

Has met the requirements of 401 KAR 58:005 and is accredited as an:

Asbestos Inspector

Agency Interest Id: **138451**
License Number: **71841**
Issue Date: **03/12/2025**
Expiration Date: 03/05/2026



PAGE 1 OF
INITIAL SUBMITTAL DATE
REVISION DATE
NOTIFICATION # -

NOTIFICATION OF ASBESTOS
ABATEMENT/DEMOLITION/RENOVATION
(Instructions for completing form on back)

File this form with Regional Office where project will be performed

Kentucky Division for Air Quality
300 Sower Boulevard, 2nd Floor
Frankfort, KY 40601

OFFICE USE ONLY
ID #
LOG #

DEP 7036

Contractor _____
Address _____
City _____ State _____ Zip _____
Phone _____ Contact Person _____

Owner _____
Address _____
City _____ State _____ Zip _____
Phone _____ Contact Person _____

Project Location _____
Address _____
City _____ State _____ Zip _____
Facility Age (yrs.) _____ Size of Facility or Affected Part (sq.ft.) _____
#Floors Affected _____ Present and Prior Use of Facility _____

TYPE OF PROJECT (CHECK ONLY ONE):
Renovation ☐ Demolition ☐ Ordered Demolition ☐ Emergency ☐ Long-term ☐

PROJECT DATES:
Start Removal _____ End Removal _____
Start Renovation/Demolition _____ End Renovation/Demolition _____

Amount of ACM to be Removed:

	Regulated ACM (RACM)	Category II nonfriable ACM (optional)	Category I nonfriable ACM (optional)
Linear Feet			
Square Feet			
Cubic Feet			

Description of planned renovation/demolition, including abatement methods
& demo/reno methods. _____

Description of affected facility components _____

Asbestos detection technique _____
Amount of Cat. I & II nonfriable ACM involved but will not be removed: _____

Describe **physical characteristics** that make it nonfriable and **methods**
to keep it nonfriable (optional): _____

Describe **contingency plan** should nonfriable ACM become friable or
additional ACM be uncovered during renovation/ demolition: _____

Transporter _____
Address _____
City _____ State _____ Zip _____
Phone _____

Disposal Site _____
Address _____
City _____ State _____ Zip _____

I hereby certify that at least one person trained as required by 40 CFR
61.145(c)(8) will supervise the abatement work described herein. (optional
for strictly non-friable work)

Submitted by: _____
Company Name: _____

INSTRUCTIONS FOR COMPLETING FORM DEP7036: NOTIFICATION OF ASBESTOS ABATEMENT/DEMOLITION/RENOVATION

Filing Deadline: This form must be completed and filed with the Kentucky Division for Air Quality at least ten (10) working days before starting any asbestos removal, demolition, or other work which will disturb asbestos-containing material (ACM) in Kentucky facilities outside Jefferson County and in schools statewide, including Jefferson County. File with appropriate Regional Office.

Renotification: If developments occur that invalidate information on a notification (e.g., changes in dates, amounts, locations), file a revised form within the time frames specified in 401 KAR 58:025. Notifications may be numbered in the top-left corner (optional). First two digits are project year; remaining digits are project number (e.g., the first project in 1999 is 99-1).

Attachments: Attachments may be included to provide additional information, propose alternative procedures, declare nonfriable removal, identify secondary transporters, etc.

Line-by-Line Instructions:

Contractor/Owner: the contractor is the asbestos remover (or, for zero-asbestos demolitions, the demolition contractor). The owner is the entity having the work done.

Project Location: The location at the address given where the work is taking place (e.g., which building/floor/room?).

Present/Prior Use: Enter the present and prior use(s) of the facility.

Type of Project: Each choice shown in this category has a specific description under 401 KAR 58:025:

Emergency renovations result from a sudden, unexpected event. If the project is an emergency renovation, attach a detailed description of the sudden, unexpected event that necessitated removal. Include the exact date and hour the event occurred and explain how the event caused an unsafe condition, or would cause equipment damage or unreasonable financial burden.

Planned renovations are renovations that do not qualify as emergency renovations.

A long-term notification is a type of planned renovation which involves a number of nonscheduled small-scale removals whose annual total exceeds the NESHAP threshold amounts and can be estimated based on past years' experience. File yearly estimate at least 10 working days before the beginning of the calendar year for which a long-term notification is being given.

Demolitions involve the wrecking or taking out of a load-supporting structural member, such as a load-bearing beam or wall. Tearing down a structure, dismantling it piecemeal, and moving it from one place to another are all considered demolitions.

Ordered demolitions must result from a demolition order issued by a government agency because the building is structurally unsound and in danger of imminent collapse. For ordered demolitions, attach to the notification a signed, dated copy of order that includes demolition deadlines and name/title/authority of the government representative issuing the order.

Project Dates: Schedules must be precise and accurate. The "start removal" date is the date the removers arrive on-site and begin physically preparing the work area for removal. "End removal" is the date the removers dismantle the work area after cleaning and clearing it. If circumstances arise that invalidate previously submitted start dates, a revised notification must be submitted showing the updated, correct start date. If the start date has been moved up, submit written renotification at least ten working days before the new start date. If the start date has been moved back, telephone the Division as soon as possible before the original date and submit written renotification no later than the original start date.

Schedules for renovation and demolition (next line after removal schedule) are handled similarly, except that renotification is required only for schedule changes involving demolitions, not renovations.

Amount of ACM: In this table, enter the amount and type (RACM , Category I, and/or Category II) of asbestos that will be removed. Although the regulation does not require you to identify the amount of nonfriable ACM that will be removed, the table provides space for nonfriable ACM to accommodate those notifiers who choose to document these removals.

Description of project: Describe the demolition or renovation work to be performed and method(s) to be used , including work practices and engineering controls to be used.

Asbestos Detection Technique: Give a general description of the asbestos survey, for example, "AHERA-style survey by accredited inspector; samples analyzed by PLM."

Amount of nonfriable ...: If all nonfriable ACM will be properly removed, enter "NA."

Contingency Plans: If Category II nonfriable ACM becomes crumbled, pulverized, or reduced to powder, or if additional RACM is discovered, describe procedures to be followed. For example, "Move demolition activity away from ACM immediately; remove the ACM using regulation-required procedures." Even "Stop work, call Division for Air Quality" is OK.

KENTUCKY TRANSPORTATION CABINET
Department of Highways
DIVISION OF RIGHT OF WAY & UTILITIESTC 62-226
Rev. 01/2016
Page 1 of 1

RIGHT OF WAY CERTIFICATION

☒	Original	☐	Re-Certification	RIGHT OF WAY CERTIFICATION	
ITEM #		COUNTY		PROJECT # (STATE)	PROJECT # (FEDERAL)
01-10171.00		Marshall		1100 FD55 121 9414002R	
PROJECT DESCRIPTION					
Statewide Bridge Delivery - 079B00014N - KY 795 at Chestnut Creek Bridge Replacement					
☐	No Additional Right of Way Required				
Construction will be within the limits of the existing right of way. The right of way was acquired in accordance to FHWA regulations under the Uniform Relocation Assistance and Real Property Acquisitions Policy Act of 1970, as amended. No additional right of way or relocation assistance were required for this project.					
☒	Condition # 1 (Additional Right of Way Required and Cleared)				
All necessary right of way, including control of access rights when applicable, have been acquired including legal and physical possession. Trial or appeal of cases may be pending in court but legal possession has been obtained. There may be some improvements remaining on the right-of-way, but all occupants have vacated the lands and improvements, and KYTC has physical possession and the rights to remove, salvage, or demolish all improvements and enter on all land. Just Compensation has been paid or deposited with the court. All relocations have been relocated to decent, safe, and sanitary housing or that KYTC has made available to displaced persons adequate replacement housing in accordance with the provisions of the current FHWA directive.					
☐	Condition # 2 (Additional Right of Way Required with Exception)				
The right of way has not been fully acquired, the right to occupy and to use all rights-of-way required for the proper execution of the project has been acquired. Some parcels may be pending in court and on other parcels full legal possession has not been obtained, but right of entry has been obtained, the occupants of all lands and improvements have vacated, and KYTC has physical possession and right to remove, salvage, or demolish all improvements. Just Compensation has been paid or deposited with the court for most parcels. Just Compensation for all pending parcels will be paid or deposited with the court prior to AWARD of construction contract					
☐	Condition # 3 (Additional Right of Way Required with Exception)				
The acquisition or right of occupancy and use of a few remaining parcels are not complete and/or some parcels still have occupants. All remaining occupants have had replacement housing made available to them in accordance with 49 CFR 24.204. KYTC is hereby requesting authorization to advertise this project for bids and to proceed with bid letting even though the necessary right of way will not be fully acquired, and/or some occupants will not be relocated, and/or the just compensation will not be paid or deposited with the court for some parcels until after bid letting. KYTC will fully meet all the requirements outlined in 23 CFR 635.309(c)(3) and 49 CFR 24.102(j) and will expedite completion of all acquisitions, relocations, and full payments after bid letting and prior to AWARD of the construction contract or force account construction.					
Total Number of Parcels on Project		1	EXCEPTION (S) Parcel #	ANTICIPATED DATE OF POSSESSION WITH EXPLANATION	
Number of Parcels That Have Been Acquired					
Signed Deed		1			
Condemnation		0			
Signed ROE		0			
Notes/ Comments (Text is limited. Use additional sheet if necessary.)					
LPA RW Project Manager			Right of Way Supervisor		
Printed Name				Printed Name	
Signature				Mark C. Askin, P.E. Digitally signed by Askin, Mark DN: cn=Askin, Mark, ou=Strand, email=mark.askin@strand.com Date: 2026.06.23 11:10:27 - 04'00'	
Date				06/23/26	
Right of Way Director			FHWA		
Printed Name		Dean M. Loy		Printed Name	
Signature		DM Loy Digitally signed by DM Loy Date: 2026.06.23 11:15:47 -04'00'		Signature	
Date				Date	

UTILITIES AND RAIL CERTIFICATION NOTE

Project:	1-10171.00	Marshall County	KY 795
Funding Source:	FD55 121 9414002U		
Description:	BRIDGE PROJECT IN MARSHALL COUNTY ON (079B00014N) KY-795 AT CHESTNUT CREEK		
Mile Point:	3.039 To 3.051		

GENERAL UTILITY NOTES

1. Please Note: The information presented in this Utility Note is informational in nature and the information contained herein is not guaranteed.
2. The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. The contractor is instructed to contact KY 811 for the location of existing underground utilities. Contact shall be made a minimum of two (2) and no more than ten (10) business days prior to excavation. The contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY 811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom are to be contacted through their individual Protection Notification Center. It may be necessary for the contractor to contact the County Court.
3. For all projects under 2000 Linear feet which require a normal excavation locate request pursuant to KRS 367.4901-4917, the awarded contractor shall field mark the proposed excavation or construction boundaries of the project (also called white lining) using the procedure set forth in KRS 367.4909(9)(k). For all projects over 2000 linear feet, which are defined as a "Large Project" in KRS 367.4903(18), the awarded contractor shall initially mark the first 2000 linear feet minimally of proposed excavation or construction boundaries of the project to be worked using the procedure set forth in KRS 367.4909(9)(k). This temporary field locating of the project excavation boundary shall take place prior to submitting an excavation location request to the underground utility protection Kentucky Contact Center. For large projects, the awarded contractor shall work with the impacted utilities to determine when additional white lining of the remainder of the project site will take place. This

UTILITIES AND RAIL CERTIFICATION NOTE

Project:	1-10171.00	Marshall County	KY 795
Funding Source:	FD55 121 9414002U		
Description:	BRIDGE PROJECT IN MARSHALL COUNTY ON (079B00014N) KY-795 AT CHESTNUT CREEK		
Mile Point:	3.039 To 3.051		

provision shall not alter or relieve the awarded contractor from complying with requirements of KRS 367.4905 to 367.4917 in their entirety.

4. The contractor will be responsible for contacting all utility facility owners on the subject project to coordinate his activities. The contractor will coordinate his activities to minimize and, where possible, avoid conflicts with utility facilities. Due to the nature of the work proposed, it is unlikely to conflict with the existing utilities beyond minor facility adjustments. Where conflicts with utility facilities are unavoidable, the contractor will coordinate any necessary relocation work with the facility owner and Resident Engineer. The Kentucky Transportation Cabinet maintains the right to remove or alter portions of this contract if a utility conflict occurs. The utility facilities as noted in the previous section(s) have been determined using data garnered by varied means and with varying degrees of accuracy: from the facility owners, a result of S.U.E., field inspections, and/or reviews of record drawings. The facilities defined may not be inclusive of all utilities in the project scope and are not Level A quality, unless specified as such. It is the contractor's responsibility to verify all utilities and their respective locations before excavating.

UTILITIES AND RAIL CERTIFICATION NOTE

Project:	1-10171.00	Marshall County	KY 795
Funding Source:	FD55 121 9414002U		
Description:	BRIDGE PROJECT IN MARSHALL COUNTY ON (079B00014N) KY-795 AT CHESTNUT CREEK		
Mile Point:	3.039 To 3.051		

DO NOT DISTURB THE FOLLOWING FACILITIES LOCATED WITHIN THE PROJECT

Not Applicable

THE FOLLOWING FACILITY OWNERS ARE RELOCATING/ADJUSTING THEIR FACILITIES WITHIN THE PROJECT LIMITS AND WILL BE COMPLETE PRIOR TO CONSTRUCTION

Utility Company	Facility Type
West Kentucky RECC	Electric - Marshall
West Kentucky RECC – Electric will be temporarily relocating their electric lines into the Special Use Permit area to allow for construction of the bridge. They will be leaving existing poles in place and reattach once the construction is complete. The temporary relocation will be complete by October 31, 2026.	

The Contractor is fully responsible for protection of all utilities listed above

THE FOLLOWING FACILITY OWNERS HAVE FACILITIES TO BE RELOCATED/ADJUSTED BY THE OWNER OR THEIR SUBCONTRACTOR AND IS TO BE COORDINATED WITH THE ROAD CONTRACT

Not Applicable

UTILITIES AND RAIL CERTIFICATION NOTE

Project:	1-10171.00	Marshall County	KY 795
Funding Source:	FD55 121 9414002U		
Description:	BRIDGE PROJECT IN MARSHALL COUNTY ON (079B00014N) KY-795 AT CHESTNUT CREEK		
Mile Point:	3.039 To 3.051		

THE FOLLOWING FACILITY OWNERS HAVE FACILITIES TO BE RELOCATED/ADJUSTED BY THE ROAD CONTRACTOR AS INCLUDED IN THIS CONTRACT

Not Applicable

RAIL COMPANIES HAVE FACILITIES IN CONJUNCTION WITH THIS PROJECT AS NOTED

No Rail Involvement

AREA FACILITY OWNER CONTACT LIST

1. West Kentucky RECC - Electric
- Ricky Binkley - Phone: (270) 251-6944 Email: rbinkley@wkrecc.com



Andy Beshear
GOVERNOR

ENERGY AND ENVIRONMENT CABINET
DEPARTMENT FOR ENVIRONMENTAL PROTECTION

300 Sower Boulevard
Frankfort, Kentucky 40601
Phone: (502) 564-2150
Fax: 502-564-4245

Rebecca W. Goodman
SECRETARY

Anthony R. Hatton
COMMISSIONER

November 25, 2025

Danny Peake
Kentucky Transportation Cabinet (KYTC)
200 Mero St
Frankfort, KY 40622

Re: §401 Water Quality Certification
KY 795 Bridge Replacement
WQC No: WQC2025-136-1
AI No.: 188215; Activity ID: APE20250001
KYTC Item No.: 1-10171.00
Chestnut Creek
Marshall County, Kentucky

Dear Mr. Peake:

Pursuant to Section 401 of the Clean Water Act (CWA) and 40 CFR 121.7(c), the Commonwealth of Kentucky certifies it has reasonable assurances that applicable water quality standards under Kentucky Administrative Regulations Title 401, Chapter 10, established pursuant to Sections 301, 302, 303, 304, 306, and 307 of the CWA, will not be violated by the above referenced project provided that the U.S. Army Corps of Engineers authorizes the activity under a federal license or permit, and the attached conditions are met.

Other permits from the Division of Water may be required for this activity. Projects that disturb one acre or more of land or is part of a larger common plan of development or sale that will ultimately disturb one acre or more of land require a Kentucky Pollution Discharge Elimination System (KPDES) Stormwater Permit; contact the Surface Water Permits Branch (502-564-3410 or SWPBSupport@ky.gov). A Groundwater Protection Plan is required if activities listed in Section 2(2) of 401 KAR 5:037 are conducted. A Water Withdrawal Application is required for activities proposing raw water withdrawals of 10,000 gallons per day or more; contact the Watershed Management Branch (502-564-3410).

All future correspondence on this project must reference AI No. **188215**. **The attached document is your official Water Quality Certification; please read it carefully.** Please contact Bryan Killian by phone at 502-782-4695 or email at bryan.killian@ky.gov if you have any questions.

Sincerely,

A handwritten signature in dark ink that reads "Samantha Vogeler". The signature is written in a cursive style with a horizontal line underneath.

Samantha Vogeler, Supervisor
Water Quality Certification Section
Kentucky Division of Water

SV:BK

Attachment

cc: Emma Priger, KYTC: Frankfort (via email: emma.priger@ky.gov)
Andrew Logsdon, KYTC: Frankfort (via email: Andrew.Logsdon@ky.gov)
Dave Harmon, KYTC: Frankfort (via email: Dave.Harmon@ky.gov)
Crystal Byrd, USACE: Louisville District (via email: Crystal.D.Byrd@usace.army.mil)
Jana Day, RES: (via email: jday@res.us)
Josh Lillpop, USFWS: Frankfort (via email: kentuckyes@fws.gov)
Madeline Traylor, Paducah Regional Office (via email: madeline.traylor@ky.gov)
Michelle Weaver, Four Rivers Coordinator (via email: michelle.weaver@cumberlandrivercompact.org)

KTC Water Quality Certification

KY 795 Bridge - Marshall Co

Facility Requirements

Permit Number: WQC2025-136-1

Activity ID No.:APE20250001

ACTV0000000001 (AI 188215 - KY 795 Bridge - Marshall) KYTC Item # 1-10171:

Submittal/Action Requirements:

Condition No.	Condition
S-1	The Kentucky Transportation Cabinet (KYTC) shall notify the Water Quality Certification Project Manager or Supervisor of the scheduled start of construction activities at least two weeks before the start of construction. This condition is necessary for the Division of Water to be informed of the ongoing activity for the purposes of site visits to ensure implementation of Kentucky Regulatory Statutes and Administrative Regulations; the Division will monitor the environment, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
S-2	KYTC shall notify the Water Quality Certification Project Manager or Supervisor of substantial completion of construction no later than two weeks post-construction. This condition is necessary for the Division of Water to be informed of the ongoing activity for the purposes of site visits to ensure implementation of Kentucky Regulatory Statutes and Administrative Regulations; the Division will monitor the environment, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
S-3	KYTC shall submit as-built drawings within 90 days after substantial completion of construction to the Water Quality Certification Section Project Manager or Supervisor. This condition is necessary to monitor the aquatic resources, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]

KTC Water Quality Certification
KY 795 Bridge - Marshall Co
Facility Requirements
Permit Number: WQC2025-136-1
Activity ID No.:APE20250001

ACTV0000000001 (AI 188215 - KY 795 Bridge - Marshall) KYTC Item # 1-10171:

Narrative Requirements:

Condition No.	Condition
T-1	The work approved by this certification shall be limited to 36.913655, -88.391581: - Removal and replacement of the existing bridge on KY 795 over Chestnut Creek in Marshall County - The new bridge will be constructed in the same location with current geometrics (bridge width, length, hydraulic opening, etc.) - A temporary work pad will be constructed of clean stone and will be removed completely once no longer necessary - 35 linear feet of permanent impacts to perennial streams for rip rap - 110 linear feet of temporary impacts to perennial streams for construction access This condition is necessary to confirm activities approved by this certification. [401 KAR 10:030 Section 1, 401 KAR 9:010 Section 1(a)(2), KRS 224.10-100, KRS 224.70-110]
T-2	All work performed under this certification shall adhere to the design and specifications set forth in the following document(s): - Application for Permit to Construct Across or Along a Stream and/or Water Quality Certification received on 10/6/2025 - Pre-file Meeting Request received on 10/6/2025 - Certification Request received on 10/23/2025 - xmit KY 795 BrdgReplcmnt Item 1-10171 Bridge 079B00014N.msg - 079B00014N_GEC_Request for IWQC_ENV_PSE.pdf This condition is necessary to confirm activities approved by this certification. [401 KAR 10:030 Section 1, 401 KAR 9:010 Section 1(a)(2), KRS 224.10-100, KRS 224.70-110]
T-3	KYTC is responsible for preventing degradation of waters of the Commonwealth from soil erosion. An erosion and sediment control plan must be designed, implemented, and maintained in effective operating condition at all times during construction. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-4	No in-stream operations or activities shall be conducted during fish spawning season (April 1 through June 30), due to the potential impacts of increased sediment load and associated water quality and designated aquatic habitat impacts. This condition is necessary to monitor the aquatic resources, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 4(1)(c,h), KRS 224.10-100, KRS 224.70-110]

KTC Water Quality Certification
KY 795 Bridge - Marshall Co
Facility Requirements
Permit Number: WQC2025-136-1
Activity ID No.:APE20250001

ACTV0000000001 (AI 188215 - KY 795 Bridge - Marshall) KYTC Item # 1-10171:

Narrative Requirements:

Condition No.	Condition
T-5	Heavy equipment (e.g. bulldozers, backhoes, draglines, etc.), if required for this project, should not be used or operated within the stream channel. In those instances where such instream work is unavoidable, then it shall be performed in such a manner and duration as to minimize re-suspension of sediments and disturbance to the channel, banks, or riparian vegetation. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-6	Erosion and sediment pollution control plans and Best Management Practices must be designed, installed, and maintained in effective operating condition at all times during construction activities so that violations of state water quality standards do not occur. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-7	Remove all sediment and erosion control measures after re-vegetation has become well-established. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-8	Any fill or riprap shall be of a composition that shall not cause violations of water quality standards by adversely affecting the biological, chemical, or physical properties of waters of the Commonwealth. If riprap is used, it shall be of a weight and size that bank stress or slump conditions shall not occur. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-9	Sediment and erosion control measures (e.g., check-dams, silt fencing, or hay bales) shall not be placed within surface waters of the Commonwealth, either temporarily or permanently, without prior approval by the Kentucky Division of Water's Water Quality Certification Section. If placement of sediment and erosion control measures in surface waters is unavoidable, placement shall not be conducted in such a manner that may cause instability of streams that are adjacent to, upstream, or downstream of the structures. All sediment and erosion control measures shall be removed and the natural grade restored prior to withdrawal from the site. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-10	Measures shall be taken to prevent or control spills of fuels, lubricants, or other toxic materials used in construction from entering the watercourse. This condition is necessary to prevent water pollution as prohibited by statute. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-11	To the maximum extent practicable, all in-stream work under this certification shall be performed during low flow. This condition is necessary to prevent and minimize objectionable deposits and pollution and protect the use of the stream. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]

KTC Water Quality Certification
KY 795 Bridge - Marshall Co
Facility Requirements
Permit Number: WQC2025-136-1
Activity ID No.:APE20250001

ACTV0000000001 (AI 188215 - KY 795 Bridge - Marshall) KYTC Item # 1-10171:

Narrative Requirements:

Condition No.	Condition
T-12	Removal of existing riparian vegetation shall be restricted to the minimum necessary for project construction. This condition is necessary to minimize negative effects to the environment, protect the use of the stream, and protect aquatic resources. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-13	Should stream pollution, wetland impairment, and/or violations of water quality standards occur as a result of this activity (either from a spill or other forms of water pollution), the Kentucky Division of Water shall be notified immediately by calling 800/564-2380. This condition is necessary to monitor the aquatic resources, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [401 KAR 10:030 Section 1, 401 KAR 10:031 Section 2(1)(a), KRS 224.10-100, KRS 224.70-110]
T-14	This Water Quality Certification expires on November 25, 2030. This condition is necessary for the issuance of the certification. [KRS 224.10-100, KRS 224.16-050(2), KRS 224.70-110]
T-15	Other permits from the Division of Water may be required for this activity. If this activity occurs within a floodplain, a Permit to Construct Across or Along a Stream may be required. Please contact the Floodplain Management Section Supervisor (502-564-3410) for more information prior to construction. If the project will disturb one acre or more of land, or is part of a larger common plan of development or sale that will ultimately disturb one acre or more of land, a Kentucky Pollution Discharge Elimination System (KPDES) Stormwater Permit shall be required. Please contact the Surface Water Permits Branch (502-564-3410 or SWPBSupport@ky.gov) for more information. A Groundwater Protection Plan is required if any of the activities listed in Section 2(2) of 401 KAR 5:037 are conducted. A Water Withdrawal Application is required for any activities proposing raw water withdrawals of 10,000 gallons per day or more. For technical assistance contact the Watershed Management Branch at 502-564-3410 or visit eec.ky.gov. This condition is necessary for confirm authorized impacts, the appropriate responsible party, monitor the aquatic resources, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [KRS 224.10-100, KRS 224.16-050(2), KRS 224.70-110]

KTC Water Quality Certification

KY 795 Bridge - Marshall Co

Facility Requirements

Permit Number: WQC2025-136-1

Activity ID No.:APE20250001

ACTV0000000001 (AI 188215 - KY 795 Bridge - Marshall) KYTC Item # 1-10171:

Narrative Requirements:

Condition No.	Condition
T-16	If there is a transfer or conveyance of the project site during the issued WQC term for the approved activity, KYTC shall submit written notice to the Water Quality Certification Section Project Manager or Supervisor of the transfer or conveyance of the project site or any part of the project site at least 60 days prior to the transfer or conveyance of the project site. The notification shall include the WQC number; the Agency Interest (AI) No.; the name, mailing address, email address, and telephone number of the current owner; the name, mailing address, email address, and telephone number of the prospective transferee; the proposed effective date of transfer/conveyance; and a copy of the documentation evidencing the transfer/conveyance. Failure to comply with this condition does not negate the validity or enforceability of this certification. This condition is necessary for confirm authorized impacts, the appropriate responsible party, monitor the aquatic resources, minimize impact to aquatic resources, protect the use and designation of resources, allow more effective and efficient control practices, identify changes and conditions in ecological systems as a result of activities, and to warn of emergency conditions. [401 KAR 10:030 Section 1, 401 KAR 9:010 Section 1(a)(2), KRS 224.10-100, KRS 224.70-110]

Kentucky Transportation
Cabinet Project:

N O T I C E

DEPARTMENT OF THE ARMY
CORPS OF ENGINEERS
NATIONWIDE SECTION 404 PERMIT AUTHORIZATION

DEPARTMENT FOR ENVIRONMENTAL PROTECTION
KENTUCKY DIVISION OF WATER
SECTION 401 WATER QUALITY CERTIFICATION

PROJECT DESCRIPTION: Bridge Replacement
KY 795 over Chestnut Creek
Marshall County, KY
KYTC Item No.: 01-10171

The Sections 404 and 401 activities for this project have previously been permitted under the authority of the Department of the Army, Section 404 Nationwide Permit Number 3, *Maintenance Projects* (with additional *Kentucky Regional General Conditions*), and the Kentucky Division of Water, Section 401 General Water Quality Certification. For these authorized permits to be valid, the attached conditions must be followed. The contractor shall post a copy of this Nationwide Permit Number 3 and General Water Quality Certification in a conspicuous location at the project site, with unencumbered public access, for the duration of construction and comply with the general conditions required.

Kentucky Transportation
Cabinet Project:

Locations Impacting Water Quality

Station-Location	Description
Bridge ID: 079B00014N	The project will involve rehabilitation or replacement of a previously authorized, currently serviceable structure. The project will entail rehabbing or replacing the existing bridge and constructing a new bridge in the same general location and generally matching the current geometrics (bridges width, length, hydraulic openings, etc.). The project may involve the removal of debris and/or sediment.

This project involves work near and/or within Jurisdictional Waters of the United States as defined by the U. S. Army Corps of Engineers; therefore, requiring a Nationwide Number 3 General Section 404 permit. The Division of Water conditionally certified this General Permit. Importantly, one of those conditions regards the use of heavy equipment in any stream channel, or streambed. If there is need to cross the stream channel with heavy equipment, or conduct work within the stream channel, a work platform or temporary crossing, is authorized. This should be constructed with clean rock and sufficient pipe to allow stream flow to continue, unimpeded. Other conditions may be found under the heading, *General Certification—Nationwide Permit # 3 Maintenance Projects*.

In order for this authorization to be valid, the attached conditions must be followed. The contractor shall post a copy of this Nationwide Permit Number 3 Approval in a conspicuous location at the project site, for the duration of the construction, and comply with the general conditions as required.

To more readily expedite construction, the contractor may elect to alter the design, or perform the work in a manner different from what was originally proposed and specified. Prior to commencing such alternative work, the contractor shall obtain written permission from the Division of Construction and the Kentucky Transportation Cabinet, Division of Environmental Analysis. If such changes necessitate further permitting, then the contractor will be responsible for applying to the U. S. Army Corps of Engineers and the Kentucky Division of Water. A copy of any request to the Corps of Engineers or Division of Water to alter this proposal and subsequent responses shall be forwarded to the Division of Environmental Analysis, DA Permit Coordinator, for office records and for informational purposes.



US Army Corps
of Engineers®

2026 Nationwide Permit Summary

Effective: March 15, 2026

Expires: March 15, 2031

Nationwide Permit 3. Maintenance

<https://www.federalregister.gov/d/2026-00121/p-1275>

(a) The repair, rehabilitation, or replacement of any previously authorized, currently serviceable structure or fill, or of any currently serviceable structure or fill authorized by [33 CFR 330.3](#), provided that the structure or fill is not to be put to uses differing from those uses specified or contemplated for it in the original permit or the most recently authorized modification. Minor deviations in the structure's configuration or filled area, including those due to changes in materials, construction techniques, requirements of other regulatory agencies, or current construction codes or safety standards that are necessary to make the repair, rehabilitation, or replacement are authorized. This NWP also authorizes the removal of previously authorized structures or fills. Any stream channel modification is limited to the minimum necessary for the repair, rehabilitation, or replacement of the structure or fill; such modifications, including the removal of material from the stream channel, must be immediately adjacent to the project. This NWP also authorizes the removal of accumulated sediment and debris within, and in the immediate vicinity of, the structure or fill. This NWP also authorizes the repair, rehabilitation, or replacement of those structures or fills destroyed or damaged by storms, floods, fire or other discrete events, provided the repair, rehabilitation, or replacement is commenced, or is

under contract to commence, within two years of the date of their destruction or damage. In cases of catastrophic events, such as hurricanes or tornadoes, this two-year limit may be waived by the district engineer, provided the permittee can demonstrate funding, contract, or other similar delays.

(b) This NWP also authorizes the removal of accumulated sediments and debris outside the immediate vicinity of existing structures (e.g., bridges, culverted road crossings, water intake structures, etc.). The removal of sediment is limited to the minimum necessary to restore the waterway in the vicinity of the structure to the approximate dimensions that existed when the structure was built, but cannot extend farther than 200 feet in any direction from the structure. This 200 foot limit does not apply to maintenance dredging to remove accumulated sediments blocking or restricting outfall and intake structures or to maintenance dredging to remove accumulated sediments from canals associated with outfall and intake structures. All dredged or excavated materials must be deposited and retained in an area that has no waters of the United States unless otherwise specifically approved by the district engineer under separate authorization.

(c) This NWP also authorizes temporary structures, fills, and work, including the use of temporary mats, necessary to conduct the maintenance activity. Appropriate measures must be taken to maintain normal

downstream flows and minimize flooding to the maximum extent practicable, when temporary structures, work, and discharges of dredged or fill material, including cofferdams, are necessary for construction activities, access fills, or dewatering of construction sites. Temporary fills must consist of materials, and be placed in a manner, that will not be eroded by expected high flows. After conducting the maintenance activity, temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The areas affected by temporary fills must be revegetated, as appropriate.

(d) This NWP does not authorize maintenance dredging for the primary purpose of navigation. This NWP does not authorize beach restoration. This NWP does not authorize new stream channelization or stream relocation projects.

Notification: For activities authorized by paragraph (b) of this NWP, the permittee must submit a pre-construction notification to the district engineer prior to commencing the activity (see general condition 32). The pre-construction notification must include information regarding the original design capacities and configurations of the outfalls, intakes, small impoundments, and canals. (Authorities: Section 10 of the Rivers and Harbors Act of 1899 and Section 404 of the Clean Water Act (Sections 10 and 404))

Note:

This NWP authorizes the repair, rehabilitation, or replacement of any

previously authorized structure or fill that does not qualify for the Clean Water Act Section 404(f) exemption for maintenance.

Nationwide Permit - General Conditions

<https://www.federalregister.gov/d/2026-00121/p-1563>

Note: To qualify for NWP authorization, the prospective permittee must comply with the following general conditions, as applicable, in addition to any regional or case-specific conditions imposed by the division engineer or district engineer. Prospective permittees should contact the appropriate Corps district office to determine if regional conditions have been imposed on an NWP. Prospective permittees should also contact the appropriate Corps district office to determine the status of Clean Water Act Section 401 water quality certification and/or Coastal Zone Management Act consistency for an NWP. Every person who may wish to obtain permit authorization under one or more NWPs, or who is currently relying on an existing or prior permit authorization under one or more NWPs, has been and is on notice that all of the provisions of [33 CFR 330.1](#) through [330.6](#) apply to every NWP authorization. Note especially [33 CFR 330.5](#) relating to the modification, suspension, or revocation of any NWP authorization.

1. Navigation. (a) No activity may cause more than a minimal adverse effect on navigation.

(b) Any safety lights and signals prescribed by the U.S. Coast Guard, through regulations or otherwise, must be installed and maintained at the permittee's expense on authorized facilities in navigable waters of the United States.

(c) The permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration, of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his or her authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps of Engineers, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the United States. No claim shall be made against the United States on account of any such removal or alteration.

2. Aquatic Life Movements. No activity may substantially disrupt the necessary life cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water. All permanent and temporary crossings of waterbodies shall be suitably culverted, bridged, or otherwise designed and constructed to maintain low flows to sustain the movement of those aquatic species. If a bottomless culvert cannot be used, then the crossing should be designed and constructed to minimize adverse effects to aquatic life movements.

3. Spawning Areas. Activities in spawning areas during spawning seasons must be avoided to the maximum extent practicable. Activities that result in the physical destruction (e.g., through excavation, fill, or downstream smothering by substantial turbidity) of an important spawning area are not authorized.

4. Migratory Bird Breeding Areas. Activities in waters of the United States that serve as breeding areas for

migratory birds must be avoided to the maximum extent practicable.

5. Shellfish Beds. No activity may occur in areas of concentrated shellfish populations, unless the activity is directly related to a shellfish harvesting activity authorized by NWPs 4 and 48, or is a shellfish seeding or habitat restoration activity authorized by NWP 27.

6. Suitable Material. No activity may use unsuitable material (e.g., trash, debris, car bodies, asphalt, etc.). Material used for construction or discharged must be free from toxic pollutants in toxic amounts (see section 307 of the Clean Water Act).

7. Water Supply Intakes. No activity may occur in the proximity of a public water supply intake, except where the activity is for the repair or improvement of public water supply intake structures or adjacent bank stabilization.

8. Adverse Effects From Impoundments. If the activity creates an impoundment of water, adverse effects to the aquatic system due to accelerating the passage of water, and/or restricting its flow must be minimized to the maximum extent practicable.

9. Management of Water Flows. To the maximum extent practicable, the pre-construction course, condition, capacity, and location of open waters must be maintained for each activity, including stream channelization, storm water management activities, and temporary and permanent road crossings, except as provided below. The activity must be constructed to withstand expected high flows, including tidal flows. The activity must not restrict or impede the passage of normal or high flows, including tidal flows, unless the primary purpose of the activity is to impound water or manage high flows. The activity may alter the pre-construction course, condition, capacity, and location of open waters if it benefits the aquatic environment (

e.g., stream restoration or relocation activities).

10. Fills Within 100-Year Floodplains.

The activity must comply with applicable FEMA-approved state or local floodplain management requirements.

11. Equipment. Heavy equipment working in wetlands or mudflats must be placed on mats, or other measures must be taken to minimize soil disturbance. If mats are used to minimize soil disturbance, the affected areas must be returned to pre-construction elevations, and revegetated as appropriate. In circumstances where the use of mats has caused significant soil compaction, efforts using techniques (e.g., soil reaeration techniques) to break up the compaction should be employed to return the soil to a pre-construction state prior to returning to pre-construction elevations.

12. Soil Erosion and Sediment

Controls. Appropriate soil erosion and sediment controls must be used and maintained in effective operating condition during construction, and all exposed soil and other fills, as well as any work below the ordinary high water mark or high tide line, must be permanently stabilized at the earliest practicable date. Permittees are encouraged to perform work within waters of the United States during periods of low-flow or no-flow, or during low tides.

13. Removal of Temporary Structures and Fills.

Temporary structures must be removed, to the maximum extent practicable, after their use has been discontinued. Temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The affected areas must be revegetated, as appropriate.

14. Proper Maintenance. Any authorized structure or fill shall be properly maintained, including maintenance to ensure public safety and compliance with applicable NWP general conditions, as well as any activity-specific conditions added by the district engineer to an NWP authorization.

15. Single and Complete Project. The activity must be a single and complete project. The same NWP cannot be used more than once for the same single and complete project.

16. Wild and Scenic Rivers. (a) No NWP activity may occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, unless the appropriate Federal agency with direct management responsibility for such river has determined in writing that the proposed activity will not adversely affect the Wild and Scenic River designation or study status.

(b) If a proposed NWP activity will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, the permittee must submit a pre-construction notification (see general condition 32). The district engineer will coordinate the PCN with the Federal agency with direct management responsibility for that river. Permittees shall not begin the NWP activity until notified by the district engineer that the Federal agency with direct management responsibility for that river has determined in writing that the proposed NWP activity will not adversely affect the Wild and Scenic River designation or study status.

(c) Information on Wild and Scenic Rivers may be obtained from the appropriate Federal land management agency responsible for the designated Wild and Scenic River or study river (e.g., National Park Service, U.S. Forest Service, Bureau of Land Management, U.S. Fish and Wildlife Service). Information on these rivers is also available at: <http://www.rivers.gov/>.

17. Tribal Rights. No activity or its operation may impair reserved tribal rights, including, but not limited to, reserved water rights and treaty fishing and hunting rights.

18. Endangered Species. (a) No activity is authorized under any NWP which is likely to directly or indirectly jeopardize the continued existence of a threatened or endangered species or a species proposed for such designation, as identified under the federal Endangered Species Act (ESA), or which will directly or indirectly destroy or adversely modify designated critical habitat or critical habitat proposed for such designation. No activity is authorized under any NWP which "may affect" a listed species or critical habitat, unless ESA section 7 consultation addressing the consequences of the proposed activity on listed species or critical habitat has been completed. See [50 CFR 402.02](#) for the definition of "effects of the action" for the purposes of ESA section 7 consultation.

(b) Federal agencies should follow their own procedures for complying with the requirements of the ESA (see [33 CFR 330.4\(f\)\(1\)](#)). If pre-construction notification is required for the proposed activity, the federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation has not been submitted, additional ESA section

7 consultation may be necessary for the activity and the respective federal agency would be responsible for fulfilling its obligation under section 7 of the ESA.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat or critical habitat proposed for such designation, and shall not begin work on the activity until notified by the district engineer that the requirements of the ESA have been satisfied and that the activity is authorized. For activities that might affect federally-listed endangered or threatened species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation), the pre-construction notification must include the name(s) of the endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or that utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. The district engineer will determine whether the proposed activity "may affect" or will have "no effect" to listed species and designated critical habitat and will notify the non-federal applicant of the Corps' determination within 45 days of receipt of a complete pre-construction notification. For activities where the non-federal applicant has identified listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) that might be affected or is in the vicinity of the activity, and has so notified the Corps, the applicant shall

not begin work until the Corps has provided notification that the proposed activity will have "no effect" on listed species (or species proposed for listing or designated critical habitat (or critical habitat proposed for such designation), or until ESA section 7 consultation or conference has been completed. If the non-federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(d) As a result of formal or informal consultation or conference with the FWS or NMFS the district engineer may add species-specific permit conditions to the NWPs.

(e) Authorization of an activity by an NWP does not authorize the "take" of a threatened or endangered species as defined under the ESA. In the absence of separate authorization (e.g., an ESA Section 10 Permit, a Biological Opinion with "incidental take" provisions, etc.) from the FWS or the NMFS, the Endangered Species Act prohibits any person subject to the jurisdiction of the United States to take a listed species, where "take" means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or to attempt to engage in any such conduct. The word "harm" in the definition of "take" means an act which actually kills or injures wildlife. Such an act may include significant habitat modification or degradation where it actually kills or injures wildlife by significantly impairing essential behavioral patterns, including breeding, feeding or sheltering.

(f) If the non-federal permittee has a valid ESA section 10(a)(1)(B) incidental take permit with an approved Habitat Conservation Plan for a project or a group of projects that includes the proposed NWP activity, the non-federal permittee should provide a

copy of that ESA section 10(a)(1)(B) permit with the PCN required by paragraph (c) of this general condition. The district engineer will coordinate with the agency that issued the ESA section 10(a)(1)(B) permit to determine whether the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation conducted for the ESA section 10(a)(1)(B) permit. If that coordination results in concurrence from the agency that the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation for the ESA section 10(a)(1)(B) permit, the district engineer does not need to conduct a separate ESA section 7 consultation for the proposed NWP activity. The district engineer will notify the non-federal applicant within 45 days of receipt of a complete pre-construction notification whether the ESA section 10(a)(1)(B) permit covers the proposed NWP activity or whether additional ESA section 7 consultation is required.

(g) Information on the location of threatened and endangered species and their critical habitat can be obtained directly from the offices of the FWS and NMFS or their web pages at <http://www.fws.gov/> or <http://www.fws.gov/ipac> and <http://www.nmfs.noaa.gov/pr/species/esa/> respectively.

19. Migratory Birds and Bald and Golden Eagles. The permittee is responsible for ensuring that an action authorized by an NWP complies with the Migratory Bird Treaty Act and the Bald and Golden Eagle Protection Act. The permittee is responsible for contacting the appropriate local office of the U.S. Fish and Wildlife Service to determine what measures, if any, are necessary or appropriate to reduce adverse effects to migratory birds or eagles, including whether "incidental take" permits are necessary and available under the Migratory Bird

Treaty Act or Bald and Golden Eagle Protection Act for a particular activity.

20. Historic Properties. (a) No activity is authorized under any NWP which may have the potential to cause effects on properties listed, or eligible for listing, in the National Register of Historic Places until the requirements of Section 106 of the National Historic Preservation Act (NHPA) have been satisfied.

(b) Federal permittees should follow their own procedures for complying with the requirements of section 106 of the National Historic Preservation Act (see [33 CFR 330.4\(g\)\(1\)](#)). If pre-construction notification is required for the proposed NWP activity, the federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation is not submitted, then additional consultation under section 106 may be necessary. The respective federal agency is responsible for fulfilling its obligation to comply with section 106.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if the NWP activity might have the potential to cause effects on any historic properties listed on, determined to be eligible for listing on, or potentially eligible for listing on the National Register of Historic Places, including previously unidentified properties. For such activities, the pre-construction notification must state which historic properties might have the potential to be affected by the proposed NWP activity or include a vicinity map indicating the location of the historic properties or the potential for the presence of historic properties. Assistance regarding information on

the location of, or potential for, the presence of historic properties can be sought from the State Historic Preservation Officer, Tribal Historic Preservation Officer, or designated tribal representative, as appropriate, and the National Register of Historic Places (see [33 CFR 330.4\(g\)](#)). When reviewing pre-construction notifications, district engineers will comply with the current procedures for addressing the requirements of section 106 of the National Historic Preservation Act. The district engineer shall make a reasonable and good faith effort to carry out appropriate identification efforts commensurate with potential impacts, which may include background research, consultation, oral history interviews, sample field investigation, and/or field survey. Based on the information submitted in the PCN and these identification efforts, the district engineer shall determine whether the proposed NWP activity has the potential to cause effects on historic properties. Section 106 consultation is not required when the district engineer determines that the activity does not have the potential to cause effects on historic properties (see [36 CFR 800.3\(a\)](#)). Section 106 consultation is required when the district engineer determines that the activity has the potential to cause effects on historic properties. The district engineer will conduct consultation with consulting parties identified under [36 CFR 800.2\(c\)](#) when he or she makes any of the following effect determinations for the purposes of section 106 of the NHPA: no historic properties affected, no adverse effect, or adverse effect.

(d) Where the non-federal applicant has identified historic properties on which the proposed NWP activity might have the potential to cause effects and has so notified the Corps, the non-federal applicant shall not

begin the activity until notified by the district engineer either that the activity has no potential to cause effects on historic properties or that NHPA section 106 consultation has been completed. For non-federal permittees, the district engineer will notify the prospective permittee within 45 days of receipt of a complete pre-construction notification whether NHPA section 106 consultation is required. If NHPA section 106 consultation is required, the district engineer will notify the non-federal applicant that he or she cannot begin the activity until section 106 consultation is completed. If the non-federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(e) Prospective permittees should be aware that section 110k of the NHPA ([54 U.S.C. 306113](#)) prevents the Corps from granting a permit or other assistance to an applicant who, with intent to avoid the requirements of section 106 of the NHPA, has intentionally significantly adversely affected a historic property to which the permit would relate, or having legal power to prevent it, allowed such significant adverse effect to occur, unless the Corps, after consultation with the Advisory Council on Historic Preservation (ACHP), determines that circumstances justify granting such assistance despite the adverse effect created or permitted by the applicant. If circumstances justify granting the assistance, the Corps is required to notify the ACHP and provide documentation specifying the circumstances, the degree of damage to the integrity of any historic properties affected, and proposed mitigation. This documentation must include any views obtained from the applicant, SHPO/THPO, appropriate Indian tribes if the undertaking occurs on or affects historic properties on tribal lands or affects properties of interest to those

tribes, and other parties known to have a legitimate interest in the impacts to the permitted activity on historic properties.

21. Discovery of Previously Unknown Remains and Artifacts. Permittees that discover any previously unknown historic, cultural or archeological remains and artifacts while accomplishing the activities authorized by NWP, must immediately notify the district engineer of what they have found, and to the maximum extent practicable, avoid construction activities that may affect the remains and artifacts until the required coordination has been completed. The district engineer will initiate the federal, tribal, and state coordination required to determine if the items or remains warrant a recovery effort or if the site is eligible for listing in the National Register of Historic Places.

22. Designated Critical Resource Waters. Critical resource waters include, NOAA-managed marine sanctuaries and marine monuments, and National Estuarine Research Reserves. The district engineer may designate, after notice and opportunity for public comment, additional waters officially designated by a state as having particular environmental or ecological significance, such as outstanding national resource waters or state natural heritage sites. The district engineer may also designate additional critical resource waters after notice and opportunity for public comment.

(a) Discharges of dredged or fill material into waters of the United States are not authorized by NWPs 7, 12, 14, 16, 17, 21, 29, 31, 35, 39, 40, 42, 43, 44, 49, 50, 51, 52, 57 and 58 for any activity within, or directly affecting, critical resource waters, including wetlands adjacent to such waters.

(b) For NWPs 3, 8, 10, 13, 15, 18, 19, 22, 23, 25, 27, 28, 30, 33, 34, 36, 37, 38, and 54, notification is required in accordance with general condition 32, for any activity proposed by permittees in the designated critical resource waters including wetlands adjacent to those waters. The district engineer may authorize activities under these NWPs only after she or he determines that the impacts to the critical resource waters will be no more than minimal.

23. Mitigation. The district engineer will consider the following factors when determining appropriate and practicable mitigation necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal:

(a) The activity must be designed and constructed to avoid and minimize adverse effects, both temporary and permanent, to waters of the United States to the maximum extent practicable at the project site (*i.e.*, on site).

(b) Mitigation in all its forms (avoiding, minimizing, rectifying, reducing, or compensating for resource losses) will be required to the extent necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal.

(c) Compensatory mitigation at a minimum one-for-one ratio will be required for all wetland losses that exceed 1/10 -acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate or the adverse environmental effects of the proposed activity are no more than minimal, and provides an activity-specific waiver of this requirement. For wetland losses of 1/10 -acre or less that require pre-construction

notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects.

(d) Compensatory mitigation at a minimum one-for-one ratio will be required for all losses of stream bed that exceed 3/100 -acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate or the adverse environmental effects of the proposed activity are no more than minimal, and provides an activity-specific waiver of this requirement. This compensatory mitigation requirement may be satisfied through the restoration or enhancement of riparian areas next to streams in accordance with paragraph (e) of this general condition. For losses of stream bed of 3/100 -acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects. Compensatory mitigation for losses of streams should be provided, if practicable, through stream rehabilitation, enhancement, or preservation, because streams are difficult-to-replace resources (see [33 CFR 332.3\(e\)\(3\)](#)).

(e) Compensatory mitigation plans for NWP activities in or near streams or other open waters will normally include a requirement for the restoration or enhancement, maintenance, and legal protection (*e.g.*, conservation easements) of riparian areas next to open waters. In some cases, the restoration or maintenance/protection of riparian areas may be the only compensatory mitigation required. If restoring riparian areas involves planting vegetation, only native species should be planted. The width of the

required riparian area will address documented water quality or aquatic habitat loss concerns. Normally, the riparian area will be 25 to 50 feet wide on each side of the stream, but the district engineer may require slightly wider riparian areas to address documented water quality or habitat loss concerns. If it is not possible to restore or maintain/protect a riparian area on both sides of a stream, or if the waterbody is a lake or coastal waters, then restoring or maintaining/protecting a riparian area along a single bank or shoreline may be sufficient. Where both wetlands and open waters exist on the project site, the district engineer will determine the appropriate compensatory mitigation (*e.g.*, riparian areas and/or wetlands compensation) based on what is best for the aquatic environment on a watershed basis. In cases where riparian areas are determined to be the most appropriate form of minimization or compensatory mitigation, the district engineer may waive or reduce the requirement to provide wetland compensatory mitigation for wetland losses.

(f) Compensatory mitigation projects provided to offset losses of aquatic resources must comply with the applicable provisions of [33 CFR part 332](#).

(1) The prospective permittee is responsible for proposing an appropriate compensatory mitigation option if compensatory mitigation is necessary to ensure that the activity results in no more than minimal adverse environmental effects. For the NWP, the preferred mechanism for providing compensatory mitigation is mitigation bank credits or in-lieu fee program credits (see [33 CFR 332.3\(b\)\(2\)](#) and [\(3\)](#)). However, if an appropriate number and type of mitigation bank or in-lieu credits are not available at the time the PCN is

submitted to the district engineer, the district engineer may approve the use of permittee-responsible mitigation.

(2) The amount of compensatory mitigation required by the district engineer must be sufficient to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see [33 CFR 330.1\(e\)\(3\)](#)). (See also [33 CFR 332.3\(f\)](#).)

(3) Since the likelihood of success is greater and the impacts to potentially valuable uplands are reduced, aquatic resource restoration should be the first compensatory mitigation option considered for permittee-responsible mitigation.

(4) If permittee-responsible mitigation is the proposed option, the prospective permittee is responsible for submitting a mitigation plan. A conceptual or detailed mitigation plan may be used by the district engineer to make the decision on the NWP verification request, but a final mitigation plan that addresses the applicable requirements of [33 CFR 332.4\(c\)\(2\)](#) through [\(14\)](#) must be approved by the district engineer before the permittee begins work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation (see [33 CFR 332.3\(k\)\(3\)](#)). If permittee-responsible mitigation is the proposed option, and the proposed compensatory mitigation site is located on land in which another federal agency holds an easement, the district engineer will coordinate with that federal agency to determine if proposed compensatory mitigation project is compatible with the terms of the easement.

(5) If mitigation bank or in-lieu fee program credits are the proposed option, the mitigation plan needs to address only the baseline conditions at the impact site and the number of credits to be provided (see [33 CFR 332.4\(c\)\(1\)\(ii\)](#)).

(6) Compensatory mitigation requirements (*e.g.*, resource type and amount to be provided as compensatory mitigation, site protection, ecological performance standards, monitoring requirements) may be addressed through conditions added to the NWP authorization, instead of components of a compensatory mitigation plan (see [33 CFR 332.4\(c\)\(1\)\(ii\)](#)).

(g) Compensatory mitigation will not be used to increase the acreage losses allowed by the acreage limits of the NWPs. For example, if an NWP has an acreage limit of 1/2 -acre, it cannot be used to authorize any NWP activity resulting in the loss of greater than 1/2 -acre of waters of the United States, even if compensatory mitigation is provided that replaces or restores some of the lost waters. However, compensatory mitigation can and should be used, as necessary, to ensure that an NWP activity already meeting the established acreage limits also satisfies the no more than minimal impact requirement for the NWPs.

(h) Permittees may propose the use of mitigation banks, in-lieu fee programs, or permittee-responsible mitigation. When developing a compensatory mitigation proposal, the permittee must consider appropriate and practicable options consistent with the framework at [33 CFR 332.3\(b\)](#). For activities resulting in the loss of marine or estuarine resources, permittee-responsible mitigation may be environmentally preferable if there are no mitigation banks or in-lieu fee programs in the area that have marine or estuarine credits available for sale or transfer to the permittee. For

permittee-responsible mitigation, the special conditions of the NWP verification must clearly indicate the party or parties responsible for the implementation and performance of the compensatory mitigation project, and, if required, its long-term management.

(i) Where certain functions and services of waters of the United States are permanently adversely affected by a regulated activity, such as discharges of dredged or fill material into waters of the United States that will convert a forested or scrub-shrub wetland to a herbaceous wetland in a permanently maintained utility line right-of-way, mitigation may be required to reduce the adverse environmental effects of the activity to the no more than minimal level.

24. Safety of Impoundment

Structures. To ensure that all impoundment structures are safely designed, the district engineer may require non-federal applicants to demonstrate that the structures comply with established state or federal, dam safety criteria or have been designed by qualified persons. The district engineer may also require documentation that the design has been independently reviewed by similarly qualified persons, and appropriate modifications made to ensure safety.

25. Water Quality. (a) Where the certifying authority (state, authorized tribe, or EPA, as appropriate) has not previously certified compliance of an NWP with CWA section 401, a CWA section 401 water quality certification for the proposed activity which may result in any discharge from a point source into waters of the United States must be obtained or waived (see [33 CFR 330.4\(c\)](#)). If the permittee cannot comply with all of the conditions of a water quality certification previously issued by the

certifying authority for the issuance of the NWP, then the permittee must obtain a water quality certification or waiver for the proposed activity which may result in any discharge from a point source into waters of the United States in order for the activity to be authorized by an NWP.

(b) If the NWP activity requires pre-construction notification and the certifying authority has not previously certified compliance of an NWP with CWA section 401, the proposed activity which may result in any discharge from a point source into waters of the United States is not authorized by an NWP until water quality certification is obtained or waived. If the certifying authority issues a water quality certification for the proposed discharge into waters of the United States, the permittee must submit a copy of the certification to the district engineer. The discharge into waters of the United States is not authorized by an NWP until the district engineer has notified the permittee that the water quality certification requirement has been satisfied (*i.e.*, by the issuance of a water quality certification or a waiver and completion of the Section 401(a)(2) process).

(c) The district engineer or certifying authority may require additional water quality management measures to ensure that the authorized activity does not result in more than minimal degradation of water quality.

26. Coastal Zone Management. In coastal states where an NWP has not previously received a state coastal zone management consistency concurrence, an individual state coastal zone management consistency concurrence must be obtained, or a presumption of concurrence must occur (see [33 CFR 330.4\(d\)](#)). If the permittee cannot comply with all of the conditions of a coastal zone

management consistency concurrence previously issued by the state, then the permittee must obtain an individual coastal zone management consistency concurrence or presumption of concurrence in order for the activity to be authorized by an NWP. The district engineer or a state may require additional measures to ensure that the authorized activity is consistent with state coastal zone management requirements.

27. Regional and Case-By-Case

Conditions. The activity must comply with any regional conditions that may have been added by the division engineer (see [33 CFR 330.4\(e\)](#)) and with any case specific conditions added by the Corps or by the state, Indian Tribe, or U.S. EPA in its CWA section 401 Water Quality Certification, or by the state in its Coastal Zone Management Act consistency determination.

28. Use of Multiple Nationwide

Permits. The use of more than one NWP for a single and complete project is authorized, subject to the following restrictions:

(a) The total acreage loss of waters of the United States for a single and complete project cannot exceed the acreage limit of the NWP with the highest specified acreage limit when multiple NWPs are used to authorize an activity.

(b) If only one of the NWPs used to authorize the single and complete project has a specified acreage limit, the acreage loss of waters of the United States for that single and complete project cannot exceed that specified acreage limit. For example, if a road crossing over tidal waters is constructed under NWP 14 (which has an acreage limit of 1/3 acre in tidal waters), with associated bank stabilization authorized by NWP 13 (which does not have a specified acreage limit), the maximum acreage loss of waters of the United

States for the total project cannot exceed 1/3 -acre.

(c) If two or more of the NWP's used to authorize the single and complete project have specified acreage limits, the acreage loss of waters of the United States authorized by each of those NWP's cannot exceed the specified acreage limits of each of those NWP's. For example, if a commercial development is constructed under NWP 39 (which as a 1/2 -acre limit), and the single and complete project includes the filling of a ditch authorized by NWP 46 (which has a 1-acre limit), the maximum acreage loss of waters of the United States for the construction of the commercial development under NWP 39 cannot exceed 1/2 -acre, and the total acreage loss of waters of United States caused by the combination of the NWP 39 and NWP 46 activities cannot exceed 1 acre.

29. Transfer of Nationwide Permit

Verifications. If the permittee sells the property associated with a nationwide permit verification, the permittee may transfer the nationwide permit verification to the new owner by submitting a letter to the appropriate Corps district office to validate the transfer. A copy of the nationwide permit verification must be attached to the letter, and the letter must contain the following statement and signature:

"When the structures or work authorized by this nationwide permit are still in existence at the time the property is transferred, the terms and conditions of this nationwide permit, including any special conditions, will continue to be binding on the new owner(s) of the property. To validate the transfer of this nationwide permit and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below."

(Transferee)

(Date)

30. Compliance Certification. Each permittee who receives an NWP verification letter from the Corps must provide a signed certification documenting completion of the authorized activity and implementation of any required compensatory mitigation. The successful completion of any required permittee-responsible mitigation, including the achievement of ecological performance standards, will be addressed separately by the district engineer. The Corps will provide the permittee the certification document with the NWP verification letter. The certification document will include:

(a) A statement that the authorized activity was done in accordance with the NWP authorization, including any general, regional, or activity-specific conditions;

(b) A statement that the implementation of any required compensatory mitigation was completed in accordance with the permit conditions. If credits from a mitigation bank or in-lieu fee program are used to satisfy the compensatory mitigation requirements, the certification must include the documentation required by [33 CFR 332.3\(l\)\(3\)](#) to confirm that the permittee secured the appropriate number and resource type of credits; and

(c) The signature of the permittee certifying the completion of the activity and mitigation.

The completed certification document must be submitted to the district engineer within 30 days of completion of the authorized activity or the implementation of any required compensatory mitigation, whichever occurs later.

31. Activities Affecting Structures or Works Built by the United States.

If an NWP activity also requires review by, or permission from, the Corps pursuant to [33 U.S.C. 408](#) because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers (USACE) federally authorized Civil Works project (a "USACE project"), the prospective permittee must submit a pre-construction notification. See paragraph (b)(10) of general condition 32. An activity that requires section 408 permission and/or review is not authorized by an NWP until the appropriate Corps office issues the section 408 permission or completes its review to alter, occupy, or use the USACE project, and the district engineer issues a written NWP verification.

32. Pre-Construction Notification. (a)

Timing. Where required by the terms of the NWP, the prospective permittee must notify the district engineer by submitting a pre-construction notification (PCN) as early as possible. The district engineer must determine if the PCN is complete within 30 calendar days of the date of receipt and, if the PCN is determined to be incomplete, notify the prospective permittee within that 30 day period to request the additional information necessary to make the PCN complete. The request must specify the information needed to make the PCN complete. As a general rule, district engineers will request additional information necessary to make the PCN complete only once. However, if the prospective permittee does not provide all of the requested information, then the district engineer will notify the prospective permittee that the PCN is still incomplete and the PCN review process will not commence until all of the requested information has been received by the district engineer. The prospective permittee shall not begin the activity until either:

(1) He or she is notified in writing by the district engineer that the activity may

proceed under the NWP with any special conditions imposed by the district or division engineer; or

(2) 45 calendar days have passed from the district engineer's receipt of the complete PCN and the prospective permittee has not received written notice from the district or division engineer. However, if the permittee was required to notify the Corps pursuant to general condition 18 that listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or are in the vicinity of the activity, or to notify the Corps pursuant to general condition 20 that the activity might have the potential to cause effects to historic properties, the permittee cannot begin the activity until receiving written notification from the Corps that there is "no effect" on listed species or "no potential to cause effects" on historic properties, or that any consultation required under Section 7 of the Endangered Species Act (see [33 CFR 330.4\(f\)](#)) and/or section 106 of the National Historic Preservation Act (see [33 CFR 330.4\(g\)](#)) has been completed. If the proposed activity requires a written waiver to exceed specified limits of an NWP, the permittee may not begin the activity until the district engineer issues the waiver. If the district or division engineer notifies the permittee in writing that an individual permit is required within 45 calendar days of receipt of a complete PCN, the permittee cannot begin the activity until an individual permit has been obtained. Subsequently, the permittee's right to proceed under the NWP may be modified, suspended, or revoked only in accordance with the procedure set forth in [33 CFR 330.5\(d\)\(2\)](#).

(b) *Contents of Pre-Construction Notification:* The PCN must be in

writing and include the following information:

- (1) Name, address and telephone numbers of the prospective permittee;
- (2) Location of the proposed activity;
- (3) Identify the specific NWP or NWP(s) the prospective permittee wants to use to authorize the proposed activity;
- (4) (i) A description of the proposed activity; the activity's purpose; direct and indirect adverse environmental effects the activity would cause, including the anticipated amount of loss of wetlands, other special aquatic sites, and other waters expected to result from the NWP activity, in acres, linear feet, or other appropriate unit of measure; a description of any proposed mitigation measures intended to reduce the adverse environmental effects caused by the proposed activity; and any other NWP(s), regional general permit(s), or individual permit(s) used or intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings for linear projects that require Department of the Army authorization but do not require pre-construction notification. The description of the proposed activity and any proposed mitigation measures should be sufficiently detailed to allow the district engineer to determine that the adverse environmental effects of the activity will be no more than minimal and to determine the need for compensatory mitigation or other mitigation measures.
(ii) For linear projects where one or more single and complete crossings require pre-construction notification, the PCN must include the quantity of anticipated losses of wetlands, other special aquatic sites, and other waters

for each single and complete crossing of those wetlands, other special aquatic sites, and other waters (including those single and complete crossings authorized by an NWP but do not require PCNs). This information will be used by the district engineer to evaluate the cumulative adverse environmental effects of the proposed linear project, and does not change those non-PCN NWP activities into NWP PCNs.

(iii) Sketches should be provided when necessary to show that the activity complies with the terms of the NWP. (Sketches usually clarify the activity and when provided results in a quicker decision. Sketches should contain sufficient detail to provide an illustrative description of the proposed activity (e.g., a conceptual plan), but do not need to be detailed engineering plans);

(5) The PCN must include a delineation of waters, wetlands, and other special aquatic sites on the project site. Wetland delineations must be prepared in accordance with the current method required by the Corps. The permittee may ask the Corps to delineate the special aquatic sites and other waters on the project site, but there may be a delay if the Corps does the delineation, especially if the project site is large or contains many wetlands, other special aquatic sites, and other waters. Furthermore, the 45-day period will not start until the delineation has been submitted to or completed by the Corps, as appropriate. For NWP 27 activities that require PCNs because of other general conditions or regional conditions imposed by division engineers, see Note 2 of that NWP;

(6) If the proposed activity will result in the loss of greater than 1/10 -acre of wetlands or 3/100 -acre of stream bed and a PCN is required, the prospective permittee must submit a statement describing how the compensatory mitigation requirement will be satisfied, or explaining why the adverse

environmental effects are no more than minimal and why compensatory mitigation should not be required. As an alternative, the prospective permittee may submit a conceptual or detailed mitigation plan.

(7) For non-federal permittees, if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat (or critical habitat proposed for such designation), the PCN must include the name(s) of those endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. For NWP activities that require pre-construction notification, federal permittees must provide documentation demonstrating compliance with the Endangered Species Act;

(8) For non-federal permittees, if the NWP activity might have the potential to cause effects to a historic property listed on, determined to be eligible for listing on, or potentially eligible for listing on, the National Register of Historic Places, the PCN must state which historic property might have the potential to be affected by the proposed activity or include a vicinity map indicating the location of the historic property. For NWP activities that require pre-construction notification, federal permittees must provide documentation demonstrating compliance with section 106 of the National Historic Preservation Act;

(9) For an activity that will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a

“study river” for possible inclusion in the system while the river is in an official study status, the PCN must identify the Wild and Scenic River or the “study river” (see general condition 16); and

(10) For an NWP activity that requires permission from, or review by, the Corps pursuant to [33 U.S.C. 408](#) because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers federally authorized civil works project, the pre-construction notification must include a statement confirming that the project proponent has submitted a written request for section 408 permission from, or review by, the Corps office having jurisdiction over that USACE project.

(c) Form of Pre-Construction Notification: The nationwide permit pre-construction notification form (Form ENG 6082) should be used for NWP PCNs. A letter containing the required information may also be used. Applicants may provide electronic files of PCNs and supporting materials if the district engineer has established tools and procedures for electronic submittals.

(d) Agency Coordination: (1) The district engineer will consider any comments from federal and state agencies concerning the proposed activity's compliance with the terms and conditions of the NWPs and the need for mitigation to reduce the activity's adverse environmental effects so that they are no more than minimal.

(2) Agency coordination is required for: (i) all NWP activities that require pre-construction notification and result in the loss of greater than 1/2 - acre of waters of the United States; (ii) NWP 13 activities in excess of 500 linear feet, fills greater than one cubic yard per running foot, or involve

discharges of dredged or fill material into special aquatic sites; and (iii) NWP 54 activities in excess of 500 linear feet, or that extend into the waterbody more than 30 feet from the mean low water line in tidal waters or the ordinary high water mark in the Great Lakes.

(3) When agency coordination is required, the district engineer will immediately provide (e.g., via email, facsimile transmission, overnight mail, or other expeditious manner) a copy of the complete PCN to the appropriate federal or state offices (FWS, state natural resource or water quality agency, EPA, and, if appropriate, the NMFS). With the exception of NWP 37, these agencies will have 10 calendar days from the date the material is transmitted to notify the district engineer via telephone, facsimile transmission, or email that they intend to provide substantive, site-specific comments. The comments must explain why the agency believes the adverse environmental effects will be more than minimal. If so contacted by an agency, the district engineer will wait an additional 15 calendar days before making a decision on the pre-construction notification. The district engineer will fully consider agency comments received within the specified time frame concerning the proposed activity's compliance with the terms and conditions of the NWPs, including the need for mitigation to ensure that the net adverse environmental effects of the proposed activity are no more than minimal. The district engineer will provide no response to the resource agency, except as provided below. The district engineer will indicate in the administrative record associated with each pre-construction notification that the resource agencies' concerns were considered. For NWP 37, the emergency watershed protection and rehabilitation activity may proceed immediately in cases where there is an unacceptable hazard to life or a significant loss of

property or economic hardship will occur. The district engineer will consider any comments received to decide whether the NWP 37 authorization should be modified, suspended, or revoked in accordance with the procedures at [33 CFR 330.5](#).

(4) In cases where the prospective permittee is not a federal agency, the district engineer will provide a response to NMFS within 30 calendar days of receipt of any Essential Fish Habitat conservation recommendations, as required by section 305(b)(4)(B) of the Magnuson-Stevens Fishery Conservation and Management Act.

(5) Applicants are encouraged to provide the Corps with either electronic files or multiple copies of pre-construction notifications to expedite agency coordination.

D. District Engineer's Decision

1. In reviewing the PCN for the proposed activity, the district engineer will determine whether the activity authorized by the NWP will result in more than minimal individual or cumulative adverse environmental effects or may be contrary to the public interest. If a project proponent requests authorization by a specific NWP, the district engineer should issue the NWP verification for that activity if it meets the terms and conditions of that NWP, unless he or she determines, after considering mitigation, that the proposed activity will result in more than minimal individual and cumulative adverse effects on the aquatic environment and other aspects of the public interest and exercises discretionary authority to require an individual permit for the proposed activity. For a linear project, this determination will include an evaluation of the single and complete crossings of waters of the United States that require PCNs to

determine whether they individually satisfy the terms and conditions of the NWP(s), as well as the cumulative effects caused by all of the crossings of waters of the United States authorized by an NWP. If an applicant requests a waiver of an applicable limit, as provided for in NWPs 13, 36, or 54, the district engineer will only grant the waiver upon a written determination that the NWP activity will result in only minimal individual and cumulative adverse environmental effects.

2. When making minimal adverse environmental effects determinations the district engineer will consider the direct and indirect effects caused by the NWP activity. He or she will also consider the cumulative adverse environmental effects caused by activities authorized by an NWP and whether those cumulative adverse environmental effects are no more than minimal. The district engineer will also consider site specific factors, such as the environmental setting in the vicinity of the NWP activity, the type of resource that will be affected by the NWP activity, the functions provided by the aquatic resources that will be affected by the NWP activity, the degree or magnitude to which the aquatic resources perform those functions, the extent that aquatic resource functions will be lost as a result of the NWP activity (*e.g.*, partial or complete loss), the duration of the adverse effects (temporary or permanent), the importance of the aquatic resource functions to the region (*e.g.*, watershed or ecoregion), and mitigation required by the district engineer. If an appropriate functional or condition assessment method is available and practicable to use, that assessment method may be used by the district engineer to assist in the minimal adverse environmental effects determination. The district engineer may add activity-specific

conditions to the NWP authorization to address site-specific environmental concerns.

3. If the proposed NWP activity requires a PCN and will result in a loss of greater than 1/10 -acre of wetlands or 3/100 -acre of stream bed, the prospective permittee should submit a mitigation proposal with the PCN. Applicants may also propose compensatory mitigation for NWP activities with smaller impacts, or for impacts to other types of waters. However, compensatory mitigation shall not be required for activities authorized by NWP 27 because those activities must result in net increases in aquatic resource functions and services (see the text of NWP 27). The district engineer will consider any proposed compensatory mitigation or other mitigation measures the applicant has included in the proposal when determining whether the net adverse environmental effects of the proposed NWP activity are no more than minimal. The compensatory mitigation proposal may be either conceptual or detailed. If the district engineer determines that the proposed activity complies with the terms and conditions of the NWP and that the adverse environmental effects are no more than minimal, after considering mitigation, the district engineer will notify the permittee and include any activity-specific conditions in the NWP verification the district engineer deems necessary. Conditions for compensatory mitigation requirements must comply with the appropriate provisions at [33 CFR 332.3\(k\)](#). The district engineer must approve the final mitigation plan before the permittee commences work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation. If the prospective permittee elects to submit a compensatory mitigation plan

with the PCN, the district engineer will expeditiously review the proposed compensatory mitigation plan. The district engineer must review the proposed compensatory mitigation plan within 45 calendar days of receiving a complete PCN and determine whether the proposed mitigation would ensure that the NWP activity results in no more than minimal adverse environmental effects. If the net adverse environmental effects of the NWP activity (after consideration of the mitigation proposal) are determined by the district engineer to be no more than minimal, the district engineer will provide a timely written response to the applicant. The response will state that the NWP activity can proceed under the terms and conditions of the NWP, including any activity-specific conditions added to the NWP authorization by the district engineer.

4. If the district engineer determines that the adverse environmental effects of the proposed NWP activity are more than minimal, then the district engineer will notify the applicant either: (a) that the activity does not qualify for authorization under the NWP and instruct the applicant on the procedures to seek authorization under an individual permit; (b) that the activity is authorized under the NWP subject to the applicant's submission of a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal; or (c) that the activity is authorized under the NWP with specific modifications or conditions. Where the district engineer determines that mitigation is required to ensure no more than minimal adverse environmental effects, the activity will be authorized within the 45-day PCN review period (unless additional time is required to comply with general conditions 16, 18, 20, and/or 31), with activity-specific

conditions that state the mitigation requirements. The authorization will include the necessary conceptual or detailed mitigation plan or a requirement that the applicant submit a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal. When compensatory mitigation is required, no work in waters of the United States may occur until the district engineer has approved a specific mitigation plan or has determined that prior approval of a final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation.

E. Further Information

1. District engineers have authority to determine if an activity complies with the terms and conditions of an NWP.
2. NWPs do not obviate the need to obtain other federal, state, or local permits, approvals, or authorizations required by law.
3. NWPs do not grant any property rights or exclusive privileges.
4. NWPs do not authorize any injury to the property or rights of others.
5. NWPs do not authorize interference with any existing or proposed Federal project (see general condition 31).

F. Nationwide Permit Definitions

Best management practices (BMPs):

Policies, practices, procedures, or structures implemented to mitigate the adverse environmental effects on surface water quality resulting from development. BMPs are categorized as structural or non-structural.

Compensatory mitigation: The restoration (re-establishment or rehabilitation), establishment (creation), enhancement, and/or in certain circumstances preservation of

aquatic resources for the purposes of offsetting unavoidable adverse impacts which remain after all appropriate and practicable avoidance and minimization has been achieved.

Currently serviceable: Useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

Direct effects: Effects that are caused by the activity and occur at the same time and place.

Discharge: The term "discharge" means any discharge of dredged or fill material into waters of the United States.

Ecological reference: A model used to plan and design an aquatic ecosystem restoration, enhancement, or establishment activity under NWP 27. An ecological reference may be based on: (1) the structure, functions, and dynamics of an aquatic ecosystem type or a riparian area type that currently exists in the region; (2) the structure, functions, and dynamics of an aquatic ecosystem type or riparian area type that existed in the region in the past; and/or (3) indigenous and local ecological knowledge that apply to the aquatic ecosystem type or riparian area type (*i.e.*, a cultural ecosystem). Cultural ecosystems are ecosystems that have developed under the joint influence of natural processes and human management activities (*e.g.*, fire stewardship). An ecological reference takes into account the range of variation of the aquatic habitat type or riparian area type in the region.

Enhancement: The manipulation of the physical, chemical, or biological characteristics of an aquatic resource to heighten, intensify, or improve a specific aquatic resource function(s). Enhancement results in the gain of selected aquatic resource function(s), but may also lead to a decline in other aquatic resource function(s).

Enhancement does not result in a gain in aquatic resource area.

Establishment (creation): The manipulation of the physical, chemical, or biological characteristics present to develop an aquatic resource that did not previously exist at an upland site. Establishment results in a gain in aquatic resource area.

High Tide Line: The line of intersection of the land with the water's surface at the maximum height reached by a rising tide. The high tide line may be determined, in the absence of actual data, by a line of oil or scum along shore objects, a more or less continuous deposit of fine shell or debris on the foreshore or berm, other physical markings or characteristics, vegetation lines, tidal gages, or other suitable means that delineate the general height reached by a rising tide. The line encompasses spring high tides and other high tides that occur with periodic frequency but does not include storm surges in which there is a departure from the normal or predicted reach of the tide due to the piling up of water against a coast by strong winds such as those accompanying a hurricane or other intense storm.

Historic Property: Any prehistoric or historic district, site (including archaeological site), building, structure, or other object included in, or eligible for inclusion in, the National Register of Historic Places maintained by the Secretary of the Interior. This term includes artifacts, records, and remains that are related to and located within such properties. The term includes properties of traditional religious and cultural importance to an Indian tribe or Native Hawaiian organization and that meet the National Register criteria ([36 CFR part 60](#)).

Independent utility: A test to determine what constitutes a single and complete non-linear project in the Corps Regulatory Program. A project is considered to have independent utility if it would be constructed absent the construction of other projects in the project area. Portions of a multi-phase project that depend upon other phases of the project do not have independent utility. Phases of a project that would be constructed even if the other phases were not built can be considered as separate single and complete projects with independent utility.

Indirect effects: Effects that are caused by the activity and are later in time or farther removed in distance, but are still reasonably foreseeable.

Loss of waters of the United States: Waters of the United States that are permanently adversely affected by filling, flooding, excavation, or drainage because of the regulated activity. The loss of stream bed includes the acres of stream bed that are permanently adversely affected by filling or excavation because of the regulated activity. Permanent adverse effects include permanent discharges of dredged or fill material that change an aquatic area to dry land, increase the bottom elevation of a waterbody, or change the use of a waterbody. The acreage of loss of waters of the United States is a threshold measurement of the impact to jurisdictional waters or wetlands for determining whether a project may qualify for an NWP; it is not a net threshold that is calculated after considering compensatory mitigation that may be used to offset losses of aquatic functions and services. Waters of the United States temporarily filled, flooded, excavated, or drained, but restored to pre-construction contours and elevations after construction, are not included in the measurement of loss of waters of the United States. Impacts resulting

from activities that do not require Department of the Army authorization, such as activities eligible for exemptions under section 404(f) of the Clean Water Act, are not considered when calculating the loss of waters of the United States.

Nature-based solutions: Actions to protect, sustainably manage, and restore natural or modified ecosystems, that address societal challenges effectively and adaptively, simultaneously providing human well-being and biodiversity benefits.

Navigable waters: Waters subject to section 10 of the Rivers and Harbors Act of 1899. These waters are defined at [33 CFR part 329](#).

Non-tidal wetland: A non-tidal wetland is a wetland that is not subject to the ebb and flow of tidal waters. Non-tidal wetlands contiguous to tidal waters are located landward of the high tide line (*i.e.*, spring high tide line).

Open water: For purposes of the NWPs, an open water is any area that in a year with normal patterns of precipitation has water flowing or standing above ground to the extent that an ordinary high water mark can be determined. Aquatic vegetation within the area of flowing or standing water is either non-emergent, sparse, or absent. Vegetated shallows are considered to be open waters. Examples of "open waters" include rivers, streams, lakes, and ponds.

Ordinary High Water Mark: The term ordinary high water mark means that line on the shore established by the fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas.

Perennial stream: A perennial stream has surface water flowing continuously year-round during a typical year.

Practicable: Available and capable of being done after taking into consideration cost, existing technology, and logistics in light of overall project purposes.

Pre-construction notification: A request submitted by the project proponent to the Corps for confirmation that a particular activity is authorized by nationwide permit. The request may be a permit application, letter, or similar document that includes information about the proposed work and its anticipated environmental effects. Pre-construction notification may be required by the terms and conditions of a nationwide permit, or by regional conditions. A pre-construction notification may be voluntarily submitted in cases where pre-construction notification is not required and the project proponent wants confirmation that the activity is authorized by nationwide permit.

Preservation: The removal of a threat to, or preventing the decline of, aquatic resources by an action in or near those aquatic resources. This term includes activities commonly associated with the protection and maintenance of aquatic resources through the implementation of appropriate legal and physical mechanisms. Preservation does not result in a gain of aquatic resource area or functions.

Re-establishment: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former aquatic resource. Re-establishment results in rebuilding a former aquatic resource and results in

a gain in aquatic resource area and functions.

Rehabilitation: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of repairing natural/historic functions to a degraded aquatic resource. Rehabilitation results in a gain in aquatic resource function, but does not result in a gain in aquatic resource area.

Restoration: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former or degraded aquatic resource. For the purpose of tracking net gains in aquatic resource area, restoration is divided into two categories: re-establishment and rehabilitation.

Riffle and pool complex: Riffle and pool complexes are special aquatic sites under the 404(b)(1) Guidelines. Riffle and pool complexes sometimes characterize steep gradient sections of streams. Such stream sections are recognizable by their hydraulic characteristics. The rapid movement of water over a coarse substrate in riffles results in a rough flow, a turbulent surface, and high dissolved oxygen levels in the water. Pools are deeper areas associated with riffles. A slower stream velocity, a streaming flow, a smooth surface, and a finer substrate characterize pools.

Riparian areas: Riparian areas are lands next to streams, lakes, and estuarine-marine shorelines. Riparian areas are transitional between terrestrial and aquatic ecosystems, through which surface and subsurface hydrology connects riverine, lacustrine, estuarine, and marine waters with their adjacent wetlands, non-wetland waters, or uplands. Riparian areas provide a variety of ecological functions and services and

help improve or maintain local water quality. (See general condition 23.)

Shellfish seeding: The placement of shellfish seed and/or suitable substrate to increase shellfish production. Shellfish seed consists of immature individual shellfish or individual shellfish attached to shells or shell fragments (*i.e.*, spat on shell). Suitable substrate may consist of shellfish shells, shell fragments, or other appropriate materials placed into waters for shellfish habitat.

Single and complete linear project: A linear project is a project constructed for the purpose of getting people, goods, or services from a point of origin to a terminal point, which often involves multiple crossings of one or more waterbodies at separate and distant locations. The term “single and complete project” is defined as that portion of the total linear project proposed or accomplished by one owner/developer or partnership or other association of owners/developers that includes all crossings of a single water of the United States (*i.e.*, a single waterbody) at a specific location. For linear projects crossing a single or multiple waterbodies several times at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. However, individual channels in a braided stream or river, or individual arms of a large, irregularly shaped wetland or lake, etc., are not separate waterbodies, and crossings of such features cannot be considered separately.

Single and complete non-linear project: For non-linear projects, the term “single and complete project” is defined at [33 CFR 330.2\(i\)](#) as the total project proposed or accomplished by one owner/developer or partnership or other association of owners/developers. A single and complete non-linear project must have independent utility (see

definition of “independent utility”). Single and complete non-linear projects may not be “piecemealed” to avoid the limits in an NWP authorization.

Stormwater management:

Stormwater management is the mechanism for controlling stormwater runoff for the purposes of reducing downstream erosion, water quality degradation, and flooding and mitigating the adverse effects of changes in land use on the aquatic environment.

Stormwater management facilities:

Stormwater management facilities are those facilities, including but not limited to, stormwater retention and detention ponds and best management practices, which retain water for a period of time to control runoff and/or improve the quality (*i.e.*, by reducing the concentration of nutrients, sediments, hazardous substances and other pollutants) of stormwater runoff.

Stream bed: The substrate of the stream channel between the ordinary high water marks. The substrate may be bedrock or inorganic particles that range in size from clay to boulders.

The substrate may also be comprised, in part, of organic matter, such as large or small wood fragments, leaves, algae, and other organic materials. Wetlands contiguous to the stream bed, but outside of the ordinary high water marks, are not considered part of the stream bed.

Stream channelization: The manipulation of a stream's course, condition, capacity, or location that causes more than minimal interruption of normal stream processes. A channelized jurisdictional stream remains a water of the United States.

Structure: An object that is arranged in a definite pattern of organization.

Examples of structures include, without limitation, any pier, boat dock, boat ramp, wharf, dolphin, weir, boom, breakwater, bulkhead, revetment, riprap, jetty, artificial island, artificial reef, permanent mooring structure, power transmission line, permanently moored floating vessel, piling, aid to navigation, or any other manmade obstacle or obstruction.

Tidal wetland: A tidal wetland is a jurisdictional wetland that is inundated by tidal waters. Tidal waters rise and fall in a predictable and measurable rhythm or cycle due to the gravitational pulls of the moon and sun. Tidal waters end where the rise and fall of the water surface can no longer be practically measured in a predictable rhythm due to masking by other waters, wind, or other effects. Tidal wetlands are located channelward of the high tide line.

Tribal lands: Any lands title to which is either: (1) held in trust by the United States for the benefit of any Indian tribe or individual; or (2) held by any Indian tribe or individual subject to restrictions by the United States against alienation.

Tribal rights: Those rights legally accruing to a tribe or tribes by virtue of inherent sovereign authority, unextinguished aboriginal title, treaty, statute, judicial decisions, executive order or agreement, and that give rise to legally enforceable remedies.

Vegetated shallows: Vegetated shallows are special aquatic sites under the 404(b)(1) Guidelines. They are areas that are permanently inundated and under normal circumstances have rooted aquatic vegetation, such as seagrasses in marine and estuarine systems and a variety of vascular rooted plants in freshwater systems.

Waterbody: For purposes of the NWPs, a waterbody is a “water of the United States.” If a wetland is adjacent to a waterbody determined to be a water of the United States, that waterbody and any adjacent wetlands are considered together as a single aquatic unit (see [33 CFR 328.4\(c\)\(2\)](#)).



Report of Geotechnical Exploration REV01

Bridge ID: 079B00014N
Kentucky 795 Over
Chestnut Creek
Marshall County, Kentucky
Item No. 1-10171

June 19, 2026

Prepared for:

Kentucky Transportation Cabinet
Frankfort, Kentucky

Prepared by:

Stantec Consulting Services
Lexington, Kentucky



Stantec Consulting Services Inc.
3052 Beaumont Centre Circle, Lexington KY 40513-1703

June 19, 2026
File: RP_STN_LJA_GEOFINALREV01_079B00014N_06192026

Attention: Ms. Chelsea Burk, PE

Strand Associates, Inc.
651 Perimeter Drive #220
Lexington, Kentucky 40517

**Reference: Bridge ID: 079B00014N
KY 795 over Chestnut Creek
Marshall County, Kentucky
Item No. 1-10171**

Dear Catherine,

Stantec Consulting Services Inc. (Stantec) is submitting the geotechnical engineering report for the referenced structure with this letter.

This report presents results of the field exploration along with our recommendations for the design and construction for the referenced bridge replacement. As always, we enjoy collaborating with your staff and if we can be of further assistance, please contact us.

Respectfully,

Stantec Consulting Services Inc.

A handwritten signature in blue ink that reads 'Mickey F. Dial'.

Mickey Dial, PE
Senior Project Engineer
Phone: (502) 212-5024
Mickey.Dial@stantec.com

A handwritten signature in blue ink that reads 'Luis Arduz'.

Luis Arduz, PE
Senior Associate
Phone: (859) 422-3051
Luis.Arduz@stantec.com

REPORT OF GEOTECHNICAL EXPLORATION

Introduction
June 19, 2026

Table of Contents

1.0 INTRODUCTION 3

2.0 SITE TOPOGRAPHY AND GEOLOGIC CONDITIONS 4

3.0 FIELD INVESTIGATION..... 4

4.0 SUBSURFACE CONDITIONS 5

5.0 LABORATORY TESTING AND RESULTS 5

6.0 ENGINEERING ANALYSES..... 6

6.1 GENERAL 6

6.2 STEEL H-PILE ANALYSES 6

6.2.1 Pile Capacity6

6.2.2 Hammer Energy7

6.3 SCOUR CONSIDERATIONS AND ANALYSES 8

7.0 SEISMIC DESIGN CONSIDERATIONS 8

8.0 FOUNDATION SYSTEM RECOMMENDATIONS..... 9

8.1 GENERAL 9

8.2 STEEL H-PILE FOUNDATIONS..... 9

9.0 CLOSING 10

LIST OF TABLES

Table 1. Summary of Bridge Borings 5

Table 2. Summary of Driven Pile Resistances 7

Table 3. Summary of Pile Foundations 9

LIST OF FIGURES

Figure 1. Google Image showing Project Site. 3

LIST OF APPENDICES

APPENDIX A SITE MAP..... A.1

APPENDIX B SUBSURFACE DATA SHEETS B.1

APPENDIX C COORDINATE SUBMISSION FORM..... C.1

APPENDIX D DRIVEN PILES RESISTANCE TABLES..... D.1

APPENDIX E IDEALIZED SOIL PROFILESE.1



REPORT OF GEOTECHNICAL EXPLORATION

Introduction
June 19, 2026

1.0 INTRODUCTION

The Kentucky Transportation Cabinet (KYTC) has initiated the Statewide Bridge Program Project Delivery (BPPD). The purpose of the program is to rehabilitate or replace bridges across the state. Bridges that have been identified as a part of the program are structures that are in a state of deterioration and have low load ratings that limit the movement of people and freight across the state.

This report addresses the geotechnical considerations for Bridge 079B00014N, Kentucky 795 (Scale Road) over Chestnut Creek, located in Marshall County, Kentucky. The existing bridge is a three-span structure with an overall length of approximately 68 feet. The bridge location is presented in Figure 1 below.



Figure 1. Google Image showing Project Site.

Proposed bridge plans provided by the structural designer show the replacement bridge to consist of a new single span structure. The approximate overall length of the new bridge is

REPORT OF GEOTECHNICAL EXPLORATION

Site Topography and Geologic Conditions
June 19, 2026

approximately 76.5 feet. The plans also indicate that the new bridge will be located in the same place as the existing bridge. The foundations for the new approach spans are anticipated to consist of driven HP 12x53 piles.

2.0 SITE TOPOGRAPHY AND GEOLOGIC CONDITIONS

The new bridge is situated within central Marshall County near the northeast corner of the Mississippi Embayment region of western Kentucky. The project site is situated in a gently rolling plain. Chestnut Creek is a tributary of the Clarks River, and the bridge is located about ¼ mile north of the Clarks River. The elevation of the project site vicinity is approximately 355 feet, and local relief in the area is about 100 feet with low hills situated to the east of the bridge. The KY 795 over Chestnut Creek Bridge is located approximately 3 miles west of Draffenville and 4 miles northwest of Benton.

Available geologic mapping of the area is illustrated in the Geology of the Elva Quadrangle, Kentucky (Kentucky Geological Survey -1963), which indicates the bridge site is underlain by lacustrine and fluvial deposits. In general, the deposits are alluvial soils consisting of silt, sand, and gravel.

Geologic mapping suggests that the lacustrine and fluvial deposits are underlain by various soil formations including continental deposits, the Clairborne formation, the Porter's Creek Clay, and the McNairy and Clayton formations. No bedrock is mapped within 200 feet of the ground surface.

A concealed fault is mapped within 0.3 miles north of the proposed bridge replacement site. Two other concealed faults are mapped within about one mile east and southeast of the project site. Numerous other faults are mapped within about 8 miles of the project site, especially crossing the Kentucky Lake to the east. These fault systems are not to have been active in recent geologic times.

3.0 FIELD INVESTIGATION

A geotechnical exploration was conducted in April of 2025 which consisted of one subsurface boring, designated herein as 079B00014N-1, drilled near the north end of the existing bridge. The new bridge will replace the existing bridge along the existing alignment. The Bridging Kentucky TEAM obtained the boring location and surface elevations. A site vicinity map showing the project location is presented in Appendix A. Table 1 provides a summary of the location, elevation, and depth of the boring drilled for the proposed bridge replacement.

REPORT OF GEOTECHNICAL EXPLORATION

Subsurface Conditions
June 19, 2026

Table 1. Summary of Bridge Borings

Hole No.	Latitude	Longitude	Station	Offset	Surface Elevation (ft.) MSL	Bottom of Hole	
						Depth (ft.)	Elevation (ft.) MSL
079B00014N-1	36.913851	-88.391615	14+38	13.7' RT	354.3	100.0	254.3

Note: Bedrock was not encountered in the boring.

The boring was performed with a track-mounted drill rig (CME-55T) equipped with hollow-stem augers, and an automatic hammer. The field personnel generally performed soil sampling at five-foot intervals to obtain in situ strength data and specimens for subsequent laboratory classification testing and natural moisture content determinations. Standard penetration testing (SPT) sampling and Shelby tube undisturbed sampling (where feasible) were performed for this bridge replacement project.

4.0 SUBSURFACE CONDITIONS

The boring was performed at the northeast end of the existing bridge. In general, the subsurface conditions consisted of low to medium plasticity clays to the explored depth of 100 feet below the existing ground surface, except for a layer of silty clayey sand encountered from about 42 feet to 52 feet below the ground surface. Standard penetration tests (SPT) performed within the upper cohesive soil deposits resulted in N-values ranging from 0 to 16 blows per foot indicating very soft to stiff consistencies. Unconfined compressive strength testing of Shelby tube specimens within the cohesive soils indicated unconfined strengths ranging from 80 to 1980 psf, indicating very soft to medium stiff consistencies. SPT testing on underlying granular and cohesive soils resulted in N-values ranging from about 14 to over 50 blows per foot. Relative densities of dense to very dense are indicated in granular soils, while stiff to very stiff consistencies were correlated to the cohesive soil layers. These soil deposits are consistent with the lacustrine and fluvial deposits mapped along Chestnut Creek.

Based upon the site exploration and local geology, bedrock is not encountered in the boring to the depth explored.

Groundwater was encountered during drilling at a depth of 19.2 feet below the ground surface (elevation 335.1). Groundwater can also be expected to be encountered near the level of Chestnut Creek. Groundwater levels and/or conditions may vary, with time, and according to the prevailing climate, rainfall, or other factors.

5.0 LABORATORY TESTING AND RESULTS

Stantec performed laboratory testing on recovered soil samples from the borings. All laboratory tests were performed in accordance with the applicable American Association of State Highway and Transportation Officials (AASHTO) or Kentucky Methods for soil and rock testing



REPORT OF GEOTECHNICAL EXPLORATION

Engineering Analyses
June 19, 2026

specifications. Laboratory testing consisted of natural moisture content, grain size-sieve analyses (silt plus clay determinations), and soil classification index testing.

Generally, soils classify as CL throughout the soil profile according to the Unified Soil Classification System, except for the SC-SM material from 44-52 feet. Soils classify as A-4, A-6, and A-7-6 based upon the AASHTO classification system.

Liquid limits of cohesive soils ranged from 22 to 49 percent. Moisture contents ranged from 13 to 33 percent. Specific results of the laboratory testing are also presented next to the graphical log in Appendix B.

6.0 ENGINEERING ANALYSES

6.1 GENERAL

This project will consist of replacing the existing three span bridge with a new single span bridge on the existing alignment. Any grading requirements or material placement that may be needed should be placed at 2H:1V slopes or flatter. Foundation support for the new bridge is expected to consist of driven H-piles at the end bents. Deep foundations for this project will be designed using the Load and Resistance Factor Design (LRFD) methodology. LRFD is a design approach in which applicable failure and serviceability conditions can be evaluated considering the uncertainties associated with loads and materials resistances. Where applicable, the following engineering analyses followed the current KYTC and AASHTO LRFD guidelines.

6.2 STEEL H-PILE ANALYSES

6.2.1 Pile Capacity

Based upon geologic mapping the depth to bedrock in the area exceeds 200 feet. Therefore, friction piles consisting of driven steel H-piles could be used at the proposed end bent locations. As noted in Sections 3 and 4 of this report, foundation soils at the boring location reached depths of 100 feet without encountering bedrock. It is anticipated that HP12x53 piles will be used to support the proposed structure. Due to the nature of the soil deposits and the subsurface conditions observed at the site, an axial structural resistance factor (ϕ_c) of 0.6 is recommended for good driving conditions as outlined in Section 6.5.4.2 of the current LRFD Design Specifications. Using $\phi_c = 0.6$, the estimated factored structural resistance for an HP12x53 is 465 kips

Stantec performed driven pile resistance calculations to estimate the nominal and factored resistances of piles that extend to a depth of approximately 91 feet below the provided bottom of cap elevations. The pile resistance calculations include the approximate lengths of piles that would be required to resist the design loads at the end bents. The following table summarizes the estimated geotechnical resistances below the pile cap elevations provided.

REPORT OF GEOTECHNICAL EXPLORATIONEngineering Analyses
June 19, 2026**Table 2. Summary of Driven Pile Resistances**

Sub-Structure Location	Bottom of Cap Elevation (ft)	Depth (ft) ^a	Tip Elevation (ft)	Factored Geotechnical Axial Resistance (kips)	Total Factored Geotechnical Uplift Resistance (kips) ^b
End Bent 1	348.9	91.0	257.9	132.2	89.3
End Bent 2	348.9	91.0	257.9	132.2	89.3

^a Depth as measured from the bottom of the pile cap.^b Calculated uplift resistance for the corresponding pile length

The Designer should note that these estimates are for the factored geotechnical axial resistance for an HP12x53 at the respective substructure location. Resistances at higher elevations are also provided in the tables in Appendix D. Geotechnical axial resistances at depths deeper than 91 feet are not recommended without a deeper boring. Drivability limitations may dictate the final tip elevation and associated axial resistance. Additionally, should the elevation of the bottom of the pile cap change, pile lengths and elevations would no longer be valid and should be adjusted accordingly.

6.2.2 Hammer Energy

Static pile analyses were conducted to estimate the nominal driving resistance that a 12-inch steel H-pile would experience during the installation process. Drivability analyses were performed at the bridge end bents. The analyses were performed using guidelines presented in the FHWA "Soils and Foundations Workshop Manual" and using the GRLWEAP (version 2014) computer program for driven steel H-piles.

The subsurface conditions at the end bents are assumed to be similar, consisting of low plasticity clays in the upper profile with a granular layer from about 45 to 55 feet, underlain by stiff clays. The results of FHWA research and other literature regarding pile installation indicate that significant reductions in skin resistances occur during pile driving, primarily due to the dynamics of the installation process. Soils are remolded and pore water pressures apparently increase, causing reductions in shear strengths. The driving resistances were estimated under the condition that no interruptions, and therefore no pile "set" characteristics would be experienced during the driving process.

The drivability analyses were conducted using the GRLWEAP (Version 2014) computer program for steel H-piles driven to a depth of 91.0 feet below the bottom of pile cap elevation which corresponds to the Required Nominal Axial Resistance depth. To perform the drivability analyses, two situations were modeled. The first one involved determining the minimum hammer energy which would drive the H-piles to depth without excessive blows (<120 blow per foot). The second part of the analysis would determine what maximum hammer energy is needed to drive the piles to the required depths, with a minimum of about 30 blows per foot and without damage to the pile (compression stresses greater than 45 ksi). The 2016 FHWA publication titled "Design and Construction of Driven Pile Foundations – Volume I (FHWA-NHI-16-009)" defines a

REPORT OF GEOTECHNICAL EXPLORATION

SEISMIC DESIGN CONSIDERATIONS June 19, 2026

reasonable range of hammer blows to be between 30 and 120 blows per foot for a steel H-pile. Where 120 blows per foot or 10 blows per inch is considered refusal driving conditions by many hammer manufacturers. The results of the drivability analyses indicate that a hammer with a minimum energy of about 22.5 foot-kips and a maximum energy of 198.5 foot-kips will be required to drive a 12x53 steel H-pile to the estimated depth of 91 feet below the base of the pile cap without encountering excessive blow counts or damaging the pile.

6.3 SCOUR CONSIDERATIONS AND ANALYSES

The soils encountered at the planned substructure element locations within the Chestnut Creek flood plain consist of shallow lean clays and silts with deeper deposits of silty sand and clay. A soil's susceptibility to scour is commonly determined by analyzing its particles size distribution. A soil's "D₅₀" and "D₉₅" values, defined as the grain diameter (in millimeters) below which 50 percent and 95 percent of the sample is smaller, are used in analyses to predict the amount of scour that could occur in that soil for a given flow condition. Once the scour results have been completed, the pile cap, if applicable should be placed below the scour depth or the foundations should be designed to accommodate an unsupported length to the base of the scour zone. Values of D₅₀ and D₉₅ are presented adjacent to the boring logs on the Subsurface Data Sheets in Appendix B and may be used for applicable scour analyses to be performed by others.

7.0 SEISMIC DESIGN CONSIDERATIONS

In accordance with guidelines provided by the KYTC Division of Structural Design manual, seismic design criteria were obtained from the Kentucky Transportation Center (KTC) Research Report KTC-07-07/SPR246-02-6F. This report contains ground-motion hazard maps from which seismic parameters for a maximum credible earthquake (MCE) can be estimated for bridge design. We understand that this bridge along Kentucky 795 is not considered to be a critical route and therefore a liquefaction analysis is not required.

Based on AASHTO Table 3.10.3.1-1 Site Class Definitions, Stantec conducted a review of the soil profile data for the boring completed for this exploration. In general, the soil profile over the explored depth of about 100 feet consists of cohesive soils with a layer of clayey silty sand from about 45 to 55 feet below the existing ground surface. Clay was encountered at the bottom of the explored depth of 100 feet. Based on the analysis the bridge can be classified as **Site Class E**. Stantec used this site class designation to obtain the applicable site factors from the KTC report. Upon estimating the adjusted response parameters using the KTC seismic data, the resulting acceleration coefficient indicates that this bridge site may be designed (conservatively) within **Seismic Zone 3**.

REPORT OF GEOTECHNICAL EXPLORATION

Foundation System Recommendations
June 19, 2026

8.0 FOUNDATION SYSTEM RECOMMENDATIONS

Stantec developed the following recommendations based upon reviews of available data, information obtained during the field exploration, results of laboratory testing and engineering analyses, and discussions with TEAM personnel.

8.1 GENERAL

8.1.1 Foundation excavations should be properly braced/shored to provide adequate safety to people working in or around the excavations. Bracing should be performed in accordance with applicable federal, state, and local guidelines.

8.1.2 **A plan note should be included by the designer** that indicates that temporary shoring, sheeting, cofferdams, and/or dewatering methods may be required to facilitate foundation construction. It should be anticipated that groundwater will be encountered at foundation locations within the flood plain.

8.2 STEEL H-PILE FOUNDATIONS

8.2.1 The following table provides recommended maximum pile lengths applicable at the referenced substructure element locations. Preliminary plans indicate that 12x53 H-pile foundations are being planned for use in supporting the new bridge substructure elements. Bottom of pile cap elevations are at about 348.9.

Table 3. Summary of Pile Foundations

Sub-Structure Location	Foundation Type	Factored Geotechnical Axial Resistance (kips)	Estimated Tip Elevation (ft) MSL	Approximate Maximum Pile Length ^a (ft)
End Bent 1	12x53 H-Piles	132.2	257.9	91
End Bent 2	12x53 H-Piles	132.2	257.9	91

a. Approximate Pile Length is from bottom of pile cap. Preliminary design documents indicate the piles will extend 4 feet into the pile cap.

The Designer should note that these estimates are for the factored geotechnical axial resistance for an HP12x53 at the respective substructure locations. Resistances at higher elevations/lower resistances are also provided in the tables in Appendix D. Drivability limitations may dictate the final tip elevation and associated axial resistance.

8.2.2 **A plan note should be included by the designer** which states the following hammer criteria: A diesel pile driving hammer with a rated energy between 22.5 foot-kips and 198.5 foot-kips will be required to drive 12x53 steel H-piles to a depth of about 90 feet without encountering excessive blow counts or damaging the piles. The Contractor shall submit the proposed pile driving system to the Engineer for approval prior to the installation of the first pile. Approval of

REPORT OF GEOTECHNICAL EXPLORATION

Closing
June 19, 2026

the pile driving system by the Engineer will be subject to satisfactory field performance of the pile driving procedures.

8.2.3 The design and installation of the pile foundations should conform to current AASHTO LRFD Bridge Design Specifications, and Section 604 of the current edition of the Kentucky Department of Highways Standard Specifications for Road and Bridge Construction.

8.2.4 The AASHTO LRFD Bridge Design Specifications recommend a resistance factor for horizontal geotechnical resistance of a single pile or pile group of 1.0 for lateral capacity analyses.

8.2.5 The 2020 AASHTO LRFD Bridge Design Specifications recommends axial resistance factors based on pile driving conditions (good or severe driving conditions). Based on the general subsurface conditions encountered across the project, it is anticipated that there will be good pile driving conditions.

Therefore, it is recommended that the axial resistance of piles in compression (ϕ_c) used in design be 0.60. Further, the combined axial and flexural resistance factors for design should be $\phi_c = 0.70$ and $\phi_f = 1.00$ as noted in Section 6.5.4.2 of the referenced AASHTO specifications.

8.2.6 It is recommended that a center-to-center pile spacing of no less than 2.5 pile diameters be used in the layout and design of the pile foundations.

9.0 CLOSING

9.1 The conclusions and recommendations presented herein are based on data and subsurface conditions from one boring performed for the geotechnical exploration using that degree of care and skill ordinarily exercised under similar circumstances by competent members of the engineering profession. No warranties can be made regarding the continuity of conditions between borings.

9.2 General soil descriptions and indicated boundaries are based on an engineering interpretation of all available subsurface information and may not necessarily reflect the actual variation in subsurface conditions between borings and samples.

9.3 The observed water levels and/or conditions indicated on the boring logs are as recorded at the time of exploration. These water levels and/or conditions may vary, with time, according to the prevailing climate, rainfall, tail water elevations or other factors and are otherwise dependent on the duration of and methods used in the exploration program.

9.4 Stantec exercised sound engineering judgment in preparing the subsurface information presented herein. This information has been prepared, and is intended for design, and estimating purposes. Its presentation on the plans or elsewhere is for the purpose of providing intended users with access to the same information. This subsurface information interpretation is

REPORT OF GEOTECHNICAL EXPLORATION

Closing
June 19, 2026

presented in good faith and is not intended as a substitute for independent interpretations or judgments of the Contractor.

9.5 All structure details shown herein are for illustrative purposes only and may not be indicative of the final design conditions shown in the contract plans.

APPENDIX A SITE MAP



LOCATION MAP




SHEET 1 OF 2

 COMMONWEALTH OF KENTUCKY DEPARTMENT OF HIGHWAYS	REVISION	DATE	 Stantec	DATE: SEPTEMBER, 2025	CHECKED BY:	LOCATION MAP CROSSING CHESTNUT CREEK	ROUTE	COUNTRY OF	ITEM NO. 1-10171 SHEET NO.	MARSHALL DRAWING NUMBER	
					DESIGNED BY: P. BOND		A. CRACE				

APPENDIX B

SUBSURFACE DATA SHEETS

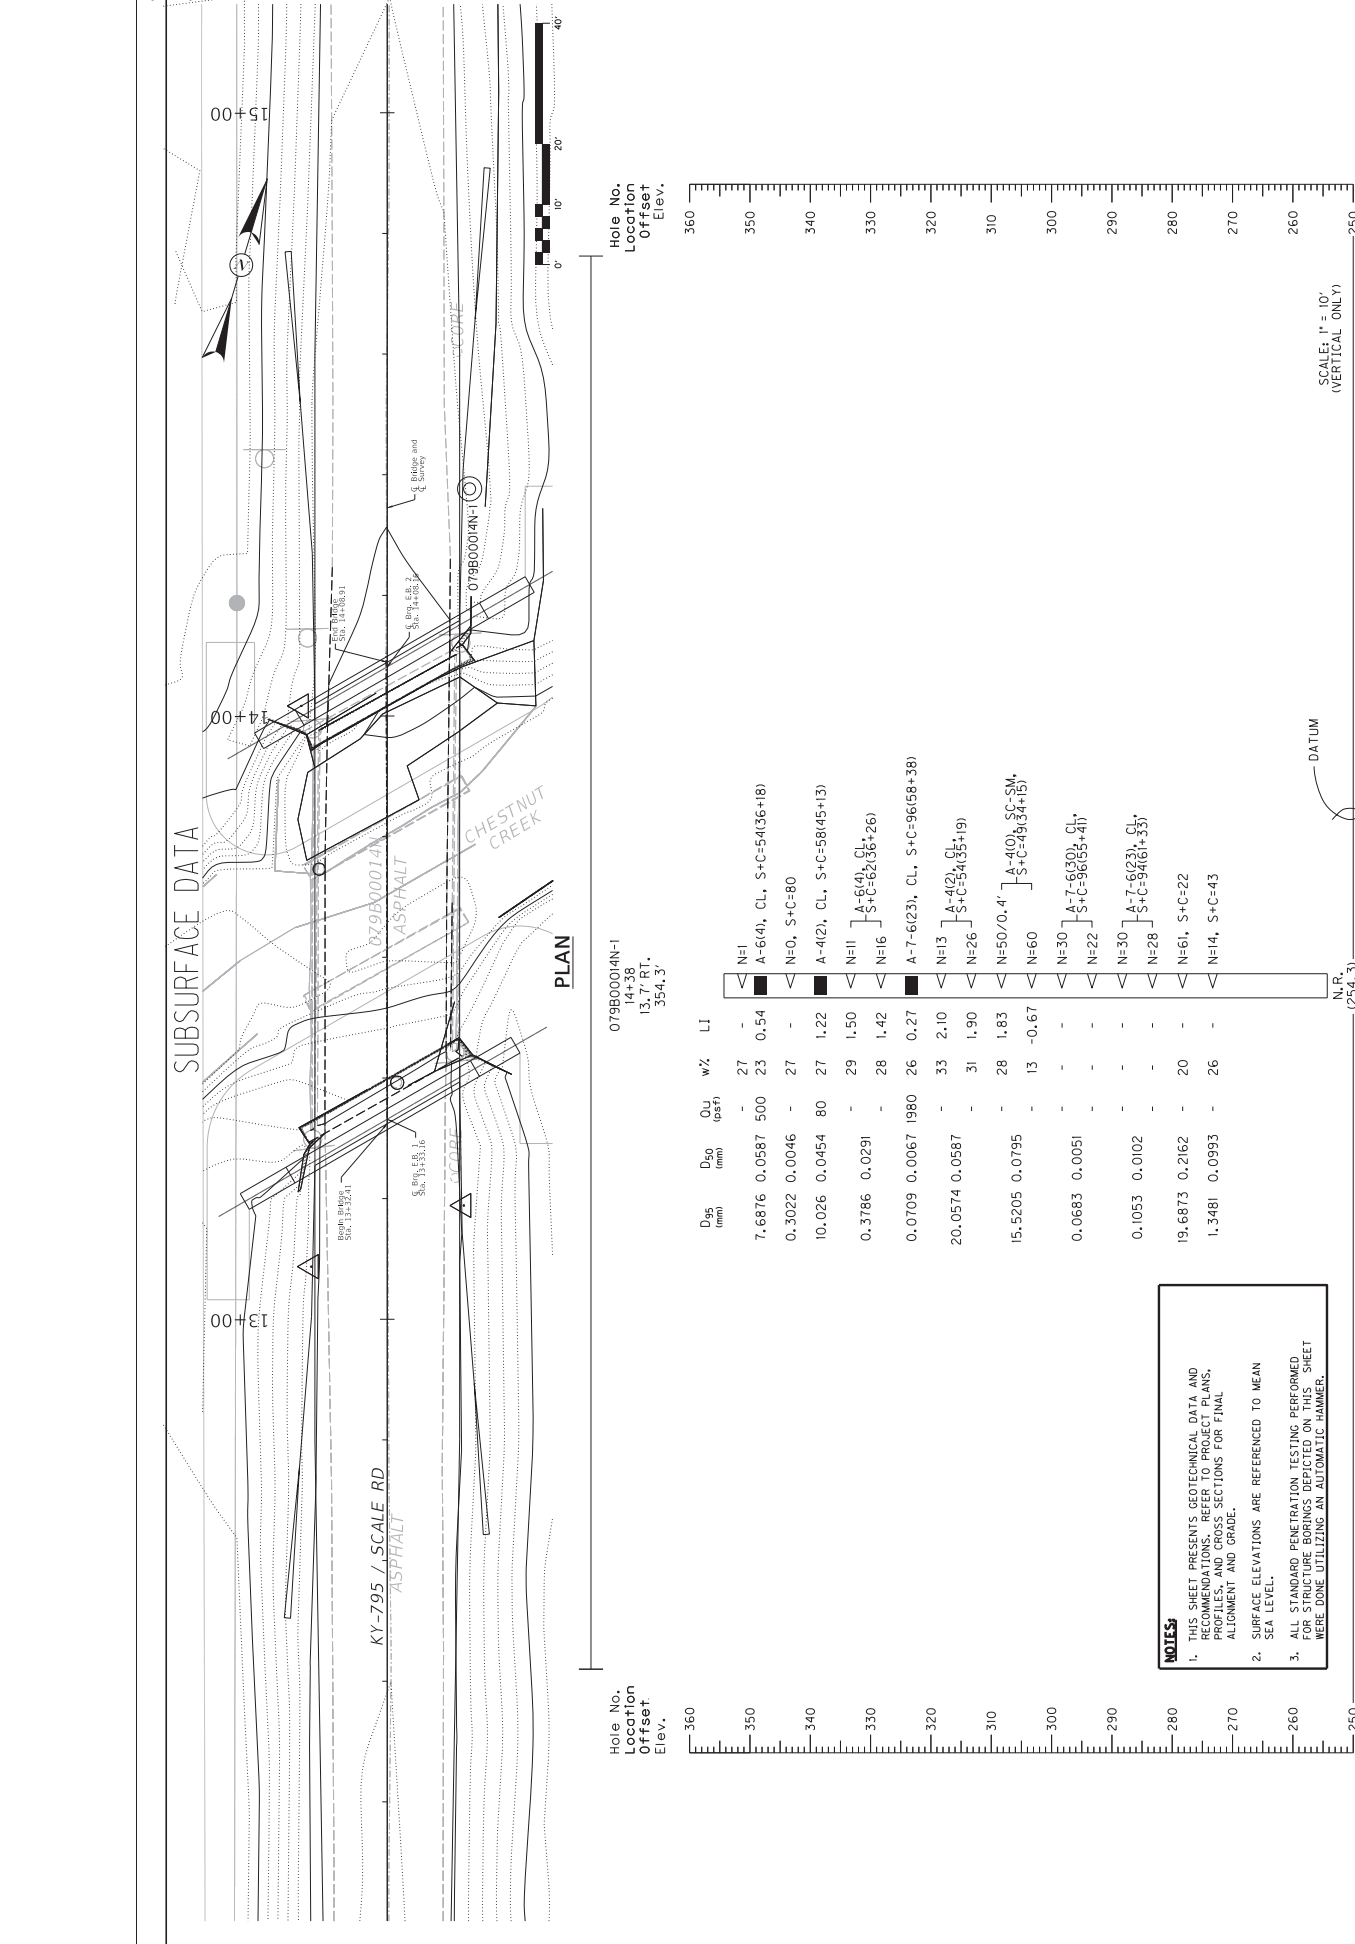

 COMMONWEALTH OF KENTUCKY DEPARTMENT OF HIGHWAYS	REVISION		DATE	 Stantec	DATE: SEPTEMBER, 2025		CHECKED BY K. BEHREND A. CRACE	ROUTE KY 795	COUNTY OF MARSHALL DRAWING NUMBER 1-10171 SHEET NO.
					DESIGNED BY: A. WEBER				
					DETAILED BY: P. BOND				
			DATE PLOTTED: 9/23/2025	\$TIMES	FILE NAME: V:\1703\active\170556003\gssc\civil\drawing\sheet\079B00014N\079B00014N_LAYOUT.dgn				
USER: PBOB									

APPENDIX C

COORDINATE SUBMISSION FORM

COORDINATE DATA SUBMISSION FORM

KYTC DIVISION OF STRUCTURAL DESIGN -- GEOTECHNICAL BRANCH

County

Marshall

Road Number

KY 795 over Chestnut Creek

Survey Crew / Consultant

Stantec

Contact Person

K. Dawahare

Item #

1-10171

Mars #

Project #

178568003

Date

9/15/2025

Notes:

Elevation Datum

NAVD88

HOLE NUMBER	LATITUDE (Decimal Degrees)	LONGITUDE (Decimal Degrees)	HOLE NUMBER	STATION	OFFSET	ELEVATION (ft)
079B00014N-1	36.9138508	-88.3916152	079B00014N-1	14+38	13.7' Right	354.3

Appendix D
DRIVEN PILES RESISTANCE TABLES

Steel H-Pile Capacities
079G00014N
HP12x53 (50ksi steel)

Location: **EB1 / EB2**
Estimated Base of Pile Cap Elevation = 348.9 ft

Depth	Soil Type	Depth Below Pile Cap (ft)	Nominal Side Resistance		Nominal End Bearing	R _n		Total Factored Static Geotechnical Axial Resistance (φ=0.35 in clay, 0.45 in sand)		Field Verification Values (φ=0.4 FHWA Modified Gates)		Total Factored Geotechnical Uplift Resistance Static Analysis Method		Total Factored Geotechnical Extreme Resistance Static Analysis Method		Total Factored Geotechnical Extreme Uplift Resistance Static Analysis Method	
			(kips)	(kips)		(kips)	(tons)	(kips)	(tons)	(kips)	(tons)	(kips)	(tons)	(kips)	(tons)	(kips)	(tons)
0	Clay	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1	Clay	1	0.2	0.1	0.1	0.3	0.1	0.1	0.1	0.3	0.1	0.1	0.0	0.3	0.2	0.2	0.1
2	Clay	2	0.5	0.1	0.6	0.3	0.2	0.6	0.1	0.5	0.2	0.1	0.1	0.6	0.3	0.4	0.2
3	Clay	3	0.9	0.1	1.0	0.5	0.4	0.2	0.1	0.9	0.4	0.1	0.1	1.0	0.5	0.7	0.4
4	Clay	4	1.3	0.1	1.4	0.7	0.5	0.2	0.2	1.2	0.6	0.2	0.3	1.4	0.7	1.0	0.5
5	Clay	5	1.7	0.1	1.8	0.9	0.6	0.3	0.3	1.6	0.8	0.2	0.4	1.8	0.9	1.4	0.7
6	Clay	6	2.1	0.1	2.2	1.1	0.8	0.4	0.4	1.9	1.0	0.5	0.5	2.2	1.1	1.7	0.8
7	Clay	7	2.5	0.1	2.6	1.3	0.9	0.5	0.5	2.3	1.1	0.6	0.3	2.6	1.3	2.0	1.0
8	Clay	8	2.9	0.1	3.0	1.5	1.1	0.5	0.5	2.6	1.3	0.7	0.4	3.0	1.5	2.3	1.2
9	Clay	9	3.3	0.1	3.4	1.7	1.2	0.6	0.6	3.0	1.5	0.8	0.4	3.4	1.7	2.6	1.3
10	Clay	10	3.7	0.1	3.8	1.9	1.3	0.7	0.7	3.3	1.7	0.9	0.5	3.8	1.9	3.0	1.5
11	Clay	11	4.2	0.1	4.3	2.2	1.5	0.8	0.8	3.8	1.9	1.1	0.5	4.3	2.2	3.4	1.7
12	Clay	12	4.6	0.1	4.7	2.4	1.6	0.8	0.8	4.1	2.1	1.2	0.6	4.7	2.4	3.7	1.8
13	Clay	13	5.0	0.1	5.1	2.6	1.8	0.9	0.9	4.5	2.2	1.3	0.6	5.1	2.6	4.0	2.0
14	Clay	14	5.4	0.3	5.7	2.9	2.0	1.0	1.0	5.0	2.5	1.4	0.7	5.7	2.9	4.3	2.2
15	Clay	15	5.8	0.5	6.3	3.2	2.2	1.1	1.1	5.5	2.5	1.5	0.7	6.3	3.2	4.6	2.3
16	Clay	16	7.4	0.8	8.2	4.1	2.9	1.4	1.4	7.2	3.6	1.9	0.9	8.2	4.1	5.9	3.0
17	Clay	17	10.3	1.0	11.3	5.7	4.0	2.0	2.0	9.9	4.9	2.6	1.3	11.3	5.7	8.2	4.1
18	Clay	18	13.1	1.0	14.1	7.1	4.9	2.5	2.5	12.3	6.2	3.3	1.6	14.1	7.1	10.5	5.2
19	Clay	19	16.1	1.0	17.1	8.6	6.0	3.0	3.0	15.0	7.5	4.0	2.0	17.1	8.6	12.9	6.4
20	Clay	20	19.0	1.0	20.0	10.0	7.0	3.5	3.5	17.5	8.8	4.8	2.4	20.0	10.0	15.2	7.6
21	Clay	21	22.1	1.0	23.1	11.6	8.1	4.0	4.0	20.2	10.1	5.5	2.8	23.1	11.6	17.7	8.8
22	Clay	22	25.1	1.0	26.1	13.1	9.1	4.6	4.6	22.8	11.4	6.3	3.1	26.1	13.1	20.1	10.0
23	Clay	23	28.2	1.0	29.2	14.6	10.2	5.1	5.1	25.6	12.8	7.1	3.5	29.2	14.6	22.6	11.3
24	Clay	24	31.4	1.0	32.4	16.2	11.3	5.7	5.7	28.4	14.2	7.9	3.9	32.4	16.2	25.1	12.6
25	Clay	25	34.5	1.0	35.5	17.8	12.4	6.2	6.2	31.1	15.5	8.6	4.3	35.5	17.8	27.6	13.8
26	Clay	26	37.8	1.0	38.8	19.4	13.6	6.8	6.8	34.0	17.0	9.5	4.7	38.8	19.4	30.2	15.1
27	Clay	27	41.0	1.0	42.0	21.0	14.7	7.4	7.4	36.8	18.4	10.3	5.1	42.0	21.0	32.8	16.4
28	Clay	28	44.3	1.0	45.3	22.7	15.9	7.9	7.9	39.6	19.8	11.1	5.5	45.3	22.7	35.4	17.7
29	Clay	29	47.6	1.0	48.6	24.3	17.0	8.5	8.5	42.5	21.3	11.9	6.0	48.6	24.3	38.1	19.0
30	Clay	30	51.0	1.0	52.0	26.0	18.2	9.1	9.1	45.5	22.8	12.8	6.4	52.0	26.0	40.8	20.4
31	Clay	31	54.4	1.0	55.4	27.7	19.4	9.7	9.7	48.5	24.2	13.6	6.8	55.4	27.7	43.5	21.8
32	Clay	32	57.9	1.0	58.9	29.5	20.6	10.3	10.3	51.5	25.8	14.5	7.2	58.9	29.5	46.3	23.2
33	Clay	33	61.4	1.0	62.4	31.2	21.8	10.9	10.9	54.6	27.3	15.4	7.7	62.4	31.2	49.1	24.6
34	Clay	34	64.9	1.0	65.9	33.0	23.1	11.5	11.5	57.7	28.8	16.2	8.1	65.9	33.0	51.9	26.0
35	Clay	35	68.4	1.0	69.4	34.7	24.3	12.1	12.1	60.7	30.4	17.1	8.6	69.4	34.7	54.7	27.4
36	Clay	36	72.0	1.0	73.0	36.5	25.6	12.8	12.8	63.9	31.9	18.0	9.0	73.0	36.5	57.6	28.8
37	Clay	37	75.7	1.0	76.7	38.4	26.8	13.4	13.4	67.1	33.6	18.9	9.5	76.7	38.4	60.6	30.3
38	Clay	38	79.3	1.0	80.3	40.2	28.1	14.1	14.1	70.3	35.1	19.8	9.9	80.3	40.2	63.4	31.7
39	Clay	39	83.0	4.3	87.3	43.7	30.6	15.3	15.3	76.4	38.2	20.8	10.4	87.3	43.7	66.4	33.2
40	Clay	40	86.7	7.7	94.4	47.2	33.0	16.5	16.5	82.6	41.3	21.7	10.8	94.4	47.2	69.4	34.7
41	Sand	41	91.8	11.2	103.0	51.5	36.9	18.5	18.5	92.3	46.1	32.1	16.1	103.0	51.5	73.4	36.7
42	Sand	42	98.3	14.6	112.9	56.5	41.4	20.7	20.7	103.4	51.7	34.4	17.2	112.9	56.5	78.6	39.3
43	Sand	43	104.8	14.9	119.7	59.9	44.4	22.2	22.2	111.1	55.5	36.7	18.3	119.7	59.9	83.8	41.9
44	Sand	44	111.5	15.1	126.6	63.3	47.5	23.8	23.8	118.8	59.4	39.0	19.5	126.6	63.3	89.2	44.6
45	Sand	45	118.2	15.4	133.6	66.8	50.7	25.3	25.3	126.7	63.4	41.4	20.7	133.6	66.8	94.6	47.3
46	Sand	46	125.1	15.6	140.7	70.4	53.9	26.9	26.9	134.7	67.3	43.8	21.9	140.7	70.4	100.1	50.0
47	Sand	47	132.1	15.8	147.9	74.0	57.1	28.6	28.6	142.8	71.4	46.2	23.1	147.9	74.0	105.7	52.8
48	Sand	48	139.1	16.1	155.2	77.6	60.4	30.2	30.2	151.0	75.5	48.7	24.3	155.2	77.6	111.3	55.6
49	Sand	49	146.3	12.6	158.9	79.5	62.1	31.0	31.0	155.2	77.6	51.2	25.6	158.9	79.5	117.0	58.5
50	Sand	50	153.6	8.9	153.6	81.3	63.7	31.8	31.8	159.2	79.6	53.8	26.9	165.0	81.3	122.9	61.4
51	Clay	51	159.8	5.2	165.0	82.5	64.6	32.3	32.3	161.4	80.7	40.0	20.0	165.0	82.5	127.8	63.9
52	Clay	52	164.8	1.5	166.3	83.2	65.0	32.5	32.5	162.5	81.3	41.2	20.6	166.3	83.2	131.8	65.9
53	Clay	53	169.9	1.5	171.4	85.7	66.8	33.4	33.4	167.0	83.5	42.5	21.2	171.4	85.7	135.9	68.0

Depth	Soil Type	Depth Below Pile Cap (ft)	Nominal Side Resistance (kips)	Nominal End Bearing (kips)	R _n		Φ _{fact} R _n		Φ _{up} R _n		Φ _{ult} R _n		Φ _{up} R _n	
					Total Nominal Geotechnical Axial Resistance (kips)	(tons)	Total Factored Static Geotechnical Axial Resistance (φ=0.35 in clay, 0.45 in sand) (kips)	(tons)	Field Verification Values (φ=0.4 FHWA Modified Gates) (kips)	(tons)	Total Factored Geotechnical Uplift Resistance Static Analysis Method (kips)	(tons)	Total Factored Geotechnical Extreme Uplift Resistance Static Analysis Method (kips)	(tons)
54	Clay	54	174.9	1.5	176.4	88.2	68.6	34.3	171.4	85.7	43.7	21.9	176.4	88.2
55	Clay	55	180.1	1.5	181.6	90.8	70.4	35.2	175.9	88.0	45.0	22.5	181.6	90.8
56	Clay	56	185.3	1.5	186.8	93.4	72.2	36.1	180.5	90.2	46.3	23.2	186.8	93.4
57	Clay	57	190.5	1.5	192.0	96.0	74.0	37.0	185.0	92.5	47.6	23.8	192.0	96.0
58	Clay	58	195.7	1.5	197.2	98.6	75.8	37.9	189.6	94.8	48.9	24.5	197.2	98.6
59	Clay	59	201.0	1.5	202.5	101.3	77.7	38.8	194.2	97.1	50.3	25.1	202.5	101.3
60	Clay	60	206.3	1.5	207.8	103.9	79.5	39.8	198.9	99.4	51.6	25.8	207.8	103.9
61	Clay	61	211.7	1.5	213.2	106.6	81.4	40.7	203.6	101.8	52.9	26.5	213.2	106.6
62	Clay	62	217.0	1.5	218.5	109.3	83.3	41.6	208.2	104.1	54.3	27.1	218.5	109.3
63	Clay	63	222.5	1.5	224.0	112.0	85.2	42.6	213.0	106.5	55.6	27.8	224.0	112.0
64	Clay	64	227.9	1.5	229.4	114.7	87.1	43.6	217.8	108.9	57.0	28.5	229.4	114.7
65	Clay	65	233.4	1.5	234.9	117.5	89.0	44.5	222.6	111.3	58.4	29.2	234.9	117.5
66	Clay	66	238.9	1.5	240.4	120.2	91.0	45.5	227.4	113.7	59.7	29.9	240.4	120.2
67	Clay	67	244.5	1.5	246.0	123.0	92.9	46.5	232.3	116.1	61.1	30.6	246.0	123.0
68	Clay	68	250.1	1.5	251.6	125.8	94.9	47.4	237.2	118.6	62.5	31.3	251.6	125.8
69	Clay	69	255.7	1.5	257.2	128.6	96.8	48.4	242.1	121.0	63.9	32.0	257.2	128.6
70	Clay	70	261.4	1.5	262.9	131.5	98.8	49.4	247.1	123.5	65.4	32.7	262.9	131.5
71	Clay	71	267.1	1.5	268.6	134.3	100.8	50.4	252.1	126.0	66.8	33.4	268.6	134.3
72	Clay	72	272.8	1.5	274.3	137.2	102.8	51.4	257.0	128.5	68.2	34.1	274.3	137.2
73	Clay	73	278.6	1.5	280.1	140.1	104.8	52.4	262.1	131.1	69.7	34.8	280.1	140.1
74	Clay	74	284.4	1.3	285.7	142.9	106.8	53.4	267.0	133.5	71.1	35.6	285.7	142.9
75	Clay	75	290.2	1.2	291.4	145.7	108.8	54.4	272.0	136.0	72.6	36.3	291.4	145.7
76	Clay	76	295.2	1.1	296.3	148.2	110.5	55.3	276.3	138.1	73.8	36.9	296.3	148.2
77	Clay	77	299.3	1.0	300.3	150.2	111.9	56.0	279.8	139.9	74.8	37.4	300.3	150.2
78	Clay	78	303.5	1.0	304.5	152.3	113.4	56.7	283.5	141.7	75.9	37.9	304.5	152.3
79	Clay	79	307.6	1.0	308.6	154.3	114.8	57.4	287.1	143.5	76.9	38.5	308.6	154.3
80	Clay	80	311.7	1.0	312.7	156.4	116.3	58.1	290.6	145.3	77.9	39.0	312.7	156.4
81	Clay	81	315.9	1.0	316.9	158.5	117.7	58.9	294.3	147.2	79.0	39.5	316.9	158.5
82	Clay	82	320.0	1.0	321.0	160.5	119.2	59.6	297.9	149.0	80.0	40.0	321.0	160.5
83	Clay	83	324.1	1.0	325.1	162.6	120.6	60.3	301.5	150.7	81.0	40.5	325.1	162.6
84	Clay	84	328.3	1.0	329.3	164.7	122.1	61.0	305.2	152.6	82.1	41.0	329.3	164.7
85	Clay	85	332.4	1.0	333.4	166.7	123.5	61.8	308.8	154.4	83.1	41.6	333.4	166.7
86	Clay	86	336.5	1.0	337.5	168.8	124.9	62.5	312.3	156.2	84.1	42.1	337.5	168.8
87	Clay	87	340.7	1.0	341.7	170.9	126.4	63.2	315.0	158.0	85.2	42.6	341.7	170.9
88	Clay	88	344.8	1.0	345.8	172.9	127.8	63.9	318.6	159.8	86.2	43.1	345.8	172.9
89	Clay	89	348.9	1.0	349.9	175.0	129.3	64.6	323.2	161.6	87.2	43.6	349.9	175.0
90	Clay	90	353.1	1.0	354.1	177.1	130.7	65.4	326.9	163.4	88.3	44.1	354.1	177.1
91	Clay	91	357.2	1.0	358.2	179.1	132.2	66.1	330.5	165.2	89.3	44.7	358.2	179.1

Appendix E

IDEALIZED SOIL PROFILES

GENERAL SOIL AND BEDROCK PROFILE

KY 795 over Chestnut Creek

Based on Boring 079B00014N-1

Approximate		Description	
Elevation	Depth	STRATA	
(ft)	(ft)	Description	Parameters
		(USCS Classification)	
348.9	0.0		
		Sandy Lean Clay	$\gamma_t \text{ (lb/ft}^3\text{)} = 120$
		(CL)	$\gamma_e \text{ (lb/ft}^3\text{)} = 57.6$
			$C_u \text{ (psf)} = 100$
			$K_S \text{ (lb/in}^3\text{)} = 299$
			$E_{50} = 0.015$
334.3	14.6		
		Sandy Lean Clay	$\gamma_t \text{ (lb/ft}^3\text{)} = 122$
		(CL)	$\gamma_e \text{ (lb/ft}^3\text{)} = 59.6$
			$C_u \text{ (psf)} = 1000$
			$K_S \text{ (lb/in}^3\text{)} = 429$
			$E_{50} = 0.012$
309.3	39.6		
		Silty Clayey Sand	$\gamma_t \text{ (lb/ft}^3\text{)} = 118$
		(SC-SM)	$\gamma_e \text{ (lb/ft}^3\text{)} = 55.6$
			$\phi \text{ (}^\circ\text{)} = 35$
			$K_S \text{ (lb/in}^3\text{)} = 131$ (above water table)
			$K_S \text{ (lb/in}^3\text{)} = 9$ (below water table)
299.3	49.6		
		Lean Clay	$\gamma_t \text{ (lb/ft}^3\text{)} = 122$
		(CL)	$\gamma_e \text{ (lb/ft}^3\text{)} = 59.6$
			$C_u \text{ (psf)} = 1500$
			$K_S \text{ (lb/in}^3\text{)} = 524$ (above water table)
			$E_{50} = 0.011$ (below water table)
274.3	74.6		
		Lean Clay	$\gamma_t \text{ (lb/ft}^3\text{)} = 122$
		(CL)	$\gamma_e \text{ (lb/ft}^3\text{)} = 59.6$
			$C_u \text{ (psf)} = 1000$
			$K_S \text{ (lb/in}^3\text{)} = 429$
			$E_{50} = 0.012$
254.3	94.6	Bottom of Hole	

Groundwater estimated at elevation 335.1

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

STANDARD SPECIFICATIONS

Any reference in the plans or proposal to previous editions of the *Standard Specifications for Road and Bridge Construction* and *Standard Drawings* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2026* and *Standard Drawings, Edition of 2025*.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting. The Supplemental Specifications can be found at the following link:
<http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx>

SPECIAL NOTE FOR PORTABLE CHANGEABLE MESSAGE SIGNS

This Special Note will apply when indicated on the plans or in the proposal.

1.0 DESCRIPTION. Furnish, install, operate, and maintain variable message signs at the locations shown on the plans or designated by the Engineer. Remove and retain possession of variable message signs when they are no longer needed on the project.

2.0 MATERIALS.

2.1 General. Use LED Variable Message Signs Class I, II, or III, as appropriate, from the Department's List of Approved Materials.

Unclassified signs may be submitted for approval by the Engineer. The Engineer may require a daytime and nighttime demonstration. The Engineer will make a final decision within 30 days after all required information is received.

2.2 Sign and Controls. All signs must:

- 1) Provide 3-line messages with each line being 8 characters long and at least 18 inches tall. Each character comprises 35 pixels.
- 2) Provide at least 40 preprogrammed messages available for use at any time. Provide for quick and easy change of the displayed message; editing of the message; and additions of new messages.
- 3) Provide a controller consisting of:
 - a) Keyboard or keypad.
 - b) Readout that mimics the actual sign display. (When LCD or LCD type readout is used, include backlighting and heating or otherwise arrange for viewing in cold temperatures.)
 - c) Non-volatile memory or suitable memory with battery backup for storing pre-programmed messages.
 - d) Logic circuitry to control the sequence of messages and flash rate.
- 4) Provide a serial interface that is capable of supporting complete remote control ability through land line and cellular telephone operation. Include communication software capable of immediately updating the message, providing complete sign status, and allowing message library queries and updates.
- 5) Allow a single person easily to raise the sign to a satisfactory height above the pavement during use, and lower the sign during travel.
- 6) Be Highway Orange on all exterior surfaces of the trailer, supports, and controller cabinet.
- 7) Provide operation in ambient temperatures from -30 to + 120 degrees Fahrenheit during snow, rain and other inclement weather.
- 8) Provide the driver board as part of a module. All modules are interchangeable, and have plug and socket arrangements for disconnection and reconnection. Printed circuit boards associated with driver boards have a conformable coating to protect against moisture.
- 9) Provide a sign case sealed against rain, snow, dust, insects, etc. The lens is UV stabilized clear plastic (polycarbonate, acrylic, or other approved material) angled to prevent glare.
- 10) Provide a flat black UV protected coating on the sign hardware, character PCB, and appropriate lens areas.
- 11) Provide a photocell control to provide automatic dimming.

11

- 12) Allow an on-off flashing sequence at an adjustable rate.
- 13) Provide a sight to aim the message.
- 14) Provide a LED display color of approximately 590 nm amber.
- 15) Provide a controller that is password protected.
- 16) Provide a security device that prevents unauthorized individuals from accessing the controller.
- 17) Provide the following 3-line messages preprogrammed and available for use when the sign unit begins operation:

/KEEP/RIGHT/⇒⇒⇒/	/MIN/SPEED/**MPH/
/KEEP/LEFT/⇐⇐⇐/	/ICY/BRIDGE/AHEAD/ /ONE
/LOOSE/GRAVEL/AHEAD/	LANE/BRIDGE/AHEAD/
/RD WORK/NEXT/**MILES/	/ROUGH/ROAD/AHEAD/
/TWO WAY/TRAFFIC/AHEAD/	/MERGING/TRAFFIC/AHEAD/
/PAINT/CREW/AHEAD/	/NEXT/***/MILES/
/REDUCE/SPEED/**MPH/	/HEAVY/TRAFFIC/AHEAD/
/BRIDGE/WORK/**0 FT/	/SPEED/LIMIT/**MPH/
/MAX/SPEED/**MPH/	/BUMP/AHEAD/
/SURVEY/PARTY/AHEAD/	/TWO/WAY/TRAFFIC/

*Insert numerals as directed by the Engineer.

Add other messages during the project when required by the Engineer.

2.3 Power.

- 1) Design solar panels to yield 10 percent or greater additional charge than sign consumption. Provide direct wiring for operation of the sign or arrow board from an external power source to provide energy backup for 21 days without sunlight and an on-board system charger with the ability to recharge completely discharged batteries in 24 hours.

3.0 CONSTRUCTION. Furnish and operate the variable message signs as designated on the plans or by the Engineer. Ensure the bottom of the message panel is a minimum of 7 feet above the roadway in urban areas and 5 feet above in rural areas when operating. Use Class I, II, or III signs on roads with a speed limit less than 55 mph. Use Class I or II signs on roads with speed limits 55 mph or greater.

Maintain the sign in proper working order, including repair of any damage done by others, until completion of the project. When the sign becomes inoperative, immediately repair or replace the sign. Repetitive problems with the same unit will be cause for rejection and replacement.

Use only project related messages and messages directed by the Engineer, unnecessary messages lessen the impact of the sign. Ensure the message is displayed in either one or 2 phases with each phase having no more than 3 lines of text. When no message is needed, but it is necessary to know if the sign is operable, flash only a pixel.

When the sign is not needed, move it outside the clear zone or where the Engineer directs. Variable Message Signs are the property of the Contractor and shall be removed from the project when no longer needed. The Department will not assume ownership of these signs.

4.0 MEASUREMENT. The final quantity of Variable Message Sign will be

11
the actual number of individual signs acceptably furnished and operated during the project. The Department will not measure signs replaced due to damage or rejection.

5.0 PAYMENT. The Department will pay for the Variable Message Signs at the unit price each. The Department will not pay for signs replaced due to damage or rejection. Payment is full compensation for furnishing all materials, labor, equipment, and service necessary to, operate, move, repair, and maintain or replace the variable message signs. The Department will make payment for the completed and accepted quantities under the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
02671	Portable Changeable Message Sign	Each

Effective June 15, 2012

SPECIAL PROVISION FOR EMBANKMENT AT BRIDGE END BENT STRUCTURES

This Special Provision will apply when indicated on the plans or in the proposal. Section references herein are to the Department's Standard Specifications for Road and Bridge Construction, Current Edition.

1.0 DESCRIPTION. Construct a soil, granular, or rock embankment with soil, granular or cohesive pile core and place structure granular backfill, as the Plans require. Construct the embankment according to the requirements of this Special Provision, the Plans, Standard Drawing RGX 100 and 105, and the Standard Specifications, Current Edition.

2.0 MATERIALS.

2.1 Granular Embankment. Conform to Subsection 805.10. When Granular Embankment materials are erodible or unstable according to Subsection 805.03.04, use the Special Construction Methods found in 3.2 of the Special Provision.

2.2 Rock Embankment. Provide durable rock from roadway excavation that consists principally of Unweathered Limestone, Durable Shale (SDI equal to or greater than 95 according to KM 64-513), or Durable Sandstone.

2.3 Pile Core. Provide a pile core in the area of the embankments where deep foundations are to be installed unless otherwise specified. The Pile Core is the zone indicated on Standard Drawings RGX 100 and 105 designated as Pile Core. Material control of the pile core area during embankment construction is always required. Proper Pile Core construction is required for installation of foundation elements such as drilled or driven piles or drilled shafts. The type of material used to construct the pile core is as directed in the plans or below. Typically, the pile core area will be constructed from the same material used to construct the surrounding embankment. Pile Core can be classified as one of three types:

A) Pile Core - Conform to Section 206 of the Standard Specifications. Provide pile core material consisting of the same material as the adjacent embankment except the material in the pile core area shall be free of boulders or particle sizes larger than 4 inches in any dimension or any other obstructions that may hinder pile driving operations. If the pile core material hinders pile driving operations, take the appropriate means necessary to reach the required pile tip elevation, at no expense to the Department.

B) Granular Pile Core. Granular pile core is required only when specified in the plans. Select a gradation of durable rock to facilitate pile driving that conforms to Subsection 805.11. If granular pile core material hinders pile driving operations, take appropriate means necessary to reach the required pile tip elevation, at no expense to the Department.

C) Cohesive Pile Core. Cohesive Pile Core is required only when specified in the plans. Conform to Section 206 of the Standard Specifications and use soil with at least 50 percent passing a No. 4 sieve having a minimum Plasticity Index (PI) of 10. In addition, keep the cohesive pile core free of boulders, larger than 4 inches in any dimension, or any other obstructions, which would interfere with drilling operations. If cohesive pile core material interferes with drilling operations, take appropriate means necessary to maintain excavation stability, at no expense to the Department.

2.4 Structure Granular Backfill. Conform to Subsection 805.11

2.5 Geotextile Fabric. Conform to Class 1 or Class 2 in Section 214 and 843.

3.0 CONSTRUCTION.

3.1 General. Construct roadway embankments at end bents according to Section 206 and in accordance with the Special Provision, the Plans, and Standard Drawings for the full embankment section. In some instances, granular or rock embankment will be required for embankment construction for stability purposes, but this special provision does not prevent the use of soil when appropriate. Refer to the plans for specific details regarding material requirements for embankment construction.

Place and compact the pile core and structure granular backfill according to the applicable density requirements for the project. If the embankment and pile core are dissimilar materials (i.e., a granular pile core is used with a soil embankment or a cohesive pile core is used with a granular embankment), a Geotextile Fabric, will be required between the pile core and embankment in accordance with Sections 214 and 843 of the Standard Specifications.

When granular or rock embankment is required for embankment construction, conform to the general requirements of Subsection 206.03.02 B. In addition, place the material in no greater than 2-foot loose lifts and compact with a vibrating smooth wheel roller capable of producing a minimum centrifugal force of 15 tons. Apply these requirements to the full width of the embankment for a distance of half the embankment height or 50 feet, whichever is greater, as shown on Standard Drawing RGX-105.

When using granular pile core, install 8-inch perforated underdrain pipe at or near the elevation of the original ground in the approximate locations depicted on the standard drawing, and as the Engineer directs, to ensure positive drainage of the embankment. Wrap the perforated pipe with a fabric of a type recommended by the pipe manufacturer.

After constructing the embankment, excavate for the end bent cap, drive piling, install shafts or other foundation elements, place the mortar bed, construct the end bent, and complete the embankment to finish grade according to the construction sequence shown on the Plans or Standard Drawings and as specified hereinafter.

Certain projects may require widening of existing embankments and the removal of substructures. Construct embankment according to the plans. Substructure removal shall be completed according to the plans and Section 203. Excavation may be required at the existing embankment in order to place the structure granular backfill as shown in the Standard Drawings.

After piles are driven or shafts installed (see design drawings), slope the bottom of the excavation towards the ends of the trench as noted on the plans for drainage. Using a separate pour, place concrete mortar, or any class concrete, to provide a base for forming and placing the cap. Place side forms for the end bent after the mortar has set sufficiently to support workmen and forms without being disturbed.

Install 4-inch perforated pipe in accordance with the plans and Standard Drawings. In the event slope protection extends above the elevation of the perforated pipe, extend the pipe through the slope protection.

After placing the end bent cap and achieving required concrete cylinder strengths, remove adjacent forms and fill the excavation with compacted structure granular backfill material (maximum 1' loose lifts) to the level of the berm prior to placing beams for the bridge. Place a geotextile fabric between embankment material and structure granular backfill. After completing the end bent backwall, or after completing the span end wall, place the compacted structure granular backfill (maximum 1'

loose lifts) to subgrade elevation. If the original excavation is enlarged, fill the entire volume with compacted structure granular backfill (maximum 1' loose lifts) at no expense to the Department. Do not place backfill before removing adjacent form work. Place structure granular backfill material in trench ditches at the ends of the excavation. Place Geotextile Fabric, over the surface of the compacted structure granular backfill prior to placing aggregate base course.

Tamp the backfill with hand tampers, pneumatic tampers, or other means approved by the Engineer. Thoroughly compact the backfill under the overhanging portions of the structure to ensure that the backfill is in intimate contact with the sides of the structure.

Do not apply seeding, sodding, or other vegetation to the exposed granular embankment.

3.2 Special Construction Methods. Erodible or unstable materials may erode even when protected by riprap or channel lining; use the special construction method described below when using these materials.

Use fine aggregates or friable sandstone granular embankment at "dry land" structures only. Do not use them at stream crossings or locations subject to flood waters.

For erodible or unstable materials having 50 percent or more passing the No. 4 sieve, protect with geotextile fabric. Extend the fabric from the original ground to the top of slope over the entire area of the embankment slopes on each side of, and in front of, the end bent. Cover the fabric with at least 12 inches of non-erodible material.

For erodible or unstable materials having less than 50 percent passing a No. 4 sieve, cover with at least 12 inches of non-erodible material.

Where erodible or unstable granular embankment will be protected by riprap or channel lining, place a geotextile fabric between the embankment and the specified slope protection.

4.0 MEASUREMENT.

4.1 Granular Embankment. The Department will measure the quantity in cubic yards using the plan quantity, increased or decreased by authorized adjustments as specified in Section 204. The Department will not measure for payment any Granular Embankment that is not called for in the plans.

The Department will not measure for payment any special construction caused by using erodible or unstable materials and will consider it incidental to the Granular Embankment regardless of whether the erodible or unstable material was specified or permitted.

4.2 Rock Embankment. The Department will not measure for payment any rock embankment and will consider it incidental to roadway excavation or embankment in place, as applicable. Rock embankments will be constructed using granular embankment on projects where there is no available rock present within the excavation limits of the project.

4.3 Pile Core. Pile core will be measured and paid under roadway excavation or embankment in place, as applicable. The Department will not measure the pile core for separate payment. The Department will not measure for payment the 8-inch perforated underdrain pipe and will consider it incidental to the Pile Core.

4.4 Structure Granular Backfill. The Department will measure the quantity in cubic yards using the plan quantity, increased or decreased by authorized adjustments as specified in Section 204. The

Department will not measure any additional material required for backfill outside the limits shown on the Plans and Standard Drawings for payment and will consider it incidental to the work.

The Department will not measure for payment the 4-inch perforated underdrain pipe and will consider it incidental to the Structure Granular Backfill.

4.5 Geotextile Fabric. The Department will not measure the quantity of fabric used for separating dissimilar materials when constructing the embankment and pile core and will consider it incidental to embankment construction.

The Department will not measure for payment the Geotextile Fabric used to separate the Structure Granular Backfill from the embankment and aggregate base course and will consider it incidental to Structure Granular Backfill.

The Department will not measure for payment the Geotextile Fabric required for construction with erodible or unstable materials and will consider it incidental to embankment construction.

4.6 End Bent. The Department will measure the quantities according to the Contract. The Department will not measure furnishing and placing the 2-inch mortar or concrete bed for payment and will consider it incidental to the end bent construction.

4.7 Structure Excavation. The Department will not measure structure excavation on new embankments for payment and will consider it incidental to the Structure Granular Backfill or Concrete as applicable.

5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
02223	Granular Embankment	Cubic Yards
02231	Structure Granular Backfill	Cubic Yards

The Department will consider payment as full compensation for all work required in this provision.

August 5, 2019

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

**TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS**

**LABOR AND WAGE REQUIREMENTS
APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS**

- I. Application
- II. Nondiscrimination of Employees (KRS 344)

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

II. NONDISCRIMINATION OF EMPLOYEES

**AN ACT OF THE KENTUCKY
GENERAL ASSEMBLY TO PREVENT
DISCRIMINATION IN EMPLOYMENT
KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972**

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.

EXECUTIVE BRANCH CODE OF ETHICS

The Executive Branch Code of Ethics created by Kentucky Revised Statutes (KRS) Chapter 11A, effective July 14, 1992, establishes the ethical standards that govern the conduct of all executive branch employees. The Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

A present or former public servant listed in KRS 11A.010(9)(a) to (g) shall not, within one (1) year following termination of his or her office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of one (1) year, he or she personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his or her tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not to obtain private benefits.

If you have worked for the executive branch of state government within the past year, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 1025 Capital Center Drive, Suite 105, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: March 11, 2025

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address:
<https://www.eProcurement.ky.gov>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

"General Decision Number: KY20260040 05/18/2026

State: Kentucky

Construction Types: Highway

Counties: Kentucky Counties of
Allen, Ballard, Butler, Caldwell,
Calloway, Carlisle, Christian,
Crittenden, Daviess, Edmonson, Fulton,
Graves, Hancock, Henderson, Hickman,
Hopkins, Livingston, Logan, Lyon,
Marshall, McCracken, McLean, Muhlenberg,
Ohio, Simpson, Todd, Trigg, Union,
Warren and Webster

Modification Number Publication Date
0 01/02/2026
1 05/18/2026

BRIN0004-002 06/01/2024
Rates Fringes
BRICKLAYER (DAVIESS, HANCOCK, HENDERSON, MCLEAN,
UNION, AND WEBSTER COUNTIES).....\$ 33.70 16.57
BRICKLAYER (BUTLER, EDMONSON, HOPKINS, MUHLENBERG,
AND OHIO COUNTIES).....\$ 33.70 16.57
BRICKLAYER (BALLARD, CALDWELL, CARLISLE,
CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON,
LYON, MARSHALL, AND MCCracken COUNTIES).....\$ 33.70 16.57

BRTN0004-005 06/01/2024
Rates Fringes
BRICKLAYER (ALLEN, CALLOWAY, CHRISTIAN, LOGAN,
SIMPSON, TODD, TRIGG, AND WARREN COUNTIES).....\$ 33.70 16.57

CARP0357-002 04/01/2025
Rates Fringes
PILEDRIVERMAN.....\$ 34.39 24.02
DIVER.....\$ 51.21 24.02
CARPENTER.....\$ 33.89 24.02

ELEC0369-006 05/27/2025
Rates Fringes
ELECTRICIAN (BUTLER, EDMONSON, LOGAN, TODD & WARREN
COUNTIES:).....\$ 40.96 22.44

ELEC0429-001 06/01/2024
Rates Fringes
ELECTRICIAN (ALLEN & SIMPSON COUNTIES).....\$ 34.92 14.75

ELEC0816-002 06/01/2025

Rates Fringes

ELECTRICIAN (BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON (EXCEPT A 5 MILE RADIUS OF CITY HALL IN FULTON), GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCracken & TRIGG COUNTIES) CABLE SPICERS RECEIVE \$.25 PER HOUR
ADDITIONAL.....\$ 36.75 10.29

ELEC1701-003 07/01/2024

Rates Fringes

ELECTRICIAN (DAVIESS, HANCOCK, HENDERSON, HOPKINS, MCLEAN, MUHLENBERG, OHIO, UNION & WEBSTER COUNTIES) CABLE SPICERS RECEIVE \$.25 PER HOUR
ADDITIONAL.....\$ 37.10 20.03

ELEC1925-002 01/01/2025

Rates Fringes

ELECTRICIAN (FULTON COUNTY (UP TO A 5 MILE RADIUS OF CITY HALL IN FULTON)).....\$ 28.60 15.49
CABLE SPLICER (FULTON COUNTY (UP TO A 5 MILE RADIUS OF CITY HALL IN FULTON)).....\$ 28.85 15.50

ENGI0181-017 07/01/2025

Rates Fringes

POWER EQUIPMENT OPERATOR GROUP 4 BITUMINOUS DISTRIBUTOR; BURLAP & CURING MACHINE; CEMENT GUN; CONCRETE SAW; CONVEYOR; DECKHAND OILER; GROUT PUMP; HYDRAULIC POST DRIVER; HYDRO SEEDER; MUD JACK; OILER; PAVING JOINT MACHINE; POWER FORM HANDLING EQUIPMENT; PUMP; ROLLER (EARTH); STEERMAN; TAMPING MACHINE; TRACTOR (UNDER 50 H.P.); & VIBRATOR CRANES - WITH BOOMS 150 FT. & OVER (INCLUDING JIB), AND WHERE THE LENGTH OF THE BOOM IN COMBINATION WITH THE LENGTH OF THE PILING EQUALS OR EXCEEDS 150 FT. - \$1.00 ABOVE GROUP 1 RATE EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE TO BE PAID 10% ABOVE BASIC WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK.....\$ 38.37 19.60
POWER EQUIPMENT OPERATOR GROUP 3 ALL OFF ROAD MATERIAL HANDLING EQUIPMENT, INCLUDING ARTICULATING DUMP TRUCKS; GREASER ON GREASE FACILITIES SERVICING HEAVY EQUIPMENT CRANES - WITH BOOMS 150 FT. & OVER (INCLUDING JIB), AND WHERE THE LENGTH OF THE BOOM IN COMBINATION WITH THE LENGTH OF THE PILING EQUALS OR EXCEEDS 150 FT. - \$1.00 ABOVE GROUP 1 RATE EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE TO BE PAID 10% ABOVE BASIC WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK.....\$ 39.14 19.60
POWER EQUIPMENT OPERATOR GROUP 2 AIR COMPRESSOR (OVER 900 CU. FT. PER MIN.); BITUMINOUS MIXER; BOOM TYPE TAMPING MACHINE; BULL FLOAT; CONCRETE MIXER (UNDER 21 CU. FT.); DREDGE ENGINEER; ELECTRIC VIBRATOR; COMPACTOR/SELF-PROPELLED COMPACTOR; ELEVATOR (ONE DRUM OR BUCK HOIST); ELEVATOR (WHEN USED TO HOIST BUILDING MATERIAL); FINISH MACHINE; FIREMEN & HOIST (ONE DRUM); FLEXPLANE; FORKLIFT (REGARDLESS OF LIFT HEIGHT); FORM GRADER; JOINT SEALING MACHINE; OUTBOARD MOTOR BOAT; POWER SWEEPER (RIDING TYPE); ROLLER (ROCK); ROSS CARRIER; SKID MOUNTED OR TRAILER MOUNTED CONCRETE PUMP; SKID STEER

MACHINE WITH ALL ATTACHMENTS; SWITCHMAN OR
BRAKEMAN; THROTTLE VALVE PERSON; TRACTAIR & ROAD
WIDENING TRENCHER; TRACTOR (50 H.P. OR OVER); TRUCK
CRANE OILER; TUGGER; WELDING MACHINE; WELL POINTS;&
WHIRLEY OILER CRANES - WITH BOOMS 150 FT. & OVER
(INCLUDING JIB), AND WHERE THE LENGTH OF THE BOOM
IN COMBINATION WITH THE LENGTH OF THE PILING EQUALS
OR EXCEEDS 150 FT. - \$1.00 ABOVE GROUP 1 RATE
EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE
TO BE PAID 10% ABOVE BASIC WAGE RATE. THIS DOES
NOT APPLY TO OPEN CUT WORK.....\$ 38.69 19.60
POWER EQUIPMENT OPERATOR GROUP 1 A-FRAME WINCH
TRUCK; AUTO PATROL; BACKFILLER; BATCHER PLANT;
BITUMINOUS PAVER; BITUMINOUS TRANSFER MACHINE; BOOM
CAT; BULLDOZER; MECHANIC; CABLEWAY; CARRY-ALL
SCOOP; CARRY DECK CRANE; CENTRAL COMPRESSOR PLANT;
CHERRY PICKER; CLAMSHELL; CONCRETE MIXER (21 CU.
FT. OR OVER); CONCRETE PAVER; TRUCK-MOUNTED
CONCRETE PUMP; CORE DRILL; CRANE; CRUSHER PLANT;
DERRICK; DERRICK BOAT; DITCHING & TRENCHING
MACHINE; DRAGLINE; DREDGE OPERATOR; DREDGE
ENGINEER; ELEVATING GRADER & LOADERS; GRADE-ALL;
GURRIES; HEAVY EQUIPMENT ROBOTICS
OPERATOR/MECHANIC; HIGH LIFT; HOE-TYPE MACHINE;
HOIST (TWO OR MORE DRUMS); HOISTING ENGINE (TWO OR
MORE DRUMS); HORIZONTAL DIRECTIONAL DRILL OPERATOR;
HYDROCRANE; HYSTER; KECAL LOADER; LETOURNEAU;
LOCOMOTIVE; MECHANIC; MECHANICALLY OPERATED LASER
SCREED; MECHANIC WELDER; MUCKING MACHINE; MOTOR
SCRAPER; ORANGEPEEL BUCKET; OVERHEAD CRANE;
PILEDRIVER; POWER BLADE; PUMPCRETE; PUSH DOZER;
ROCK SPREADER, ATTACHED TO EQUIPMENT; ROTARY DRILL;
ROLLER (BITUMINOUS); ROUGH TERRAIN CRANE;
SCARIFIER; SCOOPMOBILE; SHOVEL; SIDE BOOM;
SUBGRADER; TAILBOOM; TELESCOPING TYPE FORKLIFT; TOW
OR PUSH BOAT; TOWER CRANE (FRENCH, GERMAN & OTHER
TYPES); TRACTOR SHOVEL; TRUCK CRANE; TUNNEL MINING
MACHINES, INCLUDING MOLES, SHIELDS OR SIMILAR TYPES
OF TUNNEL MINING EQUIPMENT CRANES - WITH BOOMS
150 FT. & OVER (INCLUDING JIB), AND WHERE THE
LENGTH OF THE BOOM IN COMBINATION WITH THE LENGTH
OF THE PILING EQUALS OR EXCEEDS 150 FT. - \$1.00
ABOVE GROUP 1 RATE EMPLOYEES ASSIGNED TO WORK
BELOW GROUND LEVEL ARE TO BE PAID 10% ABOVE BASIC
WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK....\$ 41.55 19.60

IRON0070-005 06/01/2025
Rates Fringes
IRONWORKER: STRUCTURAL; ORNAMENTAL; REINFORCING;
PRECAST CONCRETE ERECTORS (BUTLER COUNTY (EASTERN
EIGHTH, INCLUDING THE TOWNSHIPS OF DECKER, LEE
& TILFORD); EDMONSON COUNTY (NORTHERN
THREE-FOURTHS, INCLUDING THE TOWNSHIPS OF ASPHALT,
BEE SPRING, BROWNSVILLE, GRASSLAND, HUFF, KYROCK,
LINDSEYVILLE, MAMMOTH CAVE, OLLIE, PROSPERITY,
RHODA, SUNFISH & SWEDEN)).....\$ 36.17 25.80

IRON0103-004 08/01/2024
Rates Fringes
IRONWORKERS: (DAVIESS, HANCOCK, HENDERSON, HOPKINS,
MCLEAN, OHIO, UNION & WEBSTER COUNTIES BUTLER
COUNTY (TOWNSHIPS OF ABERDEEN, BANCOCK, CASEY,
DEXTERVILLE, DUNBAR, ELFIE, GILSTRAP, HUNTSVILLE,

LOGANSPORT, MONFORD, MORGANTOWN, PROVO, ROCHESTER,
SOUTH HILL & WELCHS CREEK); CALDWELL COUNTY
(NORTHEASTERN THIRD, INCLUDING THE TOWNSHIP OF
CRESWELL); CHRISTIAN COUNTY (NORTHERN THIRD,
INCLUDING THE TOWNSHIPS OF APEX, CROFTON, KELLY,
MANNINGTON & WYNNS); CRITTENDEN COUNTY
(NORTHEA.....\$ 35.34 26.40

IRON0492-003 05/01/2025
Rates Fringes
IRONWORKERS: (ALLEN, LOGAN, SIMPSON, TODD &
WARREN COUNTIES BUTLER COUNTY (SOUTHERN THIRD,
INCLUDING THE TOWNSHIPS OF BOSTON, BERRYS LICK,
DIMPLE, JETSON, QUALITY, SHARER, SUGAR GROVE &
WOODBURY); CHRISTIAN COUNTY (EASTERN TWO-THIRDS,
INCLUDING THE TOWNSHIPS OF BENNETTSTOWN, CASKY,
HERNDON, HOPKINSVILLE, HOWELL, MASONVILLE, PEMBROKE
& THOMPSONVILLE); EDMONSON COUNTY (SOUTHERN
FOURTH, INCLUDING THE TOWNSHIPS OF CHALYBEATE
& ROCKY HILL); MUHLENBERG COUNTY (SOUTHERN
EIGHTH, I.....\$ 35.32 16.44

IRON0782-006 08/01/2025
Rates Fringes
IRONWORKERS:: PROJECTS WITH A TOTAL CONTRACT COST
OF \$20,000,000.00 OR ABOVE (BALLARD, CALLOWAY,
CARLISLE, FULTON, GRAVES, HICKMAN, LIVINGSTON,
LYON, MARSHALL, MCCracken & TRIGG COUNTIES
CALDWELL COUNTY (SOUTHWESTERN TWO-THIRDS, INCLUDING
THE TOWNSHIPS OF CEDAR BLUFF, CIDER, CLAXTON,
COBB, CROWTOWN, DULANEY, FARMERSVILLE, FREDONIA,
MCGOWAN, OTTER POND & PRINCETON); CHRISTIAN
COUNTY (WESTERN THIRD, EXCLUDING THE TOWNSHIPS OF
APEX, CROFTON, KELLY, MANNINGTON, WYNNS,
BENNETTSTOWN, CASKY.....\$ 37.47 26.49
IRONWORKERS:: ALL OTHER WORK (BALLARD, CALLOWAY,
CARLISLE, FULTON, GRAVES, HICKMAN, LIVINGSTON,
LYON, MARSHALL, MCCracken & TRIGG COUNTIES
CALDWELL COUNTY (SOUTHWESTERN TWO-THIRDS, INCLUDING
THE TOWNSHIPS OF CEDAR BLUFF, CIDER, CLAXTON,
COBB, CROWTOWN, DULANEY, FARMERSVILLE, FREDONIA,
MCGOWAN, OTTER POND & PRINCETON); CHRISTIAN
COUNTY (WESTERN THIRD, EXCLUDING THE TOWNSHIPS OF
APEX, CROFTON, KELLY, MANNINGTON, WYNNS,
BENNETTSTOWN, CASKY, HERNDON, HOPKINSVILLE, HOWELL,
MASONVILLE, PEM.....\$ 35.63 26.49

LAB00189-005 07/01/2025
Rates Fringes
LABORERS: GROUP 4 CAISSON WORKER (FREE AIR); CEMENT
FINISHER; ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC
& HAZARDOUS WASTE - LEVELS A & B; MINER & DRILLER
(FREE AIR); TUNNEL BLASTER; & TUNNEL MUCKER (FREE
AIR); DIRECTIONAL & HORIZONTAL BORING; AIR TRACK
DRILLERS (ALL TYPES); POWDERMEN & BLASTERS; TROXLER
& CONCRETE TESTER IF LABORER IS UTILIZED (BALLARD,
CALLOWAY, CARLISLE, FULTON, GRAVES, HICKMAN,
LIVINGSTON, LYON, MARSHALL & MCCracken COUNTIES)....\$ 27.77 19.66
LABORERS: GROUP 3 ASPHALT LUTEMAN & RAKER; GUNNITE
NOZZLEMAN; GUNNITE OPERATOR & MIXER; GROUT PUMP
OPERATOR; BLASTER; SIDE RAIL SETTER; RAIL PAVED
DITCHES; SCREW OPERATOR; TUNNEL (FREE AIR); WATER

BLASTER (BALLARD, CALLOWAY, CARLISLE, FULTON,
GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL &
MCCRACKEN COUNTIES).....\$ 27.17 19.66
LABORERS: GROUP 2 BATTER BOARD MAN (SANITARY &
STORM SEWER); BRICKMASON TENDER; MORTAR MIXER
OPERATOR; SCAFFOLD BUILDER; BURNER & WELDER;
BUSHAMMER; CHAIN SAW OPERATOR; CONCRETE SAW
OPERATOR; DECKHAND SCOW MAN; DRY CEMENT HANDLER;
ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC &
HAZARDOUS WASTE - LEVEL C; FORKLIFT OPERATOR FOR
MASONARY; FORM SETTER; GREEN CONCRETE CUTTING; HAND
OPERATED GROUTER & GRINDER MACHINE OPERATOR;
JACKHAMMER; PAVEMENT BREAKER; PAVING JOINT MACHINE;
PIPELAYER; PLASTIC PIPE FUSION; POWER DRIVEN
GEORGIA BUGGY & WHEEL BARROW; POWER POST HOLE
DIGGER; PRECAST MANHOLE SETTER; WALK-BEHIND TAMPER;
WALK-BEHIND TRENCHER; SAND BLASTER; CONCRETE
CHIPPER; SURFACE GRINDER; VIBRATOR OPERATOR; WAGON
DRILLER (BALLARD, CALLOWAY, CARLISLE, FULTON,
GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL &
MCCRACKEN COUNTIES).....\$ 27.12 19.66
LABORERS: GROUP 1 AGING & CURING OF CONCRETE;
ASBESTOS ABATEMENT WORKER; ASPHALT PLANT; ASPHALT;
BATCH TRUCK DUMP; CARPENTER TENDER; CEMENT MASON
TENDER; CLEANING OF MACHINES; CONCRETE; DEMOLITION;
DREDGING; ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC
& HAZARDOUS WASTE - LEVEL D; FLAGPERSON; GRADE
CHECKER; HAND DIGGING & HAND BACK FILLING;
HIGHWAY MARKER PLACER; LANDSCAPING, MESH HANDLER &
PLACER; PUDDLER; RAILROAD; RIP-RAP & GROUTER;
RIGHT-OF-WAY; SIGN, GUARD RAIL & FENCE INSTALLER;
SIGNAL PERSON; SOUND BARRIER INSTALLER; STORM &
SANITARY SEWER; SWAMPER; TRUCK SPOTTER & DUMPER;
WRECKING OF CONCRETE FORMS; GENERAL CLEANUP
(BALLARD, CALLOWAY, CARLISLE, FULTON, GRAVES,
HICKMAN, LIVINGSTON, LYON, MARSHALL & MCCRACKEN
COUNTIES).....\$ 26.87 19.66

LAB00189-006 07/01/2025
Rates Fringes
LABORERS: GROUP 4 CAISSON WORKER (FREE AIR); CEMENT
FINISHER; ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC
& HAZARDOUS WASTE - LEVELS A & B; MINER & DRILLER
(FREE AIR); TUNNEL BLASTER; & TUNNEL MUCKER (FREE
AIR); DIRECTIONAL & HORIZONTAL BORING; AIR TRACK
DRILLERS (ALL TYPES); POWDERMEN & BLASTERS; TROXLER
& CONCRETE TESTER IF LABORER IS UTILIZED (ALLEN,
BUTLER, CALDWELL, CHRISTIAN, DAVIESS, EDMONSON,
HANCOCK, HOPKINS, LOGAN, MCLEAN, MUHLENBERG, OHIO,
SIMPSON, TODD, TRIGG & WARREN COUNTIES).....\$ 27.77 19.66
LABORERS: GROUP 3 ASPHALT LUTEMAN & RAKER; GUNNITE
NOZZLEMAN; GUNNITE OPERATOR & MIXER; GROUT PUMP
OPERATOR; BLASTER; SIDE RAIL SETTER; RAIL PAVED
DITCHES; SCREW OPERATOR; TUNNEL (FREE AIR); WATER
BLASTER (ALLEN, BUTLER, CALDWELL, CHRISTIAN,
DAVIESS, EDMONSON, HANCOCK, HOPKINS, LOGAN, MCLEAN,
MUHLENBERG, OHIO, SIMPSON, TODD, TRIGG & WARREN
COUNTIES).....\$ 27.17 19.66
LABORERS: GROUP 2 BATTER BOARD MAN (SANITARY &
STORM SEWER); BRICKMASON TENDER; MORTAR MIXER
OPERATOR; SCAFFOLD BUILDER; BURNER & WELDER;
BUSHAMMER; CHAIN SAW OPERATOR; CONCRETE SAW
OPERATOR; DECKHAND SCOW MAN; DRY CEMENT HANDLER;
ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC &

HAZARDOUS WASTE - LEVEL C; FORKLIFT OPERATOR FOR
MASONARY; FORM SETTER; GREEN CONCRETE CUTTING; HAND
OPERATED GROUTER & GRINDER MACHINE OPERATOR;
JACKHAMMER; PAVEMENT BREAKER; PAVING JOINT MACHINE;
PIPELAYER; PLASTIC PIPE FUSION; POWER DRIVEN
GEORGIA BUGGY & WHEEL BARROW; POWER POST HOLE
DIGGER; PRECAST MANHOLE SETTER; WALK-BEHIND TAMPER;
WALK-BEHIND TRENCHER; SAND BLASTER; CONCRETE
CHIPPER; SURFACE GRINDER; VIBRATOR OPERATOR; WAGON
DRILLER (ALLEN, BUTLER, CALDWELL, CHRISTIAN,
DAVIESS, EDMONSON, HANCOCK, HOPKINS, LOGAN, MCLEAN,
MUHLENBERG, OHIO, SIMPSON, TODD, TRIGG & WARREN
COUNTIES).....\$ 27.12 19.66
LABORERS: GROUP 1 AGING & CURING OF CONCRETE;
ASBESTOS ABATEMENT WORKER; ASPHALT PLANT; ASPHALT;
BATCH TRUCK DUMP; CARPENTER TENDER; CEMENT MASON
TENDER; CLEANING OF MACHINES; CONCRETE; DEMOLITION;
DREDGING; ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC
& HAZARDOUS WASTE - LEVEL D; FLAGPERSON; GRADE
CHECKER; HAND DIGGING & HAND BACK FILLING;
HIGHWAY MARKER PLACER; LANDSCAPING, MESH HANDLER &
PLACER; PUDDLER; RAILROAD; RIP-RAP & GROUTER;
RIGHT-OF-WAY; SIGN, GUARD RAIL & FENCE INSTALLER;
SIGNAL PERSON; SOUND BARRIER INSTALLER; STORM &
SANITARY SEWER; SWAMPER; TRUCK SPOTTER & DUMPER;
WRECKING OF CONCRETE FORMS; GENERAL CLEANUP
(ALLEN, BUTLER, CALDWELL, CHRISTIAN, DAVIESS,
EDMONSON, HANCOCK, HOPKINS, LOGAN, MCLEAN,
MUHLENBERG, OHIO, SIMPSON, TODD, TRIGG & WARREN
COUNTIES).....\$ 26.87 19.66

LAB00561-001 07/01/2025
Rates Fringes
LABORERS: GROUP 4 CAISSON WORKER (FREE AIR); CEMENT
FINISHER; ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC
& HAZARDOUS WASTE - LEVELS A & B; MINER & DRILLER
(FREE AIR); TUNNEL BLASTER; & TUNNEL MUCKER (FREE
AIR); DIRECTIONAL & HORIZONTAL BORING; AIR TRACK
DRILLERS (ALL TYPES); POWDERMEN & BLASTERS; TROXLER
& CONCRETE TESTER IF LABORER IS UTILIZED
(CRITTENDEN, HENDERSON, UNION & WEBSTER COUNTIES)...\$ 29.45 18.77
LABORERS: GROUP 3 ASPHALT LUTEMAN & RAKER; GUNNITE
NOZZLEMAN; GUNNITE OPERATOR & MIXER; GROUT PUMP
OPERATOR; BLASTER; SIDE RAIL SETTER; RAIL PAVED
DITCHES; SCREW OPERATOR; TUNNEL (FREE AIR); WATER
BLASTER (CRITTENDEN, HENDERSON, UNION & WEBSTER
COUNTIES).....\$ 28.85 18.77
LABORERS: GROUP 2 BATTER BOARD MAN (SANITARY &
STORM SEWER); BRICKMASON TENDER; MORTAR MIXER
OPERATOR; SCAFFOLD BUILDER; BURNER & WELDER;
BUSHAMMER; CHAIN SAW OPERATOR; CONCRETE SAW
OPERATOR; DECKHAND SCOW MAN; DRY CEMENT HANDLER;
ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC &
HAZARDOUS WASTE - LEVEL C; FORKLIFT OPERATOR FOR
MASONARY; FORM SETTER; GREEN CONCRETE CUTTING; HAND
OPERATED GROUTER & GRINDER MACHINE OPERATOR;
JACKHAMMER; PAVEMENT BREAKER; PAVING JOINT MACHINE;
PIPELAYER; PLASTIC PIPE FUSION; POWER DRIVEN
GEORGIA BUGGY & WHEEL BARROW; POWER POST HOLE
DIGGER; PRECAST MANHOLE SETTER; WALK-BEHIND TAMPER;
WALK-BEHIND TRENCHER; SAND BLASTER; CONCRETE
CHIPPER; SURFACE GRINDER; VIBRATOR OPERATOR; WAGON
DRILLER (CRITTENDEN, HENDERSON, UNION & WEBSTER
COUNTIES).....\$ 28.80 18.77

LABORERS: GROUP 1 AGING & CURING OF CONCRETE;
ASBESTOS ABATEMENT WORKER; ASPHALT PLANT; ASPHALT;
BATCH TRUCK DUMP; CARPENTER TENDER; CEMENT MASON
TENDER; CLEANING OF MACHINES; CONCRETE; DEMOLITION;
DREDGING; ENVIRONMENTAL - NUCLEAR, RADIATION, TOXIC
& HAZARDOUS WASTE - LEVEL D; FLAGPERSON; GRADE
CHECKER; HAND DIGGING & HAND BACK FILLING;
HIGHWAY MARKER PLACER; LANDSCAPING, MESH HANDLER &
PLACER; PUDDLER; RAILROAD; RIP-RAP & GROUTER;
RIGHT-OF-WAY; SIGN, GUARD RAIL & FENCE INSTALLER;
SIGNAL PERSON; SOUND BARRIER INSTALLER; STORM &
SANITARY SEWER; SWAMPER; TRUCK SPOTTER & DUMPER;
WRECKING OF CONCRETE FORMS; GENERAL CLEANUP
(CRITTENDEN, HENDERSON, UNION & WEBSTER COUNTIES)...\$ 28.55 18.77

PAIN0032-002 09/01/2024
Rates Fringes
PAINTERS: BRIDGES (BALLARD COUNTY).....\$ 36.77 21.77
PAINTERS: ALL OTHER WORK (BALLARD COUNTY) SPRAY,
BLAST, STEAM, HIGH & HAZARDOUS (INCLUDING LEAD
ABATEMENT) AND ALL EPOXY - \$1.00 PREMIUM.....\$ 34.47 21.77

PAIN0118-003 06/01/2014
Rates Fringes
PAINTERS: SPRAY, SANDBLAST, POWER TOOLS, WATERBLAST
& STEAM CLEANING (EDMONSON COUNTY).....\$ 19.50 11.97
PAINTERS: BRUSH & ROLLER (EDMONSON COUNTY).....\$ 18.50 11.97

PAIN0156-006 04/01/2024
Rates Fringes
PAINTERS: BRIDGES (DAVIESS, HANCOCK, HENDERSON,
MCLEAN, OHIO, UNION & WEBSTER COUNTIES) (GROUP
4).....\$ 35.00 20.30
PAINTERS: BRIDGES (DAVIESS, HANCOCK, HENDERSON,
MCLEAN, OHIO, UNION & WEBSTER COUNTIES) (GROUP
3).....\$ 31.77 20.30
PAINTERS: BRIDGES (DAVIESS, HANCOCK, HENDERSON,
MCLEAN, OHIO, UNION & WEBSTER COUNTIES) (GROUP
1).....\$ 30.77 20.30
PAINTERS: ALL OTHER WORK: (DAVIESS, HANCOCK,
HENDERSON, MCLEAN, OHIO, UNION & WEBSTER
COUNTIES) (GROUP 4).....\$ 31.77 20.30
PAINTERS: ALL OTHER WORK: (DAVIESS, HANCOCK,
HENDERSON, MCLEAN, OHIO, UNION & WEBSTER
COUNTIES) (GROUP 3).....\$ 30.62 20.30
PAINTERS: ALL OTHER WORK: (DAVIESS, HANCOCK,
HENDERSON, MCLEAN, OHIO, UNION & WEBSTER
COUNTIES) (GROUP 2).....\$ 30.37 20.30
PAINTERS: ALL OTHER WORK: (DAVIESS, HANCOCK,
HENDERSON, MCLEAN, OHIO, UNION & WEBSTER
COUNTIES) (GROUP 1).....\$ 29.62 20.30

PAIN0500-002 06/01/2025
Rates Fringes
PAINTERS: BRIDGES (CALDWELL, CALLOWAY, CARLISLE,
CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN,
HOPKINS, LIVINGSTON, LYON, MARSHALL, MCCracken &
TRIGG COUNTIES) WATERBLASTING UNITS WITH 3500
PSI AND ABOVE - \$.50 PREMIUM SPRAYPAINTING AND ALL
ABRASIVE BLASTING - \$1.00 PREMIUM WORK 40 FT. AND
ABOVE GROUND LEVEL - \$1.00 PREMIUM.....\$ 31.50 15.60

PAINTERS: ALL OTHER WORK (CALDWELL, CALLOWAY,
CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES,
HICKMAN, HOPKINS, LIVINGSTON, LYON, MARSHALL,
MCCRACKEN & TRIGG COUNTIES) WATERBLASTING UNITS
WITH 3500 PSI AND ABOVE - \$.50 PREMIUM
SPRAYPAINTING AND ALL ABRASIVE BLASTING - \$1.00
PREMIUM WORK 40 FT. AND ABOVE GROUND LEVEL - \$1.00
PREMIUM.....\$ 25.25 15.60

PLUM0184-002 07/01/2025
Rates Fringes
PLUMBER; STEAMFITTER (BALLARD, CALDWELL, CALLOWAY,
CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES,
HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCRACKEN AND
TRIGG COUNTIES).....\$ 44.26 20.28

PLUM0502-004 08/01/2024
Rates Fringes
PLUMBER; STEAMFITTER (ALLEN, BUTLER, EDMONSON,
SIMPSON & WARREN).....\$ 41.90 24.89

PLUM0633-002 08/01/2024
Rates Fringes
PLUMBER/PIPEFITTER (DAVIESS, HANCOCK, HENDERSON,
HOPKINS, LOGAN, MCLEAN, MUHLENBERG, OHIO, TODD,
UNION & WEBSTER COUNTIES:).....\$ 38.41 22.26

TEAM0089-003 04/01/2025
Rates Fringes
TRUCK DRIVERS: ZONE 1: (ALLEN, BUTLER, EDMONSON,
LOGAN, SIMPSON & WARREN COUNTIES) (Group 4).....\$ 26.00 27.81
TRUCK DRIVERS: ZONE 1: (ALLEN, BUTLER, EDMONSON,
LOGAN, SIMPSON & WARREN COUNTIES) (Group 3).....\$ 26.98 27.81
TRUCK DRIVERS: ZONE 1: (ALLEN, BUTLER, EDMONSON,
LOGAN, SIMPSON & WARREN COUNTIES) (Group 2).....\$ 25.90 27.81
TRUCK DRIVERS: ZONE 1: (ALLEN, BUTLER, EDMONSON,
LOGAN, SIMPSON & WARREN COUNTIES) (Group 1).....\$ 25.72 27.81

TEAM0215-003 04/01/2025
Rates Fringes
TRUCK DRIVER GROUP 4 EUCLID AND OTHER HEAVY EARTH
MOVING EQUIPMENT; LOW BOY; ARTICULATOR CAT; 5 AXLE
VEHICLE; WINCH AND A- FRAME WHEN USED IN
TRANSPORTING MATERIALS; ROSS CARRIER; FORK LIFT
WHEN USED TO TRANSPORT BUILDING MATERIALS; DRIVER
ON PAVEMENT BREAKER (DAVIESS, HANCOCK, HENDERSON,
HOPKINS, MCLEAN, MUHLENBERG, OHIO & WEBSTER
COUNTIES).....\$ 27.66 27.81
TRUCK DRIVER GROUP 3 SINGLE AXLE DUMP; FLAT BED;
ALL TERRAIN VEHICLE WHEN USED TO HAUL MATERIALS;
SEMI TRAILER OR POLE TRAILER WHEN USED TO PULL
BUILDING MATERIALS AND EQUIPMENT; TANDEM AXLE DUMP;
DRIVER OF DISTRIBUTORS; MIXER ALL TYPES (DAVIESS,
HANCOCK, HENDERSON, HOPKINS, MCLEAN, MUHLENBERG,
OHIO & WEBSTER COUNTIES).....\$ 27.65 27.81
TRUCK DRIVER GROUP 2 TRUCK MECHANIC (DAVIESS,
HANCOCK, HENDERSON, HOPKINS, MCLEAN, MUHLENBERG,
OHIO & WEBSTER COUNTIES).....\$ 27.58 27.81
TRUCK DRIVER GROUP 1 GREASER, TIRE CHANGER
(DAVIESS, HANCOCK, HENDERSON, HOPKINS, MCLEAN,

MUHLenberg, OHIO & WEBSTER COUNTIES).....	\$ 27.35	27.81

TEAM0236-001 04/01/2025		
Rates Fringes		
TRUCK DRIVER GROUP 5 MIXER ALL TYPES (BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCracken,TODD & TRIGG COUNTIES)...	\$ 26.00	27.81
TRUCK DRIVER GROUP 4 EUCLID AND OTHER HEAVY EARTH MOVING EQUIPMENT; LOW BOY; ARTICULATOR CAT; FIVE AXLE VEHICLE; WINCH AND A-FRAME WHEN USED IN TRANSPORTING MATERIALS; ROSS CARRIER (BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCracken,TODD & TRIGG COUNTIES)...	\$ 25.98	27.81
TRUCK DRIVER GROUP 3 SINGLE AXLE DUMP; FLAT BED; ALL TERRAIN VEHICLE WHEN USED TO HAUL MATERIALS; SEMI TRAILER OR POLE TRAILER WHEN USED TO PULL BUILDING MATERIALS AND EQUIPMENT; TANDEM AXLE DUMP; DRIVERS OF DISTRIBUTORS (BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCracken,TODD & TRIGG COUNTIES).....	\$ 25.90	27.81
TRUCK DRIVER GROUP 2 TRUCK MECHANIC (BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCracken,TODD & TRIGG COUNTIES)...	\$ 25.90	27.81
TRUCK DRIVER GROUP 1 GREASER, TIRE CHANGER (BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCracken,TODD & TRIGG COUNTIES)...	\$ 25.72	27.81

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====
Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <https://www.dol.gov/agencies/whd/government-contracts>.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least \$13.65 per hour (or the applicable wage rate listed on this

wage determination, if it is higher) for all hours spent performing on the contract from May 11, 2026, through December 31, 2026. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than **◆SU◆**, **◆UAVG◆**, **◆SA◆**, or **◆SC◆** denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The **◆SU◆** identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may

include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

◆SU◆ wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The ◆SA◆ identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ◆SA◆ identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

- a) a survey underlying a wage determination
- b) an existing published wage determination
- c) an initial WHD letter setting forth a position on a wage determination matter
- d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor

200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

=====
END OF GENERAL DECISION
"

Fringe benefit amounts are applicable for all hours worked except when otherwise noted.

No laborer, workman or mechanic shall be paid at a rate less than that of a Journeyman except those classified as bona fide apprentices.

Apprentices or trainees shall be permitted to work as such subject to Administrative Regulations adopted by the Commissioner of Workplace Standards. Copies of these regulations will be furnished upon request from any interested person.

Before using apprentices on the job the contractor shall present to the Contracting Officer written evidence of registration of such employees in a program of a State apprenticeship and training agency approved and recognized by the U. S. Bureau of Apprenticeship and Training. In the absence of such a State agency, the contractor shall submit evidence of approval and registration by the U. S. Bureau of Apprenticeship and Training.

The contractor shall submit to the Contracting Officer, written evidence of the established apprenticeship-journeyman ratios and wage rates in the project area, which will be the basis for establishing such ratios and rates for the project under the applicable contract provisions.

TO: EMPLOYERS/EMPLOYEES

PREVAILING WAGE SCHEDULE:

The wages indicated on this wage schedule are the least permitted to be paid for the occupations indicated. When an employee works in more than one classification, the employer must record the number of hours worked in each classification at the prescribed hourly base rate.

OVERTIME:

Overtime is to be paid to an employee at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty (40) hours in such workweek. Wage violations or questions should be directed to the designated Engineer or the undersigned.

Director
Division of Construction Procurement
Frankfort, Kentucky 40622
502-564-3500

EMPLOYEE RIGHTS UNDER THE FAIR LABOR STANDARDS ACT

THE UNITED STATES DEPARTMENT OF LABOR WAGE AND HOUR DIVISION

FEDERAL MINIMUM WAGE

\$7.25

 PER HOUR

BEGINNING JULY 24, 2009

OVERTIME PAY

At least $1\frac{1}{2}$ times your regular rate of pay for all hours worked over 40 in a workweek.

CHILD LABOR

An employee must be at least **16** years old to work in most non-farm jobs and at least **18** to work in non-farm jobs declared hazardous by the Secretary of Labor.

Youths **14** and **15** years old may work outside school hours in various non-manufacturing, non-mining, non-hazardous jobs under the following conditions:

No more than

- **3** hours on a school day or **18** hours in a school week;
- **8** hours on a non-school day or **40** hours in a non-school week.

Also, work may not begin before **7 a.m.** or end after **7 p.m.**, except from June 1 through Labor Day, when evening hours are extended to **9 p.m.** Different rules apply in agricultural employment.

TIP CREDIT

Employers of "tipped employees" must pay a cash wage of at least \$2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee's tips combined with the employer's cash wage of at least \$2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.

ENFORCEMENT

The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.

Employers may be assessed civil money penalties of up to \$1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to \$11,000 for each employee who is the subject of a violation of the Act's child labor provisions. In addition, a civil money penalty of up to \$50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to \$100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.

ADDITIONAL INFORMATION

- Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions.
- Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands.
- Some state laws provide greater employee protections; employers must comply with both.
- The law requires employers to display this poster where employees can readily see it.
- Employees under 20 years of age may be paid \$4.25 per hour during their first 90 consecutive calendar days of employment with an employer.
- Certain full-time students, student learners, apprentices, and workers with disabilities may be paid less than the minimum wage under special certificates issued by the Department of Labor.

For additional information:



1-866-4-USWAGE

(1-866-487-9243)

TTY: 1-877-889-5627



WWW.WAGEHOUR.DOL.GOV

PART IV

BID ITEMS

265417

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	840.00	TON		\$	
0020	00100		ASPHALT SEAL AGGREGATE	17.00	TON		\$	
0030	00103		ASPHALT SEAL COAT	2.00	TON		\$	
0040	00212		CL2 ASPH BASE 1.00D PG64-22	763.00	TON		\$	
0050	00301		CL2 ASPH SURF 0.38D PG64-22	117.00	TON		\$	
0060	00356		ASPHALT MATERIAL FOR TACK	2.00	TON		\$	

Section: 0002 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0070	01987		DELINEATOR FOR G/R BI DIRECTIONAL WHITE	4.00	EACH		\$	
0080	02014		BARRICADE-TYPE III	12.00	EACH		\$	
0090	02223		GRANULAR EMBANKMENT	577.00	CUYD		\$	
0100	02230		EMBANKMENT IN PLACE	3,133.00	CUYD		\$	
0110	02371		G/R END TREATMENT TYPE 7	4.00	EACH		\$	
0120	02429		RIGHT-OF-WAY MONUMENT TYPE 1	4.00	EACH		\$	
0130	02432		WITNESS POST	4.00	EACH		\$	
0140	02545		CLEARING AND GRUBBING APPROX LESS THAN 1 ACRE	1.00	LS		\$	
0150	02562		TEMPORARY SIGNS	650.00	SQFT		\$	
0160	02585		EDGE KEY	36.50	LF		\$	
0170	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0180	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0190	02726		STAKING	1.00	LS		\$	
0200	02731		REMOVE STRUCTURE	1.00	LS		\$	
0210	06406		SBM ALUM SHEET SIGNS .080 IN	2.50	SQFT		\$	
0220	06410		STEEL POST TYPE 1	9.00	LF		\$	
0230	06514		PAVE STRIPING-PERM PAINT-4 IN	4,598.00	LF		\$	
0240	06555		PAVE STRIPING-DUR TY 1-4 IN Y	154.00	LF		\$	
0250	21415ND		EROSION CONTROL	1.00	LS		\$	
0260	24631EC		BARCODE SIGN INVENTORY	2.00	EACH		\$	
0270	26312EC		G/R-W BEAM-S FACE (TL-3) 8 FT POST	100.00	LF		\$	

Section: 0003 - BRIDGE

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0280	02231		STRUCTURE GRANULAR BACKFILL	150.00	CUYD		\$	
0290	03299		ARMORED EDGE FOR CONCRETE	56.00	LF		\$	
0300	08003		FOUNDATION PREPARATION	1.00	LS		\$	
0310	08019		CYCLOPEAN STONE RIP RAP	441.00	TON		\$	
0320	08033		TEST PILES	176.00	LF		\$	
0330	08046		PILES-STEEL HP12X53	1,162.00	LF		\$	

Report Date 9/23/26

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0340	08100		CONCRETE-CLASS A	58.00	CUYD		\$	
0350	08104		CONCRETE-CLASS AA	45.00	CUYD		\$	
0360	08151		STEEL REINFORCEMENT-EPOXY COATED	9,585.00	LB		\$	
0370	08665		PRECAST PC BOX BEAM CB33-48	459.00	LF		\$	
0380	23378EC		CONCRETE SEALING	3,537.00	SQFT		\$	
0390	25017ED		RAIL SYSTEM SIDE MOUNTED MGS	138.00	LF		\$	
0400	26233EC		MOBILIZATION FOR CONCRETE SURF TREATMENT	1.00	LS		\$	

Section: 0004 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0410	02568		MOBILIZATION	1.00	LS		\$	
0420	02569		DEMOBILIZATION	1.00	LS		\$	