



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Jim Gray
SECRETARY

April 17, 2025

CALL NO. 102
CONTRACT ID NO. 251107
ADDENDUM # 2

Subject: Nelson County, NHPP 9002(013)
Letting April 24, 2025

- (1) Added - Typical Section - Page 146A of 276
- (2) Added - Special Note - Page 155A of 276
- (3) Added - Summary Sheet - Page 157A of 276
- (4) Omit Proposal Pages - Pages 195-207 of 276
- (5) Revised - Proposal Bid Items - Pages 273-276 of 276

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.


Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement


RM:mr
Enclosures

MAINTENANCE OF TRAFFIC TEMPORARY BARRIER WALL LAYOUT FOR BRIDGE WORK

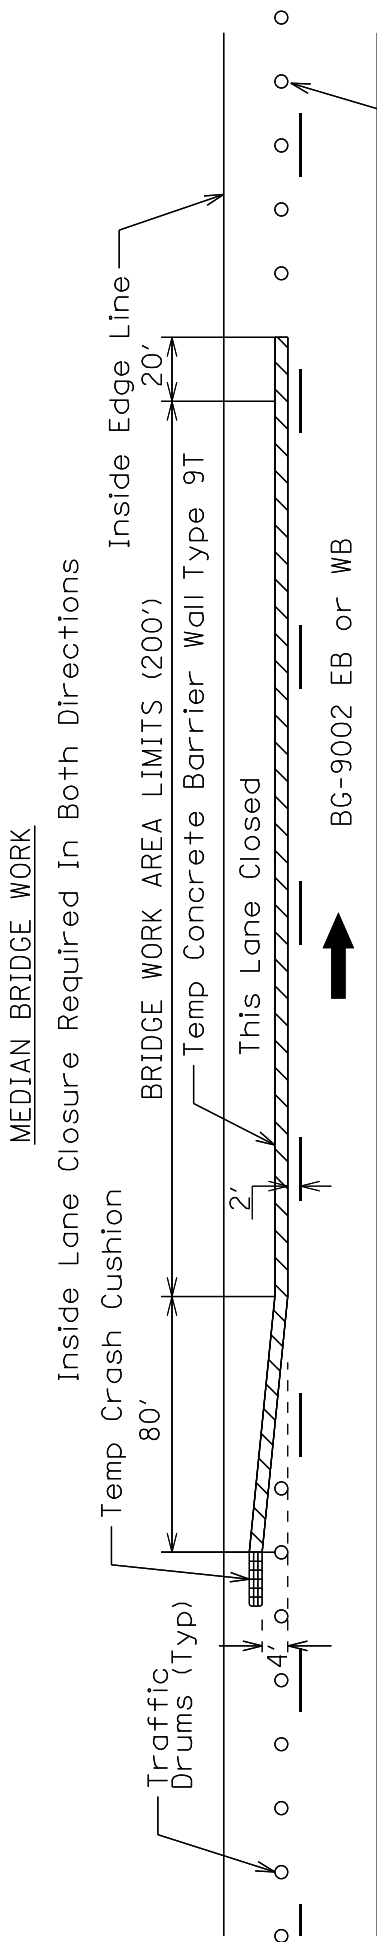

Drums Required Only If Lane Closure Continues

OUTSIDE SHOULDER BRIDGE WORK

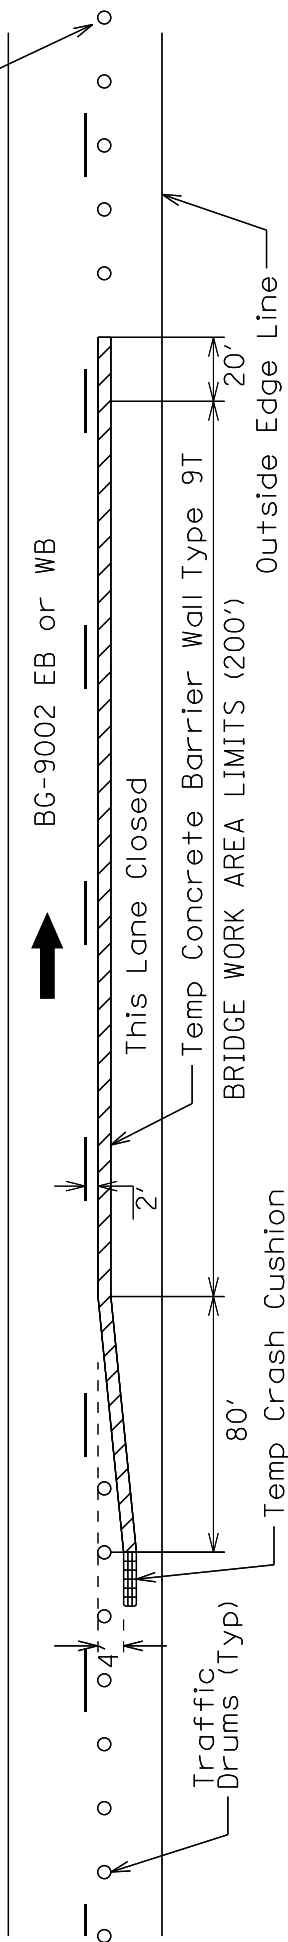

All lane closures will be in compliance with the appropriate Standard Drawings and the Manual on Uniform Traffic Control Devices (MUTCD), current edition.

See the Bridge Work Maintenance of Traffic Items Summary for Quantities.

Special Note for Signing Variable Work Zone Speed Limits in Construction Work Zones

This note establishes criteria for implementing variable work zone speed limits in construction work zones.

1. Definition

A variable work zone speed limit is in effect only when specified work zone conditions are present.

2. Application of Variable Work Zone Speed Limits

Post a reduced work zone speed limit of 60 miles per hour only where any of the following work zone conditions are present **and** only for the length of the affected roadway:

- Workers present within 15 feet of the traveled way
- Frequent construction vehicle entry/exit
- Temporary barrier within 2 feet of a travel lane
- Drop-offs greater than 2 inches within 8 feet of a travel lane
- Uneven or milled surfaces

If the Engineer determines a condition that is present but not listed above warrants a reduced work zone speed limit, the Contractor shall lower the speed limit to 60 mph as directed by the Engineer.

3. Location and Placement of Speed Zone Signs

Install speed zone signs per [Standard Drawing TTD-130, Option A](#), and every two (2) miles throughout the project. If an interchange is present, install a set of signs within 500 feet of the on-ramp termination, then every two (2) miles unless another interchange is located within that distance.

Put the reduced work zone speed limit into operation by switching on the flashing lights of the first speed zone sign located upstream of the work zone condition.

Operationalize the reduced speed limit **(a)** only in the direction affected by the work zone condition and **(b)** only for the length of roadway affected. For example, if a work zone condition is only present in the northbound direction along a three-mile segment, only put the reduced speed limit into effect on that segment. Retain the original posted speed limit along all remaining northbound segments and the entirety of the southbound direction.

The first speed limit sign located downstream of the point at which the work zone condition ends should **(a)** reinstate the original posted speed limit and **(b)** have no flashing lights activated.

4. Duration of Reduced Speed Limit Posting

The reduced work zone speed limit should remain in effect so long as the following are present:

- Any condition listed in Section 2, or
- Any other condition identified by the Engineer as warranting a speed limit reduction.

If a work zone condition is expected to be paused for less than six hours, do not reinstate the original posted speed limit during this period.

5. Penalties

If the Engineer observes the reduced work zone speed limit has not been put into effect as defined in Section 3, they should alert the Contractor of their failure to comply with this Special Note. If the signing is not in compliance within one (1) hour from initial notification by the Engineer, a penalty of \$200 per hour will be assessed on an hourly basis beginning from the initial notification of non-compliance.

**BLUEGRASS PARKWAY (BG-9002) PAVEMENT REHABILITATION
NELSON COUNTY
ITEM NO. 4-22175.00**

BRIDGE WORK MAINTENANCE OF TRAFFIC ITEMS SUMMARY

CODE	ITEM	UNIT	QUANTITY
2003	Relocate Temp Conc Barrier	Lin Ft	4,800
2898	Relocate Crash Cushion	Each	16
3171	Concrete Barrier Wall Type 9T	Lin Ft	1,200
8903	Crash Cushion TY VI Class BT TL3	Each	4

Notes:

- (1) All items carried forward to the General Summary.
- (2) See following page for layout of barrier wall and crash cushions.
- (3) Quantities based on completing bridge work at two bridges and relocating these items to the other three bridges.
- (4) Lane closures required for this work will be incidental to Maintain and Control Traffic.

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	9,092.00	TON		\$	
0020	00100		ASPHALT SEAL AGGREGATE	1,507.00	TON		\$	
0030	00103		ASPHALT SEAL COAT	181.20	TON		\$	
0040	00190		LEVELING & WEDGING PG64-22	1,000.00	TON		\$	
0050	00214		CL3 ASPH BASE 1.00D PG64-22	5,895.00	TON		\$	
0060	00339		CL3 ASPH SURF 0.38D PG64-22	50,295.00	TON		\$	
0070	02676		MOBILIZATION FOR MILL & TEXT	1.00	LS		\$	
0080	02677		ASPHALT PAVE MILLING & TEXTURING	63,811.00	TON		\$	
0090	02697		EDGE LINE RUMBLE STRIPS	243,255.00	LF		\$	
0100	20071EC		JOINT ADHESIVE	240,768.00	LF		\$	
0110	20997ED		REMOVE TRAFFIC ISLAND	196.00	SQYD		\$	
0120	22906ES403		CL3 ASPH SURF 0.38A PG64-22	30,609.00	TON		\$	
0130	24891EC		PAVE MOUNT INFRARED TEMP EQUIPMENT	3,198,159.00	SF		\$	
0140	24970EC		ASPHALT MATERIAL FOR TACK NON-TRACKING	355.60	TON		\$	

Section: 0002 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0150	00078		CRUSHED AGGREGATE SIZE NO 2	71.00	TON		\$	
0160	01897		ASPHALT WEDGE CURB	835.00	LF		\$	
0170	01982		DELINEATOR FOR GUARDRAIL MONO DIRECTIONAL WHITE	150.00	EACH		\$	
0180	01983		DELINEATOR FOR GUARDRAIL MONO DIRECTIONAL YELLOW	50.00	EACH		\$	
0185	02003		RELOCATE TEMP CONC BARRIER (ADDED 4-17-25)	4,800.00	LF		\$	
0190	02014		BARRICADE-TYPE III	8.00	EACH		\$	
0200	02200		ROADWAY EXCAVATION	385.00	CUYD		\$	
0210	02367		GUARDRAIL END TREATMENT TYPE 1	6.00	EACH		\$	
0220	02369		GUARDRAIL END TREATMENT TYPE 2A	12.00	EACH		\$	
0230	02381		REMOVE GUARDRAIL	5,536.50	LF		\$	
0240	02483		CHANNEL LINING CLASS II	100.00	TON		\$	
0250	02562		TEMPORARY SIGNS	1,000.00	SQFT		\$	
0260	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0270	02654		TRUCK MOUNTED ATTENUATOR	1.00	EACH		\$	
0280	02671		PORTABLE CHANGEABLE MESSAGE SIGN	4.00	EACH		\$	
0290	02701		TEMP SILT FENCE	1,000.00	LF		\$	
0300	02704		SILT TRAP TYPE B	10.00	EACH		\$	
0310	02705		SILT TRAP TYPE C	10.00	EACH		\$	
0320	02726		STAKING	1.00	LS		\$	
0325	02898		RELOCATE CRASH CUSHION (ADDED 4-17-25)	16.00	EACH		\$	
0326	03171		CONC BARRIER WALL TYPE 9T (ADDED 4-17-25)	1,200.00	LF		\$	
0330	04940		REMOVE LIGHTING	1.00	LS		\$	
0340	05950		EROSION CONTROL BLANKET	4,669.00	SQYD		\$	

251107

PROPOSAL BID ITEMS

Report Date 4/17/25

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0350	05963		INITIAL FERTILIZER	.50	TON		\$	
0360	05964		MAINTENANCE FERTILIZER	.50	TON		\$	
0370	05992		AGRICULTURAL LIMESTONE	2.20	TON		\$	
0380	06401		FLEXIBLE DELINEATOR POST-M/W	100.00	EACH		\$	
0390	06404		FLEXIBLE DELINEATOR POST-M/Y	50.00	EACH		\$	
0400	06511		PAVE STRIPING-TEMP PAINT-6 IN	261,536.00	LF		\$	
0410	06542		PAVE STRIPING-THERMO-6 IN W	150,998.00	LF		\$	
0420	06543		PAVE STRIPING-THERMO-6 IN Y	121,916.00	LF		\$	
0430	06546		PAVE STRIPING-THERMO-12 IN W	2,535.00	LF		\$	
0440	06549		PAVE STRIPING-TEMP REM TAPE-B	5,000.00	LF		\$	
0450	06550		PAVE STRIPING-TEMP REM TAPE-W	2,500.00	LF		\$	
0460	06551		PAVE STRIPING-TEMP REM TAPE-Y	2,500.00	LF		\$	
0470	06568		PAVE MARKING-THERMO STOP BAR-24IN	112.00	LF		\$	
0480	06613		INLAID PAVEMENT MARKER-B W/R	1,643.00	EACH		\$	
0490	06614		INLAID PAVEMENT MARKER-B Y/R	67.00	EACH		\$	
0495	08903		CRASH CUSHION TY VI CLASS BT TL3 (ADDED 4-17-25)	4.00	EACH		\$	
0500	10020NS		FUEL ADJUSTMENT	139,775.00	DOLL	\$1.00	\$	\$139,775.00
0510	10030NS		ASPHALT ADJUSTMENT	343,259.00	DOLL	\$1.00	\$	\$343,259.00
0520	20192ED		REM ASPHALT WEDGE CURB	873.00	LF		\$	
0530	20411ED		LAW ENFORCEMENT OFFICER	250.00	HOURL		\$	
0540	20432ES112		REMOVE CRASH CUSHION	10.00	EACH		\$	
0550	20629NS719		THRIE BEAM TO W BEAM CONNECTOR	2.00	EACH		\$	
0560	21380ES719		GUARDRAIL THRIE BEAM	587.50	LF		\$	
0570	21802EN		G/R STEEL W BEAM-S FACE (7 FT POST)	4,837.50	LF		\$	
0580	24457EC		REMOVE CONCRETE MEDIAN BARRIER END	10.00	EACH		\$	
0590	24640ED		OBJECT MARKER TYPE 1	14.00	EACH		\$	
0600	24679ED		PAVE MARK THERMO CHEVRON	800.00	SQFT		\$	
0610	24683ED		PAVE MARKING-THERMO DOTTED LANE EXTEN	755.00	LF		\$	
0620	25078ED		THRIE BEAM GUARDRAIL TRANSITION TL-3	7.00	EACH		\$	
0630	25079ED		THRIE BEAM GUARDRAIL TRANSITION TL-2	5.00	EACH		\$	
0640	26136EC		PORTABLE QUEUE WARNING ALERT SYSTEM	5.00	MONT		\$	
0650	26137EC		QUEUE WARNING PCMS	30.00	MONT		\$	
0660	26138EC		QUEUE WARNING PORTABLE RADAR SENSORS	30.00	MONT		\$	
0670	26233EC		MOBILIZATION FOR CONCRETE SURF TREATMENT	1.00	LS		\$	
0680	26236EC		THRIE BEAM BULLNOSE TERMINAL	10.00	EACH		\$	
0690	26237EC		CONNECTED ARROW PANEL	10.00	MONT		\$	

Section: 0003 - DRAINAGE

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0700	00462		CULVERT PIPE-18 IN	16.00	LF		\$	
0710	01450		S & F BOX INLET-OUTLET-18 IN	1.00	EACH		\$	
0720	01490		DROP BOX INLET TYPE 1	1.00	EACH		\$	
0730	01584		CAP DROP BOX INLET	1.00	EACH		\$	
0740	01691		FLUME INLET TYPE 2	3.00	EACH		\$	

PROPOSAL BID ITEMS

Report Date 4/17/25

Page 3 of 4

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0750	02484		CHANNEL LINING CLASS III	105.00	TON		\$	
0760	20366NN		REPLACE GRATE	5.00	EACH		\$	

Section: 0004 - BRIDGE NO. 090B00122N - US 150 OVER BG-9002

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0770	08100		CONCRETE-CLASS A	134.00	CUYD		\$	
0780	08150		STEEL REINFORCEMENT	10,185.00	LB		\$	
0790	20591EC		REMOVE BARRIER	15.00	LF		\$	
0800	23378EC		CONCRETE SEALING	3,560.00	SQFT		\$	

Section: 0005 - BRIDGE NO. 090B00086N - KY 605 OVER BG-9002

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0810	02403		REMOVE CONCRETE MASONRY	8.00	CUYD		\$	
0820	08100		CONCRETE-CLASS A	65.00	CUYD		\$	
0830	08150		STEEL REINFORCEMENT	5,334.00	LB		\$	
0840	23378EC		CONCRETE SEALING	1,440.00	SQFT		\$	

Section: 0006 - BRIDGE NO. 090B00093N - KY 1858 OVER BG-9002

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0850	02403		REMOVE CONCRETE MASONRY	12.00	CUYD		\$	
0860	08100		CONCRETE-CLASS A	77.00	CUYD		\$	
0870	08150		STEEL REINFORCEMENT	5,886.00	LB		\$	
0880	20591EC		REMOVE BARRIER	15.00	LF		\$	
0890	23378EC		CONCRETE SEALING	1,640.00	SQFT		\$	

Section: 0007 - BRIDGE NO. 090B00032N - KY 2230 OVER BG-9002

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0900	02403		REMOVE CONCRETE MASONRY	6.00	CUYD		\$	
0910	08100		CONCRETE-CLASS A	40.00	CUYD		\$	
0920	08150		STEEL REINFORCEMENT	3,406.00	LB		\$	
0930	23378EC		CONCRETE SEALING	820.00	SQFT		\$	

Section: 0008 - BRIDGE NO. 090B00020N - KY 55 OVER BG-9002

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0940	02403		REMOVE CONCRETE MASONRY	23.00	CUYD		\$	
0950	08100		CONCRETE-CLASS A	75.00	CUYD		\$	
0960	08150		STEEL REINFORCEMENT	6,152.00	LB		\$	
0970	20591EC		REMOVE BARRIER	15.00	LF		\$	
0980	23378EC		CONCRETE SEALING	1,710.00	SQFT		\$	

PROPOSAL BID ITEMS

Report Date 4/17/25

Section: 0009 - DEMOBILIZATION &/OR MOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0990	02568		MOBILIZATION	1.00	LS		\$	
1000	02569		DEMOBILIZATION	1.00	LS		\$	