

CALL NO. 323
CONTRACT ID. 122187
GRAYSON COUNTY
FED/STATE PROJECT NUMBER FD05 043 0062 004-009
DESCRIPTION BEAVER DAM ROAD (US 62)
WORK TYPE ASPHALT RESURFACING
PRIMARY COMPLETION DATE 11/15/2012

#### LETTING DATE: April 20, 2012

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN DAYLIGHT TIME April 20, 2012. Bids will be publicly announced at 10:00 AM EASTERN DAYLIGHT TIME.

**DEFERRED PAYMENT** 

**REQUIRED BID PROPOSAL GUARANTY:** Not less than 5% of the total bid.

#### TABLE OF CONTENTS

#### PART I SCOPE OF WORK

- PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES
- CONTRACT NOTES
- STATE CONTRACT NOTES
- 2012 DEFERRED PAY
- SURFACING AREAS
- ASPHALT MIXTURE
- DGA BASE FOR SHOULDERS
- INCIDENTAL SURFACING
- FUEL AND ASPHALT PAY ADJUSTMENT
- COMPACTION OPTION B
- AWARD OF CONTRACT
- ASPHALT MIX PAVEMENT WEDGE MONOLITHIC OPERATION
- ASPHALT MILLING AND TEXTURING
- TYPICAL SECTION DIMENSIONS
- TRAFFIC CONTROL PLAN
- SKETCH MAP(S)
- SUMMARY SHEET(S)
- TYPICAL SECTION(S)
- DETAIL SHEET(S)
- BRIDGE DETAIL FOR PAVING PROJECT

#### PART II SPECIFICATIONS AND STANDARD DRAWINGS

- SPECIFICATIONS REFERENCE
- SUPPLEMENTAL SPECIFICATIONS
- 2008 STANDARD DRAWINGS THAT APPLY

#### PART III EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

- LABOR AND WAGE REQUIREMENTS
- EXECUTIVE BRANCH CODE OF ETHICS
- KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978
- PROJECT WAGE RATES

#### PART IV INSURANCE

#### PART V BID ITEMS

## PART I SCOPE OF WORK

GRAYSON COUNTY FD05 043 0062 004-009

CONTRACT ID - 122187

ADMINISTRATIVE DISTRICT - 04

PROJECT(S) IDENTIFICATION AND DESCRIPTION:

COUNTY - GRAYSON FD05 043 0062 004-009 BEAVER DAM ROAD (US 62) FROM EA PCN - MP043006212R1

BEAVER DAM ROAD (US 62) FROM EAST END OF CANEY CREEK BRIDGE (MP 4.145) EXTENDING EASTERLY TO KY 79 (MP 8.719), A DISTANCE OF 4.57 MILES. ASPHALT RESURFACING.
GEOGRAPHIC COORDINATES LATITUDE 37^25'55" LONGITUDE 86^31'45"
AVERAGE DAILY TRAFFIC - 1590 AVERAGE MAINLINE WIDTH - 20.0 FEET

COMPLETION DATE(S):

COMPLETION DATE - November 15, 2012
APPLIES TO ENTIRE CONTRACT

#### **CONTRACT NOTES**

#### **PROPOSAL ADDENDA**

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

#### **BID SUBMITTAL**

Bidder must use the Department's Expedite Bidding Program available on the Internet web site of the Department of Highways, Division of Construction Procurement. (<a href="www.transportation.ky.gov/contract">www.transportation.ky.gov/contract</a>)

The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

#### JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

#### UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor is advised that the Underground Facility Damage Protection Act of 1994, became law January 1, 1995. It is the contractor's responsibility to determine the impact of the act regarding this project, and take all steps necessary to be in compliance with the provision of the act.

#### <u>REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN</u> ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by KRS 14A.9-010 to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under KRS 14A.9-030 unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in KRS 14A.9-010, the foreign entity should identify the applicable exception. Foreign entity is defined within KRS 14A.1-070.

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at https://secure.kentucky.gov/sos/ftbr/welcome.aspx.

#### SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to <a href="mailto-kytc.projectquestions@ky.gov">kytc.projectquestions@ky.gov</a>. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (<a href="www.transportation.ky.gov/contract">www.transportation.ky.gov/contract</a>). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

#### **ACCESS TO RECORDS**

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for

production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004. (See attachment)

10/18/2011

Steven L. Beshear Governor Lori H. Flanery Secretary

Room 383, Capitol Annex 702 Capital Avenue Frankfort, KY 40601-3462 (502) 564-4240 Fax (502) 564-6785

OFFICE OF THE SECRETARY

#### **SECRETARY'S ORDER 11-004**

#### FINANCE AND ADMINISTRATION CABINET

#### **Vendor Document Disclosure**

WHEREAS, in order to promote accountability and transparency in governmental operations, the Finance and Administration Cabinet believes that a mechanism should be created which would provide for review and assistance to an Executive Branch agency if said agency cannot obtain access to documents that it deems necessary to conduct a review of the records of a private vendor that holds a contract to provide goods and/or services to the Commonwealth; and

WHEREAS, in order to promote accountability and transparency in governmental operations, the Finance and Administration Cabinet believes that a mechanism should be created which would provide for review and assistance to an Executive Branch agency if said agency cannot obtain access to documents that it deems necessary during the course of an audit, investigation or any other inquiry by an Executive Branch agency that involves the review of documents; and

WHEREAS, KRS 42.014 and KRS 12.270 authorizes the Secretary of the Finance and Administration Cabinet to establish the internal organization and assignment of functions which are not established by statute relating to the Finance and Administration Cabinet; further, KRS Chapter 45A.050 and 45A.230 authorizes the Secretary of the Finance and Administration Cabinet to procure, manage and control all supplies and services that are procured by the Commonwealth and to intervene in controversies among vendors and state agencies; and

**NOW, THEREFORE**, pursuant to the authority vested in me by KRS 42.014, KRS 12.270, KRS 45A.050, and 45A.230, I, Lori H. Flanery, Secretary of the Finance and Administration Cabinet, do hereby order and direct the following:

- I. Upon the request of an Executive Branch agency, the Finance and Administration Cabinet ("FAC") shall formally review any dispute arising where the agency has requested documents from a private vendor that holds a state contract and the vendor has refused access to said documents under a claim that said documents are not directly pertinent or relevant to the agency's inquiry upon which the document request was predicated.
- II. Upon the request of an Executive Branch agency, the FAC shall formally review any situation where the agency has requested documents that the agency deems necessary to



- conduct audits, investigations or any other formal inquiry where a dispute has arisen as to what documents are necessary to conclude the inquiry.
- III. Upon receipt of a request by a state agency pursuant to Sections I & II, the FAC shall consider the request from the Executive Branch agency and the position of the vendor or party opposing the disclosure of the documents, applying any and all relevant law to the facts and circumstances of the matter in controversy. After FAC's review is complete, FAC shall issue a Determination which sets out FAC's position as to what documents and/or records, if any, should be disclosed to the requesting agency. The Determination shall be issued within 30 days of receipt of the request from the agency. This time period may be extended for good cause.
- IV. If the Determination concludes that documents are being wrongfully withheld by the private vendor or other party opposing the disclosure from the state agency, the private vendor shall immediately comply with the FAC's Determination. Should the private vendor or other party refuse to comply with FAC's Determination, then the FAC, in concert with the requesting agency, shall effectuate any and all options that it possesses to obtain the documents in question, including, but not limited to, jointly initiating an action in the appropriate court for relief.
- V. Any provisions of any prior Order that conflicts with the provisions of this Order shall be deemed null and void.

#### SPECIAL NOTE FOR RECIPROCAL PREFERENCE

#### Reciprocal preference to be given by public agencies to resident bidders

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the Expedite Bidding Program. Submittal of the Affidavit should be done along with the bid in Bid Express.

Contract ID: 122187 Page 11 of 74

DEFERRED PAYMENT: The successful bidder on this project may request a work order with an effective date prior to June 15, 2012. The successful bidder must make the request in writing to the Department. The Department will issue a work order at the request of the contractor with the distinct understanding that payment for any Work Performed Estimates may be delayed until July 15, 2012. Unless the successful bidder requests an earlier work order date, the Department will issue a work order on June 15, 2012 for this project.

#### SURFACING AREAS

The Department estimates the mainline surfacing width to be 20 feet.

The Department estimates the total mainline area to be surfaced to be 59,035 square yards.

The Department estimates the shoulder width to be 1.5 feet on each side.

The Department estimates the total shoulder area to be surfaced to be 8,050 square yards.

#### ASPHALT MIXTURE

Unless otherwise noted, the Department estimates the rate of application for all asphalt mixtures to be 110 lbs/sy per inch of depth.

#### **DGA BASE FOR SHOULDERS**

Unless otherwise noted, the Department estimates the rate of application for DGA Base for Shoulders to be 115 lbs/sy per inch of depth. The Department will not measure necessary grading and/or shaping of existing shoulders prior to placing of DGA Base, but shall be incidental to the Contract unit price per ton for DGA Base.

Accept payment at the Contract unit price per ton as full compensation for all labor, materials, equipment, and incidentals for grading and/or shaping of existing shoulders and furnishing, placing, and compacting the DGA Base.

#### INCIDENTAL SURFACING

The Department has included in the quantities of asphalt mixtures established in the proposal estimated quantities required for resurfacing or surfacing mailbox turnouts, farm field entrances, residential and commercial entrances, curve widening, ramp gores and tapers, and road and street approaches, as applicable. Pave these areas to the limits as shown on Standard Drawing RPM-110-05 or as directed by the Engineer. In the event signal detectors are present in the intersecting streets or roads, pave the crossroads to the right of way limit or back of the signal detector, whichever is the farthest back of the mainline. Surface or resurface these areas as directed by the Engineer. The Department will not measure placing and compacting for separate payment but shall be incidental to the Contract unit price for the asphalt mixtures.

#### FUEL AND ASPHALT PAY ADJUSTMENT

The Department has included the Contract items Asphalt Adjustment and Fuel Adjustment for possible future payments at an established Contract unit price of \$1.00. The Department will calculate actual adjustment quantities after work is completed. If existing Contract amount is insufficient to pay all items on the contract with the adjustments, the Department will establish additional monies with a change order.

#### **OPTION B**

Be advised that the Department will control and accept compaction of asphalt mixtures furnished on this project under OPTION B in accordance with Sections 402 and 403.

GRAYSON COUNTY FD05 043 0062 004-009

#### Contract ID: 122187 Page 12 of 74

#### SPECIAL NOTE FOR AWARD OF CONTRACT

Contrary to Section 103.02, the Department may hold the Bid Proposals of any or all bidders for a period not to exceed 90 calendar days for final disposition of award. The Department may hold the Bid Proposal of the lowest bidder longer than 90 calendar days if the bidder concurs.

Contrary to Section 103.04, The Department will hold the Proposal Guaranty of the lowest bidder and the Proposal Guaranty of the second lowest bidder, as determined by the Commissioner, until the Department awards the Contract and executes and approves the Contract and bond of the successful bidder, or until the Department rejects all Bid Proposals. If the Department does not make an award within 90 calendar days, the Department will return all Proposal Guaranties.

Except as provided in this note or elsewhere in the proposal, the Department will apply all other applicable portions of Section 103.

1-3002 Award of Contract 01/02/2012


## SPECIAL NOTE FOR PAVEMENT WEDGE AND SHOULDER MONOLITHIC OPERATION

- **1.0 MATERIALS.** Provide an Asphalt Surface Mixture conforming to Section 403 of the Standard Specifications, as applicable to the project, for the pavement wedge.
- **2.0 CONSTRUCTION.** Place the specified Asphalt Surface Mixture on shoulders monolithically with the driving lane. Prime the existing shoulder with tack material as the Engineer directs before placing the wedge. Construct according to Section 403.03 of the Standard Specifications.

Equip the paver with a modified screed that extends the full width of the wedge being placed and is tapered to produce a wedge. Obtain the Engineer's approval of the modified screed before placing shoulder wedge monolithically with the driving lane.

The wedge may vary in thickness at the edge of the milled area in the shoulder. If the area to receive the shoulder wedge is milled prior to placement, during rolling operations pinch the outside edge of the new inlay wedge to match the existing shoulder elevation not being resurfaced. Unless required otherwise by the Contract, construct rolled or sawed rumble strips according to Section 403.03.08, as applicable.

The following sketch is primarily for the computation of quantities; however, the wedge will result in a similar cross-section where sufficient width exists. Do not construct a shoulder for placing the wedge unless specified elsewhere in the Contract.

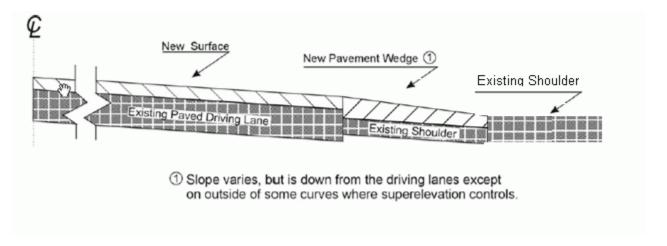

- **3.0 MEASUREMENT.** The Department will measure Asphalt Surface Mixture placed as the pavement wedge according to Section 403.
- **4.0 PAYMENT.** The Department will make payment for the completed and accepted quantities of Asphalt Surface Mixtures on pavement wedges according to Section 403.

GRAYSON COUNTY FD05 043 0062 004-009

#### Contract ID: 122187 Page 14 of 74

#### SPECIAL NOTE FOR ASPHALT MILLING AND TEXTURING

Begin paving operations within <u>48 hours</u> of commencement of the milling operation. Continue paving operations continuously until completed. If paving operations are not begun within this time period, the Department will assess liquidated damages at the rate prescribed by Section 108.09 until such time as paving operations are begun.

Contrary to Section 408, the Department will retain possession of the material obtained from the milling operations. Deliver this material to the State Maintenance facility in Grayson County. The Contractor, at his option, may elect to keep this material at an agreed cost of \$7.50 per ton. If the Contractor elects this option, the Department will deduct the cost for this material from money due on the Contract.

NOTICE TO CONTRACTOR: The Department considers transfer of millings to the state maintenance facility to be a part of the construction project, therefore truck operators are subject to receiving prevailing wages.

1-3526 48hours contractor option \$7.50 01/2/2012

GRAYSON COUNTY FD05 043 0062 004-009 Contract ID: 122187 Page 15 of 74

#### SPECIAL NOTE FOR TYPICAL SECTION DIMENSIONS

Consider the dimensions shown on the typical sections for pavement and shoulder widths and thickness' to be nominal or typical dimensions. The Engineer may direct or approve varying the actual dimensions to be constructed to fit existing conditions. Do not widen existing pavement or shoulders unless specified elsewhere in this proposal or directed by the engineer.

1-3725 Typical Section Dimensions 01/02/2012

#### TRAFFIC CONTROL PLAN

#### TRAFFIC CONTROL GENERAL

Except as provided herein, maintain and control traffic in accordance with the Standard and Supplemental Specifications and the Standard and Sepia Drawings, current editions. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic".

Contrary to Section 106.01, furnish new, or used in like new condition, traffic control devices at the beginning of the work and maintain in like new condition until completion of the work.

#### PROJECT PHASING & CONSTRUCTION PROCEDURES

The Engineer may specify days and hours when lane closures will not be allowed.

Maintain alternating one way traffic during construction. Provide a minimum clear lane width of 9 feet; however, provide for passage of vehicles of up to 16 feet in width. If traffic should be stopped due to construction operations, and a school bus on an official run arrives on the scene, make provisions for the passage of the bus as quickly as possible.

#### **LANE CLOSURES**

Do not leave lane closures in place during non-working hours.

#### **SIGNS**

Contrary to section 112.04.02, only long term signs (signs intended to be continuously in place for more than 3 days) will be measured for payment; short term signs (signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic.

#### **BARRICADES**

The Department will not measure barricades used in lieu of barrels and cones for channelization or delineation, but shall be incidental to Maintain and Control Traffic according to Section 112.04.01.

The Department will measure barricades used to protect pavement removal areas in individual units Each. The Department will measure for payment the maximum number of barricades in concurrent use at the same time on a single day on all sections of the contract. The Department will measure individual barricades only once for payment, regardless of how many times they are

Traffic Control Plan Page 2 of 3

set, reset, removed, and relocated during the duration of the project. The Department will not measure replacements for damaged barricades the Engineer directs to be replaced due to poor condition or reflectivity. Retain possession of the Barricades upon completion of construction.

#### **PAVEMENT MARKINGS**

If there is to be a deviation from the existing striping plan, the Engineer will furnish the Contractor a striping plan prior to placement of the final surface course.

Install Temporary Striping according to Section 112 with the following exception:

If the Contractor's operations or phasing requires temporary markings that must subsequently be removed from the final surface course, use an approved removable lane tape; however, the Department will not measure removable lane tape for separate payment, but will measure and pay for removable lane tape as temporary striping.

#### THERMOPLASTIC INTERSECTION MARKINGS

Consider the locations listed on the summary as approximate only. Prior to milling and/or resurfacing, locate and document the locations of the existing markings. After resurfacing, replace the markings at their approximate existing locations or as directed by Engineer. Place markings not existing prior to resurfacing as directed by the Engineer.

#### PAVEMENT EDGE DROP-OFFS

Do not allow a pavement edge between opposing directions of traffic or lanes that traffic is expected to cross in a lane change situation with an elevation difference greater than  $1\frac{1}{2}$ ". Place Warning signs (MUTCD W8-11 or W8-9A) in advance of and at 1500' intervals throughout the drop-off area. Dual post the signs on both sides of the traveled way. Wedge all transverse transitions between resurfaced and unresurfaced areas which traffic may cross with asphalt mixture for leveling and wedging. Remove the wedges prior to placement of the final surface course.

Protect pavement edges that traffic is not expected to cross, except accidentally, as follows:


Less than 2" - No protection required.

2" to 4" - Place plastic drums, vertical panels, or barricades every 50 feet. During daylight working hours only, the Engineer will allow the Contractor to use cones in lieu of plastic drums, panels, and barricades. Wedge the drop-off with DGA or asphalt mixture for leveling and wedging with a 1:1 or flatter slope in daylight hours, or 3:1 or flatter slope during nighttime hours, when work is not active in the drop-off area.

GRAYSON COUNTY FD05 043 0062 004-009 Contract ID: 122187 Page 18 of 74

Traffic Control Plan Page 3 of 3


Pedestrians & Bicycles - Protect pedestrian and bicycle traffic as directed by the engineer.

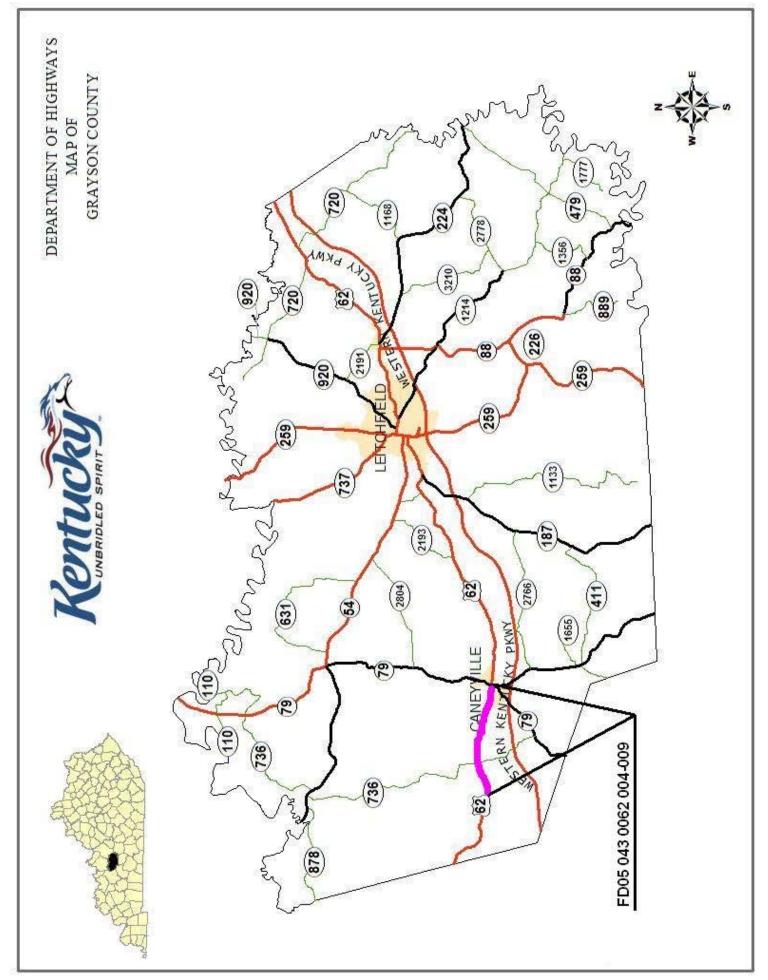

# GRAYSON COUNTY THERMOPLASTIC INTERSECTION MARKINGS FD05 043 0062 004-009

THERMO CURVE ARROW (EACH)							0
THERMO THERMO RR XING COMB 16" ARROW (FEET) (EACH)							0
_							0
THERMO RR XING X-WALK 16" (FEET)							0
THERMO THERMO STOP-BAR 12" X-WALK (FEET) 6" (FEET)							0
THERMO STOP-BAR 24" (FEET)	14						14
PAVEMENT STRIPING THERMO 6" (FEET)							0
PAVEMENT STRIPING THERMO 12" (FEET)							0
MILE POINT	8.719						
LOCATION / INTERSECTION	Ky 79 and U.S. 62						TOTAL:

TYPICAL SECTION
BRECKINRIDGE COUNTY
FD05 043 0062 004-009
MP 4.086 -8.719

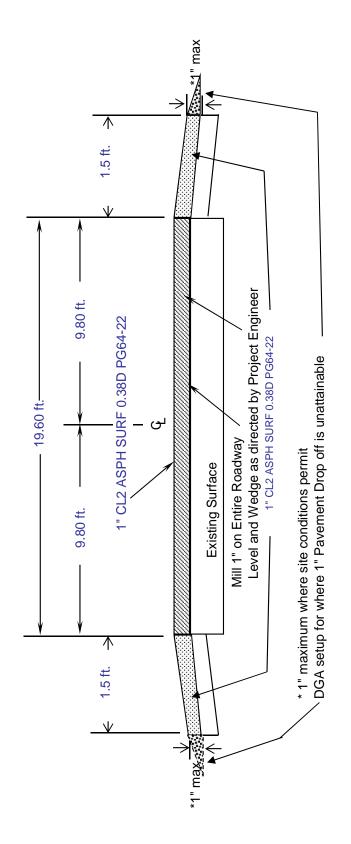

...\DGNfiles\Srone Wedge.dgn 12/2/2007 3:41:13 PM

the engineer on the project


Stone Shoulder Wedge to be used when shoulder dropoff is over 1"

used as directed by

Stone Shoulder Wedge to be

NOTE:

## CONSTRUCTION DETAIL FOR BRIDGE WITHIN LIMITS OF PAVING PROJECT

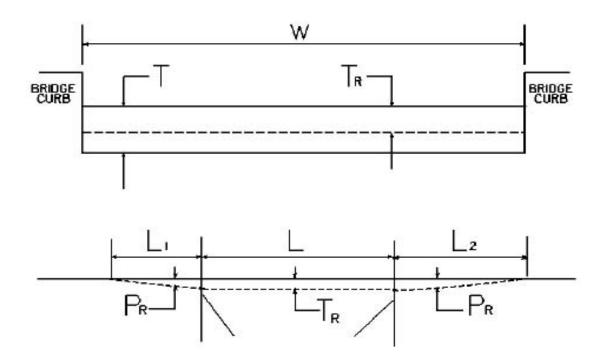

W = bridge width curb to curb T = thickness of existing asphalt overlay

L= length of bridge

 $L_1$  &  $L_2$ = length of approach pavement to be removed

 $T_R$ = thickness to be removed and replaced on bridge

 $P_R \!\!=\! thickness$  to be removed and replaced on pavement

Bridge No.	MP	W (ft)	T (in)	$L_{1}\left( ft\right)$	$L_{2}$ (ft)	$T_{R}$ (in)	L (ft)	$P_{R}$ (in)
B00038	4.086	24	N/A		N/A	0	265.0	1.00
B00037	7.086	25	6"+/-	N/A	N/A	1.0	43.0	1.00

**NOTES:** 1. Project is being milled 100%; therefore transition lengths L<sub>1</sub> & L<sub>2</sub> do not apply.

2. Mill and replace 1" on Bridge B00037 only. Do not mill on Bridge B00038.

### **PART II**

#### SPECIFICATIONS AND STANDARD DRAWINGS

#### **SPECIFICATIONS REFERENCE**

Any reference in the plans or proposal to the *Standard Specifications for Road and Bridge Construction, Edition of 2004*, and *Standard Drawings, Edition of 2000* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2008* and *Standard Drawings, Edition of 2003 with the 2008 Revision.* 

#### Contract ID: 122187 Page 26 of 74

CLIDGECTION	101.02 All models
SUBSECTION: REVISION:	101.02 Abbreviations.  Insert the following abbreviation and text into the section:
REVISION.	insert the following above viation and text into the section.
	KEPSC Kentucky Erosion Prevention and Sediment Control
SUBSECTION:	101.03 Definitions.
REVISION:	Replace the definition for Specifications – <i>Special Provisions</i> with the following:
	Additions and revisions to the Standard and Supplemental Specifications covering conditions
	peculiar to an individual project.
ariban amrahi	
SUBSECTION: REVISION:	102.03 Contents of the Bid Proposal Form.  Replace the first sentence of the first paragraph with the following:
REVISION.	The Bid Proposal form will be available on the Department internet website
	(http://transportation.ky.gov/contract/).
	Delete the constant and a second
	Delete the second paragraph.
	Delete the last paragraph.
SUBSECTION:	102.04 Issuance of Bid Proposal Form.
REVISION:	Replace Heading with the following:
	102.04 Bidder Registration.
	Replace the first sentence of the first paragraph with the following:
	The Department reserves the right to disqualify or refuse to place a bidder on the eligible bidder's list for a project for any of the following reasons:
	Replace the last sentence of the subsection with the following:
	The Department will resume placing the bidder on the eligible bidder's list for projects after the bidder improves his operations to the satisfaction of the State Highway Engineer.
SUBSECTION: REVISION:	102.06 Examination of Plans, Specifications, Special Provisions, Special Notes, and Site of Work. Replace the first paragraph with the following:
	Examine the site of the proposed work, the Bid Proposal, Plans, specifications, contract forms, and bulletins and addendums posted to the Department's website and the Bid Express Bidding Service Website before submitting the Bid Proposal. The Department considers the submission of a Bid Proposal prima facie evidence that the bidder has made such examination and is satisfied as to the conditions to be encountered in performing the work and as to the requirements of the Contract.
SUBSECTION: REVISION:	102.07.01 General.  Replace the first sentence with the following:
REVISION:	replace the first sentence with the following.
	Submit the Bid Proposal on forms furnished on the Bid Express Bidding Service website (www.bidx.com).
	Replace the first sentence of the third paragraph with the following:
	Bid proposals submitted shall use an eligible Digital ID issued by Bid Express.

#### Contract ID: 122187 Page 27 of 74

GLIDGE COTTON	100 07 00 G
SUBSECTION: REVISION:	102.07.02 Computer Bidding. Replace the first paragraph with the following:
	Subsequent to registering for a specific project, use the Department's Expedite Bidding Program on the internet website of the Department of Highways, Division of Construction Procurement ( <a href="http://transportation.ky.gov/contract/">http://transportation.ky.gov/contract/</a> ). Download the bid file from the Bid Express Bidding Service Website to prepare a Bid Proposal for submission to the Department. Submit Bid Proposal electronically through Bid Express Bidding Service.
	Delete the second and third paragraph.
SUBSECTION: REVISION:	102.08 Irregular Bid Proposals.  Delete the following from the first paragraph: 4) fails to submit a disk created from the Highway Bid Program.
	Replace the second paragraph with the following: The Department will consider Bid Proposals irregular and may reject them for the following reasons:
	<ol> <li>when there are unauthorized additions, conditional or alternate bids, or irregularities of any kind which may tend to make the Bid Proposal incomplete, indefinite, or ambiguous as to its meaning; or</li> <li>when the bidder adds any provisions reserving the right to accept or reject an award, or to enter into a Contract pursuant to an award; or</li> <li>any failure to comply with the provisions of Subsection 102.07; or</li> <li>Bid Proposals in which the Department determines that the prices are unbalanced; or when the sum of the total amount of the Bid Proposal under consideration exceeds the bidder's Current Capacity Rating.</li> </ol>
SUBSECTION: REVISION:	102.09 Bid Proposal Guaranty. Insert the following after the first sentence:
	Bid Proposals must have a bid proposal guaranty in the amount indicated in the bid proposal form accompany the submittal. A guaranty in the form of a paper bid bond, cashier's check, or certified check in an amount no less than the amount indicated on the submitted electronic bid is required when the electronic bid bond was not utilized with the Bid Express Bidding Service. Paper bid bonds must be delivered to the Division of Construction Procurement prior to the time of the letting.
SUBSECTION: REVISION:	102.10 Delivery of Bid Proposals. Replace paragraph with the following:
	Submit all Bid Proposals prior to the time specified in the Notice to Contractors. All bids shall be submitted electronically using Bid Express Bidding Services. Electronically submitted bids must be done in accordance with the requirements of the Bid Express Bidding Service.
SUBSECTION: REVISION:	102.11 Withdrawal or Revision of Bid Proposals. Replace the paragraph with the following:
	Bid Proposals can be withdrawn in accordance the requirements of the Bid Express Bidding Service prior to the time of the Letting.

#### Contract ID: 122187 Page 28 of 74

CTTP CTT CTT CTT	Locate Data Control of the Control o
SUBSECTION:	102.13 Public Opening of Bid Proposals.
REVISION:	Replace Heading with the following: 102.13 Public Announcement of Bid Proposals.
	102.13 I done Announcement of Bid I Toposais.
	Replace the paragraph with the following:
	The Department will publicly announce all Bid Proposals at the time indicated in the Notice to
	Contractors.
SUBSECTION:	103.02 Award of Contract.
REVISION:	Replace the first sentence of the third paragraph with the following:
	The Department will normally award the Contract within 10 working days after the date of
	receiving Bid Proposals unless the Department deems it best to hold the Bid Proposals of any or all
	bidders for a period not to exceed 60 calendar days for final disposition of award.
CIDCECTION	105 00 Diagram d Washing Descriptor
SUBSECTION: REVISION:	105.02 Plans and Working Drawings. Insert the following after the fourth paragraph:
REVISION.	insert the following after the fourth paragraph.
	Submit electrical shop drawings, design data, and descriptive literature for materials in electronic
	format to the Division of Traffic Operations for approval. Drawings and literature shall be
	submitted for lighting and signal components. Notify the Engineer when submitting information to
	the Division of Traffic Operations. Do not begin work until shop drawings are approved.
	Submit shop drawings for traffic counting equipment and materials in electronic format to the
	Engineer or the Division of Planning. Notify the Engineer when submitting information directly to
	the Division of Planning. Do not begin work until shop drawings are reviewed and approved.
SUBSECTION:	105.03 Record Plans.
REVISION:	Replace the section with the following:
	Record Plans are those reproductions of the original Plans on which the accepted Bid Proposal was based and, and signed by a duly authorized representative of the Department. The Department will
	make these plans available for inspection in the Central Office at least 24 hours prior to the time of opening bids and up to the time of letting of a project or projects. The quantities appearing on the Record Plans are the same as those on which Bid Proposals are received. The Department will use these Record Plans as the controlling plans in the prosecution of the Contract. The Department will not make any changes on Record Plans subsequent to their issue unless done so by an approved contract modification. The Department will make 2 sets of Record Plans for each project, and will maintain one on file in the Central Office and one of file in the District Office. The Department will furnish the Contractor with the following: 1 full size, 2 half size and an electronic file copy of the Record Plans at the Pre-Construction conference.
	ı.

Contract ID: 122187 Page 29 of 74

## **Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition**

(Effective with the July15, 2011 Letting)

### SUBSECTION: REVISION:

105.12 Final Inspection and Acceptance of Work.

Insert the following paragraphs after the first paragraph:

Notify the Engineer when all electrical items are complete. A notice of the electrical work completion shall be made in writing to the Contractor. Electrical items will be inspected when the electrical work is complete and are not subject to waiting until the project as a whole has been completed. The Engineer will notify the Division of Traffic Operations within 3 days that all electrical items are complete and ready for a final inspection. A final inspection will be completed within 90 days after the Engineer notifies the Division of Traffic Operations of the electrical work completion.

Energize all electrical items prior to notifying the Engineer that all electrical items are complete. Electrical items must remain operational until the Division of Traffic Operations has inspected and accepted the electrical portion of the project. Payment for the electrical service is the responsibility of the Contractor from the time the electrical items are energized until the Division of Traffic Operations has accepted the work.

Complete all corrective work within 90 calendar days of receiving the original electrical inspection report. Notify the Engineer when all corrective work is complete. The Engineer will notify the Division of Traffic Operations that the corrective work has been completed and the project is ready for a follow-up inspection. Upon re-inspection, if additional corrective work is required, complete within the same 90 calendar day allowance. The Department will not include time between completion of the corrective work and the follow up electrical inspection(s). The 90 calendar day allowance is cumulative regardless of the number of follow-up electrical inspections required.

The Department will assume responsibility for the electrical service on a project once the Division of Traffic Operations gives final acceptance of the electrical items on the project. The Department will also assume routine maintenance of those items. Any damage done to accepted electrical work items by other Contractors shall be the responsibility of the Prime Contractor. The Department will not be responsible for repairing damage done by other contractors during the construction of the remaining project.

Failure to complete the electrical corrective work within the 90 calendar day allowance will result in penalties assessed to the project. Penalties will be assessed at ½ the rate of liquidated damages established for the contract.

Replace the following in the second sentence of the second paragraph:

Replace Section 213 with Section 212.

Delete the fifth paragraph from the section.

### SUBSECTION: REVISION:

105.13 Claim Resolution Process.

Replace the last sentence of the 3. Bullet with the following:

If the Contractor did not submit an as-bid schedule at the Pre-Construction Meeting or a written narrative in accordance with Subsection 108.02, the Cabinet will not consider the claim for delay.

Delete the last paragraph from the section.

Contract ID: 122187 Page 30 of 74

## **Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition**

(Effective with the July15, 2011 Letting)

### SUBSECTION: REVISION:

106.04 Buy America Requirement.

Replace the section with the following:

**106.04 Buy America Requirement.** Follow the "Buy America" provisions as required by Title 23 Code of Federal Regulations § 635.410. Except as expressly provided herein all manufacturing processes of steel or iron materials including but not limited to structural steel, guardrail materials, corrugated steel, culvert pipe, structural plate, prestressing strands, and steel reinforcing bars shall occur in the United States of America, including the application of:

- Coating,
- Galvanizing,
- Painting, and
- Other coating that protects or enhances the value of steel or iron products.

The following are exempt, unless processed or refined to include substantial amounts of steel or iron material, and may be used regardless of source in the domestic manufacturing process for steel or iron material:

- Pig iron,
- Processed, pelletized, and reduced iron ore material, or
- Processed alloys.

The Contractor shall submit a certification stating that all manufacturing processes involved with the production of steel or iron materials occurred in the United States.

Produce, mill, fabricate, and manufacture in the United States of America all aluminum components of bridges, tunnels, and large sign support systems, for which either shop fabrication, shop inspection, or certified mill test reports are required as the basis of acceptance by the Department.

Use foreign materials only under the following conditions:

- 1) When the materials are not permanently incorporated into the project; or
- 2) When the delivered cost of such materials used does not exceed 0.1 percent of the total Contract amount or \$2,500.00, whichever is greater.

The Contractor shall submit to the Engineer the origin and value of any foreign material used.

## SUBSECTION: REVISION:

106.10 Field Welder Certification Requirements.

Insert the following sentence before the first sentence of the first paragraph:

All field welding must be performed by a certified welder unless otherwise noted.

## SUBSECTION: REVISION:

108.02 Progress Schedule.

Insert the following prior to the first paragraph:

Specification 108.02 applies to all Cabinet projects except the following project types:

- Right of Way Mowing and/or Litter Removal
- Waterborne Paint Striping
- Projects that contain Special Provision 82
- Projects that contain the Special Note for CPM Scheduling

Insert the following paragraph after paragraph two:

Working without the submittal of a Written Narrative is violation of this specification and additionally voids the Contractor's right to delay claims.

Insert the following paragraph after paragraph six:

The submittal of bar chart or Critical Path Method schedule does not relieve the Contractor's requirement to submit a Written Narrative schedule.

Contract ID: 122187 Page 31 of 74

	Insert the following at the beginning of the first paragraph of A) Written Narrative.:
	Submit the Written Narrative Schedule using form TC 63-50 available at the Division of Construction's website ( <a href="http://www.transportation.ky.gov/construction/ResCenter/ResCenter.htm">http://www.transportation.ky.gov/construction/ResCenter/ResCenter.htm</a> ).
	Replace Part A) Written Narrative 1. And 2. with the following:
	<ol> <li>Provide a description that includes how the Contractor will sequence and stage the work, how the Contractor plans to maintain and control traffic being specific and detailed, and what equipment and crew sizes are planned to execute the work.</li> <li>Provide a list of project milestones including, if applicable, winter shut-downs, holidays, or special events. The Contractor shall describe how these milestones and other dates effect the prosecution of the work. Also, include start date and completion date milestones for the contract, each project if the contract entails multiple projects, each phase of work, site of work, or segment of work as divided in the project plans, proposal, or as subdivided by the Contractor.</li> </ol>
SUBSECTION: REVISION:	109.07.01 Liquid Asphalt. Add the following to the Adjustable Contract Items:  Stone Matrix Asphalt for Base Stone Matrix Asphalt for Surface
SUBSECTION: REVISION:	110.01 Mobilization. Replace paragraph three with the following:
	Do not bid an amount for Mobilization that exceeds 5 percent of the sum of the total amounts bid for all items in the Bid Proposal, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives. The Department will automatically adjust any Bid Proposals that are in excess of this amount down to 5 percent to compare Bid Proposals and award the Contract. The Department will award a Contract for the actual amount bid when the amount bid for Mobilization is less than 5 percent, or the Department will award the Contract for the adjusted bid amount of 5 percent when the amount bid for Mobilization is greater than 5 percent. If any errors in unit bid prices for other Contract items in a Contractor's Bid Proposal are discovered after bid opening and such errors reduce the total amount bid for all other items, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives, so that the percent bid for Mobilization is larger than 5 percent, the Department will adjust the amount bid for Mobilization to 5 percent of the sum of the corrected total bid amounts.
SUBSECTION: REVISION:	110.02 Demobilization. Replace the third paragraph with the following:
	Bid an amount for Demobilization that is a minimum of \$1,000 or 1.5 percent of the sum of the total amounts bid for all other items in the Bid Proposal, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives. The Department will automatically adjust any Bid Proposal that is less than this amount up to \$1,000 or 1.5 percent to compare Bid Proposals and award the Contract. The Department will award a Contract for the actual amount bid when the amount bid for demobilization exceeds 1.5 percent, or the Department will award the Contract for the adjusted bid amount when the amount bid for demobilization is less than the minimum of \$1,000 or less than 1.5 percent of the sum of the total amounts bid for all other items in the Bid Proposal, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives.
SUBSECTION: REVISION:	110.04 Payment.  Insert the following paragraph following the demobilization payment schedule (4 <sup>th</sup> paragraph):
	The Department will withhold an amount equal to \$1,000 for demobilization, regardless of the schedule listed above. The \$1,000 withheld for demobilization will be paid when the final estimate is paid.

#### Contract ID: 122187 Page 32 of 74

CLIDGECTION	11002016 17 67 6 4 1
SUBSECTION: REVISION:	112.03.01 General Traffic Control.  Replace paragraph three with the following:
	All flaggers shall be trained in current MUTCD flagging procedures. Proof of training must be available for review at the Department's request. Flagging credentials must be current within the last 5 years.
SUBSECTION:	112.03.11 Temporary Pavement Markings.
PART:	B) Placement and Removal of Temporary Striping.
REVISION:	Replace the 2 <sup>nd</sup> sentence of the first paragraph with the following:
	On interstates and parkways, and other roadways approved by the State Highway Engineer, install pavement striping that is 6 inches in width.
SUBSECTION: REVISION:	112.03.12 Project Traffic Coordinator (PTC). Add the following at the end of the subsection:
	After October 1, 2008 the Department will require the PTC to have successfully completed the applicable qualification courses. Personnel that have not successfully completed the applicable courses by that date will not be considered qualified. Prior to October 1, 2008, conform to Subsection 108.06 A) and ensure the designated PTC has sufficient skill and experience to properly perform the task.
SUBSECTION:	112.03.15 Non-Compliance of Maintain and Control of Traffic.
REVISION:	Add the following section:
	112.03.15 Non-Compliance of Maintain and Control of Traffic. It is the Contractor's responsibility to conform to the traffic control requirements in the TCP, Proposal, plan sheets, specifications, and the Manual on Uniform Traffic Control Devices.
	Unless specified elsewhere in the contract, a penalty will be assessed in the event of non-compliance with Maintain and Control of Traffic requirements. These penalties will be assessed when the Contractor fails to correct a situation or condition of non-compliance with the contract traffic control requirements after being notified by the Engineer. The calculation of accrued penalties for non-compliance will be based upon the date/time of notification by the Engineer.
	The amount of the penalty assessed for non-compliance will be determined based upon the work zone duration, as defined by the MUTCD, and will be the greatest of the different calculation methods indicated below:
	A) Long-term stationary work that occupies a location more than 3 days.
	Correct the non-compliant issue within 24 hours from initial notification by the Engineer. If the issue is not corrected within 24 hours from the initial notification, a penalty for non-compliance will be assessed on a daily basis beginning from the initial notification of non-compliance. The Contractor will be assessed a \$1,000 daily penalty or the amount equal to the contract liquidated damages in Section 108.09, whichever of the 2 is greater. The penalty for non-compliance will escalate as follows for continued non-compliance after the initial notification.
	3 Days after Notification \$1,500 daily penalty or 1.5 times the contract liquidated damages daily charge rate in Section 108.09, whichever is greater.
	7 Days after Notification \$2,000 daily penalty or double the contract liquidated damages daily charge rate in Section 108.09, whichever is greater.

#### Contract ID: 122187 Page 33 of 74

## Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the July15, 2011 Letting)

B) Intermediate-term stationary work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than 1 hour.

Correct the non-compliant issue within 4 hours from initial notification by the Engineer. If the issue is not corrected within 4 hours from notification, a penalty for non-compliance will be assessed on an hourly basis beginning from the initial notification of non-compliance. The penalty for non-compliance will be assessed at \$200 per hour.

C) Short-term stationary is work that occupies a location for more than 1 hour within a single 24-hour period.

Correct the non-compliant issue within 1 hour from initial notification by the Engineer. If the issue is not corrected within 1 hour from notification, a penalty for non-compliance will be assessed on an hourly basis beginning from the initial notification of non-compliance. The penalty for non-compliance will be assessed at \$200 per hour.

If the Contractor remains in violation of the Maintain and Control of Traffic requirements, or if the Department determines it to be in the public's interest, work will be suspended in accordance with Section 108.08 until the deficiencies are corrected. The Department reserves the right to correct deficiencies by any means available and charge the Contractor for labor, equipment, and material costs incurred in emergency situations.

#### SUBSECTION:

206.03.02 Embankment

**REVISION:** 

Replace the last paragraph with the following:

When rock roadbed is specified, construct the upper 2 feet of the embankment according to Subsection 204.03.09 A).

### SUBSECTION: REVISION:

213.03.03 Inspection and Maintenance.

Replace the last sentence of the second paragraph with the following:

Initiate corrective action within 24 hours of any noted deficiency and complete the work within 7 calendar days of receipt of the report. The Contractor shall make a concentrated effort to complete any corrective action required prior to the next predicted rainfall event.

Insert the following paragraph after the second paragraph:

When the Contractor is required to obtain the KPDES permit, it is their responsibility to ensure compliance with the inspection and maintenance requirements of the permit. The Engineer will perform verification inspections a minimum of once per month and within 7 days of a ½ inch or greater rainfall event. The Engineer will document these inspections using Form TC 63-61 A. The Engineer will provide copies of the inspection only when improvements to the BMP's are required. Verification inspections performed by the Engineer do not relieve the Contractor of any responsibility for compliance with the KPDES permit. Initiate corrective action within 24 hours of any noted deficiency and complete the work within 7calendar days of receipt of the report. The Contractor shall make a concentrated effort to complete any corrective action required prior to the next predicted rainfall event.

#### Contract ID: 122187 Page 34 of 74

SUBSECTION: PART: REVISION:	213.03.05 Temporary Control Measures. E) Temporary Seeding and Protection. Replace the first paragraph with the following:
	Apply an Annual Rye seed mix at a rate of 100 pounds per acre during the months of March through August. In addition to the Annual Rye, add 10 pounds of German Foxtail-Millet (Setaria italica), when performing temporary seeding during the months of June through August. During the months of September through February, apply Winter Wheat or Rye Grain at a rate of 100 pounds per acre. Obtain the Engineer's approval prior to the application of the seed mixture.
SUBSECTION: PART:	213.03.05 Temporary Control Measures. F) Temporary Mulch.
REVISION:	Replace the last sentence with the following:
	Place temporary mulch to an approximate 2-inch loose depth (2 tons per acre) and anchor it into the soil by mechanically crimping it into the soil surface or applying tackifier to provide a protective cover. Regardless of the anchoring method used, ensure the protective cover holds until disturbance is required or permanent controls are in installed.
SUBSECTION: REVISION:	303.05 Payment. Replace the second paragraph of the section with the following:
	The Department will make payment for Drainage Blanket-Type II (ATDB) according to the Lot Pay Adjustment Schedule for Specialty Mixtures in Section 402.
SUBSECTION: PART:	401.02.04 Special Requirements for Dryer Drum Plants. F) Production Quality Control.
REVISION:	Replace the first sentence with the following:
	Stop mixing operations immediately if, at any time, a failure of the automatic electronic weighing system of the aggregate feed, asphalt binder feed, or water injection system control occurs.
SUBSECTION: REVISION:	401.02.04 Special Requirements for Dryer Drum Plants. Add the following:
	Part G) <b>Water Injection System.</b> Provided each system has prior approval as specified in Subsection 402.01.01, the Department will allow the use of water injection systems for purposes of foaming the asphalt binder and lowering the mixture temperature for production of Warm Mix Asphalt (WMA).
	Ensure the equipment for water injection meets the following requirements:  1) Injection equipment computer controls are automatically coupled to the plants controls (manual operation is not permitted);  2) Injection equipment has provided a controls that introduce water ratios based on production.
	Injection equipment has variable controls that introduce water ratios based on production rates of mixtures;
	<ul> <li>3) Injects water into the flow of asphalt binder prior to contacting the aggregate;</li> <li>4) Provides alarms on the water injection system that operate when the flow of water is interrupted or deviates from the prescribed water rate.</li> </ul>
SUBSECTION: REVISION:	401.03.01 Preparation of Mixtures.  Replace the last sentence of the second paragraph with the following:
	Do not use asphalt binder while it is foaming in a storage tank.
L	

Contract ID: 122187 Page 35 of 74

## **Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition**

(Effective with the July15, 2011 Letting)

### SUBSECTION: REVISION:

401.03.01 Preparation of Mixtures.

Replace the third paragraph and Mixing and Laying Temperature table with the following:

Maintain the temperature of the component materials and asphalt mixture within the ranges listed in the following table:

MIXING AND LAYING TEMPERATURES (°F)						
Material		Minimum	Maximum			
Aggregates		240	330			
Aggregates used with Recycle (RAP)	ed Asphalt Pavement	240	_			
Asphalt Binders	PG 64-22	230	330			
	PG 76-22	285	350			
Asphalt Mixtures at Plant	PG 64-22 HMA	250	330			
(Measured in Truck)	PG 76-22 HMA	310	350			
	PG 64-22 WMA	230	275			
	PG 76-22 WMA	250	300			
Asphalt Mixtures at Project	PG 64-22 HMA	230	330			
(Measured in Truck	PG 76-22 HMA	300	350			
When Discharging)	PG 64-22 WMA	210	275			
	PG 76-22 WMA	240	300			

## SUBSECTION: REVISION:

402.01 Description.

Replace the paragraph with the following:

Provide the process control and acceptance testing of all classes and types of asphalt mixtures which may be furnished either as hot mix asphalt (HMA) or warm mix asphalt (WMA) produced with water injection systems.

## SUBSECTION REVISION:

402.01.01 Warm Mix Asphalt (WMA) Evaluation and Approval. Add the following subsection:

402.01.01 Warm Mix Asphalt (WMA) Evaluation and Approval.

The Department will evaluate trial production of WMA by use of a water injection system provided the system is installed according to the manufacturer's requirements and satisfies the requirements of Section 401. Evaluation will include production and placement of WMA to demonstrate adequate mixture quality including volumetric properties and density by Option A as specified in Subsection 402.03.02 D). Do not place WMA for evaluation on Department projects. Provided production and placement operations satisfy the applicable quality levels, the Department will approve WMA production on Department projects using the water injection system as installed on the specific asphalt mixing plant evaluated.

## SUBSECTION: REVISION:

402.05.02 Asphalt Mixtures and Mixtures With RAP.

Replace Subsection Title as below:

402.05.02 Asphalt Mixtures, HMA and WMA, Including Mixtures With RAP.

## SUBSECTION: REVISION:

402.05.02 Asphalt Mixtures, HMA and WMA, Including Mixtures With RAP. Replace the paragraph with the following:

The Department will pay for the mixture at the Contract unit bid price and apply a Lot Pay Adjustment for each lot placed based on the degree of compliance with the specified tolerances. Using the appropriate Lot Pay Adjustment Schedule, the Department will assign a pay value for the applicable properties within each sublot and average the sublot pay values to determine the pay value for a given property for each lot. The Department will apply the Lot Pay Adjustment for each lot to a defined unit price of \$50.00 per ton. The Department will calculate the Lot Pay Adjustment using all possible incentives and disincentives but will not allow the overall pay value for a lot to exceed 1.00.

## Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the July15, 2011 Letting)

GUDGEGEION	100 07 00 A 1 LAC A TRACT LIVE AC A Wild DAD				
SUBSECTION: PART:	402.05.02 Asphalt Mixtures, HMA and WMA, Including Mixtures With RAP.  C) Conventional and RAP Mixtures Placed on Shoulders.				
REVISION:	Replace Title and Text with the following:				
112 (1510)	The plane and toll with the tollowing.				
	C) HMA, WMA and RAP Mixtures Placed on Shoulders or Placed as Asphalt Pavement Wedge.				
	<ol> <li>Placed monolithically with the Mainline – Width of 4 feet or less. The Department will pay as mainline mixture.</li> </ol>				
	2) Placed monolithically with the Mainline – Width of greater than 4 feet. The Department will pay as mainline mixture but use 1.00 for the Lane and Joint Density Pay Value for				
	shoulder or Asphalt Pavement Wedge quantities.  3) Placed Separately. The Department will use 1.00 for the Lane and Joint Density Pay Value.				
SUBSECTION:	402.05.02 Asphalt Mixtures, HMA and WMA, Including Mixtures With RAP.				
PART:	D) Conventional and RAP Mixtures Placed Monolithically as Asphalt Pavement Wedge.				
REVISION:	Replace the title with the following:				
	D) HMA, WMA, and RAP Mixtures Placed Monolithically as Asphalt Pavement Wedge.				
	Delete the fellowing				
	Delete the following: D) HMA, WMA, and RAP Mixtures Placed Monolithically as Asphalt Pavement Wedge. The				
	Department will pay as mainline mixture but use a 1.00 pay value for all properties.				
SUBSECTION:	402.05.02 Asphalt Mixtures for Temporary Pavement.				
PART:	E) Asphalt Mixtures for Temporary Pavement.				
REVISION:	Replace E) Asphalt Mixtures for Temporary Pavement with the following:				
	D) Asphalt Mixtures for Temporary Pavement.				
SUBSECTION:	402.05.02 Asphalt Mixtures, HMA and WMA, Including Mixtures With RAP.				
PART:	Lot Pay Adjustment Schedule, Compaction Option A, Base and Binder Mixtures				
TABLES:	VMA				
REVISION:	Replace the VMA table with the following:				
	VMA				
	Pay Value Deviation From Minimum				
	1.00 ≥ min. VMA				
	0.95 0.1-0.5 below min.				
	0.90 0.6-1 0 below min.				
	(1) > 1.0 below min.				
SUBSECTION:	402.05.02 Asphalt Mixtures, HMA and WMA, Including Mixtures With RAP.				
PART:	Lot Pay Adjustment Schedule, Compaction Option A, Surface Mixtures				
TABLES:	VMA				
REVISION:	Replace the VMA table with the following:				
	X/M A				
	VMA				
	Pay Value Deviation				
	From Minimum				
	1.00 ≥ min. VMA				
	0.95 0.1-0.5 below min.				
	0.90 0.6-1.0 below min.  (1) > 1.0 below min.				
	> 1.0 below min.				

Contract ID: 122187 Page 37 of 74

SUBSECTION: PART: REVISION:   A03.03.09 Leveling and Wedging, and Scratch Course. PART: REVISION: PART: PA	SUBSECTION: PART: TABLE: REVISION:		ment Schedule	HMA and WMA, Inc., Compaction Option the following:			With RA	P.	
SUBSECTION:   403.03.03 Preparation of Mixture.   0.9   0.6-1.0 below min.   0.9   0.9   0.6-1.0 below min.   0.9				V	MA		1		
SUBSECTION:   403.03.03 Preparation of Mixture.   0.9   0.6-1.0 below min.   0.9   0.9   0.6-1.0 below min.   0.9   0.9   0.6-1.0 below min.   0.9   0.				Pay Value	De	viation	1		
SUBSECTION:   403.03.03 Preparation of Mixture.   0.9   0.6-1.0 below min.   175   > 1.0 below					From	Minimum			
Main									
SUBSECTION: PART: NUMBER: REVISION: Replace the first sentence of the first paragraph with the following:  SUBSECTION: PART: NUMBER: REVISION: Replace the first sentence of the paragraph with the following:  SUBSECTION: Revision: Revision: Revision at the spropriate number of gyrations as given in the table below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:				0.95					
SUBSECTION: PART: NUMBER: REVISION:  Replace the last two sentences of the paragraph and table with the following:  Complete the volumetric mix design at the appropriate number of gyrations as given in the table below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:    Class   ESAL's (millions)   Number of Gyrations									
PART: NUMBER: REVISION:  REVISION:  REVISION:  Complete the volumetric mix design at the appropriate number of gyrations as given in the table below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:    Class   ESAL's (millions)   Number of Gyrations				(2)	> 1.0 b	elow min.			
NUMBER: REVISION: Replace the last two sentences of the paragraph and table with the following:  Complete the volumetric mix design at the appropriate number of gyrations as given in the table below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:    Number of Gyrations   Number of Gyrations	SUBSECTION:	403.03.03 Prep	aration of Mixt	ture.					
REVISION: Replace the last two sentences of the paragraph and table with the following:  Complete the volumetric mix design at the appropriate number of gyrations as given in the table below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:									
Complete the volumetric mix design at the appropriate number of gyrations as given in the table below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:    Number of Gyrations				s of the paragraph ar	nd table	with the f	ollowing:		
below for the number of 20-year ESAL's. The Department will define the relationship between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:    Class   ESAL's (millions)   Number of Cyrations		_							
between ESAL classes, as given in the bid items for Superpave mixtures, and 20-year ESAL ranges as follows:    Number of Gytations   Number of Gytations		below for	olumetric mix the number of	design at the approof 20-year ESAL's	opriate r . The	iumber of Departme	t gyration ent will (	ıs as gıv define tl	he relationship
Class   ESAL's (millions)   Number of Gyrations									
Class   ESAL's (millions)   N <sub>ination</sub>   N <sub>design</sub>   N <sub>max</sub>   2   < 3.0   6   50   75									
2   <3.0   6   50   75     3   3.0 to <30.0   7   75   115     4   ≥30.0   8   100   160     SUBSECTION: PART: REVISION: Replace the first sentence of the first paragraph with the following: Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION: Replace the second sentence of the first paragraph with the following: Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: Replace the second sentence of the first paragraph with the following: Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: 407.01 DESCRIPTION. Replace the first sentence of the paragraph with the following: Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION. Replace the first sentence of the paragraph with the following: Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.									
SUBSECTION: PART: REVISION:  SUBSECTION: REPlace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION:  SUBSECTION: REVISION:  A07.01 DESCRIPTION. REVISION: REVISION:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: REVISION:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.									
SUBSECTION: PART: REVISION: Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: PART: B) Scratch Course. B) Scratch Course. B) Scratch Course. Replace the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: Replace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: 407.01 DESCRIPTION.  REVISION: Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION.  REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.									
PART: REVISION: Replace the first sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: PART: B) Scratch Course. B) Scratch Course. Replace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION: Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.			·			8	100	160	
REVISION: Replace the first sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: 403.03.09 Leveling and Wedging, and Scratch Course. B) Scratch Course. Replace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: 407.01 DESCRIPTION. REVISION: Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION. REVISION: Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.				ging, and Scratch Co	urse.				
surface as the Engineer directs.  SUBSECTION: PART: PART: REVISION:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: REVISION: REVISION:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.	-			he first paragraph w	ith the fo	ollowing:			
surface as the Engineer directs.  SUBSECTION: PART: PART: REVISION:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: REVISION: REVISION:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.		Conform to the	aradation reas	uirements (control no	ointe) of	Δ Δ SHT(	) M 323 t	for base	hinder or
PART: REVISION: B) Scratch Course. Replace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION: REVISION: Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: REVISION: REVISION: Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.									
PART: REVISION: B) Scratch Course. Replace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: REVISION: REVISION: Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: REVISION: REVISION: Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.	CLIDGECTION	402 02 00 L	1	: 1 C C-					
REVISION: Replace the second sentence of the first paragraph with the following:  Conform to the gradation requirements (control points) of AASHTO M 323 for base, binder, or surface as the Engineer directs.  SUBSECTION: 407.01 DESCRIPTION. REVISION: Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION. REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.				ing, and Scratch Co	urse.				
surface as the Engineer directs.  SUBSECTION: 407.01 DESCRIPTION. Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION. REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.		/		of the first paragraph	with the	e followir	ng:		
surface as the Engineer directs.  SUBSECTION: 407.01 DESCRIPTION. Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION. REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.		Conform to the	oradation requ	uirements (control no	oints) of	AASHTO	) M 323 t	for base	hinder or
REVISION: Replace the first sentence of the paragraph with the following:  Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION: 409.01 DESCRIPTION.  REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.		surface as the E	Engineer directs		JIII(3) OI	21210111	J 141 323 1	or ouse,	omder, or
Construct a pavement wedge composed of a hot-mixed or warm-mixed asphalt mixture.  SUBSECTION:  REVISION:  409.01 DESCRIPTION.  Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION:  410.01 DESCRIPTION.				h a mana anamb xxii4b 4b	o follow	·i ~.			
SUBSECTION: 409.01 DESCRIPTION. REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.	REVISION:	Replace the firs	st sentence of the	ne paragraph with th	ie ionow	ing:			
REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.		Construct a pay	vement wedge of	composed of a hot-n	nixed or	warm-mi	xed aspha	alt mixtu	ıre.
REVISION: Replace the first sentence of the paragraph with the following:  Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.									
Use reclaimed asphalt pavement (RAP) from Department projects or other approved sources in hot mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.									
mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.	REVISION:	Replace the first	st sentence of the	he paragraph with th	e follow	ing:			
mix asphalt (HMA) or warm mix asphalt (WMA) provided mixture requirements are satisfied.  SUBSECTION: 410.01 DESCRIPTION.		Use reclaimed	asphalt paveme	ent (RAP) from Dep	artment	projects o	or other ap	proved	sources in hot
	SUBSECTION:	410.01 DESCR	IPTION.						
<b>REVISION:</b> Delete the second sentence of the paragraph.				the paragraph.					

# Contract ID: 122187 Page 38 of 74

SUBSECTION:	410.03.01 Corrective Work.				
REVISION:	Replace the last sentence of the paragraph with the following:				
	Provide a final surface comparable to the adjacent pavement that does not require corrective work in respect to texture, appearance, and skid resistance.				
	in respect to texture, appearance, and skid resistance.				
~~~~					
SUBSECTION: PART:	410.03.02 Ride Quality. B) Requirements.				
NUMBER:	1) Category A.				
REVISION:	Replace the last sentence of the first paragraph with the following:				
	At the Department's discretion, a pay deduction of \$1200 per 0.1-lane-mile section may be applied				
	in lieu of corrective work.				
SUBSECTION:	410.03.02 Ride Quality.				
PART:	B) Requirements.				
NUMBER: REVISION:	2) Category B.  Replace the second and third sentence of the first paragraph with the following:				
KE VISIOIV.	Replace the second and third sentence of the first paragraph with the following.				
	When the IRI is greater than 90 for a 0.1-mile section, perform corrective work, or remove and				
	replace the pavement to achieve the specified IRI. At the Department's discretion, a pay deduction of \$750 per 0.1-lane-mile section may be applied in lieu of corrective work.				
	of \$\psi \text{of per of the mine section may be applied in field of corrective work.}				
SUBSECTION:	410.05 PAYMENT.				
REVISION:	Add the following sentence to the end of the first paragraph:				
	The sum of the pay value adjustments for ride quality shall not exceed \$0 for the project as a whole.				
SUBSECTION:	413.05.02 CL3 SMA BASE 1.00D PG76-22.				
REVISION:	Insert the following sentence between the first and second sentence of the first paragraph:				
	The Department will calculate the Lot Pay Adjustment using all possible incentives and disincentives but will not allow the overall pay value for a lot to exceed 1.00.				
GLIDGE GETON					
SUBSECTION: TABLE:	413.05.02 CL3 SMA BASE 1.00D PG 76-22. JOINT DENSITY TABLE				
REVISION:	Replace the joint density table with the following:				
	A A ME DENOMAL				
	Pay Value Test Result (%)				
	1.05 95.0-96.5 1.00 93.0-94.9				
	1.00 93.0-94.9 0.95 92.0-92.9 or 96.6-97.0				
	0.95 92.0-92.9 or 96.6-97.0 0.90 91.0-91.9 or 97.1-97.5				
	(I) < 91.0 or > 97.5				
GLIDGE CETAL	412.05.02.01.2.01.4.01.DE.0.50.4.DC.76.20. 1.01.2.01.4.01.DE.0.20.4.DC.76.20.				
SUBSECTION: REVISION:	413.05.03 CL3 SMA SURF 0.50A PG76-22 and CL3 SMA SURF 0.38A PG76-22. Insert the following sentence between the first and second sentence of the first paragraph:				
	The Department will establish the Let Department of the United States of				
	The Department will calculate the Lot Pay Adjustment using all possible incentives and disincentives but will not allow the overall pay value for a lot to exceed 1.00.				
	F.D				
	·				

Contract ID: 122187 Page 39 of 74

SUBSECTION: TABLE: REVISION:	JOINT DENSIT		A PG76-22 and CL3 SMA h the following:	SURF 0.38A PG76-22.	
			DENSITY		
		Pay Value	Lane Density Test Result (%)	Joint Density Test Result (%)	
		1.05	95.0-96.5	92.0-96.0	
		1.00	93.0-94.9	90.0-91.9	
		0.95	92.0-92.9 or 96.6-97.0	89.0-89.9 or 96.1-96.5	
	0.90 91.0-91.9 or 97.1-97.5 88.0-88.9 or 96.6-97.0				
		0.75		< 88.0 or > 97.0	
		(1)	< 91.0 or > 97.5		
SUBSECTION: REVISION:	501.05.02 Ride Quality.  Add the following sentence to the end of the first paragraph:  The sum of the pay value adjustments for the ride quality shall not exceed \$0 for the project as a whole.				
SUBSECTION: REVISION:		sentence with the warning pavers a	-	on all commercial entrances according to	o the
SUBSECTION: REVISION:	The Department projects will requapplicable to the incidental to the	graph with the followill measure the uire the removal of project. The cost detectable warning	quantity in square feet. A of existing sidewalks to met associated with the remo- legs bid item or incidental to	Il retrofit applications for maintenance eet the requirements of the standard draw val of the existing sidewalk will be to the bid item for the construction of the	
	concrete sidewal	k unless otherwis	e noted.		
SUBSECTION: REVISION:	505.05 PAYME Add the followin	NT.  ng to the bid item	table:		
	<u>Code</u> 23158ES505	Pay Item Detectable W	arnings Pay Unit Square Foo	t	
SUBSECTION: REVISION:	509.01 DESCRI Replace the seco	PTION. ond paragraph with	n the following:		
	Research Progra the Standard Dra length, material,	m (NCHRP) 350 awings. Obtain the drain slot dimensite or less from the	Test Level 3 (TL-3) requi e Engineers approval prio ions and locations typical	form to the National Cooperative Highw rements and the typical features depicted r to use. Ensure the barrier wall shape, features are met and the reported maximest $3-11$ (pickup truck impacting at 60	d by

Contract ID: 122187 Page 40 of 74

# Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the July15, 2011 Letting)

SUBSECTION: REVISION:	601.03.02 Concrete Producer Responsibilities. Replace the first sentence with the following:
	Obtain the concrete from producers that are in compliance with KM 64-323 and on the Department's List of Approved Materials.
	Add the following to the first paragraph:
	If a concrete plant becomes unqualified during a project and there are no other qualified plants in the region, the Department will provide qualified personnel to witness and ensure the producer follows the required specifications. The Department will assess the Contractor a \$100 per hour charge for this service.
SUBSECTION:	601.03.02 Concrete Producer Responsibilities.
PART:	B) Certified Personnel.
REVISION:	Replace the second sentence with the following:
	Ensure that the concrete technicians are certified as ACI Level I (Level I) and KRMCA Level II (Level II).
SUBSECTION:	601.03.02 Concrete Producer Responsibilities.
PART:	C) Quality Control.
REVISION:	Replace the second sentence with the following:
	Ensure that the Level II concrete technician is present when work is in progress and is responsible for
	inspecting trucks, batch weight calculations, monitoring batching, making mixture adjustments,
	reviewing the slump, air content, unit weight, temperature, and aggregate tests, all to provide conforming concrete to the project.
	concrete to the project.
SUBSECTION: PART:	601.03.02 Concrete Producer Responsibilities.  D) Producer Testing.
REVISION:	Replace with the following:
	When producing for state work, have a Qualified Concrete Aggregate Technician or KYTC Qualified
	Aggregate Technician perform, at a minimum, weekly gradations and minus 200 wash tests and daily moisture contents of coarse and fine aggregate (Fine aggregates will not require a minus 200 wash test).
	Using the daily moisture contents, adjust the approved mix design accordingly prior to production.
	Ensure that the Level II concrete technician is present when work is in progress and is responsible for
	inspecting trucks, batch weight calculations, monitoring batching, making mixture adjustments, reviewing the slump, air content, unit weight, temperature, and aggregate tests, all to provide conforming
	concrete to the project.
SUBSECTION:	601.03.02 Concrete Producer Responsibilities.
PART:	E) Trip Tickets.
REVISION:	Replace the second sentence with the following:
	Include on the trip ticket the Sample ID for the approved mix design and a statement certifying that the
	data on the ticket is correct and that the mixture conforms to the mix design.
SUBSECTION:	601.03.03 Proportioning and Requirements.
PART:	C) Mixtures Using Type IP, IS, and I(SM) Cement or Mineral Admixtures
NUMBER:	2) Mineral Admixtures.
REVISION:	Replace the second sentence with the following:
	Reduction of the total cement content by a combination of mineral admixtures will be allowed, up to a maximum of 40 percent.

# Contract ID: 122187 Page 41 of 74

SUBSECTION:	601.03.03 Proportioning and Requirements.
PART:	C) Mixtures Using Type IP, IS, and I(SM) Cement or Mineral Admixtures
NUMBER:	2) Mineral Admixtures.
LETTER:	a) Fly Ash.
REVISION:	Delete the last sentence of the third paragraph.
SUBSECTION:	601.03.03 Proportioning and Requirements.
PART:	C) Mixtures Using Type IP, IS, and I(SM) Cement or Mineral Admixtures
NUMBER:	2) Mineral Admixtures.
LETTER:	b) Ground Granulated Blast Furnace Slag (GGBF Slag).
REVISION:	Delete the second sentence of the third paragraph.
SUBSECTION:	601.03.03 Proportioning and Requirements.
PART:	E) Measuring.
<b>REVISION:</b>	Add the following sentence:
	Conform to the individual ingredient material batching tolerances in Appendix A.
SUBSECTION:	601.03.09 Placing Concrete.
PART:	A) General.
REVISION:	Replace the last sentence of the fourth paragraph with the following:
	Do not use aluminum or aluminum alloy troughs, pipes, or chutes that have surface damage or for
	lengths greater than 20 feet.
	Replace the second sentence of the fifth paragraph with the following:
	When pumping, equip the delivery pipe with a nozzle, having a minimum of 2 right angles, at the
	discharge end. Alternate nozzles or restriction devices may be allowed with prior approval by the
	Engineer.
SUBSECTION:	605.02.05 Forms.
REVISION:	Delete the last sentence.
SUBSECTION:	605.03.04 Tack Welding.
REVISION:	Replace with the following:
	The Depositment does not allow took wolding
	The Department does not allow tack welding.
SUBSECTION:	606.02.11 Coarse Aggregate.
<b>REVISION:</b>	Replace with the following:
	Conform to Section 805, size No. 8 or 9-M.
SUBSECTION:	609.03.04 Expansion and Fixed Joints.
PART:	D) Preformed Neoprene Joint Seals.
REVISION:	Replace the last sentence of paragraph seven with the following:
	Field splices will not be allowed during partial width construction. It is Contractor's responsibility to
CIDCECTION	determine and install the length of seal required for the joint to barrier wall as per the standard drawing.
SUBSECTION:	609.03.09 Finish with Burlap Drag.  Delete the entire section.
REVISION:	Defend the entire section.
SUBSECTION:	609.04.06 Joint Sealing.
REVISION:	Replace Subsection 601.04 with the following:
	Subsection 606.04.08.

# Contract ID: 122187 Page 42 of 74

REVISION: Replace the Pay Unit for Joint Sealing with the following:  See Subsection 606.05.  SUBSECTION: REVISION: Policy of the properties of the last paragraph with the following:  When the Contract specifies, perform quality control testing to verify compaction according to KM 64-512.  SUBSECTION: Tol. 10.3.08. Testing of Pipe. Replace and rename the subsection with the following:  701.03.08. Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require camera/video inspection on a minimum of 50 percent of the linear feet of all pisatilled under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe is to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer may require additional sections to be tested. Provide the video and report to the Engineer may require additional sections to a proper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, asaging or other interior dan	SUBSECTION:	609.05 Payment.
SUBSECTION: REVISION: REVI		
SUBSECTION: REVISION:  701.03.06 Initial Backfill. Replace the first sentence of the last paragraph with the following: When the Contract specifies, perform quality control testing to verify compaction according to KM 64-512.  SUBSECTION: REVISION:  701.03.08 Testing of Pipe. Replace and rename the subsection with the following:  701.03.08 Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indic		
REVISION: Replace the first sentence of the last paragraph with the following: When the Contract specifies, perform quality control testing to verify compaction according to KM 64-512.  SUBSECTION: REVISION: REVISION: REPlace and rename the subsection with the following:  701.03.08 Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require cameral/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct cameral/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pive will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes		See Subsection 606.05.
When the Contract specifies, perform quality control testing to verify compaction according to KM 64-512.  SUBSECTION: REVISION: REVISIO	SUBSECTION:	701.03.06 Initial Backfill.
SUBSECTION: REVISION: REVI	<b>REVISION:</b>	Replace the first sentence of the last paragraph with the following:
SUBSECTION: REVISION: REVI		Will do Color of the Color of the WM CA
REVISION:  Replace and rename the subsection with the following:  701.03.08 Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require camera/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surfacing conflicts with the 30-day minimum, conduct the inspections prior to placement of the final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indicated in the table below, provide the Department with		
REVISION: Replace and rename the subsection with the following:  701.03.08 Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require camera/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installation be project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surfacing conflicts with the 30-day minimum, conduct the inspections prior to placement of the final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indicated in the table below, provide the Department with an evaluation of each location conducted by a Professional Engineer addressing the severity of the		312.
701.03.08 Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require camera/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of jupe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surface, The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indicated in the table below, provide the Department with an evaluation of each location conducted by a Professional Engineer addressing the seventiy of the deflection, structural integrity, environmental conditions, design s	SUBSECTION:	701.03.08 Testing of Pipe.
require camera/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surfacing conflicts with the 30-day minimum, conduct the inspections prior to placement of the final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indicated in the table below, provide the Department with an evaluation of each location conducted by a Professional Engineer addressing the severity of the deflection, structural integrity, environmental conditions, de	REVISION:	Replace and rename the subsection with the following:
REVISION: Replace and rename the subsection with the following:  701.04.07 Pipeline Video Inspection. The Department will measure the quantity in linear feet along the pipe invert of the structure inspected. When inspection above the specified 50 percent is performed due to a disagreement or suspicion of additional distresses and the Department is found in error, the Department will measure the quantity as Extra Work according to Subsection 104.03. However, if additional distresses or non-conformance is found, the Department will not measure the		require camera/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.  Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surfacing conflicts with the 30-day minimum, conduct the inspections prior to placement of the final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.  Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.  Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indicated in the table below, provide the Department with an evaluation of each location conducted by a Professional Engineer addressing the severity of the deflection, structural integrity, environmental conditions, de
<b>701.04.07 Pipeline Video Inspection.</b> The Department will measure the quantity in linear feet along the pipe invert of the structure inspected. When inspection above the specified 50 percent is performed due to a disagreement or suspicion of additional distresses and the Department is found in error, the Department will measure the quantity as Extra Work according to Subsection 104.03. However, if additional distresses or non-conformance is found, the Department will not measure the		
along the pipe invert of the structure inspected. When inspection above the specified 50 percent is performed due to a disagreement or suspicion of additional distresses and the Department is found in error, the Department will measure the quantity as Extra Work according to Subsection 104.03. However, if additional distresses or non-conformance is found, the Department will not measure the	REVISION:	Replace and rename the subsection with the following:
		along the pipe invert of the structure inspected. When inspection above the specified 50 percent is performed due to a disagreement or suspicion of additional distresses and the Department is found in error, the Department will measure the quantity as Extra Work according to Subsection 104.03. However, if additional distresses or non-conformance is found, the Department will not measure the

# Contract ID: 122187 Page 43 of 74

SUBSECTION: REVISION:	701.05 PAYMENT. Add the following pay item to the large t	list of pay items: em ne Video Inspection	<u>Pay Unit</u> Linear Foot	
SUBSECTION: TABLE: REVISION:	701.05 PAYMENT PIPE DEFLECTION DETERMIN Replace this table with the following		ING	
		PIPE DEFLECTI	ON	
	Amount of Deflection (9	%) Pa	ayment	
	0.0 to 5.0	10	00% of the Unit Bid Price	
	5.1 to 9.9	50	0% of the Unit Bid Price (1)	
	10 or greater	R	emove and Replace	
	(1) Provide Structural Analysis allowed to remain in place at the re		ed on the structural analysis, pipe may be	
SUBSECTION: TABLE: REVISION:	701.05 PAYMENT PIPE DEFLECTION DETERMINED Delete this table.	ED BY MANDREL TES	TING	
SUBSECTION: REVISION:	713.02.01 Paint.			
REVISION:	Replace with the following:			
	Conform to Section 842 and Section	on 846.		
SUBSECTION:	713.03 CONSTRUCTION.			
REVISION:			he State Highway Engineer, install pavement	
	striping that is 6 inches in width.			
SUBSECTION: REVISION:	713.03.03 Paint Application. Replace the second paragraph with	the following table:		
	Material	Paint Application Rat	e Glass Beads Application Rate	
	4 inch waterborne paint	Min. of 16.5 gallons/m		
	6 inch waterborne paint	Min. of 24.8 gallons/mi		
GEIDGE GERON	6 inch durable waterborne paint	Min. of 36 gallons/mile	Min. of 6 pounds/gallon	
SUBSECTION: REVISION:	713.03.04 Marking Removal. Replace the last sentence of the par			
	Vacuum all marking material and r	emoval debris concurren	tly with the marking removal operation.	
SUBSECTION: REVISION:	713.05 PAYMENT. Insert the following codes and pay	items below the Pavemen	nt Striping – Permanent Paint:	
	24190ER Durable Waterbo	rne Marking – 6 IN W rne Marking – 6 IN Y rne Marking – 12 IN W	Pay Unit Linear Foot Linear Foot Linear Foot	

# Contract ID: 122187 Page 44 of 74

SUBSECTION:	714.03 CONSTRUCTION.
REVISION:	Insert the following paragraph at the end of the third paragraph:
	Use Type I Tape for markings on bridge decks, JPC pavement and JPC intersections. Thermoplastic should only be used for markings on asphalt pavement.
SUBSECTION: REVISION:	714.03.07 Marking Removal.  Replace the third sentence of the paragraph with the following:
REVISION.	Vacuum all marking material and removal debris concurrently with the marking removal operation.
SUBSECTION:	716.01 DESCRIPTION.
REVISION:	Insert the following after the first sentence:
	Energize lighting as soon as it is fully functional and ready for inspection. Ensure that lighting remains operational until the Division of Traffic Operations has provided written acceptance of the electrical work.
SUBSECTION:	716.02.01 Roadway Lighting Materials.
REVISION:	Replace the last two sentences of the paragraph with the following:
	Submit for material approval an electronic file of descriptive literature, drawings, and any requested design data to the Division of Traffic Operations. Do not begin work until shop drawings are approved. Notify the Engineer when submitting any information to the Division of Traffic Operations. Do not make substitutions for approved materials without written permission as described above.
SECTION:	717 – THERMOPLASTIC INTERSECTION MARKINGS.
REVISION:	Replace the section name with the following:
	INTERSECTION MARKINGS.
SUBSECTION:	717.01 DESCRIPTION:
REVISION:	Replace the paragraph with the following:
	Furnish and install thermoplastic or Type I tape intersection markings (Stop Bars, Crosswalks, Turn Arrows, etc.) Thermoplastic markings may be installed by either a machine applied, screed extrusion process or by applying preformed thermoplastic intersection marking material.
SUBSECTION:	717.02 MATERIALS AND EQUIPMENT.
REVISION:	Insert the following subsection:
	717.02.06 Type I Tape. Conform to Section 836.
SUBSECTION: REVISION:	717.03.03 Application. Insert the following part to the subsection:
	B) Type I Tape Intersection Markings. Apply according to the manufacturer's recommendations. Cut all tape at pavement joints when applied to concrete surfaces.

# Contract ID: 122187 Page 45 of 74

SUBSECTION:	717.03.05 Proving Period.			
PART:	A) Requirements.			
REVISION:	Insert the following to this secti	on:		
	of failure due to blistering, exce pavement materials, drippings, of retroreflectivity, vehicular dama warranted by the manufacturer to adequately bonded to the surfact Subsection 714.03.06 A) 1), retr	oving period, ensure that the pavement marking material essive cracking, bleeding, staining, discoloration, oil conchipping, spalling, poor adhesion to the pavement, lost age, and normal wear. Type I Tape is manufactured of to meet certain retroreflective requirements. As long are and shows no signs of failure due to the other items to roreflectivity readings will not be required. In the absorbased on a nighttime visual observation.	ontent of the s of ff site and as the material is listed in	
SUBSECTION: REVISION:	717.03.06 Marking Removal. Replace the third sentence of the	e paragraph with the following:		
	Vacuum all marking material ar	nd removal debris concurrently with the marking remo	val operation.	
SUBSECTION: REVISION:	717.05 PAYMENT. Insert the following bid item cod	des:		
	Code 06563 20782NS714 23251ES717, 23264ES717 23252ES717, 23265ES717 23253ES717 23254ES717 23255ES717 23268ES717-23270ES717 23256ES717 23256ES717 23266ES717 23266ES717	Pay Unit Pave Marking – R/R X Bucks 16 IN Pave Marking Thermo – Bike Pave Mark TY I Tape X-Walk, Size Pave Mark TY I Tape Stop Bar, Size Pave Mark TY I Tape Cross Hatch Pave Mark TY I Tape Dotted Lane Extension Pave Mark TY I Tape Arrow, Type  Pave Mark TY I Tape- ONLY Pave Mark TY I Tape- SCHOOL Pave Mark TY I Tape R/R X Bucks-16 IN Pave Mark TY I Tape-Bike	Pay Item Linear Foot Each Linear Foot Linear Foot Square Foot Linear Foot Each Each Linear Foot Each Linear Foot	
SUBSECTION: REVISION:	725.02.02 Type VI Class C & C Replace bullet 2) with the follo			
	2) The SCI100GM System as developed by SCI Products, Inc. of St. Charles, Illinois. For all miscellaneous metal work conform to ASTM A 36 and galvanize according to ASTM A 123. For the SCI100GM fender panels conform to AASHTO 180. Galvanize the SCI100GM fender panels and SCI100GM -beam connectors after fabrication according to ASTM A 123.			
SUBSECTION: REVISION:	miscellaneous metal w For the SCI100GM fer	wing: m as developed by SCI Products, Inc. of St. Charles, I york conform to ASTM A 36 and galvanize according nder panels conform to AASHTO 180. Galvanize the I-beam connectors after fabrication according to ASTI	to ASTM A 123. SCI100GM fender	
SUBSECTION:	801.01 REQUIREMENTS.			
REVISION:	Delete the fourth sentence of the	e first paragraph and add the following to the second p	oaragraph.	
		SO <sub>3</sub> content above the value in table I of ASTM C 150 ay expansion test data for the supplied SO <sub>3</sub> content on		

# Contract ID: 122187 Page 46 of 74

SUBSECTION: REVISION:	805.01 GENERAL. Replace the second paragraph with the following:
	The Department's List of Approved Materials includes the Aggregate Source List, the list of Class A and Class B Polish-Resistant Aggregate Sources, and the Concrete Restriction List.
SUBSECTION: REVISION:	805.04 CONCRETE.  Delete footnote (1) The permissible lightweight particle content of gravel coarse aggregate for reinforced
	concrete box culvert sections, concrete pipe, pipe arches, or for use only in concrete that will be permanently protected from freezing by 2 feet or more of cover is 10.0 percent.
SUBSECTION:	805.04 CONCRETE.
REVISION:	Replace the "AASHTO T 160" reference in first sentence of the third paragraph with "KM 64-629"
SUBSECTION:	805.15 GRADATION ACCEPTANCE OF NON-SPECIFICATION COARSE AGGREGATE.
TABLE:	AGGREGATE SIZE USE
PART:	Cement Concrete Structures and Incidental Construction
REVISION:	Replace "9-M for Waterproofing Overlays" with "8 or 9-M for Waterproofing Overlays"

# Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the July15, 2011 Letting)

**SUBSECTION:** 805.15 GRADATION ACCEPTANCE OF NON-SPECIFICATION COARSE AGGREGATE. REPlace the "SIZES OF COARSE AGGREGATES" table in with the following:

					S	IZES (	SIZES OF COARSE AGGREGATES	RSE AC	GREG	ATES							
	Sieve		A	SLNDOW	AMOUNTS FINER THAN EACH LABORATORY SIEVE (SQUARE OPENINGS) PERCENTAGE BY WEIGHT	AN EACE	I LABORAT	ORY SIE	EVE (SQUA	ARE OPEN	INGS) PEF	CENTAGI	BY WEI	THE			
Aggregate Size	Nominal <sup>(3)</sup> Maximum Aggregate Size	4 inch	3 1/2 inch	3 inch	2 1/2 inch	2 inch	1 1/2 inch	1 inch	3/4 inch	1/2 inch	3/8 inch	No. 4	No. 8	No. 16	No. 30	No. 100	No. 200
1	3 ½ inch	100	90-100		25-60		0-15		0-5								
2	2 1/2 inch			100	90-100	35-70	0-15		0-5								
23	2 inch			100		40-90		0-15		0-5							
3	2 inch				100	90-100	35-70	0-15		0-5							
357	2 inch				100	95-100		35-70		10-30		0-5					
4	1 ½ inch					100	90-100	20-55	0-15		0-5						
467	1 1/2 inch					100	95-100		35-70		10-30	0-5					
5	1 inch						100	90-100	20-55	0-10	0-5						
57	1 inch						100	95-100		25-60		0-10	0-5				
610	1 inch						100	85-100		40-75		15-40					
67	3/4 inch							100	90-100		20-55	0-10	0-5				
68	3/4 inch							100	90-100		30-65	5-25	0-10	0-5			
710	3/4 inch							100	80-100		30-75	0-30					
78	1/2 inch								100	90-100	40-75	5-25	0-10	0-5			
8	3/8 inch									100	85-100	10-30	0-10	0-5			
9-M	3/8 inch									100	75-100	0-25	0-5				
$10^{(2)}$	No. 4										100	85-100				10-30	
$11^{(2)}$	No. 4										100	40-90	10-40			0-5	
DENSE GRADED AGGREGATE (I)	3/4 inch							100	70-100		50-80	30-65			10-40		4-13
CRUSHED STONE BASE (I)	1 ½ inch				100		90-100		60-95		30-70	15-55			5-20		0-8
(1) Gradation performed by wet sieve KM 64.620 or AASHTO T 1117 27	nathamad ha	and of	17114	200	/TELLOV v	7 11 7	7										

© 2

Gradation performed by wet steve KM 04-050 or AASH1O 1-11/1-27.

Sizes shown for convenience and are not to be considered as coarse aggregates.

Nominal Maximum Size is the largest sieve on the gradation table for an aggregate size on which any material may be retained.

Note: The Department will allow blending of same source/same type aggregate when precise procedures are used such as cold feed, belt, or equivalent and combining of sizes or types of aggregate using the weigh hopper at concrete plants or controlled feed belts at the pugmill to obtain designated sizes.

# Contract ID: 122187 Page 48 of 74

CLIDGECTION	005 16 GAMBI BIG AND TEGTING			
SUBSECTION: REVISION:	805.16 SAMPLING AND TESTING.  Penloog the "AASHTO T 160" method with the "VA	M 64-629" method for the Concrete Beam Expansion		
KEVISION.	Test.	vi 04-029 illetilod for the Concrete Beam Expansion		
	Test.			
	Replace the "ASTM D 3042" method with the "KM	64-625" method for Insoluble Residue		
		o i o <u>a c</u>		
SUBSECTION:	810.04.01 Coating Requirements.			
REVISION:	Replace the "Subsection 806.07" references with "So	ubsection 806.06"		
	1			
SUBSECTION:	810.06.01 Polyvinyl Chloride (PVC) Pipe.			
PART:	B) Culvert and Entrance Pipe.			
<b>REVISION:</b>	Replace the title with the following:			
	B) Culvert Pipe, Storm Sewer, and Entrance Pipe.			
SUBSECTION:	823.02 LIQUID MEMBRANE FORMING COMPO	NINDS		
REVISION:	Add the following:	JUNDS.		
REVISION.	rad the following.			
	Effective July 1, 2011, to remain on or be added to the	he Department's approved list, products must have		
	completed testing or been submitted for testing throu	igh the National Transportation Product Evaluation		
	Program (NTPEP) for Concrete Curing Compounds.			
SUBSECTION:	837.03 APPROVAL.			
REVISION:	Replace the last sentence with the following:			
	The Department will sample and evaluate for approv	val each lot of thermonlastic material delivered for		
	use per contract prior to installation of the thermopla			
	thermoplastic material until it has been approved by			
	minimum of 10 working days to evaluate and approve thermoplastic material.			
	and approve diefinopustic indiction.			
SUBSECTION:	837.03.01 Composition.			
REVISION:	COMPOSITION Table:			
	Replace Lead Chromate	0.0 max. 4.0 min.		
	with	0.0 max. 4.0 mm.		
	Heavy Metals Content	Comply with 40 CFR 261		
SUBSECTION:	842.02 APPROVAL.			
TABLE:	PAINT COMPOSITION			
REVISION:	Revise the following in the table:			
	D 1 4 204E* 1 14 411 14 404E*	C 1 d V 11 1 1 1 1 1 d d		
	Replace the $2.0\Delta E^*$ values in the table with $4.0\Delta E^*$	for both yellow and white Paint on both the		
	Daytime and Nighttime Color Spectrophotometer.			
SECTION:	DIVISION 800 MATERIAL DETAILS			
REVISION:	Add the following section in Division 800			
	SECTION 846 – DURABLE WATERBO	ORNE PAINT		
	946 01 DESCRIPTION This section servers social	ly during dynahla systanhama nassanant atsining naint		
		k-drying durable waterborne pavement striping paint ly-mixed, one-component, 100% acrylic waterborne		
	striping paint suitable for application on such tra	offic-bearing surfaces as Portland cement concrete,		
	bituminous cement concrete, asphalt, tar, and previous	usly painted areas of these surfaces.		
	<b>846.02 Approval.</b> Select materials that conform to			
	independent analysis data and certification for each f			
		etermination, and compliance to 40 CFR 261 for		
	heavy metal present, the test method used for each d leachable heavy metals content. Submit initial samp			

#### Contract ID: 122187 Page 49 of 74

# **Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition**

(Effective with the July15, 2011 Letting)

operations. The initial sample may be sent from the manufacture of the paint. The Department will randomly sample and evaluate the paint each week that the striping operations are in progress.

The non-volatile portion of the vehicle shall be composed of a 100% acrylic polymer as determined by infrared spectral analysis. The acrylic resin used shall be a 100% cross-linking acrylic as evidenced by infrared peaks at wavelengths 1568, 1624, and 1672 cm-1 with intensities equal to those produced by an acrylic resin known to be 100% cross-linking.

PAINT COMPOSITION				
Property and Test Method	Yellow	White		
Daytime Color (CIELAB)	L* 81.76	L* 93.51		
Spectrophotometer using	a* 19.79	a* -1.01		
illuminant D65 at 45°	b* 89.89	b* 0.70		
illumination and 0° viewing with	Maximum allowa le	Maximum allowable variation		
a 2° observer	variation 4.0∆E*	4.0ΔE*		
Nighttime Color (CIELAB)	L* 86.90	L* 93.45		
Spectrophotometer using	a* 24.80	a* -0.79		
illuminant A at 45° illumination	b* 95.45	b* 0.43		
and 0° viewing with a 2° observer	Maximum allowable variation	Maximum allowable variation		
	4.0ΔE*	4.0ΔE*		
Heavy Metals Content	Comply with 40 CFR 261	Comply with 40 CFR 261		
Titanium Dioxide	NA	10% by weight of pigment		
ASTM D 4764		min.		
VOC	1.25 lb/gal max.	1.25 l /gal ma .		
ASTM D 2369 and D 4017				
Contrast Ratio	0.97	0.99		
(at 15 mils wft)				

**846.02.01 Manufacturers Certification.** Provide a certification of analysis for each lot of traffic paint produced stating conformance to the requirements of this section. Report the formulation identification, traffic paint trade name, color, date of manufacturer, total quantity of lot produced, actual quantity of traffic paint represented, sampling method utilized to obtain the samples, and data for each sample tested to represent each lot produced.

**846.03** ACCEPTANCE PROCEDURES FOR NON-SPECIFICATION DURABLE WATERBORNE PAVEMENT STRIPING PAINT. When non-specification paint is inadvertently incorporated into the work the Department will accept the material with a reduction in pay. The percentage deduction is cumulative based on its compositional properties, but will not exceed 60 percent. The Department will calculate the payment reduction on the unit bid price for the routes where the non-specification paint was used.

DURABLE WATERBORNE PAVEMENT STRIPING PAINT REDUCTION SCHEDULE						
Non- conforming Property	Resin	Color	Contrast	TiO <sub>2</sub>	VOC	Heavy Metals Content
Reduction Rate	60%	10%	10%	10%	60%	60%

Contract ID: 122187 Page 50 of 74

APPENDIX A:	TABLUATION OF CONSTRUCTION TOLERANCES.
PART:	601.03.03
REVISION:	Replace with the following:
	Concrete accuracy of individual ingredient material for each batch.
	± 2.0% for aggregates
	$\pm 1.0\%$ for water
	$\pm$ 1.0% for cement in batches of 4 cubic yards or greater
	$\pm$ 1.0% for total cementitious materials in batches of 4 cubic yards or greater
	0.0% to + 4.0% for cement in batches less than 4 cubic yards
	0.0% to + 4.0% for total cementitious materials in batches less than 4 cubic yards
	± 3.0% for admixtures
ADDENDIKA	TARLUATION OF CONSTRUCTION TOLERANGES
APPENDIX A:	TABLUATION OF CONSTRUCTION TOLERANCES.
PART:	601.03.03 C) 2)
<b>REVISION:</b>	Delete

# STANDARD DRAWINGS THAT APPLY

CURVE WIDENING AND SUPERELEVATION TRANSITIONS	RGS-001-06
MISCELLANEOUS STANDARDS PART 1	RGX-001-05
APPROACHES, ENTRANCES, AND MAIL BOX TURNOUT	RPM-110-05
LANE CLOSURE TWO-LANE HIGHWAY CASE I	TTC-100-01
LANE CLOSURE TWO-LANE HIGHWAY CASE II	TTC-105-01
SHOULDER CLOSURE	TTC-135-01
POST SPLICING DETAIL	TTD-110-01
PAVEMENT CONDITION WARNING SIGNS	TTD-125
MOBILE OPERATION FOR PAINT STRIPING CASE I	TTS-100-01
MOBILE OPERATION FOR PAINT STRIPING CASE II	TTS-105-01

# **PART III**

# EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

GRAYSON COUNTY FD05 043 0062 004-009

# TRANSPORTATION CABINET DEPARTMENT OF HIGHWAYS

# LABOR AND WAGE REQUIREMENTS APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS

- I. Application
- II. Nondiscrimination of Employees (KRS 344)
- III. Payment of Predetermined Minimum Wages
- IV. Statements and Payrolls

### I. APPLICATION

- 1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.
- 2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.
- 3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

#### II. NONDISCRIMINATION OF EMPLOYEES

AN ACT OF THE KENTUCKY GENERAL ASSEMBLY TO PREVENT DISCRIMINATION IN EMPLOYMENT KRS CHAPTER 344 EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

- 1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy). The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.
- 2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, disability or age (between forty and seventy), except that such notice or advertisement may indicate a preference, limitation, or specification based on religion, or national origin when religion, or national origin is a bona fide occupational qualification for employment.
- 3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual

because of his race, color, religion, national origin, sex, disability or age (between forty and seventy), in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administrating agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

# III. PAYMENT OF PREDETERMINED MINIMUM WAGES

- 1. These special provisions are supplemented elsewhere in the contract by special provisions which set forth certain predetermined minimum wage rates. The contractor shall pay not less than those rates.
- 2. The minimum wage determination schedule shall be posted by the contractor, in a manner prescribed by the Department of Highways, at the site of the work in prominent places where it can be easily seen by the workers.

#### IV. STATEMENTS AND PAYROLLS

- 1. All contractors and subcontractors affected by the terms of KRS 337.505 to 337.550 shall keep full and accurate payroll records covering all disbursements of wages to their employees to whom they are required to pay not less than the prevailing rate of wages. Payrolls and basic records relating thereto will be maintained during the course of the work and preserved for a period of one (1) year from the date of completion of this contract.
- 2. The payroll records shall contain the name, address and social security number of each employee, his correct classification, rate of pay, daily and weekly number of hours worked, itemized deductions made and actual wages paid.
- 3. The contractor shall make his daily records available at the project site for inspection by the State Department of Highways contracting office or his authorized representative.

Periodic investigations shall be conducted as required to assure compliance with the labor provisions of the contract. Interrogation of employees and officials of the contractor shall be permitted during working hours.

Aggrieved workers, Highway Managers, Assistant District Engineers, Resident Engineers and Project Engineers shall report all complaints and violations to the Division of Contract Procurement.

The contractor shall be notified in writing of apparent violations. The contractor may correct the reported violations and notify the Department of Highways of the action taken or may request an informal hearing. The request for hearing shall be in writing within ten (10) days after receipt of the notice of the reported violation. The contractor may submit

records and information which will aid in determining the true facts relating to the reported violations.

Any person or organization aggrieved by the action taken or the findings established as a result of an informal hearing by the Division of Contract Procurement may request a formal hearing.

- 4. The wages of labor shall be paid in legal tender of the United States, except that this condition will be considered satisfied if payment is made by a negotiable check, on a solvent bank, which may be cashed readily by the employee in the local community for the full amount, without discount or collection charges of any kind. Where checks are used for payments, the contractor shall make all necessary arrangements for them to be cashed and shall give information regarding such arrangements.
- 5. No fee of any kind shall be asked or accepted by the contractor or any of his agents from any person as a condition of employment on the project.
- 6. No laborers shall be charged for any tools used in performing their respective duties except for reasonably avoidable loss or damage thereto.
- 7. Every employee on the work covered by this contract shall be permitted to lodge, board, and trade where and with whom he elects and neither the contractor nor his agents, nor his employees shall directly or indirectly require as a condition of employment that an employee shall lodge, board or trade at a particular place or with a particular person.
- 8. Every employee on the project covered by this contract shall be an employee of either the prime contractor or an approved subcontractor.
- 9. No charge shall be made for any transportation furnished by the contractor or his agents to any person employed on the work.
- 10. No individual shall be employed as a laborer or mechanic on this contract except on a wage basis, but this shall not be construed to prohibit the rental of teams, trucks or other equipment from individuals.

No Covered employee may be employed on the work except in accordance with the classification set forth in the schedule mentioned above; provided, however, that in the event additional classifications are required, application shall be made by the contractor to the Department of Highways and (1) the Department shall request appropriate classifications and rates from the proper agency, or (2) if there is urgent need for additional classification to avoid undue delay in the work, the contractor may employ such workmen at rates deemed comparable to rates established for similar classifications provided he has made written application through the Department of Highways, addressed to the proper agency, for the supplemental rates. The contractor shall retroactively adjust, upon receipt of the supplemental rates schedule, the wages of any employee paid less than the established rate and may adjust the wages of any employee overpaid.

- 11. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any laborer or mechanic in any work-week in which he is employed on such work, to work in excess of eight hours in any calendar day or in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one half times his basic rate of pay for all hours worked in excess of eight hours in any calendar day or in excess of forty hours in such work-week. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate. This agreement shall be in writing and shall be executed prior to the employee working in excess of eight (8) hours, but not more than ten (10) hours, in any one (1) calendar day.
- 12. Payments to the contractor may be suspended or withheld due to failure of the contractor to pay any laborer or

mechanic employed or working on the site of the work, all or part of the wages required under the terms of the contract. The Department may suspend or withhold payments only after the contractor has been given written notice of the alleged violation and the contractor has failed to comply with the wage determination of the Department of Highways.

13. Contractors and subcontractors shall comply with the sections of Kentucky Revised Statutes, Chapter 337 relating to contracts for Public Works.

Revised 2-16-95

GRAYSON COUNTY FD05 043 0062 004-009

#### Contract ID: 122187 Page 55 of 74

#### **EXECUTIVE BRANCH CODE OF ETHICS**

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

# KRS 11A.040 (6) provides:

No present or former public servant shall, within six (6) months of following termination of his office or employment, accept employment, compensation or other economic benefit from any person or business that contracts or does business with the state in matters in which he was directly involved during his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved in state government. This subsection shall not prohibit the performance of ministerial functions, including, but not limited to, filing tax returns, filing applications for permits or licenses, or filing incorporation papers.

# KRS 11A.040 (8) states:

A former public servant shall not represent a person in a matter before a state agency in which the former public servant was directly involved, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, Room 136, Capitol Building, 700 Capitol Avenue, Frankfort, Kentucky 40601; telephone (502) 564-7954.

# **Kentucky Equal Employment Opportunity Act of 1978**

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under *Vendor Information*, *Standard Attachments and General Terms* at the following address: <a href="https://www.eProcurement.ky.gov">https://www.eProcurement.ky.gov</a>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

General Decision Number: KY120125 01/20/2012 KY125

Superseded General Decision Number: KY20100211

State: Kentucky

Construction Type: Highway

Counties: Anderson, Bath, Bourbon, Boyd, Boyle, Bracken, Breckinridge, Bullitt, Carroll, Carter, Clark, Elliott, Fayette, Fleming, Franklin, Gallatin, Grant, Grayson, Greenup, Hardin, Harrison, Henry, Jefferson, Jessamine, Larue, Lewis, Madison, Marion, Mason, Meade, Mercer, Montgomery, Nelson, Nicholas, Oldham, Owen, Robertson, Rowan, Scott, Shelby, Spencer, Trimble, Washington and Woodford Counties in Kentucky.

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels, building structures in rest area projects & railroad construction; bascule, suspension & spandrel arch bridges designed for commercial navigation, bridges involving marine construction; and other major bridges).

Modification Number Publication Date 0 01/06/2012 1 01/13/2012 2 01/20/2012

BRIN0004-003 06/01/2011

BRECKENRIDGE COUNTY

BULLITT, CARROLL, GRAYSON, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, & TRIMBLE COUNTIES:

Rates Fringes

BRICKLAYER.....\$ 24.11 10.07

BRKY0002-006 06/01/2011

BRACKEN, GALLATIN, GRANT, MASON & ROBERTSON COUNTIES:

BOYD, CARTER, ELLIOT, FLEMING, GREENUP, LEWIS & ROWAN COUNTIES:

	Rates	Fringes
BRICKLAYER	\$ 28.29	16.80
BRKY0017-004 06/01/2009		

ANDERSON, BATH, BOURBON, BOYLE, CLARK, FAYETTE, FRANKLIN, HARRISON, JESSAMINE, MADISON, MERCER, MONTGOMERY, NICHOLAS, OWEN, SCOTT, WASHINGTON & WOODFORD COUNTIES:

	Rates	Fringes
BRICKLAYER	\$ 24.11	9.97
CARDO064_001_07/01/2011		

CARP0064-001 07/01/2011

	Rates	Fringes	
CARPENTER  Diver  PILEDRIVERMAN	\$ 39.30	13.26 13.26 13.26	

ELEC0212-008 05/31/2011

BRACKEN, GALLATIN and GRANT COUNTIES

	Rates	Fringes	
ELECTRICIAN	\$ 26.11	14.94	
ELEC0212-014 06/27/2011			

BRACKEN, GALLATIN & GRANT COUNTIES:

	Rates	Fringes
Sound & Communication Technician	.\$ 21.55	8.46
ELEC0317-012 06/01/2011		

BOYD, CARTER, ELLIOT & ROWAN COUNTIES:

	Rates	Fringes	
Electricians:			
Cable Splicer	\$ 32.68	18.13	
Electrician	\$ 31.87	19.96	
ELEC0369-007 06/01/2011			-

ANDERSON, BATH, BOURBON, BOYLE, BRECKINRIDGE, BULLITT, CARROLL, CLARK, FAYETTE, FRAONKLIN, GRAYSON, HARDIN, HARRISON, HENRY, JEFFERSON, JESSAMINE, LARUE, MADISON, MARION, MEADE, MERCER, MONTGOMERY, NELSON, NICHOLAS, OLDHAM, OWEN, ROBERTSON, SCOTT, SHELBY, SPENCER, TRIMBLE, WASHINGTON, & WOODFORD COUNTIES:

> Rates Fringes

ELECTRICIAN	\$ 29.27	13.33

<sup>\*</sup> ELEC0575-002 05/30/2011

FLEMING, GREENUP, LEWIS & MASON COUNTIES:

	Rates	Fringes
ELECTRICIAN	\$ 30.69	13.32

ENGI0181-018 07/01/2011

	Rates	Fringes
Operating Engineer:		
GROUP 1	\$ 26.50	13.00
GROUP 2	\$ 24.08	13.00
GROUP 3	\$ 24.46	13.00
GROUP 4	\$ 23.82	13.00

#### OPERATING ENGINEER CLASSIFICATIONS

GROUP 1 - A-Frame Winch Truck; Auto Patrol; Backfiller; Batcher Plant; Bituminous Paver; Bituminous Transfer Machine; Boom Cat; Bulldozer; Mechanic; Cableway; Carry-All Scoop; Carry Deck Crane; Central Compressor Plant; Cherry Picker; Clamshell; Concrete Mixer (21 cu. ft. or Over); Concrete Paver; Truck-Mounted Concrete Pump; Core Drill; Crane; Crusher Plant; Derrick; Derrick Boat; Ditching & Trenching Machine; Dragline; Dredge Operator; Dredge Engineer; Elevating Grader & Loaders; Grade-All; Gurries; Heavy Equipment Robotics Operator/Mechanic; High Lift; Hoe-Type Machine; Hoist (Two or More Drums); Hoisting Engine (Two or More Drums); Horizontal Directional Drill Operator; Hydrocrane; Hyster; KeCal Loader; LeTourneau; Locomotive; Mechanic; Mechanically Operated Laser Screed; Mechanic Welder; Mucking Machine; Motor Scraper; Orangepeel Bucket; Overhead Crane; Piledriver; Power Blade; Pumpcrete; Push Dozer; Rock Spreader, attached to equipment; Rotary Drill; Roller (Bituminous); Rough Terrain Crane; Scarifier; Scoopmobile; Shovel; Side Boom; Subgrader; Tailboom; Telescoping Type Forklift; Tow or Push Boat; Tower Crane (French, German & other types); Tractor Shovel; Truck Crane; Tunnel Mining Machines, including Moles, Shields or similar types of Tunnel Mining Equipment

GROUP 2 - Air Compressor (Over 900 cu. ft. per min.);
Bituminous Mixer; Boom Type Tamping Machine; Bull Float;
Concrete Mixer (Under 21 cu. ft.); Dredge Engineer;
Electric Vibrator; Compactor/Self-Propelled Compactor;
Elevator (One Drum or Buck Hoist); Elevator (When used to
Hoist Building Material); Finish Machine; Firemen & Hoist
(One Drum); Flexplane; Forklift (Regardless of Lift
Height); Form Grader; Joint Sealing Machine; Outboard Motor
Boat; Power Sweeper (Riding Type); Roller (Rock); Ross
Carrier; Skid Mounted or Trailer Mounted Conrete Pump; Skid
Steer Machine with all Attachments; Switchman or Brakeman;
Throttle Valve Person; Tractair & Road Widening Trencher;
Tractor (50 H.P. or Over); Truck Crane Oiler; Tugger;

Welding Machine; Well Points; & Whirley Oiler

GROUP 3 - All Off Road Material Handling Equipment, including Articulating Dump Trucks; Greaser on Grease Facilities servicing Heavy Equipment

GROUP 4 - Bituminous Distributor; Burlap & Curing Machine; Cement Gun; Concrete Saw; Conveyor; Deckhand Oiler; Grout Pump; Hydraulic Post Driver; Hydro Seeder; Mud Jack; Oiler; Paving Joint Machine; Power Form Handling Equipment; Pump; Roller (Earth); Steerman; Tamping Machine; Tractor (Under 50 H.P.); & Vibrator

CRANES - with booms 150 ft. & Over (Including JIB), and where the length of the boom in combination with the length of the piling leads equals or exceeds 150 ft. - \$1.00 over Group 1 rate

EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE TO BE PAID 10%

ABOVE BASIC WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK.

\_\_\_\_\_

IRON0044-009 06/01/2011

BRACKEN, GALLATIN, GRANT, HARRISON, ROBERTSON, BOURBON (Northern third, including Townships of Jackson, Millersburg, Ruddel Mills & Shawhan); CARROLL (Eastern third, including the Township of Ghent); FLEMING (Western part, excluding Townships of Beechburg, Colfax, Elizaville, Flemingsburg, Flemingsburg Junction, Foxport, Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills, Nepton, Pecksridge, Plummers Landing, Plummers Mill, Poplar Plains, Ringos Mills, Tilton & Wallingford); MASON (Western two-thirds, including Townships of Dover, Lewisburg, Mays Lick, Maysville, Minerva, Moranburg, Murphysville, Ripley, Sardis, Shannon, South Ripley & Washington); NICHOLAS (Townships of Barefoot, Barterville, Carlisle, Ellisville, Headquarters, Henryville, Morningglory, Myers & Oakland Mills); OWEN (Townships of Beechwood, Bromley, Fairbanks, Holbrook, Jonesville, Long Ridge, Lusby's Mill, New, New Columbus, New Liberty, Owenton, Poplar Grove, Rockdale, Sanders, Teresita & Wheatlev); SCOTT (Northern two-thirds, including Townships of Biddle, Davis, Delaplain, Elmville, Longlick, Muddy Ford, Oxford, Rogers Gap, Sadieville, Skinnersburg & Stonewall)

	Rates	Fringes	
IRONWORKER			
Fence Erector	\$ 22.92	17.20	
Structural	\$ 25.50	17.20	
IRON0070-006 06/01/2011			

ANDERSON, BOYLE, BRECKINRIDGE, BULLITT, FAYETTE, FRANKLIN, GRAYSON, HARDIN, HENRY, JEFFERSON, JESSAMINE, LARUE, MADISON, MARION, MEADE, MERCER, NELSON, OLDHAM, SHELBY, SPENCER,

TRIMBLE, WASHINGTON & WOODFORD
BOURBON (Southern two-thirds, including Townships of Austerlity,
Centerville, Clintonville, Elizabeth, Hutchison, Littlerock,
North Middletown & Paris);
CARROLL (Western two-thirds, including Townships of Carrollton,
Easterday, English, Locust, Louis, Prestonville & Worthville);
CLARK (Western two-thirds, including Townships of Becknerville,
Flanagan, Ford, Pine Grove, Winchester & Wyandotte);
OWEN (Eastern eighth, including Townships of Glenmary, Gratz,
Monterey, Perry Park & Tacketts Mill);
SCOTT (Southern third, including Townships of Georgetown, Great
Crossing, Newtown, Stampling Ground & Woodlake);

	Rates	Fringes	
IRONWORKER	\$ 25.77	18.28	

IRON0372-006 06/26/2011

BRACKEN, GALLATIN, GRANT, HARRISON and ROBERTSON
BOURBON (Northern third, including Townships of Jackson,
Millersburg, Ruddel Mills & Shawhan);
CARROLL (Eastern third, including the Township of Ghent);
FLEMING (Western part, Excluding Townships of Beechburg, Colfax,
Elizaville, Flemingsburg, Flemingsburg Junction, Foxport,
Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills,
Nepton, Pecksridge, Plummers Landing, Plummers Mill, Poplar
Plains,

Ringos Mills, Tilton & Wallingford);
MASON (Western two-thirds, including Town

MASON (Western two-thirds, including Townships of Dover, Lewisburg, Mays Lick, Maysville, Minerva, Moranburg, Murphysville, Ripley, Sardis, Shannon, South Ripley & Washington);

NICHOLAS (Townships of Barefoot, Barterville, Carlisle, Ellisville, Headquarters, Henryville, Morningglory, Myers & Oakland Mills);

OWEN (Townships of Beechwood, Bromley, Fairbanks, Holbrook, Jonesville, Long Ridge, Lusby's Mill, New, New Columbus, New Liberty, Owenton, Poplar Grove, Rockdale, Sanders, Teresita & Wheatley);

SCOTT (Northern two-thirds, including Townships of Biddle, Davis, Delaplain, Elmville, Longlick, Muddy Ford, Oxford, Rogers Gap, Sadieville, Skinnersburg & Stonewall) COUNTIES

	Rates	Fringes
IRONWORKER, REINFORCING  Beyond 30-mile radius of  Hamilton County, Ohio		
Courthouse	\$ 26.75	17.40
radius of Hamilton County Ohio Courthouse		17.40

IRON0769-007 06/01/2011

BATH, BOYD, CARTER, ELLIOTT, GREENUP, LEWIS, MONTGOMERY & ROWAN CLARK (Eastern third, including townships of Bloomingdale,

Hunt, Indian Fields, Kiddville, Loglick, Rightangele & Thomson); FLEMING (Townships of Beechburg, Colfax, Elizaville, Flemingsburg, Flemingsburg Junction, Foxport, Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills, Nepton, Pecksridge, Plummers Landing, Plummers Mill, Poplar Plains, Ringos Mills, Tilton & Wallingford); MASON (Eastern third, including Townships of Helena, Marshall, Orangeburg, Plumville & Springdale); NICHOLAS (Eastern eighth, including the Township of Moorefield Sprout)

I	Rates	Fringes
IRONWORKER\$	30.96	18.07
ZONE 1\$	29.59	18.07
ZONE 2\$	31.36	18.07
ZONE 3\$	32.96	18.07

ZONE 1 - Up to 10 mi. radius of union hall, Ashland, Ky., 1643 Greenup Avenue

ZONE 2 - 10 to 50 mi. radius of union hall;

ZONE 3 - 50 mi. radius and beyond

T. D. O. 1. O. 1. O. 1. O. 1. 1. O. 1. O.

LABO0189-003 07/01/2011

BATH, BOURBON, BOYD, BOYLE, BRACKEN, CARTER, CLARK, ELLIOTT, FAYETTE, FLEMING, FRANKLIN, GALLATIN, GRANT, GREENUP, HARRISON, JESSAMINE, LEWIS, MADISON, MASON, MERCER, MONTGOMERY, NICHOLAS, OWEN, ROBERTSON, ROWAN, SCOTT, & WOOLFORD COUNTIES

	F	Rates	Fringes
Laborers:			
GROUP	1\$	20.81	10.85
GROUP	2\$	21.06	10.85
GROUP	3\$	21.11	10.85
GROUP	4\$	21.71	10.85

### LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter; Green Concrete Cutting; Hand Operated Grouter & Grinder Machine Operator; Jackhammer; Pavement Breaker; Paving Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven Georgia Buggy & Wheel Barrow; Power Post Hole Digger; Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LABO0189-008 07/01/2011

ANDERSON, BULLITT, CARROLL, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE & WASHINGTON COUNTIES

	I	Rates	Fringes
Laborers:			
GROUP	1\$	21.26	10.40
GROUP	2\$	21.51	10.40
GROUP	3\$	21.56	10.40
GROUP	4\$	22.16	10.40

#### LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer);
Brickmason Tender; Mortar Mixer Operator; Scaffold Builder;
Burner & Welder; Bushammer; Chain Saw Operator; Concrete
Saw Operator; Deckhand Scow Man; Dry Cement Handler;
Environmental - Nuclear, Radiation, Toxic & Hazardous Waste
- Level C; Forklift Operator for Masonary; Form Setter;
Green Concrete Cutting; Hand Operated Grouter & Grinder
Machine Operator; Jackhammer; Pavement Breaker; Paving
Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven
Georgia Buggy & Wheel Barrow; Power Post Hole Digger;
Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind

Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LABO0189-009 07/01/2011

#### BRECKINRIDGE & GRAYSON COUNTIES

	F	Rates	Fringes
Laborers:			
GROUP	1\$	21.51	10.15
GROUP	2\$	21.76	10.15
GROUP	3\$	21.81	10.15
GROUP	4\$	22.41	10.15

#### LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer);
Brickmason Tender; Mortar Mixer Operator; Scaffold Builder;
Burner & Welder; Bushammer; Chain Saw Operator; Concrete
Saw Operator; Deckhand Scow Man; Dry Cement Handler;
Environmental - Nuclear, Radiation, Toxic & Hazardous Waste
- Level C; Forklift Operator for Masonary; Form Setter;
Green Concrete Cutting; Hand Operated Grouter & Grinder
Machine Operator; Jackhammer; Pavement Breaker; Paving
Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven
Georgia Buggy & Wheel Barrow; Power Post Hole Digger;
Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind
Trencher; Sand Blaster; Concrete Chipper; Surface Grinder;
Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

.----

PAIN0012-005 06/11/2005

BATH, BOURBON, BOYLE, CLARK, FAYETTE, FLEMING, FRANKLIN, HARRISON, JESSAMINE, MADISON, MERCER, MONTGOMERY, NICHOLAS, ROBERTSON, SCOTT & WOODFORD COUNTIES:

I	Rates	Fringes
PAINTER Bridge/Equipment Tender		
and/or Containment Builder\$	18.90	5.90
Brush & Roller\$	21.30	5.90
Elevated Tanks; Steeplejack Work; Bridge &		
Lead Abatement\$ Sandblasting &	22.30	5.90
Waterblasting\$	22.05	5.90
Spray\$	21.80	5.90

PAIN0012-017 05/02/2011

BRACKEN, GALLATIN, GRANT, MASON & OWEN COUNTIES:

	Rates	Fringes
PAINTER (Heavy & Highway		
Bridges - Guardrails -		
Lightpoles - Striping)		
Bridge Equipment Tender		
and Containment Builder\$	20.27	8.10
Brush & Roller\$	23.85	8.10
Elevated Tanks;		
Steeplejack Work; Bridge &		
Lead Abatement\$	23.85	8.10
Sandblasting & Water		
Blasting\$	24.60	8.10
Spray\$	24.35	8.10

PAIN0118-004 05/01/2010

ANDERSON, BRECKINRIDGE, BULLITT, CARROLL, GRAYSON, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE & WASHINGTON COUNTIES:

	Rates	Fringes
PAINTER		
Brush & Roller\$	18.50	10.30
Spray, Sandblast, Power		
Tools, Waterblast & Steam		
Cleaning\$	19.50	10.30

\_\_\_\_\_

PAIN1072-003 12/01/2011

BOYD, CARTER, ELLIOTT, GREENUP, LEWIS and ROWAN COUNTIES

Rates	Fringes
Races	ringes

Painters:

Bridges; Locks; Dams;

Tension Towers & Energized

-----

PLUM0248-003 06/01/2011

BOYD, CARTER, ELLIOTT, GREENUP, LEWIS & ROWAN COUNTIES:

	Rates	ringes	
Plumber and Steamfitter	\$ 32.00	16.24	
PLUM0392-007 09/01/2011			

BRACKEN, CARROLL (Eastern Half), GALLATIN, GRANT, MASON, OWEN & ROBERTSON COUNTIES:

	Rates	Fringes	
Plumbers and Pipefitters	\$ 29.30	15.74	_
PLUM0502-003 08/01/2011			

BRECKINRIDGE, BULLITT, CARROLL (Western Half), FRANKLIN (Western three-fourths), GRAYSON, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE & WASHINGTON COUNTIES

	Rates	Fringes
PLUMBER	\$ 31.00	16.13

SUKY2010-160 10/08/2001

	F	Rates	Fringes
Truck driver	s:		
GROUP 1	\$	16.57	7.34
GROUP 2	\$\$	16.68	7.34
GROUP 3	\$\$	16.86	7.34
GROUP 4	\$\$	16.96	7.34

#### TRUCK DRIVER CLASSIFICATIONS

GROUP 1 - Mobile Batch Truck Tender

GROUP 2 - Greaser; Tire Changer; & Mechanic Tender

GROUP 3 - Single Axle Dump; Flatbed; Semi-trailer or Pole

Trailer when used to pull building materials and equipment; Tandem Axle Dump; Distributor; Mixer; & Truck Mechanic

GROUP 4 - Euclid & Other Heavy Earthmoving Equipment & Lowboy; Articulator Cat; 5-Axle Vehicle; Winch & A-Frame when used in transporting materials; Ross Carrier; Forklift when used to transport building materials; & Pavement Breaker

-----

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

-----

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

-----

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is union or non-union.

Union Identifiers

An identifier enclosed in dotted lines beginning with characters other than "SU" denotes that the union classification and rate have found to be prevailing for that classification. Example: PLUM0198-005 07/01/2011. The first four letters , PLUM, indicate the international union and the four-digit number, 0198, that follows indicates the local union number or district council number where applicable , i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2011, following these characters is the effective date of the most current negotiated rate/collective bargaining agreement which would be July 1, 2011 in the above example.

Union prevailing wage rates will be updated to reflect any changes in the collective bargaining agreements governing the rate.

Non-Union Identifiers

Classifications listed under an "SU" identifier were derived from survey data by computing average rates and are not union rates; however, the data used in computing these rates may include both union and non-union data. Example: SULA2004-007 5/13/2010. SU indicates the rates are not union rates, LA indicates the State of Louisiana; 2004 is the year of the

survey; and 007 is an internal number used in producing the wage determination. A 1993 or later date, 5/13/2010, indicates the classifications and rates under that identifier were issued as a General Wage Determination on that date.

Survey wage rates will remain in effect and will not change until a new survey is conducted.

\_\_\_\_\_\_

#### WAGE DETERMINATION APPEALS PROCESS

- 1.) Has there been an initial decision in the matter? This can be:
- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- \* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations Wage and Hour Division U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board

U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

END OF GENERAL DECISION

Fringe benefit amounts are applicable for all hours worked except when otherwise noted.

These rates are listed pursuant to the Kentucky Determination No. CR-11-III- HWY dated August 04, 2011

No laborer, workman or mechanic shall be paid at a rate less than that of a Journeyman except those classified as bona fide apprentices.

Apprentices or trainees shall be permitted to work as such subject to Administrative Regulations adopted by the Commissioner of Workplace Standards. Copies of these regulations will be furnished upon request from any interested person.

Before using apprentices on the job the contractor shall present to the Contracting Officer written evidence of registration of such employees in a program of a State apprenticeship and training agency approved and recognized by the U. S. Bureau of Apprenticeship and Training. In the absence of such a State agency, the contractor shall submit evidence of approval and registration by the U. S. Bureau of Apprenticeship and Training.

The contractor shall submit to the Contracting Officer, written evidence of the established apprenticeship-journeyman ratios and wage rates in the project area, which will be the basis for establishing such ratios and rates for the project under the applicable contract provisions.

## TO: EMPLOYERS/EMPLOYEES

# **PREVAILING WAGE SCHEDULE:**

The wages indicated on this wage schedule are the least permitted to be paid for the occupations indicated. When an employee works in more than one classification, the employer must record the number of hours worked in each classification at the prescribed hourly base rate.

## **OVERTIME:**

Overtime is to be paid after an employee works eight (8) hours a day or forty (40) hours a week, whichever gives the employee the greater wages. At least time and one-half the base rate is required for all overtime. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate. Wage violations or questions should be directed to the designated Engineer or the undersigned.

Ryan Griffith, Director Division of Construction Procurement Frankfort, Kentucky 40622

# **PART IV**

# **INSURANCE**

### Contract ID: 122187 Page 72 of 74

## **INSURANCE**

The Contractor shall procure and maintain the following insurance in addition to the insurance required by law:

- 1) Commercial General Liability-Occurrence form not less than \$2,000,000 General aggregate, \$2,000,000 Products & Completed Aggregate, \$1,000,000 Personal & Advertising, \$1,000,000 each occurrence.
- 2) Automobile Liability- \$1,000,000 per accident
- 3) Employers Liability:
  - a) \$100,000 Each Accident Bodily Injury
  - b) \$500,000 Policy limit Bodily Injury by Disease
  - c) \$100,000 Each Employee Bodily Injury by Disease
- 4) The insurance required above must be evidenced by a Certificate of Insurance and this Certificate of Insurance must contain one of the following statements:
  - a) "policy contains no deductible clauses."
  - b) "policy contains \_\_\_\_\_ (amount) deductible property damage clause but company will pay claim and collect the deductible from the insured."
- 5) KENTUCKY WORKMEN'S COMPENSATION INSURANCE. The contractor shall furnish evidence of coverage of all his employees or give evidence of self-insurance by submitting a copy of a certificate issued by the Workmen's Compensation Board.

The cost of insurance is incidental to all contract items. All subcontractors must meet the same minimum insurance requirements.

# PART V

# **BID ITEMS**

# Contract ID: 122187 Page 74 of 74

# KENTUCKY TRANSPORTATION CABINET DEPARTMENT OF HIGHWAYS FRANKFORT, KY 40622

CONTRACT ID: 122187

COUNTY: GRAYSON

PROPOSAL: FD05 043 0062 004-009

PAGE: 1 LETTING: 04/20/12 CALL NO: 323

LINE NO	   ITEM 	DESCRIPTION	APPROXIMATE UNIT QUANTITY	UNIT   PRICE	AMOUNT
	SECTION 0001	ROADWAY			
0010	00001	DGA BASE	200.000 TON		
0020	00190 	LEVELING & WEDGING PG64-22	221.000 TON		
0030	00301	CL2 ASPH SURF 0.38D PG64-22	3,690.000 TON		
0040	02562 	SIGNS	370.000 SQFT		
0050	02650 	MAINTAIN & CONTROL TRAFFIC	( 1.00) LS		
0060	02676 	MOBILIZATION FOR MILL & TEXT	( 1.00) LS		
0070	02677 	ASPHALT PAVE MILLING & TEXTURING	3,690.000 TON		
0080	06510 	PAVE STRIPING-TEMP PAINT-4 IN	48,000.000 LF		
0090	06514 	PAVE STRIPING-PERM PAINT-4 IN	88,074.000 LF		
0100	  06565 	PAVE MARKING-THERMO X-WALK-6 IN	55.000 LF		
0110	  06568 	PAVE MARKING-THERMO STOP BAR-24IN	14.000 LF		
0120	10020NS 	FUEL ADJUSTMENT	5,350.000 DOLL	1.00	5,350.00
0130	10030NS 	ASPHALT ADJUSTMENT	9,425.000 DOLL	1.00	9,425.00
	SECTION 0002	DEMOBILIZATION			
0140	02569 	DEMOBILIZATION (AT LEAST 1.5%)	LUMP		
	     	TOTAL BID			