



CALL NO. 109

CONTRACT ID. 204206

ALLEN COUNTY

FED/STATE PROJECT NUMBER HSIP 5071 (019)

DESCRIPTION FRANKLIN ROAD (KY 100)

WORK TYPE ASPHALT PAVEMENT & ROADWAY REHAB

PRIMARY COMPLETION DATE 9/30/2021

LETTING DATE: September 25,2020

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 am EASTERN DAYLIGHT TIME September 25,2020. Bids will be publicly announced at 10:00 am EASTERN DAYLIGHT TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

DBE CERTIFICATION REQUIRED - 15%

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I	SCOPE OF WORK
	<ul style="list-style-type: none">• PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES• CONTRACT NOTES• FEDERAL CONTRACT NOTES• ASPHALT MIXTURE• DGA BASE• FUEL AND ASPHALT PAY ADJUSTMENT• COMPACTION OPTION A• HOLD AWARD• SPECIAL NOTE(S) APPLICABLE TO PROJECT• WASTE AND BORROW SITES• COORDINATION OF WORK WITH OTHER CONTRACTS• DOUBLE ASPHALT SEAL COAT• EDGE KEY (BY TON)• GUARDRAIL• ASPHALT MILLING AND TEXTURING• BASE FAILURE REPAIR• TYPICAL SECTION DIMENSIONS• TRAFFIC CONTROL PLAN• DURABLE PAVEMENT EDGE DETAILS• RIGHT OF WAY CERTIFICATION• UTILITY IMPACT & RAIL CERTIFICATION NOTES• DEPT OF ARMY - NATIONWIDE PERMIT• KPDES STORM WATER PERMIT, BMP AND ENOI• SKETCH MAP(S)• SUMMARY SHEET(S)• TYPICAL SECTION(S)• DETAIL SHEET(S)• GUARDRAIL DELIVERY VERIFICATION SHEET• GUARDRAIL ON BRIDGE CASE I-A• BRIDGE DETAIL FOR PAVING PROJECT• PRECAST CONCRETE BRIDGE RAIL BLOCK• SAFETY TYPE BOX INLET• DOUBLE SAFETY TYPE BOX INLET
PART II	SPECIFICATIONS AND STANDARD DRAWINGS
	<ul style="list-style-type: none">• SPECIFICATIONS REFERENCE• SUPPLEMENTAL SPECIFICATION• [SN-11M] BARCODE LABEL ON PERMANENT SIGNS• STANDARD DRAWINGS THAT APPLY
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS
	<ul style="list-style-type: none">• FEDERAL-AID CONSTRUCTION CONTRACTS - FHWA 1273• NONDISCRIMINATION OF EMPLOYEES• EXECUTIVE BRANCH CODE OF ETHICS• PROJECT WAGE RATES LOCALITY 1 / FEDERAL• NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EEO ALLEN
PART IV	INSURANCE

PART V BID ITEMS

PART I
SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 03

CONTRACT ID - 204206

HSIP 5071 (019)

COUNTY - ALLEN

PCN - 0300201002001

HSIP 5071 (019)

FRANKLIN ROAD (KY 100) (MP 0.000) FROM 0.3 MILES EAST OF KY 2601 EXTENDING NORTHEAST TO 1.25 MILES WEST OF KY 585 (MP 8.830), A DISTANCE OF 08.83 MILES.ASPHALT PAVEMENT & ROADWAY REHAB SYP NO. 03-09014.00.

GEOGRAPHIC COORDINATES LATITUDE 36:41:44.00 LONGITUDE 86:20:29.00

COMPLETION DATE(S):

COMPLETED BY 09/30/2021

APPLIES TO ENTIRE PROJECT

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by [KRS 14A.9-010](#) to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under [KRS 14A.9-030](#) unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in [KRS 14A.9-010](#), the foreign entity should identify the applicable exception. Foreign entity is defined within [KRS 14A.1-070](#).

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at <https://secure.kentucky.gov/sos/ftbr/welcome.aspx>.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/contract). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially

disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004.

April 30, 2018

FEDERAL CONTRACT NOTES

The Kentucky Department of Highways, in accordance with the Regulations of the United States Department of Transportation 23 CFR 635.112 (h), hereby notifies all bidders that failure by a bidder to comply with all applicable sections of the current Kentucky Standard Specifications, including, but not limited to the following, may result in a bid not being considered responsive and thus not eligible to be considered for award:

- | | |
|--------------------------------|--|
| 102.02 Current Rating | 102.08 Preparation and Delivery of Proposals |
| 102.13 Irregular Bid Proposals | 102.14 Disqualification of Bidders |
| 102.09 Proposal Guaranty | |

CIVIL RIGHTS ACT OF 1964

The Kentucky Department of Highways, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252) and the Regulations of the Federal Department of Transportation (49 C.F.R., Part 21), issued pursuant to such Act, hereby notifies all bidders that it will affirmatively insure that the contract entered into pursuant to this advertisement will be awarded to the lowest responsible bidder without discrimination on the ground of race, color, or national origin.

NOTICE TO ALL BIDDERS

To report bid rigging activities call: 1-800-424-9071.

The U.S. Department of Transportation (DOT) operates the above toll-free “hotline” Monday through Friday, 8:00 a.m. to 5:00 p.m. eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the “hotline” to report such activities.

The “hotline” is part of the DOT’s continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

SECOND TIER SUBCONTRACTS

Second Tier subcontracts on federally assisted projects shall be permitted. However, in the case of DBE’s, second tier subcontracts will only be permitted where the other subcontractor is also a DBE. All second tier subcontracts shall have the consent of both the Contractor and the Engineer.

DISADVANTAGED BUSINESS ENTERPRISE PROGRAM

It is the policy of the Kentucky Transportation Cabinet (“the Cabinet”) that Disadvantaged Business Enterprises (“DBE”) shall have the opportunity to participate in the performance of highway construction projects financed in whole or in part by Federal Funds in order to create a level playing field for all businesses who wish to contract with the Cabinet. To that end, the Cabinet will comply with the regulations found in 49 CFR Part 26, and the definitions and requirements contained therein shall be adopted as if set out verbatim herein.

The Cabinet, contractors, subcontractors, and sub-recipients shall not discriminate on the basis of race, color, national origin, or sex in the performance of work performed pursuant to Cabinet contracts. The contractor shall carry out applicable requirements of 49 CFR 26 in the award and administration of federally assisted highway construction projects. The contractor will include this provision in all its subcontracts and supply agreements pertaining to contracts with the Cabinet.

Failure by the contractor to carry out these requirements is a material breach of its contract with the Cabinet, which may result in the termination of the contract or such other remedy as the Cabinet deems necessary.

DBE GOAL

The Disadvantaged Business Enterprise (DBE) goal established for this contract, as listed on the front page of the proposal, is the percentage of the total value of the contract.

The contractor shall exercise all necessary and reasonable steps to ensure that Disadvantaged Business Enterprises participate in a least the percent of the contract as set forth above as goals for this contract.

OBLIGATION OF CONTRACTORS

Each contractor prequalified to perform work on Cabinet projects shall designate and make known to the Cabinet a liaison officer who is assigned the responsibility of effectively administering and promoting an active program for utilization of DBEs.

If a formal goal has not been designated for the contract, all contractors are encouraged to consider DBEs for subcontract work as well as for the supply of material and services needed to perform this work.

Contractors are encouraged to use the services of banks owned and controlled by minorities and women.

CERTIFICATION OF CONTRACT GOAL

Contractors shall include the following certification in bids for projects for which a DBE goal has been established. BIDS SUBMITTED WHICH DO NOT INCLUDE CERTIFICATION OF DBE PARTICIPATION WILL NOT BE ACCEPTED. These bids will not be considered for award by the Cabinet and they will be returned to the bidder.

“The bidder certifies that it has secured participation by Disadvantaged Business Enterprises (“DBE”) in the amount of _____ percent of the total value of this contract and that the DBE participation is in compliance with the requirements of 49 CFR 26 and the policies of the Kentucky Transportation Cabinet pertaining to the DBE Program.”

The certification statement is located in the electronic bid file. All contractors must certify their DBE participation on that page. DBEs utilized in achieving the DBE goal must be certified and prequalified for the work items at the time the bid is submitted.

DBE PARTICIPATION PLAN

Lowest responsive bidders must submit the *DBE Plan/ Subcontractor Request*, form TC 14-35 DBE, within **5** days of the letting. This is necessary before the Awards Committee will review and make a recommendation. **The project will not be considered for award prior to submission and approval of the apparent low bidder’s DBE Plan/Subcontractor Request.**

The DBE Participation Plan shall include the following:

1. Name and address of DBE Subcontractor(s) and/or supplier(s) intended to be used in the proposed project;
2. Description of the work each is to perform including the work item, unit, quantity, unit price and total amount of the work to be performed by the individual DBE. The Proposal Line Number, Category Number, and the Project Line Number can be found in the “material listing” on the Construction Procurement website under the specific letting;
3. The dollar value of each proposed DBE subcontract and the percentage of total project contract value this represents. DBE participation may be counted as follows:
 - a. If DBE suppliers and manufactures assume actual and contractual responsibility, the dollar value of materials to be furnished will be counted toward the goal as follows:
 - The entire expenditure paid to a DBE manufacturer;
 - 60 percent of expenditures to DBE suppliers that are not manufacturers provided the supplier is a regular dealer in the product involved. A regular dealer must be engaged in, as its principal business and in its own name, the sale of products to the public, maintain an inventory and own and operate distribution equipment; and
 - The amount of fees or commissions charged by the DBE firms for a bona fide service, such as professional, technical, consultant, or managerial services and assistance in the procurement of essential personnel, facilities, equipment, materials, supplies, delivery of materials and supplies or for furnishing bonds, or insurance, providing such fees or commissions are determined to be reasonable and customary.

- b) The dollar value of services provided by DBEs such as quality control testing, equipment repair and maintenance, engineering, staking, etc.;
- c) The dollar value of joint ventures. DBE credit for joint ventures will be limited to the dollar amount of the work actually performed by the DBE in the joint venture;
- 4. Written and signed documentation of the bidder's commitment to use a DBE contractor whose participation is being utilized to meet the DBE goal; and
- 5. Written and signed confirmation from the DBE that it is participating in the contract as provided in the prime contractor's commitment.

UPON AWARD AND BEFORE A WORK ORDER WILL BE ISSUED

Contractors must submit the signed subcontract between the contractor and the DBE contractor, along with the DBE's certificate of insurance. If the DBE is a supplier of materials for the project, a signed purchase order must be submitted to the Division of Construction Procurement.

Changes to DBE Participation Plans must be approved by the Cabinet. The Cabinet may consider extenuating circumstances including, but not limited to, changes in the nature or scope of the project, the inability or unwillingness of a DBE to perform the work in accordance with the bid, and/or other circumstances beyond the control of the prime contractor.

CONSIDERATION OF GOOD FAITH EFFORTS REQUESTS

If the DBE participation submitted in the bid by the apparent lowest responsive bidder does not meet or exceed the DBE contract goal, the apparent lowest responsive bidder must submit a Good Faith Effort Package to satisfy the Cabinet that sufficient good faith efforts were made to meet the contract goals prior to submission of the bid. Efforts to increase the goal after bid submission will not be considered in justifying the good faith effort, unless the contractor can show that the proposed DBE was solicited prior to the letting date. DBEs utilized in achieving the DBE goal must be certified and prequalified for the work items at the time the bid is submitted. One complete set (hard copy along with an electronic copy) of this information must be received in the Division of Contract Procurement no later than 12:00 noon of the tenth calendar day after receipt of notification that they are the apparent low bidder.

Where the information submitted includes repetitious solicitation letters it will be acceptable to submit a sample representative letter along with a distribution list of the firms solicited. Documentation of DBE quotations shall be a part of the good faith effort submittal as necessary to demonstrate compliance with the factors listed below which the Cabinet considers in judging good faith efforts. This documentation may include written subcontractors' quotations, telephone log notations of verbal quotations, or other types of quotation documentation.

The Good Faith Effort Package shall include, but may not be limited to information showing evidence of the following:

1. Whether the bidder attended any pre-bid meetings that were scheduled by the Cabinet to inform DBEs of subcontracting opportunities;
2. Whether the bidder provided solicitations through all reasonable and available means;
3. Whether the bidder provided written notice to all DBEs listed in the DBE directory at the time of the letting who are prequalified in the areas of work that the bidder will be subcontracting;
4. Whether the bidder followed up initial solicitations of interest by contacting DBEs to determine with certainty whether they were interested. If a reasonable amount of DBEs within the targeted districts do not provide an intent to quote or no DBEs are prequalified in the subcontracted areas, the bidder must notify the Disadvantaged Enterprise Business Liaison Officer (DEBLO) in the Office of Civil Rights and Small Business Development to give notification of the bidder's inability to get DBE quotes;
5. Whether the bidder selected portions of the work to be performed by DBEs in order to increase the likelihood of meeting the contract goals. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise perform these work items with its own forces;
6. Whether the bidder provided interested DBEs with adequate and timely information about the plans, specifications, and requirements of the contract;
7. Whether the bidder negotiated in good faith with interested DBEs not rejecting them as unqualified without sound reasons based on a thorough investigation of their capabilities. Any rejection should be so noted in writing with a description as to why an agreement could not be reached;
8. Whether quotations were received from interested DBE firms but were rejected as unacceptable without sound reasons why the quotations were considered unacceptable. The fact that the DBE firm's quotation for the work is not the lowest quotation received will not in itself be considered as a sound reason for rejecting the quotation as unacceptable. The fact that the bidder has the ability and/or desire to perform the contract work with its own forces will not be considered a sound reason for rejecting a DBE quote. Nothing in this provision shall be construed to require the bidder to accept unreasonable quotes in order to satisfy DBE goals;
9. Whether the bidder specifically negotiated with subcontractors to assume part of the responsibility to meet the contract DBE goal when the work to be subcontracted includes potential DBE participation;
10. Whether the bidder made any efforts and/or offered assistance to interested DBEs in obtaining the necessary equipment, supplies, materials, insurance and/or bonding to satisfy the work requirements of the bid proposal; and
11. Any other evidence that the bidder submits which may show that the bidder has made reasonable good faith efforts to include DBE participation.

FAILURE TO MEET GOOD FAITH REQUIREMENT

Where the apparent lowest responsive bidder fails to submit sufficient participation by DBE firms to meet the contract goal and upon a determination by the Good Faith Committee based upon the information submitted that the apparent lowest responsive bidder failed to make sufficient reasonable efforts to meet the contract goal, the bidder will be offered the opportunity to meet in person for administrative reconsideration. The bidder will be notified of the Committee's decision within 24 hours of its decision. The bidder will have 24 hours to request reconsideration of the Committee's decision. The reconsideration meeting will be held within two days of the receipt of a request by the bidder for reconsideration.

The request for reconsideration will be heard by the Office of the Secretary. The bidder will have the opportunity to present written documentation or argument concerning the issue of whether it met the goal or made an adequate good faith effort. The bidder will receive a written decision on the reconsideration explaining the basis for the finding that the bidder did or did not meet the goal or made adequate Good Faith efforts to do so.

The result of the reconsideration process is not administratively appealable to the Cabinet or to the United States Department of Transportation.

The Cabinet reserves the right to award the contract to the next lowest responsive bidder or to rebid the contract in the event that the contract is not awarded to the low bidder as the result of a failure to meet the good faith requirement.

SANCTIONS FOR FAILURE TO MEET DBE REQUIREMENTS OF THE PROJECT

Failure by the prime contractor to fulfill the DBE requirements of a project under contract or to demonstrate good faith efforts to meet the goal constitutes a breach of contract. When this occurs, the Cabinet will hold the prime contractor accountable, as would be the case with all other contract provisions. Therefore, the contractor's failure to carry out the DBE contract requirements shall constitute a breach of contract and as such the Cabinet reserves the right to exercise all administrative remedies at its disposal including, but not limited to the following:

- Disallow credit toward the DBE goal;
- Withholding progress payments;
- Withholding payment to the prime in an amount equal to the unmet portion of the contract goal; and/or
- Termination of the contract.

PROMPT PAYMENT

The prime contractor will be required to pay the DBE within seven (7) working days after he or she has received payment from the Kentucky Transportation Cabinet for work performed or materials furnished.

CONTRACTOR REPORTING

All contractors must keep detailed records and provide reports to the Cabinet on their progress in meeting the DBE requirement on any highway contract. These records may include, but shall not be limited to payroll, lease agreements, cancelled payroll checks, executed subcontracting agreements, etc. Prime contractors will be required to complete and submit a **signed and notarized** Affidavit of Subcontractor Payment (TC 18-7) and copies of checks for any monies paid to each DBE subcontractor or supplier utilized to meet a DBE goal. These documents must be completed and signed within 7 days of being paid by the Cabinet.

Payment information that needs to be reported includes date the payment is sent to the DBE, check number, Contract ID, amount of payment and the check date. Before Final Payment is made on this contract, the Prime Contractor will certify that all payments were made to the DBE subcontractor and/or DBE suppliers.

******* IMPORTANT *******

Please mail the original, signed and completed TC (18-7) Affidavit of Subcontractor Payment form and all copies of checks for payments listed above to the following address:

Office of Civil Rights and Small Business Development
6th Floor West 200 Mero Street
Frankfort, KY 40622

The prime contractor should notify the KYTC Office of Civil Rights and Small Business Development seven (7) days prior to DBE contractors commencing work on the project. The contact in this office is Mr. Melvin Bynes. Mr. Bynes' current contact information is email address – melvin.bynes2@ky.gov and the telephone number is (502) 564-3601.

DEFAULT OR DECERTIFICATION OF THE DBE

If the DBE subcontractor or supplier is decertified or defaults in the performance of its work, and the overall goal cannot be credited for the uncompleted work, the prime contractor may utilize a substitute DBE or elect to fulfill the DBE goal with another DBE on a different work item. If after exerting good faith effort in accordance with the Cabinet's Good Faith Effort policies and procedures, the prime contractor is unable to replace the DBE, then the unmet portion of the goal may be waived at the discretion of the Cabinet.

PROHIBITION ON TELECOMMUNICATIONS EQUIPMENT OR SERVICES

In accordance with the FY 2019 National Defense Authorization Act (NDAA), 2 CFR 200.216, and 2 CFR 200.471, Federal agencies are prohibited, after August 13, 2020, from obligating or expending financial assistance to obtain certain telecommunications and video surveillance services and equipment from specific producers. As a result of these regulations, contractors and subcontractors are prohibited, on projects with federal funding participation, from providing telecommunication or video surveillance equipment, services, or systems produced by:

- Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities)
- Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities)

LEGAL REQUIREMENTS AND RESPONSIBILITY TO THE PUBLIC – CARGO PREFERENCE ACT (CPA).

(REV 12-17-15) (1-16)

SECTION 7 is expanded by the following new Article:

102.10 **Cargo Preference Act – Use of United States-flag vessels.**

Pursuant to Title 46CFR Part 381, the Contractor agrees

- To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

- To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph 1 of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

- To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract.

ASPHALT MIXTURE

Unless otherwise noted, the Department estimates the rate of application for all asphalt mixtures to be 110 lbs/sy per inch of depth.

DGA BASE

Unless otherwise noted, the Department estimates the rate of application for DGA Base to be 115 lbs/sy per inch of depth.

FUEL AND ASPHALT PAY ADJUSTMENT

The Department has included the Contract items Asphalt Adjustment and Fuel Adjustment for possible future payments at an established Contract unit price of \$1.00. The Department will calculate actual adjustment quantities after work is completed. If existing Contract amount is insufficient to pay all items on the contract with the adjustments, the Department will establish additional monies with a change order.

OPTION A

Be advised that the Department will accept compaction of asphalt mixtures furnished for driving lanes and ramps, at 1 inch (25mm) or greater, on this project according to OPTION A in accordance with Section 402 and Section 403 of the current Standard Specifications. The Department will require joint cores as described in Section 402.03.02 for surface mixtures only. The Department will accept compaction of all other asphalt mixtures according to OPTION B.

SPECIAL NOTE FOR AWARD OF CONTRACT

In accordance to section 103.02 of the Standard Specifications for Road and Bridge Construction, the Department may hold and not award the contract for a period not to exceed sixty (60) calendar days from the date of letting.

Special Notes Applicable to Project GENERAL NOTES and DESCRIPTION OF WORK

CAUTION

The information in this proposal and shown on the plans and the type of work listed herein are approximate only and are not to be taken as an accurate evaluation of the materials and conditions to be encountered during construction; the bidder must draw his/her own conclusions. The Department does not give any guarantee as to the accuracy of the data and no claim for money or time extension will be considered if the conditions encountered are not in accordance with the information shown.

STATIONING

The contractor is advised that the planned locations of work were established from a beginning station number of STA 0+00 at the Simpson/Allen County Line, which is also MP 0.0 of KY 100. The existing mile marker signs may not correspond to the proposed work locations.

LIDAR

All survey information was obtained from available KYTC Aerial LIDAR data and should be field verified as appropriate during construction and prior to incorporating the various project work items. Refer to the Special Note for Staking concerning staking operations required to control and construct the work.

ON-SITE INSPECTION

Before submitting a bid for the work, make a thorough inspection of the site and determine existing conditions so that the work can be expeditiously performed after a contract is awarded. The Department will consider submission of a bid to be evidence of this inspection having been made. The Department will not honor any claims for money or time extension resulting from site conditions.

RIGHT OF WAY LIMITS

The Department has not established the exact limits of the Right-of-Way. Unless a consent and release form is obtained from the adjoining property owner, limit work activities to the obvious Right-of-Way and staging areas secured and environmentally cleared by the Contractor at no additional cost to the Department. In the event that private improvements (i.e. fences, buildings, etc.) encroach upon the Right-of-Way, the contractor shall notify the Engineer and limit work activities in order to NOT disturb the improvements. If they become necessary, the Department will secure consent and releases from property owners through the Engineer. Be responsible for all encroachments onto private lands.

CONTROL

Perform all work under the absolute control of the Department of Highways. Obtain the Engineer's approval of all designs required to be furnished by the Contractor prior to incorporation into the work. The Department reserves the right to have other work performed by other contractors and its own forces and to permit public utility companies and others to do work during the construction within the limits of, or adjacent to, the project. Conduct operations and cooperate with such other parties so that interference with such other work will be reduced to a minimum. The Department will not honor any claims for money or time extension created by the operations of such other parties. Should a difference of opinion arise as to the rights of the Contractor and others working within the limits of, or adjacent to, the project, the Engineer will decide as to the respective rights of the various parties involved in order to assure the completion of the Department's work in general harmony and in a satisfactory manner, and his/her decision shall be final and binding upon the Contractor.

General Notes

Page 2 of 5

GUARDRAIL END TREATMENTS

When the plans call for a Type 1 or Type 4 End Treatment, a MASH eligibility letter from FHWA is required for these end terminals. When a MASH tested eligibility letter is not available for the end terminal being utilized, the most recent NCHRP 350 eligibility letter from FHWA for that terminal will apply. Acceptance of the terminal will be at the discretion of the engineer.

DESCRIPTION OF WORK

Except as specified herein, perform all work in accordance with the Department's Standard Specifications, Supplemental Specifications, applicable Special Notes and Special Provisions, and applicable Standard and Sepia Drawings, current editions. Furnish all materials, labor, equipment, and incidentals for the following work:

Superelevation Improvements. There are multiple curves where Superelevation Improvements are being proposed. The intent of this work is to bring a consistent pavement cross slope through the identified curves. Refer to the Superelevation Improvement Summary for locations and approximate quantities. The Contractor will need to utilize Leveling & Wedging in order to achieve the desired superelevation improvements at the identified curves. The Leveling & Wedging mix design will be based on the lift thicknesses being placed for each curve. The Engineer will make the final determination as to which bid items will be required at each superelevation improvement area, as well as the appropriate lift thicknesses and number of lifts based on the existing conditions encountered at the time of construction. After placement of the Leveling & Wedging, the identified curves will be overlaid with a surface course. As a result of these paving operations within the identified curves, the roadside shoulders and fill slopes will have to be modified to match the final pavement elevations and tie in with the existing ground lines. A quantity of Ditching and Shouldering has been estimated for regrading the shoulder and fill slopes within the identified curves.

NOTE: Some field adjustments of the shoulder, fill slope, and/or superelevation improvement may be required. The resulting shoulder and fill slope grading is intended to occur within Right-Of-Way and not disturb any sensitive obstructions (i.e. fences, tree lines, utility poles, etc.). Superelevation improvements with sensitive obstructions along the roadside shall still require embankment, but the slope may have to be constructed steeper than shown on the representative cross section. The desire of the Department is to keep the fill slopes at 3:1 or flatter; however, some 2:1 slopes may be necessary, especially when the existing slope is 2:1 or close to 2:1. Further, if a desired superelevation improvement will result in a fill slope having to be graded steeper than 2:1 in order to not impact a sensitive obstruction, then the superelevation rate should be modified (reduced) in order to reduce the final change in pavement edge elevation, thereby reducing the height of the new fill slope grading, and allowing for a flatter fill slope.

Ditching and Shouldering. Several areas throughout the project are set up for Ditching & Shouldering. Perform Ditching & Shouldering at the locations identified on the Ditching & Shouldering Summary, or as directed by the Engineer. The proposed shoulder, ditch, and/or roadside dimensions are detailed on the Typical Sections. Perform Ditching & Shouldering according to the Special Note for Ditching & Shouldering. For details of the conditions and situations commonly encountered when performing Ditching & Shouldering, refer to the detail sheets titled: DITCHING & SHOULDERING AND EMBANKMENT BENCHING DETAILS.

DGA Wedge & Chip Seal. Construct DGA Wedge & Chip Seal 18" wide and 2" deep along the entire length of the roadway as specified in the Asphalt Overlay summary. In some areas, the existing shoulder will need

General Notes

Page 3 of 5

to be built up before the DGA wedge can be installed. For these situations, the bid item "Ditching and Shouldering" is to be used for re-grading the shoulders, fill slopes and/or ditches prior to placing the DGA. Locations for which ditching and shouldering may be required in conjunction with DGA wedge & chip seal placement are identified in the Ditching and Shouldering Summary. For more information refer to the DGA Wedge & Chip Seal Detail and the Special Note for Double Asphalt Seal Coat.

Temporary Fence and Fence Replacement. Impacted fence lines will be removed off Right of Way within the improvement area and placed off Right of Way once work is complete. Fences will be replaced in like kind. Temporary fencing for livestock will be installed for containment prior to removing the existing fence. The contractor shall install temporary fence equivalent to, or exceeding, that of the existing fence. Locations are noted in the Temporary Fence and Fence Replacement Summary.

Culvert Pipe Extension/Replacement. There are locations throughout the project where culvert pipes are being extended or replaced. Locations are noted in the Culvert Pipe Extension/Replacement Summary. Other items that may be included with the pipe extensions include culvert headwalls, safety box inlets, sloped & mitered concrete headwalls, shouldering, ditching, channel lining, etc. Refer to the Special Note for Pipe Replacements/Extensions for more information on this item of work. For each extension, the Contractor shall remove 4' of pipe or the length of pipe to the first joint. Refer to the Culvert Pipe Extension/Replacement Summary for estimated quantities. The pipe extensions shall be in-like kind of the existing pipe.

Entrance Pipe Replacement. Due to areas of drainage and superelevation improvements, there are locations where the existing entrance pipe will have to be removed and a new entrance pipe installed to accommodate the improvements. Refer to the Entrance Detail for details on this work item. Approximate quantities are shown on the Entrance Summary. The existing driveway surface is to be replaced with like-kind surfacing. The Engineer will make the final determination as to the locations and quantities required to complete the work based on the existing conditions encountered during construction.

Sloped & Mitered Concrete Headwalls. Sloped & Mitered Concrete Headwalls shall be constructed as shown on the detail sheets titled: SLOPED & MITERED CONCRETE HEADWALL DETAILS. This headwall is intended to combine the benefits of a pipe headwall with the advantages of safety and adaptability by allowing the headwall to be custom fit to the surrounding embankment. The Culvert Pipe Extension/Replacement Summary identifies which pipe ends are to receive the Sloped & Mitered Concrete Headwalls. The identified pipe ends shall have the headwall installed and the pipe mitered at a slope that matches the final embankment slopes at each location. If the pipe is on a skew, install the headwall and miter the pipe so that the concrete slope paving of the new headwall is perpendicular to the roadway. In other words the embankment slope should not be warped to fit the skew of the pipe; the headwall should be installed and the pipe should be mitered to match the final embankment slope, so that the roadside fill slope is fairly consistent prior to the pipe, at the pipe, and beyond the pipe, and does not create an excessive bulge in the embankment. When completed the edges of the Sloped & Mitered Concrete Headwall should be flush with the surrounding ground line. Payment at the Contract unit price Each shall be full compensation for furnishing all labor, materials, equipment, and incidentals necessary to install the headwall and miter the pipe.

NOTE: For pipes that receive the Sloped & Mitered Concrete Headwall, the pipe length will be measured to the furthest point along the mitered end of the pipe.

General Notes

Page 4 of 5

Channel Lining. 25 Tons of Channel Lining Class II have been included in the Ditching and Shouldering Summary for use in ditching and shouldering operations as directed by the Engineer. 250 Tons of Channel Lining Class II have been included in the Culvert Pipe Summary. An additional 300 Tons of Channel Lining Class II have been included in the contract for potential use around drop box inlets, safety box inlets, inlets and outlets of pipes, along areas of regraded ditch line and/or fill slope, and other areas as directed by the Engineer. The Contractor and Engineer should work together to determine the location and best use of Channel Lining throughout this project. The Engineer will make the final determination as to the placement of Channel Lining.

Erosion Control Blanket. A quantity of 27,500 square yards has been included in the contract for use in the contract for potential use along areas of regraded ditch line and/or fill slopes, inlets and outlets of pipes, and any other areas as directed by the Engineer. The Contractor and Engineer should work together to determine the location and best use of Erosion Control Blanket throughout this project. The Engineer will make the final determination as to the placement of Erosion Control Blanket.

Guardrail Replacement. Existing guardrail within the project limits will be removed and replaced with new guardrail. Refer to the Guardrail Summary for approximate locations for guardrail replacement. Refer to the Special Notes for Guardrail for more information.

NOTE: As part of the guardrail replacement on this project, three strings of Guardrail between MP 3.0-3.1 are to have an experimental delineation project installed: Luciol Systems Bidirectional Linear Delineation. This product will be the only product accepted for the bid item No. 1987-Delineator for Guardrail B/W (Luciol Systems Bidirectional Linear Delineation). Each Luciol Systems Bidirectional Linear Delineation unit is 12.5 LF in length and is pre-drilled to line up with the guardrail's bolt pattern for easy installation. Contact info: Luciol Systems Company, LLC (248) 890-9454 nskrzypczak@luciolsystems.com

Curve Widening. Locations in which curve widening is to be performed are noted in the Curve Widening Summary. Perform work as shown in the Curve Widening Detail. The Engineer shall make the final determination as to the width, depth, length, and exact location of each curve widening location.

Pavement Repair. Locations in which pavement repair is to be performed are noted in the Pavement Repair Summary. Perform work as shown in the Pavement Repair Detail and according to the Special Note for Base Failure Repair. The Engineer shall make the final determination as to the width, depth, length, and exact location of each pavement repair.

Temporary Pavement Striping. A quantity of 92,759 linear feet of Pave Striping – Temp Paint – 4 has been included in the asphalt overlay summary. The Contractor and Engineer should work together to determine any locations throughout the project requiring temporary pavement striping. The Engineer will make the final determination as to the placement of temporary pavement striping.

Asphalt Overlay and Edgeline Rumble Strips. The existing roadway is to be overlaid from Station 0+00 to Station 466+22.40. This work will include placement of an asphalt surface course, installation of edgeline rumble strips, and application of pavement markings. Refer to the Asphalt Overlay Detail and rumble strip Sepia Drawings for further information.

General Notes

Page 5 of 5

Signing. An estimated quantity of new signing and sign post is included in the Signing Summary. The District Traffic Section will provide the final signing quantities and sign types after final surfacing operations are complete. Refer to the Special Note for Signing, Special Note for Staking, and the Special Note for Signage for more details concerning the procedures for determining and staking the final layout and installation of the signing.

Remove, Store & Reinstall Signs. A quantity of 15 each of "Remove-Store and Reinstall Sign" has been included in the contract for existing sheet signs that may obstruct or interfere with proposed construction activities. Do not remove an existing sign until just prior to working in the vicinity of the sign. Reinstall the sign as soon as possible once the construction activities in the vicinity of the sign have reached a stage that the sign will no longer be an obstruction or interfere with the work. The intent is for the sign to be "down" the minimum length of time necessary.

SPECIAL NOTE FOR EROSION CONTROL

I. DESCRIPTION

Perform all erosion and water pollution control work in accordance with any other notes in the Proposal, the Department's Standard and Interim Supplemental Specifications, the Special Provisions and Special Notes, and the Standard and Sepia Drawings, current editions, or as directed by the Engineer. Section references are to the Standard Specifications. This work shall consist of:

(1) Developing and preparing a Best Management Practices Plan (BMP) tailored to suit the specific construction phasing for each site within the project; (2) Preparing the project site for construction, including locating, furnishing, installing, and maintaining temporary and/or permanent erosion and water pollution control measures as required by the BMP prior to beginning any earth disturbing activity on the project site; (3) Clearing and grubbing and removal of all obstructions as required for construction; (4) Removing all erosion control devices when no longer needed; (5) Restoring all disturbed areas as nearly as possible to their original condition; (6) Preparing seedbeds and permanently seeding all disturbed areas; (7) Providing a Kentucky Erosion Prevention and Sediment Control Program (KEPSC) qualified inspector; and (8) Performing any other work to prevent erosion and/or water pollution as specified by this contract, required by the BMP, or as directed by the Engineer.

II. MATERIALS

Furnish materials in accordance with these notes, the Standard Specifications and Interim Supplemental Specifications, applicable Special Provisions and Special Notes, and the Standard and Sepia Drawings, current editions. Provide for all materials to be sampled and tested in accordance with the Department's Sampling Manual. Unless directed otherwise by the Engineer, make the materials available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing.

III. CONSTRUCTION

Be advised, these Erosion Control Notes do not constitute a BMP plan for the project. Jointly with the Engineer, prepare a site specific BMP plan for each drainage area within the project in accordance with Section 213. Provide a unique BMP at each project site using good engineering practices taking into account existing site conditions, the type of work to be performed, the construction phasing, methods, and the techniques to be utilized to complete the work. Be responsible for all erosion prevention, sediment control, and water pollution prevention measures required by the BMP for each site. Represent and warrant compliance with the Clean Water Act (33 USC Section 1251 et seq.), the 404 Permit, the 401 Water Quality Certification, and applicable state and local government agency laws, regulations, rules, specifications, and permits. Contrary to Section 105.05, in case of discrepancy between these notes, the Standard Specifications, Interim Supplemental Specifications, Special Provisions and Special Notes, Standard and Sepia Drawings, and such state and local government agency requirements, adhere to the most restrictive requirement.

Erosion Control Page 2 of 3

Conduct operations in such a manner as to minimize the amount of disturbed ground during each phase of the construction and limit the haul roads to the minimum required to perform the work. Preserve existing vegetation not required to be removed by the work or the contract. Seed and/or mulch disturbed areas at the earliest opportunity. Use silt fence, silt traps, temporary ditches, brush barriers, erosion control blankets, sodding, channel lining, and other erosion control measures in a timely manner as required by the BMP and as directed or approved by the Engineer. Prevent sediment laden water from leaving the project, entering an existing drainage structure, or entering a stream.

Provide for erosion control measures to be in place and functioning prior to any earth disturbance within a drainage area. Compute the volume and size of silt control devices necessary to control sediment during each phase of construction. All silt control devices shall be sized to retain a volume of 3,600 cubic feet per disturbed contributing acre. Remove sediment from silt traps before they become a maximum of ½ full. Maintain silt fence by removing accumulated trappings and/or replacing the geotextile fabric when it becomes clogged, damaged, or deteriorated, or when directed by the Engineer. Properly dispose of all materials trapped by erosion control devices at approved sites off the right of way obtained by the Contractor at no additional cost to the Department. See the Special Provision for Waste and Borrow Sites.

As work progresses, add or remove erosion control measures as required by the BMP, applicable to the Contractor's project phasing, construction methods, and techniques. Update the volume calculations and modify the BMP as necessary throughout the duration of the project. Ensure that an updated BMP is kept on site and available for public inspection throughout the life of the project.

The required volume at each Silt Trap shall be computed based on the Up Gradient Contributing Areas that are disturbed and/or stabilized to the satisfaction of the Engineer. The required volume calculation for each Silt Trap shall be determined by the Contractor and verified by the Engineer. The required volume at each Silt Trap may be reduced by the following amounts:

- Up Gradient Areas not disturbed (acres)
- Up Gradient Areas that have been reclaimed and protected by Erosion Control Blanket or other ground protection material such as Temporary Mulch (acres)
- Up Gradient Areas that have been protected by Silt Fence (acres) – Areas protected by Silt Fence shall be computed at a maximum rate of 100 square feet per linear foot of Silt Fence
- Up Gradient Areas that have been protected by Silt Traps (acres)

The use of Temporary Mulch is encouraged.

Silt Trap Type B shall always be placed at the collection point prior to discharging into a Blue Line Stream or onto an adjacent Property Owner. Where overland flow exists, a Silt Fence or other filter devices may be used.

After all construction is complete, restore all disturbed areas in accordance with Section 212. Completely remove all temporary erosion control devices not required as part of the permanent erosion control from the construction site. Prior to removal, obtain the Engineer's concurrence of items to be removed. Grade the remaining exposed earth (both on and off the Right-of-Way) as nearly

Erosion Control
Page 3 of 3

as possible to its original condition, or as directed by the Engineer. Prepare the seed bed areas and sow all exposed earthen areas with the applicable seed mixture(s) according to Section 212.03.03.

IV. MEASUREMENT

The Department will measure the various erosion control items according to Section 212.04 and Section 213.04, as applicable.

V. BASIS OF PAYMENT

The Department will make payment for the various erosion control items according to Section 212.04 and Section 213.04, as applicable.

SPECIAL NOTE

For Tree Removal

**Allen County
PERFORM LOW COST SAFETY IMPROVEMENTS ALONG KY
100 BETWEEN MP 0.000 AND MP 8.830
Item No. 3-9014**

NO CLEARING OF TREES 5 INCHES OR GREATER (DIAMETER BREAST
HEIGHT) FROM JUNE 1- JULY 31.

**If there are any questions regarding this note, please contact Danny Peake, Director,
Division of Environmental Analysis, 200 Mero Street, Frankfort, KY 40601, Phone:
(502) 564-7250.**

SPECIAL NOTES FOR PIPE REPLACEMENTS / EXTENSIONS

I. DESCRIPTION

Except as provided herein, perform all work in accordance with the Department's Standard Specifications, interim Supplemental Specifications, Standard and Sepia Drawings, and Special Notes and Special Provisions, current editions. Article references are to the Standard Specifications. This project shall consist of furnishing all labor, equipment, materials, and incidentals for the following:

- (1) Maintaining and Controlling Traffic; (2) Constructing pipe replacements and/or pipe extensions; (3) Embankment and/or Excavation; (4) Erosion Control; and (6) Any other work as specified by this contract.

II. MATERIALS

Provide for sampling and testing of all materials in accordance with the Department's Sampling Manual. Make materials available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing unless otherwise specified in these notes.

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Culvert Pipe.** Furnish pipe meeting the requirements of Section 810. Select pipe for pH range Medium and minimum fill cover height according to the applicable Standard or Sepia Drawings, current editions. Verify maximum and minimum fill cover height required for new pipe prior to construction and obtain the Engineer's approval of the class or gauge of pipe and type of coating prior to delivering pipe to project. Furnish approved connecting bands or pipe anchors and toe walls.
- C. Flowable Fill.** Furnish Flowable Fill for Pipe Backfill per Section 601.03.03(B).
- D. Erosion Control.** See Special Note for Erosion Control.

III. CONSTRUCTION METHODS

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Erosion Control.** See Special Note for Erosion Control.
- C. Site Preparation.** Be responsible for all site preparation including, but not limited to, saw cutting and removing pavement; clearing and grubbing; staking; incidental excavation and backfilling; common and solid rock excavation; embankment in place; removal of obstructions, or any other items; restoration of pavements, slopes, and all disturbed areas; final dressing and cleanup; and disposal of materials. Limit clearing and grubbing to the absolute minimum required to construct the drainage features. Perform all site preparation only as approved or directed by the Engineer.

Pipe Replacements/Extensions
Page 2 of 4

- D. Removing Headwalls, Pipe, and Excavation.** Remove existing headwalls and lengths of culvert and/or entrance pipes at the approximate locations noted on the summary. The Engineer will determine the exact locations and lengths of pipe to be removed at the time of construction. When removing pipe, or any portion of pipe under the roadway, saw cut the existing asphalt pavement and base to a neat edge prior to excavation and removal of the existing pipe. NOTE: Saw cutting the pavement shall be incidental. Obtain the Engineer's approval of trench width and/or saw cutting limits prior to saw cutting the pavement. Excavate the trench and remove the pipe as directed, or approved, by the Engineer without disturbing existing underground utilities.
- E. Constructing Pipe, Headwalls, and Drainage Boxes.** Construct culvert and/or entrance pipes, pipe extensions, headwalls, drainage boxes, and other drainage structures at the locations shown in the proposal or as designated by the Engineer. The contractor will establish, with the approval of the Engineer, the final centerlines, flow lines, and skews to obtain the best fit with the existing and/or proposed ditches and other proposed improvements. (See the Special Note for Staking.) Construct pipe bedding according to Section 701 and the applicable Standard or Sepia Drawings, current editions. Use approved connecting bands or concrete anchors as required. Prior to backfilling pipe, obtain the Engineer's approval of the pipe installation. Provide Positive drainage upon completion of pipe installation.
- F. Pipe Backfill.** Backfill entrance pipes according to Section 701.03.06. Contrary to Section 701.03.06, backfill culvert pipes with flowable fill for the width of the roadway and as shown on the Pipe Replacement Detail. Steel plates will likely be required to maintain traffic while the flowable fill cures. Once the flowable fill has sufficiently cured, place the Asphalt Base in lifts with thicknesses of 3-4 inches, up to the surface of the existing pavement. Seal with Leveling & Wedging. Allow the asphalt base and leveling & wedging to be exposed to traffic for a minimum of 14 days to allow for settlement. During the waiting period, level & wedge any settlement as directed by the Engineer. After the waiting period has been met for the last pipe replacement constructed, the final surfacing operations can begin, unless directed otherwise by the Engineer.
- G. Embankments.** Backfill pipe and culvert extensions, and construct shoulder embankments as directed by the Engineer. The contractor shall bench into the existing slope and apply proper compaction according to Section 206. For more information and details on benching, refer to Note 2 on the detail sheet titled: DITCHING & SHOULDERING AND EMBANKMENT BENCHING DETAILS, found elsewhere in the Proposal. Provide positive drainage of ditches, shoulders, and slopes at all times during, and upon completion of construction.
- H. Property Damage.** Be responsible for all damage to public and/or private property resulting from the work. Repair or replace damaged roadway features in like kind materials and design as directed by the Engineer at no additional cost to the Department. Repair or replace damaged private property in like kind materials and design to the satisfaction of the owner and the Engineer at no additional cost to the Department.

Pipe Replacements/Extensions
Page 3 of 4

- I. Coordination with Utility Companies.** Locate all underground, above ground, and overhead utilities prior to beginning construction. Be responsible for contacting and maintaining liaison with all utility companies that have utilities located within the project limits. Do not disturb existing overhead or underground utilities. It is not anticipated that any utility facilities will need to be relocated and/or adjusted; however, in the event that it is discovered that the work does require that utilities be relocated and/or adjusted, the utility companies will work concurrently with the Contractor while relocating their facilities. Be responsible for repairing all utility damage that occurs as a result of pipe replacement and pipe extension operations at no additional cost to the Department. NOTIFY THE ENGINEER AND THE UTILITY OWNER(S) IMMEDIATELY WHEN IT IS DISCOVERED OR ANTICIPATED THAT ANY UTILITY CONFLICT COULD DELAY THE CONTRACTOR'S OPERATIONS. If the total delay exceeds ten working days, an extension of the specified completion date will be negotiated with the Contractor for delay to the Contractor's work; however, no extension will be granted for any delay caused by the Contractor's failure to notify the Engineer and/or the utility company as specified above when a conflict is discovered or anticipated as specified.
- J. Right-of-Way Limits.** The Department has not established exact limits of the Right-of-Way. Unless a consent and release form is obtained from the adjoining property owner, limit work activities to the obvious Right-of-Way and staging areas secured by the Contractor at no additional cost to the Department. In the event that private improvements (i.e. fences, buildings, etc.) encroach upon the Right-of-Way, the contractor shall notify the Engineer and limit work activities in order to NOT disturb the improvements. If they become necessary, the Department will secure consent and releases from property owners through the Engineer. Be responsible for all encroachments onto private lands.
- K. Clean Up, Disposal of Waste.** Clean up the project area as work progresses. Dispose of all removed concrete, pipe, pavement, debris, excess and unsuitable excavation, and all other waste at approved sites off the Right of Way obtained by the Contractor at no additional cost to the Department. See the Special Provision for Waste and Borrow Sites.
- L. Final Dressing, Seeding and Protection.** Grade all disturbed areas to blend with the adjacent roadways features and to provide a suitable seed bed. Apply Class A Final Dressing to all disturbed areas, both on and off the Right-of-Way. Sow all disturbed earthen areas with the applicable seed mixture(s) according to Section 212.03.03.
- M. Erosion Control.** See the Special Note for Erosion Control.

IV. METHOD OF MEASUREMENT

- A. Maintain and Control Traffic.** See the Traffic Control Plan.
- B. Site Preparation.** Other than the bid items listed, site preparation will NOT be measured for payment, but shall be incidental to culvert and/or entrance pipe bid items, as applicable.

Pipe Replacements/Extensions
Page 4 of 4

- C. Remove Headwall.** The Department will measure the removal of existing headwalls as Each.
 - D. Remove Pipe.** Removal of existing culvert and entrance pipe shall be measured according to Section 701.04.14. Any excavation necessary to remove existing pipe will NOT be measured for payment, but shall be incidental to the bid item "Remove Pipe".
 - E. Culvert and Entrance Pipe.** The Department will measure the quantities according to Section 701.04. Any excavation necessary to install culvert or entrance pipe shall be incidental to the corresponding pipe bid items.
 - F. Headwalls, Drainage Boxes.** The Department will measure according to Section 710.
 - G. Excavation, Pipe Backfill, Embankments.** The Department will NOT measure for payment the following items: any excavation necessary to remove the existing pipe and/or install the proposed culvert and/or entrance pipes, pipe backfill material, flowable fill, and reconstructing shoulder embankments, but shall considered these items incidental to the bid items for culvert and entrance pipe.
 - H. Clean Up, Disposal of Waste, Final Dressing, Seeding and Protection.** The Department will NOT measure for payment the following activities: Clean Up, Disposal of Waste, and Final Dressing. These activities shall be incidental to the project bid items. Seeding and Protection shall be measured according to Section 212.
 - I. Erosion Control.** See the Special Note for Erosion Control.
- V. BASIS OF PAYMENT**
- A. Maintain and Control Traffic.** See the Traffic Control Plan.
 - B. Remove Headwall.** The Department will make payment for the completed and accepted quantities of Each headwall removed.
 - C. Remove Pipe.** The Department will make payment according to Section 701.05. Payment at the Contract unit price per linear foot shall be full compensation for furnishing all labor, materials, equipment, and incidentals for removing the existing pipe.
 - D. Culvert and Entrance Pipe.** The Department will make payment according to Section 701.05. Payment at the Contract unit price per linear foot shall be full compensation for furnishing all labor, materials, equipment, and incidentals necessary for installing and backfilling new culvert and entrance pipe.
 - E. Headwalls, Drainage Boxes.** The Department will make payment according to Section 710.
 - F. Erosion Control.** See the Special Note for Erosion Control.

SPECIAL NOTE FOR DITCHING & SHOULDERING

I. DESCRIPTION

Except as provided herein, all work shall be performed in accordance with Department's Standard Specifications, Interim Supplemental Specifications, applicable Standard and Sepia Drawings, applicable Special Provisions and Special Notes, current editions. Article references are to the Standard Specifications. This project shall consist of furnishing all labor, equipment, materials, and incidentals for the following:

- (1) Maintaining and Controlling Traffic; (2) Site Preparation; (3) Ditching; (4) Shouldering;
- (5) Constructing Embankments, Embankment Benching, and/or Excavation; (6) Erosion Control; and (7) Any other work as specified in this Contract.

II. MATERIALS

All materials shall be sampled and tested in accordance with the Department's Sampling Manual and the materials shall be available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing unless otherwise specified in these Notes.

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Erosion Control.** See Special Note for Erosion Control.
- C. DGA.** Furnish Dense Graded Aggregate as per Section 805.
- D. Asphalt Seal Coat.** See the Special Note for Double Asphalt Seal Coat.
- E. Asphalt Seal Aggregate.** See the Special Note for Double Asphalt Seal Coat.
- F. Channel Lining, Class II.** When listed as a bid item, furnish Channel Lining, Class II as per Section 805.
- G. Geotextile Fabric Type IV.** When listed as a bid item, furnish Geotextile Fabric Type IV as per Section 843.
- H. Crushed Stone Base.** Furnish Crushed Stone Base as per Section 805.

III. CONSTRUCTION METHODS

- A. Maintain and Control Traffic.** See the Traffic Control Plan.
- B. Erosion Control.** See the Special Note for Erosion Control.

Ditching & Shouldering
Page 2 of 6

C. Site Preparation. Be responsible for all site preparation including, but not limited to: staking; clearing, grubbing, and removal of all obstructions or any other items; excavation, embankment benching, compacting embankment in place; temporary pollution and erosion control; disposal of excess, waste, and debris; and final dressing, cleanup, and seeding and protection. Perform all site preparation as approved or directed by the Engineer.

D. Staking. See the Special Note for Staking.

E. Ditching & Shouldering. All work shall be completed according to Section 209, or as specified in the DITCHING & SHOULDERING AND EMBANKMENT BENCHING DETAILS, the Typical Sections, the Plan Sheets, or as directed by the Engineer. Ditching & Shouldering shall consist of any necessary clearing, grubbing, grading, and/or reshaping of the existing shoulder, ditch, and/or roadside to achieve the proposed shoulder, ditch, and/or roadside dimensions detailed on the Typical Sections. Depending on the existing conditions encountered and to achieve the dimensions as detailed in the Typical Sections, Ditching & Shouldering may also include, but is not limited to: embankment benching, excavating and removing excess material, excavation of rock, providing additional earth material suitable for vegetation growth and grading, shaping, and compacting the earth material.

Provide positive drainage of ditches and slopes at all times during and upon completion of construction. When asphalt surfacing or resurfacing is included in the contract, perform all ditching and as much of the shouldering operations as is practical before beginning final surfacing operations.

F. Embankment Benching. Embankment Benching shall be required when the existing groundline has an incline greater than 15%. Any and all required embankment benching shall be incidental to the bid item DITCHING & SHOULERING. For more information refer to the DITCHING & SHOULDERING AND EMBANKMENT BENCHING DETAILS.

G. DGA Wedge & Chip Seal. The entire length of the project is set up to receive a DGA Wedge & Chip Seal after the ditching and shouldering and asphalt resurfacing operations are complete. Refer to the Typical Sections for typical width and thickness of the DGA Wedge. Construct and compact the DGA as required by Section 302. Place Chip Seal over the entire width of the DGA Wedge. See the Special Note for Double Asphalt Seal Coat for the Chip Seal requirements.

H. Channel Lining. Install Class II Channel Lining along any sections of ditches identified in the Proposal, along any fill or ditch backslopes identified in the Proposal requiring Slope Protection, or any other locations the Engineer directs for slope protection or erosion control.

Ditching & Shouldering
Page 3 of 6

- I. Right-of-Way Limits.** The Department has not established exact limits of the Right-of-Way. Unless a consent and release form is obtained from the adjoining property owner, limit work activities to the obvious Right-of-Way and staging areas secured by the Contractor at no additional cost to the Department. In the event that private improvements (i.e. fences, buildings, etc.) encroach upon the Right-of-Way, the contractor shall notify the Engineer and limit work activities in order to NOT disturb the improvements. If they become necessary, the Department will secure consent and releases from property owners through the Engineer. Be responsible for all encroachments onto private lands.
- J. Property Damage.** The Contractor shall be responsible for all damage to public and/or private property resulting from the Contractor's activities. Repair or replace damaged roadway features in like kind materials and design as directed by the Engineer at no additional cost to the Department. Repair or replace damaged private property in like kind materials and design to the satisfaction of the owner and the Engineer at no additional cost to the Department.
- K. Coordination with Utility Companies.** Locate all underground, above ground, and overhead utilities prior to beginning construction. Be responsible for contacting and maintaining liaison with all utility companies that have utilities located within the project limits. Do not disturb existing overhead or underground utilities. It is not anticipated that any utility facilities will need to be relocated and/or adjusted; however, in the event that it is discovered that the work does require that utilities be relocated and/or adjusted, the utility companies will work concurrently with the Contractor while relocating their facilities. Be responsible for repairing all utility damage that occurs due to the Contractor's operations at no additional cost to the Department. NOTIFY THE ENGINEER AND THE UTILITY OWNER(S) IMMEDIATELY WHEN IT IS DISCOVERED OR ANTICIPATED THAT ANY UTILITY CONFLICT COULD DELAY THE CONTRACTOR'S OPERATIONS. If the total delay exceeds ten working days, an extension of the specified completion date will be negotiated with the Contractor for delay to the Contractor's work; however, no extension will be granted for any delay caused by the Contractor's failure to notify the Engineer and/or the utility company as specified above when a conflict is discovered or anticipated as specified.
- L. Caution.** The information in this proposal and shown on the plans and the type of work listed herein are approximate only and are not to be taken as an accurate evaluation of the materials and conditions to be encountered during construction; the bidder must draw their own conclusions. The Department does not give any guarantee as to the accuracy of the data and no claim for money or time extension will be considered if the conditions encountered are not in accordance with the information shown.
- M. Control.** Perform all work under the absolute control of the Department. Obtain the Engineer's approval of all designs required to be furnished by the Contractor prior to incorporation into the work. The Department reserves the right to have other work performed by other contractors and its own forces, and to permit public utility companies

Ditching & Shouldering

Page 4 of 6

and others to do work during the construction within the limits of, or adjacent to, the project. Conduct operations and cooperate with such other parties so that interference with such other work will be reduced to a minimum. The Department will not honor any claims for money or time extension created by the operations of such other parties.

Should a difference of opinion arise as to the rights of the Contractor and others working within the limits of, or adjacent to, the project, the Engineer will decide as to the respective rights of the various parties involved in order to assure the completion of the Department's work in general harmony and in a satisfactory manner, and the Engineer's decision shall be final and binding upon the Contractor.

- N. Clean Up, Disposal of Waste.** Clean up the project area as work progresses. Dispose of all removed excess material, debris, and other waste at approved sites off the Right of Way obtained by the Contractor at no additional cost to the Department. See the Special Provision for Waste and Borrow Sites.
- O. Final Dressing, Seeding and Protection.** Grade all disturbed areas to blend with the adjacent roadways features and to provide a suitable seed bed. Apply Class A Final Dressing to all disturbed areas, both on and off the Right-of-Way. Sow all disturbed earthen areas with the applicable seed mixture(s) according to Section 212.03.03.

IV. METHOD OF MEASUREMENT

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Erosion Control.** See Special Note for Erosion Control.
- C. Site Preparation.** Other than the bid items listed, the Department will NOT measure Site Preparation for payment, but shall be incidental to the project bid items.
- D. Staking.** See Special Note for Staking.
- E. Ditching & Shouldering.** Contrary to Section 209.04 the Department will measure the bid item DITCHING & SHOULERING in linear feet along the centerline of the roadway as the length of the actual ditching and/or shouldering work performed. Further, this measurement will only include one side of the roadway. Therefore, for areas where ditching and shouldering occurs on both sides of the road, the Department will measure each side independently. The Department will not measure cleaning pipe structures 36 inches or less in diameter or reshaping any deformed ends on metal entrance pipes that are to remain in place, as these operations are considered incidental to the bid item DITCHING & SHOULERING.

Ditching & Shouldering
Page 5 of 6

- F. Embankment Benching.** The Department will not measure Embankment Benching for payment. Any and all required embankment benching shall be incidental to the bid item DITCHING & SHOULERING.
- G. DGA, CSB.** When listed as bid items, DGA and Crushed Stone Base shall be measured according to Section 302.04.
- H. Chip Seal.** When specified in the contract, the bid items associated with Chip Seal shall be measured according to the Special Note for Double Asphalt Seal Coat.
- I. Channel Lining, Class II.** When listed as a bid item, Class II Channel Lining shall be measured according to Section 703.04.
- J. Geotextile Fabric, Type IV.** When listed as a bid item, Geotextile Fabric, Type IV shall be measured according to Section 214.04.
- K. Clean Up, Disposal of Waste, Final Dressing, Seeding and Protection.** The Department will NOT measure for payment the following activities: Clean Up, Disposal of Waste, and Final Dressing. These activities shall be incidental to the project bid items. Seeding and Protection shall be measured according to Section 212.

V. BASIS OF PAYMENT

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Erosion Control.** See Special Note for Erosion Control.
- C. Staking.** See Special Note for Staking.
- D. Ditching & Shouldering.** The Department will make payment for the completed and accepted quantities under the bid item DITCHING & SHOULERING. The Department will consider payment full compensation for furnishing all labor, materials, equipment, and incidentals necessary to preform Ditching & Shouldering as required by these notes, at the locations indicated on the summary sheets, plans, and/or as directed by the Engineer.
- E. DGA, CSB.** When listed as bid items, the Department will make payment for DGA and Crushed Stone Base according to Section 302.05.
- F. Chip Seal.** When specified in the contract, the Department will make payment for the bid items associated with Chip Seal according to the Special Note for Double Asphalt Seal Coat.

Ditching & Shouldering
Page 6 of 6

- G. Channel Lining, Class II.** When listed as a bid item, the Department will make payment for Class II Channel Lining according to Section 703.05.

- H. Geotextile Fabric, Type IV.** When listed as a bid item, the Department will make payment for Geotextile Fabric, Type IV according to Section 214.05.

SPECIAL NOTE FOR SHOULDER MILLING/TRENCHING

Trench shoulders as shown on the Typical Section. The Engineer may eliminate locations along the route from shoulder trenching (e.g. road approaches, turn lanes, entrances, etc.). For entrances and road approaches, the Engineer will determine whether to omit the trenching or continue the trenching across the entrance or approach. **DO NOT** trench across entrances or road approaches without the Engineer's approval. If trenching is achieved by means other than milling, saw cut the pavement 4 inches deep to create a smooth edge prior to excavating the shoulder trench. Excavate the material from the shoulder and maintain the proposed cross-slope as shown on the Typical Sections. The intent is to mill, or excavate, the entire trench so that the proposed shoulder slope is retained at the end of the paving operation. Reshape and compact excavated material from the trench on the outside edge of the newly paved shoulder as shown on the Typical Section.

Retain possession of excess materials and/or materials the Engineer deems unsuitable for reuse and waste the materials off the right-of-way at sites obtained by the Contractor at no additional cost to the Department. See Special Provision for Waste and Borrow.

Accept payment at the contract unit price per square yard for SHOULDER MILLING/TRENCHING as full compensation for all labor, materials, equipment, and incidentals for excavating the shoulder trench and reuse and/or disposal of the excavated material.

SPECIAL NOTE FOR SIGNAGE

All sign sheeting shall be from the Cabinet's List of Approved Materials.

The following signs and sign components shall be fabricated using Type IX sheeting:

- White sign legends on panel signs
- STOP (R1-1) signs
- ALL WAY (R1-3P) signs
- YIELD (R1-2) signs
- DO NOT ENTER (R5-1) signs
- WRONG WAY (R5-1a) signs

The following signs and sign components shall be fabricated using Type IX fluorescent yellow sheeting:

- Horizontal Alignment Signs and Plaques, including signs shown in Figure 2C-1 of the MUTCD
- All Advisory Speed (W13-1P) plaques

The following signs shall be fabricated using Type IX fluorescent yellow-green sheeting:

- School and school bus warning signs, including the fluorescent yellow-green signs shown in Figures 7B-1 and 7B-6 of the MUTCD and other school-related warning signs that are not included in the MUTCD.
- Bicycle Warning (W11-1) signs and SHARE THE ROAD (W16-1P) plaques or diagonal downward point arrow (W16-7P) plaques that supplement Bicycle Warning signs.
- In-Street Pedestrian Crossing (R1-6) signs and Overhead pedestrian Crossing (R1-9) signs
- Supplemental plaques to any of the previously listed signs

All other permanent signs shall be fabricated using Type III or Type IV sheeting.

SPECIAL NOTE FOR SIGNING

I. DESCRIPTION

Except as provided herein, this work shall be performed in accordance with the current edition of the Manual on Uniform Traffic Control Devices (MUTCD), the Department's current Standard Specifications and Interim Supplemental Specifications, applicable Standard and Sepia Drawings, and applicable Special Provisions. Article references are to the Standard Specifications. This project shall consist of furnishing all labor, equipment, materials, and incidentals for the following:

(1) Maintaining and Controlling Traffic; (2) Furnish, Fabricate, and Erect Signs; and (3) All other work specified in the Contract.

II. MATERIALS

All materials shall be sampled and tested in accordance with the Department's Sampling Manual and the materials shall be available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing unless otherwise specified in these Notes.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Erosion Control. See Special Note for Erosion Control.

III. CONSTRUCTION METHODS

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Site Preparation. Be responsible for all site preparation including, but not limited to: clearing and grubbing, staking, excavation, backfill, and removal of obstructions or any other material not covered by other items. Perform all site preparation only as approved, or directed, by the Engineer.

C. Staking. See Special Note for Staking.

D. Signs and Posts. Before beginning installation, the Contractor shall furnish to the Engineer drawings, descriptions, manufacturer's cuts, etc. covering all material to be used. Mill test reports for beams, steel panels, and each different gauge of aluminum or steel sheeting used must be submitted to the Division of Construction and approved prior to erection.

Fabricate sheet signs from .080 or .125 gauge aluminum alloy 5052-H38 or 6061-T6, in accordance with ASTM B-209, and to the size and shape specified. Prepare the side of

Signing

Page 2 of 6

the sheet to be used as the sign face to receive the retroreflective background material according to the recommendations of the sheeting and retroreflective material manufacturer(s). Sheeting used as background material for sign faces is to be the color specified and visually in accordance with the standard requirements of ASTM D-4956, and meet the requirements of Section 830 of the Standard Specifications. Contrary to Section 830.02.06, only the types and colors of sheeting as specified in the proposal will be accepted. All retroreflective material shall be fabricated and assembled in accordance with the specifications and/or recommendations of the manufacturer(s).

All hardware for the erection of sheeting signs shall be rust resistant: stainless steel, zinc coated, aluminum, or an Engineer approved material. All beams and posts shall be of sufficient lengths to extend from the top of the sign to the required embedment in the anchor. Splicing of the sign post shall NOT be allowed. Type I steel posts shall be either standard installation in soil, with soil stabilizer, or a Type D breakaway sign support installation. For standard installations, if solid rock is encountered, the Contractor shall drill holes to the required depth into the rock and backfill the post with concrete. The cost shall be incidental to Type I steel post, and soil stabilizers will not be required. Refer to Standard Drawing RGX-065, current edition, for installation details of Type D breakaway sign supports. Approved manufacturers for Type D breakaway sign supports have been placed on the list of approved materials. All steel post shall meet the requirements of Section 832. All hardware including, but not limited to, sign post anchors, soil stabilizers, nuts, bolts, washers, fasteners, fittings, and bracing, or any other incidentals necessary to erect the signs shall be furnished by the Contractor and will be incidental to the work.

New concrete bases, posts, support anchors, signs, etc. are to be installed prior to dismantling any existing sign. The removal of existing signs, posts, and support anchors is to be performed concurrently with the installation of new signs, posts, and support anchors, under the same lane closure during the same work shift. Completely remove existing sign support anchors or remove them to a minimum depth of six (6) inches below existing ground line and backfill the disturbed area to the existing ground line.

When listed in the summaries, Reflective Sign Post Panels shall be 2" wide x 60" tall (or 84" tall for urban installations) and shall have three 3/8" holes (one hole in the top 3", one hole near the center, and one hole in the bottom 3") that align with the holes on the Type I steel post. Sheeting for the Reflective Sign Post Panels shall be the same Type and color as the sign installed on the post. Examples include:

- Red, fluorescent yellow, and fluorescent yellow-green (Type IX and/or XI Sheeting)
- White and yellow (Type III and/or IV Sheeting).

All manufactured sheeting signs shall be free of visual defects including, but not limited to: cracks, tears, ridges, humps, discoloration, etc., and defective signs shall be replaced at no additional cost to the Department.

Signing
Page 3 of 6

All sign blanks shall be hole punched by the manufacturer for either horizontal or vertical installation. Attach all aluminum sheeting signs to square post with 3/8" all steel rivets and nylon washers.

Post will be attached to the anchor with 5/16" corner bolts and 5/16" flanged nuts, and all post and anchor cuts shall be treated with a Cold Galvanizing Compound spray.

Sign posts shall be erected vertically by using a bubble level. The tolerance shall be a two (2) degree angle in any direction. For locations where there are more than one sign is mounted beside each other, the posts shall be spaced to provide approximately six inches (6") of spacing between signs.

- E. Property Damage.** The Contractor shall be responsible for all damage to public and/or private property resulting from the Contractor's activities. Repair or replace damaged roadway features in like kind materials and design as directed by the Engineer at no additional cost to the Department. Repair or replace damaged private property in like kind materials and design to the satisfaction of the owner and the Engineer at no additional cost to the Department.
- F. Coordination with Utility Companies.** Locate all underground, above ground, and overhead utilities prior to beginning construction. Be responsible for contacting and maintaining liaison with all utility companies that have utilities located within the project limits. Do not disturb existing overhead or underground utilities. It is not anticipated that any utility facilities will need to be relocated and/or adjusted; however, in the event that it is discovered that the work does require that utilities be relocated and/or adjusted, the utility companies will work concurrently with the Contractor while relocating their facilities. Be responsible for repairing all utility damage that occurs due to the Contractor's operations at no additional cost to the Department. NOTIFY THE ENGINEER AND THE UTILITY OWNER(S) IMMEDIATELY WHEN IT IS DISCOVERED OR ANTICIPATED THAT ANY UTILITY CONFLICT COULD DELAY THE CONTRACTOR'S OPERATIONS. If the total delay exceeds ten working days, an extension of the specified completion date will be negotiated with the Contractor for delay to the Contractor's work; however, no extension will be granted for any delay caused by the Contractor's failure to notify the Engineer and/or the utility company as specified above when a conflict is discovered or anticipated as specified.
- G. Caution.** The information in this proposal and shown on the plans and the type of work listed herein are approximate only and are not to be taken as an accurate evaluation of the materials and conditions to be encountered during construction; the bidder must draw their own conclusions. The Department does not give any guarantee as to the accuracy of the data and no claim for money or time extension will be considered if the conditions encountered are not in accordance with the information shown.

Signing
Page 4 of 6

H. Control. Perform all work under the absolute control of the Department. Obtain the Engineer's approval of all designs required to be furnished by the Contractor prior to incorporation into the work. The Department reserves the right to have other work performed by other contractors and its own forces, and to permit public utility companies and others to do work during the construction within the limits of, or adjacent to, the project. Conduct operations and cooperate with such other parties so that interference with such other work will be reduced to a minimum. The Department will not honor any claims for money or time extension created by the operations of such other parties.

Should a difference of opinion arise as to the rights of the Contractor and others working within the limits of, or adjacent to, the project, the Engineer will decide as to the respective rights of the various parties involved in order to assure the completion of the Department's work in general harmony and in a satisfactory manner, and the Engineer's decision shall be final and binding upon the Contractor.

I. Clean Up, Disposal of Waste. Clean up the project area as work progresses. Dispose of all removed concrete, debris, and other waste as per Section 204.03.08. The Department will incur no cost to obtain the disposal sites. The Department will NOT make direct payment for disposal of waste and debris from the project. Existing anchors, signs, posts, and any other hardware or material removed from the site are to become the property of the Contractor. See Special Provision for Waste and Borrow Sites.

J. Final Dressing, Seeding and Protection. Grade all disturbed areas to blend with the adjacent roadways features and to provide a suitable seed bed. Apply Class A Final Dressing to all disturbed areas, both on and off the Right-of-Way. Sow all disturbed earthen areas with the applicable seed mixture(s) according to Section 212.03.03.

K. Erosion Control. See Special Note for Erosion Control.

IV. METHOD OF MEASUREMENT

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Site Preparation. Other than the bid items listed, the Department will NOT measure Site Preparation for payment, but shall be incidental to the project bid items.

C. Signs. The Department will measure the finished in-place area of signs in Square Feet.

D. Sign Posts. The Department will measure the finished in-place length of sign posts in Linear Feet, from the top of the anchor, or top of the sign support, to the top of the sign post. Laps, cutoffs, excess, and waste will NOT be measured for payment.

Signing
Page 5 of 6

- E. Type D Breakaway Sign Supports.** The Department will measure Type D sign supports as Each support installed.
- F. Class A Concrete for Signs.** The Department will measure the Class A Concrete used in conjunction with Type D breakaway sign support installations in Cubic Yards. Any concrete that is required as backfill due to hitting rock during a standard installation shall be incidental to the bid item STEEL POST TYPE I, and soil stabilizers will not be required.
- G. Clean Up, Disposal of Waste, Final Dressing, Seeding and Protection.** The Department will NOT measure for payment the following activities: Clean Up, Disposal of Waste, and Final Dressing. These activities shall be incidental. Seeding and Protection shall be measured according to Section 212.
- H. Erosion Control.** See Special Note for Erosion Control.
- I. Remove Sign.** The Department will consider all signs attached to one or more connected posts as a single sign. The Department will measure as Each sign assembly removed and NOT each individual sign removed.
- J. Items Provided by KYTC.** The Department will NOT measure for payment the installation of signs and/or surface mounts provided by KYTC. These activities shall be incidental to the bid item STEEL POST TYPE I.

V. BASIS OF PAYMENT

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Signs.** The Department will make payment for the completed and accepted quantities under the bid item SBM ALUM SHEET SIGNS .125 IN or .080 IN. The Department will consider payment full compensation for all work and incidentals necessary to install the signs, as required by these notes and the details found elsewhere in the proposal, at the locations indicated on the summary sheets, plans, and/or as directed by the Engineer.
- C. Sign Posts.** The Department will make payment for the completed and accepted quantities under the bid item STEEL POST TYPE I. The Department will consider payment full compensation for all work and incidentals necessary to install the sign posts as required by these notes and the details found elsewhere in the proposal.
- D. Type D Breakaway Sign Supports.** The Department will make payment for the completed and accepted quantities under the bid item GMSS TYPE D. The Department will consider payment full compensation for all work and incidentals necessary to install

Signing
Page 6 of 6

the Type D breakaway sign supports as required by Standard Drawing RGX-065, current edition.

- E. Class A Concrete for Signs.** The Department will make payment for the completed and accepted quantities, used in conjunction with Type D breakaway sign support installations, under the bid item CLASS A CONCRETE FOR SIGNS. The Department will consider payment full compensation for all work and incidentals necessary to install the concrete as required by Standard Drawing RGX-065, current edition.
- F. Remove Sign.** The Department will make payment for the completed and accepted quantities under the bid item REMOVE SIGN. The Department will consider payment full compensation for all work and incidentals necessary to remove the existing signs, posts, anchors, and any other sign material or hardware, from the locations indicated on the summary sheets, plans, and/or as directed by the Engineer.
- G. Erosion Control.** See Special Note for Erosion Control.

SPECIAL NOTE FOR STAKING

Perform Contractor Staking according to Section 201; except, in addition to the requirements of Section 201, perform the following:

1. Contrary to Section 201, perform items 1-3 usually performed by the Engineer.
2. Using the proposed pavement superelevation rates, runout, and runoff lengths, determine the necessary changes in pavement edge elevation along the curves and the transitions leading into and out of the curve to achieve the proposed superelevation improvements. The intent to provide a consistent superelevation throughout the curves and smooth transitions into and out of the curves. Once the proposed changes in pavement edge elevations are determined and prior to starting paving operations, verify the proposed roadside re-grading along the curve can be constructed so that the new roadside is flush with the new pavement edge elevation and the new toe of slope, or top of cut, will remain within the existing Right-of-Way and/or not impact a sensitive obstruction. If necessary, and with the approval of the Engineer, reduce the proposed superelevation rate of a curve if the new edge of pavement elevation will cause the new roadside grading to extend beyond the Right-of-Way and/or impact a sensitive obstruction. Alternatively, with the approval of the Engineer and to the extent allowable by the "Ditching & Shouldering and Embankment Benching Details" and/or the Special Note for Ditching & Shouldering, the contractor may be allowed to make adjustments to the roadside grading so the proposed roadside re-grading will remain within the existing Right-of-Way and/or not impact a sensitive obstruction. After the final proposed changes in pavement edge elevations are determined and before paving operations begin, submit to the Engineer and obtain approval for the number of asphalt lifts, each asphalt lift's thickness, and the asphalt material type of each lift the contractor plans to use to achieve the superelevation improvement. Ensure positive drainage upon completion of the work.
3. Verify the dimensions, type, and quantities of the culvert pipes, entrance pipes, and/or box culverts as listed and detailed in the proposal, and determine flow line elevations and slopes necessary to provide positive drainage. Revise as necessary to accommodate the existing site conditions; to provide proper alignment of the drainage structures with existing and/or proposed ditches, stream channels, swales, and the roadway lines and grades; and to ensure positive drainage upon completion of the work.
4. Using stakes, paint marks on the pavement, mag nails, and/or any other means approved by the Engineer, the Contractor shall mark and/or stake the proposed sign locations in the field. NOTE: The proposed signs are listed in the proposal by approximate location and are NOT to be taken as the exact location for the signs. During staking operations the Contractor shall review the signing layout and existing field conditions and look for potential conflicts, including but not limited to utilities, driveways, visual obstructions, etc. When conflicts are found, adjust the staked location of signs to mitigate conflicts. Because the sign locations in the proposal are approximate and the location of some signs may need to be adjusted due to conflicts, during staking operations the Contractor shall refer to and utilize the information in the Manual on Uniform on Traffic Control Devices

Staking
Page 2 of 2

(MUTCD), current edition. The MUTCD cover items such as: appropriate sign location, advance placement distances, and spacing requirements for signing. The intent is for the proposed signs to be consistent with, and meet the requirements of, the MUTCD. Once the proposed sign locations have been staked, notify and coordinate with the District Traffic Engineer, and perform a review of the staked locations. Adjust the staked locations, as directed by the District Traffic Engineer and obtain approval of the final staked locations. This review will also be used to determine if there are any existing signs that require removal and/or relocation. Provide the District Traffic Engineer with 2 weeks of notice when a route will be ready for a review of the staked locations. NOTE: The District Traffic Engineer may determine that the proposed signing, including sign types and messages, needs to be adjusted and/or modified from what is shown in the proposal. Therefore, the Contractor shall not order any sign material for a route until the route has been staked and final sign location approval has been given by the District Traffic Engineer.

5. Produce and furnish to the Engineer "As Built" information for the superelevation improvements and the drainage improvements. For superelevation improvements, as built information will consist of a record of the final pavement cross slopes every 50 feet, for each lane of travel along the curves and the transitions into and out of the curves. Elevation data of the curve improvements is not necessary; simply the cross slope percentage every 50 feet. For the drainage improvements, as built information will consist of a final record of the actual types, sizes, and locations of the drainage structures (i.e. box inlets, headwalls, junction boxes, etc.), culvert pipes, and/or box culverts constructed. Final elevation data of the drainage improvements is not necessary.
6. Prior to incorporating into the work, obtain the Engineers approval of all revisions determined by the Contractor.
7. Perform any and all other staking operations required to control and construct the work.

SPECIAL PROVISION FOR WASTE AND BORROW SITES

Obtain U.S. Army Corps of Engineer's approval before utilizing a waste or borrow site that involves "Waters of the United States". The Corps of Engineers defines "Waters of the United States" as perennial or intermittent streams, ponds or wetlands. The Corps of Engineers also considers ephemeral streams, typically dry except during rainfall but having a defined drainage channel, to be jurisdictional waters. Direct questions concerning any potential impacts to "Waters of the United States" to the attention of the appropriate District Office for the Corps of Engineers for a determination prior to disturbance. Be responsible for any fees associated with obtaining approval for waste and borrow sites from the U.S. Army Corps of Engineer or other appropriate regulatory agencies.

1-296 Waste & Borrow Sites
01/02/2012

COORDINATION OF WORK WITH OTHER CONTRACTS

Be advised, there may be an active project(s) adjacent to or within this project. The Engineer will coordinate the work of the Contractors. See Section 105.06.

1-3193 Coordination Contracts
01/02/2012

SPECIAL NOTE FOR DOUBLE ASPHALT SEAL COAT

Use RS-2 or RS-2C asphalt material that is compatible with the seal aggregate. Apply the first course of asphalt seal coat at the rate of 3.2 lbs/sy of asphalt and 30 lbs/sy of size #78 seal coat aggregate. Apply the second course at 2.8 lbs/sy of asphalt and 20 lbs/sy of size #9M seal coat aggregate. The Engineer may adjust the rate of application as conditions warrant. Use caution in applying liquid asphalt material to avoid over spray getting on curbs, gutter, barrier walls, bridges, guardrail, and other roadway appurtenances.


The Department will not measure any surface preparation required prior to applying the asphalt seal coat, but shall be incidental to “Asphalt Material for Asphalt Seal Coat”.

1-3215 Double Asphalt Seal Coat
01/02/2012

SPECIAL NOTE FOR EDGE KEY

Construct Edge Keys at the beginning of project, end of project, at railroad crossings, and at ramps, as applicable. Unless specified in the Contract or directed by the Engineer, do not construct edge keys at intersecting streets, roads, alleys, or entrances. Cut out the existing asphalt surface to the required depth and width shown on the drawing and heel the new surface into the existing surface. The Department will make payment for this work at the Contract unit price per ton for Asphalt Pavement Milling and Texturing, which shall be full compensation for all labor, materials, equipment, and incidentals for removal and disposal of the existing asphalt surface required to construct the edge key.

EDGE KEY

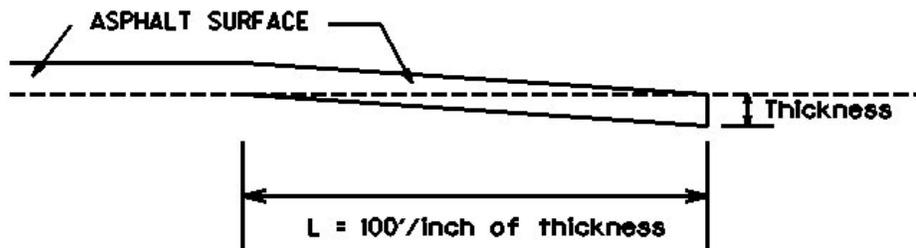

Thickness = 1.25 Inches

L = 125 LF

L= Length of Edge Key

SPECIAL NOTES FOR GUARDRAIL

I. DESCRIPTION

Except as specified herein, perform all work in accordance with the Department's Standard and Supplemental Specifications, Special Notes and Special Provisions, and the Standard and Sepia Drawings, current editions. Article references are to the Standard Specifications.

Furnish all equipment, labor, materials, and incidentals for the following work items:

(1) Site preparation; (2) Remove existing guardrail systems; (3) Construct Guardrail, End Treatments, Bridge End Connectors, and Terminal Sections, as applicable; (4) Delineators for guardrail; (5) Maintain and Control Traffic; and (6) all other work specified as part of this contract.

II. MATERIALS

Except as specified herein, provide for all materials to be sampled and tested in accordance with the Department's Sampling Manual and make the materials available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing.

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Guardrail.** Furnish guardrail system components according to Section 814 and the Standard and Sepia Drawings; except use steel posts only, no alternates.
- C. Delineators for Guardrail.** Furnish white and/or yellow Delineators for Guardrail according to Standard Drawing RBR-055 – Delineators for Guardrail, current edition.
- D. DGA.** Furnish Dense Graded Aggregate as per Section 805.
- E. Erosion Control.** See the Special Note for Erosion Control.

III. CONSTRUCTION METHODS

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Site Preparation.** Remove existing guardrail system, including the guardrail end treatments, Bridge End connectors and all other elements of the existing guardrail system as per Section 719, except that the Contractor will take possession of all concrete posts and all concrete associated with the existing bridge and/or guardrail end treatments. Locate all disposal areas off the Right of Way. Be responsible for all site preparation, including but not limited to, clearing and grubbing, excavation, embankment, and removal of all obstructions or any other items; regrading, reshaping, and adding and compacting suitable

Guardrail
Page 2 of 4

materials on the existing shoulders to provide proper template or foundation for the guardrail; filling voids left as the result of removing existing guardrail and guard posts with dry sand; temporary pollution and erosion control; disposal of excess, waste materials, and debris; and final dressing, cleanup, and seeding and protection. Perform all site preparation as approved or directed by the engineer.

- C. Guardrail.** Except as specified herein, construct guardrail system according to Section 719 and the Standard and Sepia Drawings, current editions. Locations listed on the summary and/or shown on the drawings are approximate only. The Engineer will determine the exact termini for individual guardrail installations at the time of construction. Unless directed otherwise by the Engineer, provide a minimum two (2) foot shoulder width. Construct radii at entrances and road intersections as directed by the Engineer.

Erect guardrail to the lines and grades shown on the current Standard and Sepia Drawings, or as directed by the Engineer by any method approved by the Engineer which allows construction of the guardrail to the true grade without apparent sags.

When removing existing guardrail and installing new guardrail, do not leave the blunt end exposed where it would be hazardous to the public. When it is not practical to complete the construction of the guardrail and the permanent end treatments and terminal sections first, provide a temporary end by connecting at least 25 feet of rail to the last post, and by slightly flaring, and burying the end of the rail completely into the existing shoulder. If left overnight, place a drum with bridge panel in advance of the guardrail end and maintain during use.

- D. DGA.** Place and compact DGA along and under the guardrail as shown on the Typical Section(s). Place a Double Asphalt Seal Coat over the entire width of the DGA along and under the guardrail. See the Special Note for Double Asphalt Seal Coat.
- E. Delineators for Guardrail.** Construct Delineators for Guardrail according to Standard Drawing RBR-055 – Delineators for Guardrail, current edition.
- F. Property Damage.** Be responsible for all damage to public and/or private property resulting from the work. Restore damaged roadway features and private property at no additional cost to the Department.
- G. Coordination with Utility Companies.** Locate all underground, above ground, and overhead utilities prior to beginning construction. Be responsible for contacting and maintaining liaison with all utility companies that have utilities located within the project limits. Do not disturb existing overhead or underground utilities. It is not anticipated that any utility facilities will need to be relocated and/or adjusted; however, in the event that it is discovered that the work does require utilities to be relocated and/or adjusted, the utility companies will work concurrently with the Contractor while relocating their facilities. Be responsible for repairing all utility damage that occurs as a result of guardrail operations at no additional cost to the Department.

Guardrail
Page 3 of 4

- H. Right of Way Limits.** The Department has not established the exact limits of the Right-of-Way. Limit work activities to obvious Right-of-Way, permanent or temporary easements, and work areas secured by the Department through consent and release of the adjacent property owners. Be responsible for all encroachments onto private lands.
- I. Clean Up, Disposal of Waste.** Dispose of all removed concrete, debris, and other waste and debris off the Right-of-Way at sites obtained by the Contractor at no additional cost to the Department. See the Special Provision for Waste and Borrow Sites.
- J. Final Dressing, Seeding and Protection.** Apply Class A Final Dressing to all disturbed areas, both on and off the Right-of-Way. Sow all disturbed earthen areas with the applicable seed mixture(s) according to Section 212.03.03.
- K. Erosion Control.** See the Special Note for Erosion Control.

IV. METHOD OF MEASUREMENT

- A. Maintain and Control Traffic.** See Traffic Control Plan.
- B. Site preparation.** Other than the bid items listed, the Department will not measure Site Preparation for separate payment but shall be incidental to the Guardrail, End Treatments, Bridge End Connectors, and Terminal Sections, as applicable.
- C. Guardrail, End Treatments, Bridge End Connectors, Terminal Sections, and Remove Guardrail.** The Department will measure according to Section 719.04.
- D. DGA.** The Department will measure according to Section 302.04.
- E. Delineators for Guardrail.** See Standard Drawing RBR-055 – Delineators for Guardrail.
- F. Clean Up, Disposal of Waste, Final Dressing, and Seeding and Protection.** The Department will NOT measure for payment the operations of: Clean Up, Disposal of Waste, and Final Dressing. These activities shall be incidental. Seeding and Protection will be measured according to Section 212.
- G. Erosion Control.** See the Special Note for Erosion Control.

V. BASIS OF PAYMENT

- A. Maintain and Control Traffic.** See Traffic Control Plan.

Guardrail
Page 4 of 4

- B. Guardrail, End Treatments, Bridge End Connectors, Terminal Sections, and Remove Guardrail.** The Department will make payment according to Section 719.05.
- C. DGA.** The Department will make payment according to Section 302.05.
- D. Delineators for Guardrail.** See Standard Drawing RBR-055 – Delineators for Guardrail.
- E. Erosion Control.** See the Special Note for Erosion Control.

**SPECIAL NOTE FOR
ASPHALT MILLING AND TEXTURING**

Begin paving operations within **48 hours** of commencement of the milling operation. Continue paving operations continuously until completed. If paving operations are not begun within this time period, the Department will assess liquidated damages at the rate prescribed by Section 108.09 until such time as paving operations are begun.

Take possession of the millings and recycle the millings or dispose of the millings off the Right-of-Way at sites obtained by the Contractor at no additional cost to the Department.

1-3520 48 hours Contractor keeps millings
01/2/2012

SPECIAL NOTES FOR BASE FAILURE REPAIR

Repair locations listed on the summary are approximate only. The Engineer will determine actual repair locations and dimensions at the time of construction. Prior to milling and/or resurfacing, saw cut the existing pavement, asphalt surface, base, DGA, and PCC pavement (if present). Excavate to an approximate depth of 12 inches below the existing pavement surface level. Use all possible care to avoid damaging existing culvert pipes and any existing underground utilities. Repair or restore any damaged items at no additional cost to the Department. Waste all removed materials off the Right of Way at sites obtained by the Contractor at no additional cost to the Department. See the Special Provision for Waste and Borrow Sites.

On the same day trench is excavated, backfill the excavated area with 4 inches of Crushed Limestone Size No. 23, wrapped on the bottom and sides in Class 2 Geotextile Fabric, and 8 inches of Class 2 Asphalt Base 1.00D PG64-22, in 4 inch maximum courses, up to the existing pavement surface. Compact the asphalt base to the proper compaction as required by Section 403. Seal the asphalt base with leveling and wedging. Perform all base failure repairs in such a manner that removal and replacement are completed on the same day. Do this work as one of the Contractor's first operations in order to allow further compaction by traffic. Do not mill or place new asphalt surface over repaired base failure areas until a minimum of 14 calendar days have elapsed after placement of the final course of asphalt base. After the 14 calendar day waiting period, and/or when the Engineer determines the base failure repair areas have sufficiently stabilized, begin milling and/or resurfacing operations. Prior to milling and/or constructing the new asphalt surface, level and wedge any settlement of the repair areas.

The bidder must draw his or her own conclusions as to the conditions to be encountered. The Department does not give any guarantee as to the accuracy of the data and no claim will be considered for additional compensation of the materials encountered that are not in accord with the classification shown.

Accept payment at the Contract unit prices per ton for Crushed Limestone, Asphalt Base, and Leveling and Wedging as full compensation for all labor, materials, equipment, and incidentals for saw cutting pavement and excavating and disposing of all materials; furnishing and placing crushed limestone stone wrapped in geotextile fabric; furnishing and placing asphalt base up to the existing pavement boundary; leveling and wedging until the repair areas stabilize; and all other items necessary to complete the work according to these notes to the satisfaction of the Engineer. The Department will not measure pavement removal, excavation, and geotextile fabric, but shall be incidental to Crushed Limestone and Asphalt Base as applicable.

SPECIAL NOTE FOR TYPICAL SECTION DIMENSIONS

Consider the dimensions shown on the typical sections for pavement and shoulder widths and thickness' to be nominal or typical dimensions. The Engineer may direct or approve varying the actual dimensions to be constructed to fit existing conditions. Do not widen existing pavement or shoulders unless specified elsewhere in this proposal or directed by the engineer.

1-3725 Typical Section Dimensions
01/02/2012

TRAFFIC CONTROL PLAN

TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the current editions of the Manual on Uniform Traffic Control Devices (MUTCD), Standard Specifications, and the Standard and Sepia Drawings. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to “Maintain and Control Traffic”.

Contrary to Section 106.01, traffic control devices used on this project may be new, or used in like new condition, at the beginning of the work and maintained in like new condition until completion of the work. Any temporary traffic control items, devices, materials, and incidentals shall remain the property of the contractor unless otherwise addressed, when no longer needed.

PROJECT PHASING & CONSTRUCTION PROCEDURES

For all construction activities, utilize a lane closure, and maintain alternating one way traffic. This may require part-width construction of certain elements. Provide a minimum clear lane width of 9 feet; however, provide for passage of vehicles of up to 16 feet in width. If traffic should be stopped due to construction operations, and a school bus or emergency vehicle on an official run arrives on the scene, make provisions for the passage of the school bus or emergency vehicle as quickly as possible.

No lane closures will be allowed on the following dates:

Thanksgiving Holiday	Thursday, November 26, 2020 – Sunday, November 29, 2020
Christmas Holiday	Thursday, December 24, 2020 – Sunday, December 27, 2020
New Year’s Holiday	Thursday, December 31, 2020 – Friday, January 1, 2021
Easter Weekend	Friday, April 2, 2021 – Sunday, April 4, 2021
Memorial Day Weekend	Friday, May 28, 2021 – Monday, May 31, 2021
Independence Day Weekend	Friday, July 2, 2021 – Monday, July 5, 2021
Labor Day Weekend	Friday, September 3, 2021 – Monday, September 6, 2021

At the discretion of the Engineer, additional days and hours may be specified when lane and/or road closures will not be allowed due to unforeseen events.

LANE CLOSURES

Do not leave lane closures in place during non-working hours or prohibited periods, unless otherwise approved by the Engineer. No long term lane closures (more than 3 days) will be allowed; therefore, lane closures will not be measured for payment.

Traffic Control Plan
Page 2 of 9

TEMPORARY SIGNS

Temporary sign posts and splices shall be compliant with NCHRP 350 or MASH. Manufacturer's documentation validating this compliance shall be provided to the Engineer prior to installation. Temporary signs, including any splices, shall be installed according to manufacturer's specifications and installation recommendations. Contrary to section 112.04.02, only long-term temporary signs (temporary signs intended to be continuously in place for more than 3 days) will be measured for payment. Short-term temporary signs (temporary signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic.

CHANGEABLE MESSAGE SIGNS

Provide changeable message signs at locations determined by the Engineer. The Engineer may vary the designated locations as the work progresses. The Engineer will determine the messages to be displayed. In the event of damage or mechanical/electrical failure, repair or replace the Changeable Message Sign within 24 hours. The Department will measure for payment the maximum number of Changeable Message Signs in concurrent use at the same time on a single day on all sections of the contract. The Department will measure individual Changeable Message Signs only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. The Department will not measure replacements for damaged Changeable Message Signs or for signs the Engineer directs be replaced due to poor condition or readability. Retain possession of the Changeable Message Signs upon completion of the work.

BARRICADES

The Department will not measure barricades used in lieu of barrels and cones for channelization or delineation, but shall be incidental to Maintain and Control Traffic according to Section 112.04.01.

TEMPORARY ENTRANCES

The Engineer will not require the Contractor to provide continuous access to farms, single family, duplex, or triplex residential properties during working hours; however, provide reasonable egress and ingress to each such property when actual operations are not in progress at that location. Limit the time during which a farm or residential entrance is blocked to the minimum length of time required for actual operations, not extended for the Contractor's convenience, and in no case exceeding six (6) hours. Notify all residents twenty-four hours in advance of any driveway or entrance closings and make any accommodations necessary to meet the access needs of disabled residents.

Traffic Control Plan
Page 3 of 9

Except as allowed by the Phasing as specified above, maintain direct access to all side streets and roads, schools, churches, commercial properties, and apartments or apartment complexes of four or more units at all times. Access to fire hydrants must also be maintained at all times

The Department will measure asphalt materials required to construct and maintain any temporary entrances which may be necessary to provide temporary access; however, the Department will not measure aggregates, excavation, and/or embankment, but shall be incidental to Maintain and Control Traffic. The Engineer will determine the type of surfacing material, asphalt or aggregate, to be used at each entrance.

PAVEMENT EDGE DROP-OFFS

Do not allow a pavement edge between opposing directions of traffic or lanes that traffic is expected to cross in a lane change situation with an elevation difference greater than 1½". Place Warning signs (MUTCD W8-11 or W8-9A) in advance of and at 1500' intervals throughout the drop-off area. Dual post the signs on both sides of the traveled way. Wedge all transverse transitions between resurfaced and un-resurfaced areas which traffic may cross with asphalt mixture for leveling and wedging. Remove the wedges prior to placement of the final surface course.

Protect pavement edges that traffic is not expected to cross, except accidentally, as follows:

Less than 2" - No protection required.

2" to 4" - Place plastic drums, vertical panels, or barricades every 50 feet. During daylight working hours only, the Engineer will allow the Contractor to use cones in lieu of plastic drums, panels, and barricades. Wedge the drop-off with DGA or asphalt mixture for leveling and wedging with a 1:1 or flatter slope in daylight hours, or 3:1 or flatter slope during nighttime hours, when work is not active in the drop-off area.

Greater than 4" - Protect drop-offs greater than 4 inches within 10 feet of traffic by placing drums, vertical panels, or barricades every 25 feet. The Engineer will not allow the use of cones in lieu of drums, vertical panels, or barricades for drop-offs greater than 4". Place Type III Barricades directly in front of the drop-off facing oncoming traffic in both directions of travel. Provide warning signs as shown on the Standard Drawings or as directed by the Engineer

Pedestrians & Bicycles - Protect pedestrian and bicycle traffic as directed by the Engineer.

Traffic Control Plan
Page 4 of 9

PAVEMENT MARKINGS

If there is to be a deviation from the existing striping plan, the Engineer will furnish the Contractor a striping plan prior to placement of the final surface course. Install Temporary Striping according to Section 112 with the following exception:

If the Contractor's operations or phasing requires temporary markings that must subsequently be removed from the final surface course, use an approved removable lane tape; however, the Department will not measure removable lane tape for separate payment, but will measure and pay for removable lane tape as temporary striping.

THERMOPLASTIC INTERSECTION MARKINGS

Prior to milling and/or resurfacing, locate and document the locations of the existing markings. After resurfacing, replace the markings at their approximate existing locations or as directed by Engineer. Place markings not existing prior to resurfacing as directed by the Engineer.

USE AND PLACEMENT OF CHANGEABLE MESSAGE SIGNS

The following policy is based upon current Changeable Message Signs (CMS) standards and practice from many sources, including the Federal Highway Administration (FHWA), other State Departments of Transportation, and Traffic Safety Associations. It is understood that each CMS installation or use requires individual consideration due to the specific location or purpose. However, there will be elements that are constant in nearly all applications. Accordingly these recommended guidelines bring a level of uniformity, while still being open to regional experience and engineering judgment.

Application

The primary purpose of CMS is to advise the driver of unexpected traffic and routing situations. Examples of applications where CMS can be effective include:

- Closures (road, lane, bridge, ramp, shoulder, interstate)
- Changes in alignment or surface conditions
- Significant delays, congestion
- Construction/maintenance activities (delays, future activities)
- Detours/alternative routes
- Special events with traffic and safety implications
- Crash/incidents
- Vehicle restrictions (width, height, weight, flammable)
- Advance notice of new traffic control devices
- Real-time traffic conditions (must be kept up to date)
- Weather /driving conditions, environmental conditions, Roadway Weather Information Systems
- Emergency Situations
- Referral to Highway Advisory Radio (if available)
- Messages as approved by the County Engineer's Office

CMS should not be used for:

- Replacement of static signs (e.g. road work ahead), regulatory signage (e.g. speed limits), pavement markings, standard traffic control devices, conventional warning or guide signs.
- Replacement of lighted arrow board
- Advertising (Don't advertise the event unless clarifying "action" to be taken by driver – e.g. Speedway traffic next exit)
- Generic messages
- Test messages (portable signs only)
- Describe recurrent congestion (e.g. rush hour)
- Public service announcements (not traffic related)

Traffic Control Plan
Page 6 of 9

Messages

Basic principles that are important to providing proper messages and insuring the proper operation of a CMS are:

- Visible for at least ½ mile under ideal daytime and nighttime conditions
- Legible from all lanes a minimum of 650 feet
- Entire message readable twice while traveling at the posted speed
- No more than two message panels should be used (three panels may be used on roadways where vehicles are traveling less than 45 mph). A panel is the message that fits on the face of the sign without flipping or scrolling.
- Each panel should convey a single thought; short and concise
- Do not use two unrelated panels on a sign
- Do not use the sign for two unrelated messages
- Should not scroll text horizontally or vertically
- Should not contain both the words left and right
- Use standardized abbreviations and messages
- Should be accurate and timely
- Avoid filler/unnecessary words and periods (hazardous, a, an, the)
- Avoid use of speed limits
- Use words (not numbers) for dates

Placement

Placement of the CMS is important to insure that the sign is visible to the driver and provides ample time to take any necessary action. Some of the following principles may only be applicable to controlled access roadways. The basic principles of placement for a CMS are:

- When 2 signs are needed, place on same side of roadway and at least 1,000 feet apart
- Place behind semi-rigid/rigid protection (guardrail, barrier) or outside of the clear zone
- Place 1,000 feet in advance of work zone; at least one mile ahead of decision point
- Normally place on right side of roadway; but should be placed closest to the affected lane so that either side is acceptable
- Signs should not be dual mounted (one on each side of roadway facing same direction)
- Point trailer hitch downstream
- Secure to immovable object to prevent theft (if necessary)
- Do not place in sags or just beyond crest
- Check for reflection of sun to prevent the blinding of motorist
- Should be turned ~3 degrees outward from perpendicular to the edge of pavement
- Bottom of sign should be 7 feet above the elevation of edge of roadway
- Should be removed when not in use

Traffic Control Plan
Page 7 of 9**Standard Abbreviations**

The following is a list of standard abbreviations to be used on CMS:

<u>Word</u>	<u>Abbrev</u>	<u>Example</u>
Access	ACCS	ACCIDENT AHEAD/ USE ACCS RD NEXT RIGHT
Alternate	ALT	ACCIDENT AHEAD/ USE ALT RTE NEXT RIGHT
Avenue	AVE	FIFTH AVE CLOSED/ DETOUR NEXT LEFT
Blocked	BLKD	FIFTH AVE BLKD/ MERGE LEFT
Boulevard	BLVD	MAIN BLVD CLOSED/ USE ALT RTE
Bridge	BRDG	SMITH BRDG CLOSED/ USE ALT RTE
Cardinal Directions	N, S, E, W	N I75 CLOSED/ DETOUR EXIT 30
Center	CNTR	CNTR LANE CLOSED/ MERGE LEFT
Commercial	COMM	OVRSZ COMM VEH/ USE I275
Condition	COND	ICY COND POSSIBLE
Congested	CONG	HVY CONG NEXT 3 MI
Construction	CONST	CONST WORK AHEAD/ EXPECT DELAYS
Downtown	DWNTN	DWNTN TRAF USE EX 40
Eastbound	E-BND	E-BND I64 CLOSED/ DETOUR EXIT 20
Emergency	EMER	EMER VEH AHEAD/ PREPARE TO STOP
Entrance, Enter	EX, EXT	DWNTN TRAF USE EX 40
Expressway	EXPWY	WTRSN EXPWY CLOSED/ DETOUR EXIT 10
Freeway	FRWY, FWY	GN SYNDR FWY CLOSED/ DETOUR EXIT 15
Hazardous Materials	HAZMAT	HAZMAT IN ROADWAY/ ALL TRAF EXIT 25
Highway	HWY	ACCIDENT ON AA HWY/ EXPECT DELAYS
Hour	HR	ACCIDENT ON AA HWY/ 2 HR DELAY
Information	INFO	TRAF INFO TUNE TO 1240 AM
Interstate	I	E-BND I64 CLOSED/ DETOUR EXIT 20
Lane	LN	LN CLOSED MERGE LEFT
Left	LFT	LANE CLOSED MERGE LFT
Local	LOC	LOC TRAF USE ALT RTE
Maintenance	MAINT	MAINT WRK ON BRDG/ SLOW
Major	MAJ	MAJ DELAYS I75/ USE ALT RTE
Mile	MI	ACCIDENT 3 MI AHEAD/ USE ALT RTE
Minor	MNR	ACCIDENT 3 MI MNR DELAY
Minutes	MIN	ACCIDENT 3 MI/ 30 MIN DELAY
Northbound	N-BND	N-BND I75 CLOSED/ DETOUR EXIT 50
Oversized	OVRSZ	OVRSZ COMM VEH/ USE I275 NEXT RIGHT
Parking	PKING	EVENT PKING NEXT RGT
Parkway	PKWY	CUM PKWAY TRAF/ DETOUR EXIT 60
Prepare	PREP	ACCIDENT 3 MI/ PREP TO STOP
Right	RGT	EVENT PKING NEXT RGT
Road	RD	HAZMAT IN RD/ ALL TRAF EXIT 25
Roadwork	RDWK	RDWK NEXT 4 MI/ POSSIBLE DELAYS
Route	RTE	MAJ DELAYS I75/ USE ALT RTE
Shoulder	SHLDR	SHLDR CLOSED NEXT 5 MI
Slippery	SLIP	SLIP COND POSSIBLE/ SLOW SPD
Southbound	S-BND	S-BND I75 CLOSED/ DETOUR EXIT 50
Speed	SPD	SLIP COND POSSIBLE/ SLOW SPD

Traffic Control Plan
Page 8 of 9

Standard Abbreviations (cont)

<u>Word</u>	<u>Abbrev</u>	<u>Example</u>
Street	ST	MAIN ST CLOSED/ USE ALT RTE
Traffic	TRAF	CUM PKWAY TRAF/ DETOUR EXIT 60
Vehicle	VEH	OVRSZ COMM VEH/ USE I275 NEXT RIGHT
Westbound	W-BND	W-BND I64 CLOSED/ DETOUR EXIT 50
Work	WRK	CONST WRK 2MI/ POSSIBLE DELAYS

Certain abbreviations are prone to inviting confusion because another word is abbreviated or could be abbreviated in the same way. DO NO USE THESE ABBREVIATIONS:

<u>Abbrev</u>	<u>Intended Word</u>	<u>Word Erroneously Given</u>
ACC	Accident	Access (Road)
CLRS	Clears	Colors
DLY	Delay	Daily
FDR	Feeder	Federal
L	Left	Lane (merge)
LOC	Local	Location
LT	Light (traffic)	Left
PARK	Parking	Park
POLL	Pollution (index)	Poll
RED	Reduce	Red
STAD	Stadium	Standard
TEMP	Temporary	Temperature
WRNG	Warning	Wrong

Typical Messages

The following is a list of typical messages used on CMS. The list consists of the reason or problem that you want the driver to be aware of and the action that you want the driver to take.

<u>Reason/Problem</u>	<u>Action</u>
ACCIDENT	ALL TRAFFIC EXIT RT
ACCIDENT/XX MILES	AVOID DELAY USE XX
XX ROAD CLOSED	CONSIDER ALT ROUTE
XX EXIT CLOSED	DETOUR
BRIDGE CLOSED	DETOUR XX MILES
BRIDGE/(SLIPPERY, ICE, ETC.)	DO NOT PASS
CENTER/LANE/CLOSED	EXPECT DELAYS
DELAY(S), MAJOR/DELAYS	FOLLOW ALT ROUTE
DEBRIS AHEAD	KEEP LEFT
DENSE FOG	KEEP RIGHT
DISABLED/VEHICLE	MERGE XX MILES
EMER/VEHICLES/ONLY	MERGE LEFT
EVENT PARKING	MERGE RIGHT
EXIT XX CLOSED	ONE-WAY TRAFFIC
FLAGGER XX MILES	PASS TO LEFT
FOG XX MILES	PASS TO RIGHT

Traffic Control Plan
Page 9 of 9

Typical Messages (cont)


Reason/Problem

FREEWAY CLOSED
FRESH OIL
HAZMAT SPILL
ICE
INCIDENT AHEAD
LANES (NARROW, SHIFT, MERGE, ETC.)
LEFT LANE CLOSED
LEFT LANE NARROWS
LEFT 2 LANES CLOSED
LEFT SHOULDER CLOSED
LOOSE GRAVEL
MEDIAN WORK XX MILES
MOVING WORK ZONE, WORKERS IN ROADWAY
NEXT EXIT CLOSED
NO OVERSIZED LOADS
NO PASSING
NO SHOULDER
ONE LANE BRIDGE
PEOPLE CROSSING
RAMP CLOSED
RAMP (SLIPPERY, ICE, ETC.)
RIGHT LANE CLOSED
RIGHT LANE NARROWS
RIGHT SHOULDER CLOSED
ROAD CLOSED
ROAD CLOSED XX MILES
ROAD (SLIPPERY, ICE, ETC.)
ROAD WORK
ROAD WORK (OR CONSTRUCTION) (TONIGHT, TODAY, TOMORROW, DATE)
ROAD WORK XX MILES
SHOULDER (SLIPPERY, ICE, SOFT, BLOCKED, ETC.)
NEW SIGNAL XX MILES
SLOW 1 (OR 2) - WAY TRAFFIC
SOFT SHOULDER
STALLED VEHICLES AHEAD
TRAFFIC BACKUP
TRAFFIC SLOWS
TRUCK CROSSING
TRUCKS ENTERING
TOW TRUCK AHEAD
UNEVEN LANES
WATER ON ROAD
WET PAINT
WORK ZONE XX MILES
WORKERS AHEAD

Action


PREPARE TO STOP
REDUCE SPEED
SLOW
SLOW DOWN
STAY IN LANE
STOP AHEAD
STOP XX MILES
TUNE RADIO 1610 AM
USE NN ROAD
USE CENTER LANE
USE DETOUR ROUTE
USE LEFT TURN LANE
USE NEXT EXIT
USE RIGHT LANE
WATCH FOR FLAGGER

DURABLE PAVEMENT EDGE DETAIL
 (Resurfacing adjacent to fill slope or ditch foreslope that is 3:1 or less)

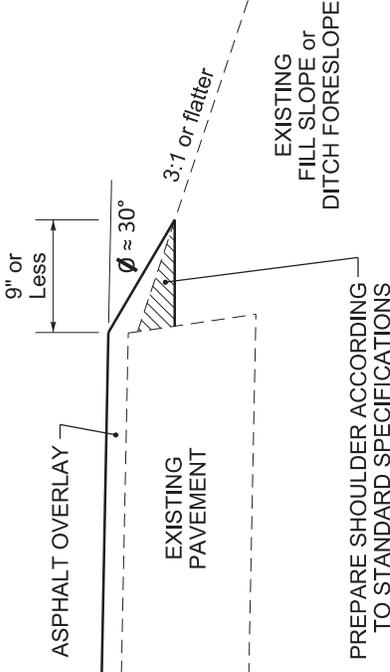

PREPARE SHOULDER ACCORDING TO STANDARD SPECIFICATIONS


DURABLE PAVEMENT EDGE DETAIL
 (Resurfacing adjacent to fill slope or ditch foreslope that is steeper than 3:1)

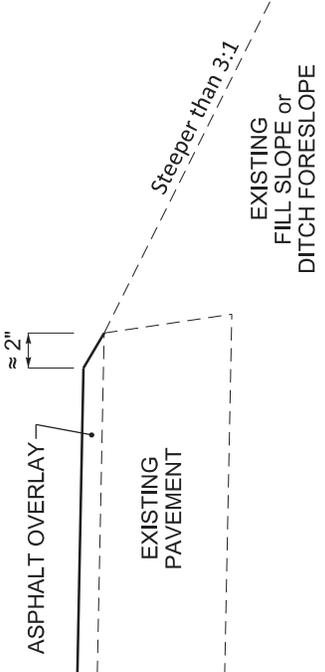


NOTES

1. DETAILS DO NOT APPLY TO OVERLAYS LESS THAN 1 INCH THICK.
2. THE DURABLE PAVEMENT EDGE DEVICE MAY BE DISENGAGED AT DRIVEWAYS, SIDE STREETS, HIGH SHOULDERS, AND OTHER LOCATIONS NOT FEASIBLE TO CONSTRUCT, AS APPROVED BY THE ENGINEER.


DURABLE PAVEMENT EDGE DETAIL
 (Resurfacing adjacent to low shoulder with dropoff of 5 inches or less)

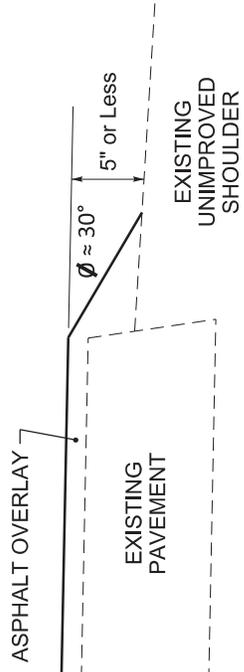

DURABLE PAVEMENT EDGE DETAIL
 (Resurfacing adjacent to low shoulder with dropoff of more than 5 inches)

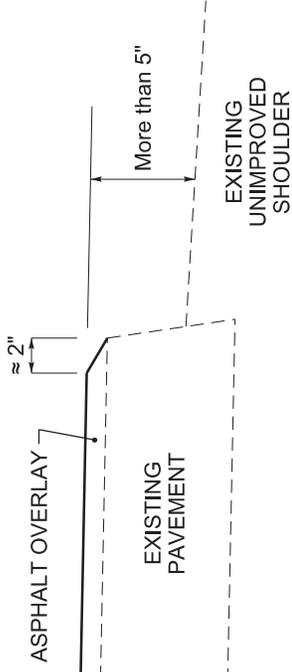

DURABLE PAVEMENT EDGE DETAIL
 (Resurfacing adjacent to an obstruction, such as an existing headwall)

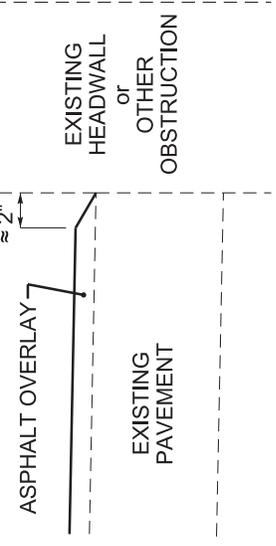

DURABLE PAVEMENT EDGE DETAILS

DRAWING NOT TO SCALE

	KENTUCKY TRANSPORTATION CABINET Department of Highways DIVISION OF RIGHT OF WAY & UTILITIES RIGHT OF WAY CERTIFICATION	TC 62-226 Rev. 01/2016 Page 1 of 1
--	--	--

<input checked="" type="checkbox"/>	Original	<input type="checkbox"/>	Re-Certification	RIGHT OF WAY CERTIFICATION	
ITEM #	COUNTY	PROJECT # (STATE)		PROJECT # (FEDERAL)	
3-9014.00	Allen	FD52 002 0100 000-009		HSIP 5071 (019)	

PROJECT DESCRIPTION

Perform low cost safety improvements along KY 100 between MP 0.00 and MP 8.83 in Allen County, KY.

No Additional Right of Way Required

Construction will be within the limits of the existing right of way. The right of way was acquired in accordance to FHWA regulations under the Uniform Relocation Assistance and Real Property Acquisitions Policy Act of 1970, as amended. No additional right of way or relocation assistance were required for this project.

Condition # 1 (Additional Right of Way Required and Cleared)

All necessary right of way, including control of access rights when applicable, have been acquired including legal and physical possession. Trial or appeal of cases may be pending in court but legal possession has been obtained. There may be some improvements remaining on the right-of-way, but all occupants have vacated the lands and improvements, and KYTC has physical possession and the rights to remove, salvage, or demolish all improvements and enter on all land. Just Compensation has been paid or deposited with the court. All relocations have been relocated to decent, safe, and sanitary housing or that KYTC has made available to displaced persons adequate replacement housing in accordance with the provisions of the current FHWA directive.

Condition # 2 (Additional Right of Way Required with Exception)

The right of way has not been fully acquired, the right to occupy and to use all rights-of-way required for the proper execution of the project has been acquired. Some parcels may be pending in court and on other parcels full legal possession has not been obtained, but right of entry has been obtained, the occupants of all lands and improvements have vacated, and KYTC has physical possession and right to remove, salvage, or demolish all improvements. Just Compensation has been paid or deposited with the court for most parcels. Just Compensation for all pending parcels will be paid or deposited with the court prior to AWARD of construction contract

Condition # 3 (Additional Right of Way Required with Exception)

The acquisition or right of occupancy and use of a few remaining parcels are not complete and/or some parcels still have occupants. All remaining occupants have had replacement housing made available to them in accordance with 49 CFR 24.204. KYTC is hereby requesting authorization to advertise this project for bids and to proceed with bid letting even though the necessary right of way will not be fully acquired, and/or some occupants will not be relocated, and/or the just compensation will not be paid or deposited with the court for some parcels until after bid letting. KYTC will fully meet all the requirements outlined in 23 CFR 635.309(c)(3) and 49 CFR 24.102(j) and will expedite completion of all acquisitions, relocations, and full payments after bid letting and prior to AWARD of the construction contract or force account construction.

Total Number of Parcels on Project	0	EXCEPTION (S) Parcel #	ANTICIPATED DATE OF POSSESSION WITH EXPLANATION
Number of Parcels That Have Been Acquired			
Signed Deed			
Condemnation			
Signed ROE			

Notes/ Comments (Use Additional Sheet if necessary)

LPA RW Project Manager		Right of Way Supervisor	
Printed Name		Printed Name	Allen Arnold
Signature		Signature	allen arnold <small>Digitally signed by allen arnold Date: 2020.03.05 06:45:04 -06'00'</small>
Date		Date	3/5/20
Right of Way Director		FHWA	
Printed Name	Kelly Divine	Printed Name	No Signature Required
Signature	 2020.03.05 08:37:23 -06'00'	Signature	as per FHWA-KYTC
Date	3/5/20	Date	Current Stewardship Agreement

UTILITIES AND RAIL CERTIFICATION NOTE

Allen County – HSIP 5071 (019)
FD52 002 0100 000-009
Safety Improvements along KY 100 from MP 0.000 to MP 8.830
Item No. 3-9014.00

GENERAL PROJECT NOTE ON UTILITY PROTECTION

Utility coordination efforts determined that no significant utility relocation work is required to complete the project.

NOTE: DO NOT DISTURB THE FOLLOWING UTILITIES LOCATED WITHIN THE PROJECT DISTURB LIMITS

The following utilities may be present in this area and are not to be disturbed during construction activities:

- Water Mains: Water mains of various sizes are located on the left and/or right sides of project throughout project limits.
- Overhead Electric/Telephone: Overhead electric/telephone is located on both left and right sides throughout project limits. Do not disturb underground or overhead utilities.

The Contractor is fully responsible for protection of all utilities listed above

THE FOLLOWING COMPANIES ARE RELOCATING/ADJUSTING THEIR UTILITIES WITHIN THE PROJECT LIMITS AND WILL BE COMPLETE PRIOR TO CONSTRUCTION

None

THE FOLLOWING COMPANIES HAVE FACILITIES TO BE RELOCATED/ADJUSTED BY THE COMPANY OR THE COMPANY'S SUBCONTRACTOR AND IS TO BE COORDINATED WITH THE ROAD CONTRACT

None

THE FOLLOWING COMPANIES HAVE FACILITIES TO BE RELOCATED/ADJUSTED BY THE ROAD CONTRACTOR AS INCLUDED IN THIS CONTRACT

None

THE FOLLOWING RAIL COMPANIES HAVE FACILITIES IN CONJUNCTION WITH THIS PROJECT AS NOTED

- No Rail Involved Minimal Rail Involved (See Below) Rail Involved (See Below)

UTILITIES AND RAIL CERTIFICATION NOTE

Allen County – HSIP 5071 (019)
FD52 002 0100 000-009
Safety Improvements along KY 100 from MP 0.000 to MP 8.830
Item No. 3-9014.00

UNDERGROUND FACILITY DAMAGE PROTECTION – BEFORE YOU DIG

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. The contractor is instructed to contact KY 811 for the location of existing underground utilities. Contact shall be made a minimum of two (2) and no more than ten (10) business days prior to excavation.

The contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY 811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom are to be contacted through their individual Protection Notification Center. It may be necessary for the contractor to contact the County Court Clerk to determine what utility companies have facilities in the area. Non-compliance with these directives can result in the enforcement of penalties.

SPECIAL CAUTION NOTE – PROTECTION OF UTILITIES

The contractor will be responsible for contacting all utility facility owners on the subject project to coordinate his activities. The contractor will coordinate his activities to minimize and, where possible, avoid conflicts with utility facilities. Due to the nature of the work proposed, it is unlikely to conflict with the existing utilities beyond minor facility adjustments. Where conflicts with utility facilities are unavoidable, the contractor will coordinate any necessary relocation work with the facility owner and Resident Engineer. The Kentucky Transportation Cabinet maintains the right to remove or alter portions of this contract if a utility conflict occurs.

The utility facilities as noted in the previous section(s) have been determined using data garnered by varied means and with varying degrees of accuracy: from the facility owners, a result of S.U.E., field inspections, and/or reviews of record drawings. The facilities defined may not be inclusive of all utilities in the project scope and are not Level A quality, unless specified as such. It is the contractor's responsibility to verify all utilities and their respective locations before excavating.

Please Note: The information presented in this Utility Note is informational in nature and the information contained herein is not guaranteed.

UTILITIES AND RAIL CERTIFICATION NOTE

Allen County – HSIP 5071 (019)
FD52 002 0100 000-009
Safety Improvements along KY 100 from MP 0.000 to MP 8.830
Item No. 3-9014.00

AREA UTILITIES CONTACT LIST

<u>Utility Company/Agency</u>	<u>Contact Name</u>	<u>Contact Information</u>
1. Tennessee Valley Authority		1101 Market Street Chattanooga, TN 37402
2. Tri-County Electric Membership Cooperative Corporation		405 College Street PO Box 40 Lafayette, TN 37083
3. Boardwalk Pipeline Partners Northern Division dba/Texas Gas Transmission, LLC		9 Greenway Plaza Suite 2800 Houston, TX 77046
4. Columbia Gulf Transmission Company		1675 Muddy Creek Pike Po Box 901 Winchester, KY 40391
5. City of Scottsville, Kentucky (Water & Gas)		201 West Main Street Scottsville, KY 42164
6. Tennessee Gas Pipeline		750 Old Hickory Boulevard Building 2, Suite 190 Brentwood, TN 37027
7. AT&T - KY		3535 Colonnade Parkway Room North W3D Birmingham, AL 35243
8. North Central Telephone Cooperative Incorporated		872 HWY 52 East Bypass PO Box 70 Lafayette, TN 37083
9. South Central Rural Telephone Cooperative Corporation, Inc.		1399 Happy Valley Road PO Box 159 Glasgow, KY 42142

UTILITIES AND RAIL CERTIFICATION NOTE

Allen County – HSIP 5071 (019)
FD52 002 0100 000-009
Safety Improvements along KY 100 from MP 0.000 to MP 8.830
Item No. 3-9014.00

- | | |
|----------------------------------|---|
| 10. Windstream Communications | 11101 Anderson Drive
Suite 100
Little Rock, AR 72212 |
| 11. Allen County Water District | 330 New Gallatin Road
PO Box 58
Scottsville, KY 42164 |
| 12. Fountain Run Water District | 226 Main Street
PO Box 118
Fountain Run, KY 42133 |
| 13. Warren County Water District | 523 Highway US-31 Bypass
PO Box 10180
Bowling Green, KY 42101 |

NOTE: The Utilities Contact List is provided as informational only, and may not be a complete list of all Utility Companies with facilities in the project area. Utility contact information will be provided at the pre-construction meeting.

N O T I C E

**DEPARTMENT OF THE ARMY
CORPS OF ENGINEERS
NATIONWIDE PERMIT AUTHORIZATION
KENTUCKY DIVISION OF WATER 401 WQC**

PROJECT: Allen County, Item No. 3-9014
KY 100 HISP project

The Section 404 & 401 activities for this project have been previously permitted under the authority of the Department of the Army Nationwide Permit No. 14 “Linear Transportation Projects” & Division of Water General Water Quality Certification. In order for these authorizations to be valid, the attached conditions must be followed. The contractor shall post a copy of this Nationwide Permit & General WQC in a conspicuous location at the project site for the duration of construction and comply with the general conditions as required.

Mile point 5.098

Extend a 24 inch culvert and rebuild headwalls. The **ephemeral** stream a U.T. to Middle Fork Drakes Creek will have impacts below the normal high water mark. The estimated area of impact is **17 linear feet** and **0.001 acres**.

This project involves work near and/or within Jurisdictional Waters of the United States as defined by the United States Army Corps of Engineers and therefore requires a Nationwide 14 General 404 Permit. The Division of Water certified this General Permit with several conditions (See attached). One that should be brought to your attention is regarding the use of heavy equipment in the stream channel. If there is need to cross the stream channel with heavy equipment or conduct work from within the stream channel a working platform or temporary crossing is authorized. This should be constructed with clean rock and sufficient pipe to allow stream flow to continue unimpeded (see attached typical drawing).

In order for this authorization to be valid, the attached conditions must be followed. The contractor shall post a copy of this Nationwide Approval in a conspicuous location at the project site for the duration of construction and comply with the general conditions as required.

To more readily expedite construction, the contractor may elect to alter the design or perform the work in a manner different from what was originally proposed and specified. Prior to commencing such alternative work, the contractor shall obtain **written** permission from the

Division of Construction and the Division of Environmental Analysis. If such changes necessitate further permitting then the contractor will be responsible for applying to the Army Corps of Engineers and the Kentucky Division of Water (KDOW). A copy of any request to the Corps of Engineers or the KDOW to alter this proposal and subsequent responses shall be forwarded to the Division of Environmental Analysis, DA Permit Coordinator, for office records and for informational purposes.



MATTHEW G. BEVIN
GOVERNOR

CHARLES G. SNAVELY
SECRETARY

**ENERGY AND ENVIRONMENT CABINET
DEPARTMENT FOR ENVIRONMENTAL PROTECTION**

R. BRUCE SCOTT
COMMISSIONER

300 SOWER BOULEVARD
FRANKFORT, KENTUCKY 40601

**General Certification--Nationwide Permit # 14
Linear Transportation Projects**

This General Certification is issued March 19, 2017, in conformity with the requirements of Section 401 of the Clean Water Act of 1977, as amended (33 U.S.C. §1341), as well as Kentucky Statute KRS 224.16-050.

For this and all nationwide permits, the definition of surface water is as per 401 KAR 10:001 Chapter 10, Section 1(80): Surface Waters means those waters having well-defined banks and beds, either constantly or intermittently flowing; lakes and impounded waters; marshes and wetlands; and any subterranean waters flowing in well-defined channels and having a demonstrable hydrologic connection with the surface. Lagoons used for waste treatment and effluent ditches that are situated on property owned, leased, or under valid easement by a permitted discharger are not considered to be surface waters of the commonwealth.

Agricultural operations, as defined by KRS 224.71-100(1) conducting activities pursuant to KRS 224.71-100 (3), (4), (5), (6), or 10 are deemed to have certification if they are implementing an Agriculture Water Quality Plan pursuant to KRS 224.71-145.

For all other operations, the Commonwealth of Kentucky hereby certifies under Section 401 of the Clean Water Act (CWA) that it has reasonable assurances that applicable water quality standards under Kentucky Administrative Regulations Title 401, Chapter 10, established pursuant to Sections 301, 302, 304, 306 and 307 of the CWA, will not be violated for the activity covered under NATIONWIDE PERMIT 14, namely Linear Transportation Projects, provided that the following conditions are met:

1. The activity will not occur within surface waters of the Commonwealth identified by the Kentucky Division of Water as Outstanding State or National Resource Water, Cold Water Aquatic Habitat, or Exceptional Waters.
2. The activity will not occur within surface waters of the Commonwealth identified as perpetually-protected (e.g. deed restriction, conservation easement) mitigation sites.
3. The activity will impact less than 1/2 acre of wetland/marsh.

General Certification--Nationwide Permit # 14
Linear Transportation Projects
Page 2

4. The activity will impact less than 300 linear feet of surface waters of the Commonwealth. Stream realignment greater than 100 feet and in-stream stormwater detention/retention basins are not covered under this general water quality certification.
5. For complete linear transportation projects, all impacts shall not exceed a cumulative length of 500 linear feet within each Hydrologic Unit Code (HUC) 14.
6. Any crossings must be constructed in a manner that does not impede natural water flow.
7. Stream impacts covered under this General Water Quality Certification and undertaken by those persons defined as an agricultural operation under the Agricultural Water Quality Act must be completed in compliance with the Kentucky Agricultural Water Quality Plan (KWQP).
8. The Kentucky Division of Water may require submission of a formal application for an individual certification for any project if the project has been determined to likely have a significant adverse effect upon water quality or degrade the waters of the Commonwealth so that existing uses of the water body or downstream waters are precluded.
9. Activities that do not meet the conditions of this General Water Quality Certification require an Individual Section 401 Water Quality Certification.
10. Activities qualifying for coverage under this General Water Quality Certification are subject to the following conditions:
 - Projects requiring in-stream stormwater detention/retention basins shall require individual water quality certifications.
 - Erosion and sedimentation pollution control plans and Best Management Practices must be designed, installed, and maintained in effective operating condition at all times during construction activities so that violations of state water quality standards do not occur (401 KAR 10:031 Section 2 and KRS 224.70-100).
 - Sediment and erosion control measures, such as check-dams constructed of any material, silt fencing, hay bales, etc., shall not be placed within surface waters of the Commonwealth, either temporarily or permanently, without prior approval by the Kentucky Division of Water's Water Quality Certification Section. If placement of sediment and erosion control measures in surface waters is unavoidable, design and placement of temporary erosion control measures shall not be conducted in such a manner that may result in instability of streams that are adjacent to,

General Certification--Nationwide Permit # 14
Linear Transportation Projects
Page 3

upstream, or downstream of the structures. All sediment and erosion control devices shall be removed and the natural grade restored within the completion timeline of the activities.

- Measures shall be taken to prevent or control spills of fuels, lubricants, or other toxic materials used in construction from entering the watercourse.
- Removal of riparian vegetation in the utility line right-of-way shall be limited to that necessary for equipment access.
- To the maximum extent practicable, all in-stream work under this certification shall be performed under low-flow conditions.
- Heavy equipment, e.g. bulldozers, backhoes, draglines, etc., if required for this project, should not be used or operated within the stream channel. In those instances in which such in-stream work is unavoidable, then it shall be performed in such a manner and duration as to minimize turbidity and disturbance to substrates and bank or riparian vegetation.
- Any fill shall be of such composition that it will not adversely affect the biological, chemical, or physical properties of the receiving waters and/or cause violations of water quality standards. If rip-rap is utilized, it should be of such weight and size that bank stress or slump conditions will not be created because of its placement.
- If there are water supply intakes located downstream that may be affected by increased turbidity and suspended solids, the permittee shall notify the operator when such work will be done.
- Should evidence of stream pollution or jurisdictional wetland impairment and/or violations of water quality standards occur as a result of this activity (either from a spill or other forms of water pollution), the KDOW shall be notified immediately by calling (800) 928-2380.

Non-compliance with the conditions of this general certification or violation of Kentucky state water quality standards may result in civil penalties.

2017 Nationwide Permits Regional and Permit-Specific Conditions COMMONWEALTH OF KENTUCKY

These regional conditions are in addition to, but do not supersede, the requirements in the Federal Register (Volume 82, No. 4 of January 6, 2017, pp 1860).

Notifications for all Nationwide Permits (NWP) shall be in accordance with General Condition No. 32.

1. For activities that would impact Outstanding State or National Resource Waters (OSNRWs), Exceptional Waters (EWs), Coldwater Aquatic Habitat Waters (CAHs) under the Endangered Species Act for the NWP listed below, a Pre-Construction Notification (PCN) will be required to the Corps. The Corps will coordinate with the appropriate resource agencies (see attached list) on these NWP (Section 404 activities), for impacts to these waters.

NWP 3 (Maintenance)

NWP 4 (Fish and Wildlife Harvesting, Enhancement, and Attraction Devices and Activities)

NWP 5 (Scientific Measurement Devices)

NWP 6 (Survey Activities)

NWP 7 (Outfall Structures and Associated Intake Structures)

NWP 12 (Utility Line Activities)

NWP 13 (Bank Stabilization)

NWP 14 (Linear Transportation Projects)

NWP 15 (U.S. Coast Guard Approved Bridges)

NWP 16 (Return Water from Upland Contained Disposal Areas)

NWP 17 (Hydropower Projects)

NWP 18 (Minor Discharges)

NWP 19 (Minor Dredging)

NWP 20 (Response Operations for Oil or Hazardous Substances)

NWP 21 (Surface Coal Mining Activities)

NWP 22 (Removal of Vessels)

NWP 23 (Approved Categorical Exclusions)

NWP 25 (Structural Discharges)

NWP 27 (Aquatic Habitat Restoration, Establishment, and Enhancement Activities)

NWP 29 (Residential Developments)

NWP 30 (Moist Soil Management for Wildlife)

NWP 31 (Maintenance of Existing Flood Control Facilities)

NWP 32 (Completed Enforcement Actions)

NWP 33 (Temporary Construction, Access, and Dewatering)

NWP 34 (Cranberry Production Activities)

NWP 36 (Boat Ramps)

NWP 37 (Emergency Watershed Protection and Rehabilitation)

NWP 38 (Cleanup of Hazardous and Toxic Waste)

NWP 39 (Commercial and Institutional Developments)

NWP 40 (Agricultural Activities)

- NWP 41 (Reshaping Existing Drainage Ditches)
 - NWP 42 (Recreational Facilities)
 - NWP 43 (Stormwater Management Facilities)
 - NWP 44 (Mining Activities)
 - NWP 45 (Repair of Uplands Damaged by Discrete Events)
 - NWP 46 (Discharges in Ditches)
 - NWP 48 (Commercial Shellfish Aquaculture Activities)
 - NWP 49 (Coal Remining Activities)
 - NWP 50 (Underground Coal Mining Activities)
 - NWP 51 (Land-Based Renewable Energy Generation Facilities)
 - NWP 52 (Water-Based Renewable Energy Generation Pilot Projects)
 - NWP 53 (Removal of Low-Head Dams)
 - NWP 54 (Living Shorelines)
2. In addition to the notification and agency coordination requirements in the NWP's, for impacts greater than 0.25 acres in all "waters of the U.S." for the NWP's listed below, a PCN will be required to the Corps. The Corps will coordinate with the appropriate resource agencies (see attached list) on these NWP's:
- NWP 3 (Maintenance)
 - NWP 7 (Outfall Structures and Associated Intake Structures)
 - NWP 12 (Utility Line Activities)
 - NWP 14 (Linear Transportation Projects)
 - NWP 29 (Residential Developments)
 - NWP 39 (Commercial and Institutional Developments)
 - NWP 40 (Agricultural Activities)
 - NWP 41 (Reshaping Existing Drainage Ditches)
 - NWP 42 (Recreational Facilities)
 - NWP 43 (Stormwater Management Facilities)
 - NWP 44 (Mining Activities)
 - NWP 51 (Land-Based Renewable Energy Generation Facilities)
 - NWP 52 (Water-Based Renewable Energy Generation Pilot Projects)
 - NWP 53 (Removal of Low-Head Dams)
3. For activities in all "waters of the U.S." for the NWP's listed below, a PCN will be required to the Corps. The Corps will coordinate with the appropriate resource agencies (see attached list) on these NWP's:
- NWP 21 (Surface Coal Mining Activities)
 - NWP 27 (Aquatic Habitat Restoration, Establishment & Enhancement Activities)
 - NWP 49 (Coal Remining Activities)
 - NWP 50 (Underground Coal Mining Activities)
4. Nationwide Permit No. 14 – Linear Transportation Projects.
- (a) New road alignments or realignments are limited to a permanent loss of 500 linear feet of intermittent or perennial stream length at each crossing. Road crossings with permanent losses greater than 500 linear feet of intermittent or perennial stream associated with new

alignments or realignments will be evaluated as an individual permit (i.e., a Letter of Permission or as a Standard Individual Permit).

- (b) In addition to the notification requirements contained in NWP 14, the permittee must submit a PCN to the district engineer prior to commencing the activity for the permanent loss of greater than 300 feet of ephemeral, intermittent and perennial stream of all "waters of the U.S." (See General Condition 32 and the definition of "loss of waters of the United States" in the Nationwide Permits for further information.)
5. Notification in accordance with General Condition 32 is required to the Corps for all activities which are subject to jurisdiction under Section 10 of the Rivers and Harbors Act of 1899 (33 U.S.C. 403).
6. All applications are required as both a paper copy and in an electronic media format, including electronic mail or compact disc.
7. For all activities, the applicant shall review the U.S. Fish and Wildlife Service's IPaC website: <http://ecos.fws.gov/ipac> to determine if the activity might affect threatened and/or endangered species or designated critical habitat. If federally-listed species or designated critical habitat are identified, a PCN in accordance with General Condition 18 and 32 would be triggered and the official species list generated from the IPaC website must be submitted with the PCN.

Further information:

Outstanding State or National Resource Water (OSNRWs), Exceptional Waters (EWs), and Coldwater Aquatic Habitat Waters (CAHs) are waters designated by the Commonwealth of Kentucky, Natural Resources and Environmental Protection Cabinet. The list can be found at the following link: <http://eppcapp.ky.gov/spwaters/>

Information on Pre-Construction Notification (PCN) can be found at NWP General Condition No. 32 in the Federal Register (Volume 81, No. 105 of June 1, 2017, pp 35211).

COORDINATING RESOURCE AGENCIES

Chief, Wetlands Regulatory Section
U.S. Environmental Protection Agency
Region IV
Atlanta Federal Center
61 Forsyth Street, SW
Atlanta, Georgia 30303

Supervisor
U.S. Fish & Wildlife Service
JC Watts Federal Building, Room 265
330 West Broadway
Frankfort, Kentucky 40601

Supervisor
401 Water Quality Certification
Kentucky Division of Water
300 Sower Boulevard, 3rd Floor
Frankfort, KY 40601

Commissioner
Department of Fish and Wildlife Resources
#1 Game Farm Road
Frankfort, Kentucky 40601

Executive Director and State Historic Preservation Officer
Kentucky Heritage Council
300 Washington Street
Frankfort, Kentucky 40601

**ADDITIONAL COORDINATING RESOURCE AGENCY
FOR NWPS 21, 49, AND 50**

Kentucky Department for Natural Resources
Division of Mine Permits
300 Sower Boulevard
Frankfort, KY 40601

Terms for Nationwide Permit No. 14
Linear Transportation Projects

Activities required for crossings of waters of the United States associated with the construction, expansion, modification, or improvement of linear transportation projects (e.g., roads, highways, railways, trails, airport runways, and taxiways) in waters of the United States. For linear transportation projects in non-tidal waters, the discharge cannot cause the loss of greater than 1/2-acre of waters of the United States. For linear transportation projects in tidal waters, the discharge cannot cause the loss of greater than 1/3-acre of waters of the United States. Any stream channel modification, including bank stabilization, is limited to the minimum necessary to construct or protect the linear transportation project; such modifications must be in the immediate vicinity of the project.

This NWP also authorizes temporary structures, fills, and work, including the use of temporary mats, necessary to construct the linear transportation project. Appropriate measures must be taken to maintain normal downstream flows and minimize flooding to the maximum extent practicable, when temporary structures, work, and discharges, including cofferdams, are necessary for construction activities, access fills, or dewatering of construction sites. Temporary fills must consist of materials, and be placed in a manner, that will not be eroded by expected high flows. Temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The areas affected by temporary fills must be revegetated, as appropriate.

This NWP cannot be used to authorize non-linear features commonly associated with transportation projects, such as vehicle maintenance or storage buildings, parking lots, train stations, or aircraft hangars.

Notification: The permittee must submit a pre-construction notification to the district engineer prior to commencing the activity if: (1) the loss of waters of the United States exceeds 1/10-acre; or (2) there is a discharge in a special aquatic site, including wetlands. (See general condition 32.) (Authorities: Sections 10 and 404)

Note 1: For linear transportation projects crossing a single waterbody more than one time at separate and distant locations, or multiple waterbodies at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. Linear transportation projects must comply with 33 CFR 330.6(d).

Note 2: Some discharges for the construction of farm roads or forest roads, or temporary roads for moving mining equipment, may qualify for an exemption under section 404(f) of the Clean Water Act (see 33 CFR 323.4).

Note 3: For NWP 14 activities that require pre-construction notification, the PCN must include any other NWP(s), regional general permit(s), or individual permit(s) used or intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings that require Department of the Army authorization but do not require pre-construction notification (see paragraph (b) of general condition 32). The district engineer will evaluate the PCN in accordance with Section D, "District Engineer's Decision." The district engineer may require mitigation to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see general condition 23).

KYTC BMP Plan for Project CID **20-4206**



Kentucky Transportation Cabinet

Highway District 3

And

_____ **(2), Construction**

**Kentucky Pollutant Discharge Elimination System
Permit KYR10
Best Management Practices (BMP) plan**

Groundwater protection plan

For Highway Construction Activities

For

**Highway Safety Improvement Project on KY 100 in
Allen County**

Project: CID 20-4206

KYTC BMP Plan for Project CID **20-4206**

Project information

Note – (1) = Design (2) = Construction (3) = Contractor

1. Owner – Kentucky Transportation Cabinet, District 3
2. Resident Engineer: (2)
3. Contractor name: (2)
Address: (2)

Phone number: (2)
Contact: (2)
Contractors agent responsible for compliance with the KPDES permit requirements (3):
4. Project Control Number: (2)
5. Route (Address): KY 100
6. Latitude/Longitude (project mid-point): 36° 41' 43", -86° 20' 29"
7. County (project mid-point): Allen
8. Project start date (date work will begin): (2)
9. Projected completion date: (2)

KYTC BMP Plan for Project CID **20-4206**

A. Site description:

1. Nature of Construction Activity (from letting project description): Asphalt Pavement & Roadway Rehab
2. Order of major soil disturbing activities: (2) and (3)
3. Projected volume of material to be moved: 2542 CY (Cut) & 2248 CY (Fill)
4. Estimate of total project area (acres): 64.2
5. Estimate of area to be disturbed (acres): 34.5
6. Post construction runoff coefficient will be included in the project drainage folder. Persons needing information pertaining to the runoff coefficient will contact the resident engineer to request this information.
7. Data describing existing soil condition: (1) & (2)
8. Data describing existing discharge water quality (if any): (1) & (2)
9. Receiving water name: Sulphur Fork Creek, Smyrna Creek, Middle Fork Drakes Creek, Johns Creek, Synder Branch, & Trammel Creek
10. TMDLs and Pollutants of Concern in Receiving Waters: *No TDML's were involved on this project.*
11. Site map – Project layout sheet plus the erosion control sheets in the project plans that depict Disturbed Drainage Areas (DDAs) and related information. These sheets depict the existing project conditions with areas delineated by DDA (drainage area bounded by watershed breaks and right of way limits), the storm water discharge locations (either as a point discharge or as overland flow) and the areas that drain to each discharge point. These plans define the limits of areas to be disturbed and the location of control measures. Controls will be either site specific as designated by the designer or will be annotated by the contractor and resident engineer before disturbance commences. The project layout sheet shows the surface waters and wetlands.
12. Potential sources of pollutants:

The primary source of pollutants is solids that are mobilized during storm events. Other sources of pollutants include oil/fuel/grease from servicing and operating construction equipment, concrete washout water, sanitary wastes and trash/debris. (3)

KYTC BMP Plan for Project CID **20-4206**

B. Sediment and Erosion Control Measures:

1. Plans for highway construction projects will include erosion control sheets that depict Disturbed Drainage Areas (DDAs) and related information. These plan sheets will show the existing project conditions with areas delineated by DDA within the right of way limits, the discharge points and the areas that drain to each discharge point. Project managers and designers will analyze the DDAs and identify Best Management Practices (BMPs) that are site specific. The balance of the BMPs for the project will be listed in the bid documents for selection and use by the contractor on the project with approval by the resident engineer.

Projects that do not have DDAs annotated on the erosion control sheets will employ the same concepts for development and managing BMP plans.

2. Following award of the contract, the contractor and resident engineer will annotate the erosion control sheets showing location and type of BMPs for each of the DDAs that will be disturbed at the outset of the project. This annotation will be accompanied by an order of work that reflects the order or sequence of major soil moving activities. The remaining DDAs are to be designated as "Do Not Disturb" until the contractor and resident engineer prepare the plan for BMPs to be employed. The initial BMP's shall be for the first phase (generally Clearing and Grubbing) and shall be modified as needed as the project changes phases. The BMP Plan will be modified to reflect disturbance in additional DDA's as the work progresses. All DDA's will have adequate BMP's in place before being disturbed.
3. As DDAs are prepared for construction, the following will be addressed for the project as a whole or for each DDA as appropriate:
 - Construction Access – This is the first land-disturbing activity. As soon as construction begins, bare areas will be stabilized with gravel and temporary mulch and/or vegetation.
 - At the beginning of the project, all DDAs for the project will be inspected for areas that are a source of storm water pollutants. Areas that are a source of pollutants will receive appropriate cover or BMPs to arrest the introduction of pollutants into storm water. Areas that have not been opened by the contractor will be inspected periodically (once per month) to determine if there is a need to employ BMPs to keep pollutants from entering storm water.
 - Clearing and Grubbing – The following BMP's will be considered and used where appropriate.

KYTC BMP Plan for Project CID **20-4206**

- Leaving areas undisturbed when possible.
- Silt basins to provide silt volume for large areas.
- Silt Traps Type A for small areas.
- Silt Traps Type C in front of existing pipes and drop inlets which are to be saved
- Diversion ditches to catch sheet runoff and carry it to basins or traps or to divert it around areas to be disturbed.
- Brush and/or other barriers to slow and/or divert runoff.
- Silt fences to catch sheet runoff on short slopes. For longer slopes, multiple rows of silt fence may be considered.
- Temporary Mulch for areas which are not feasible for the fore mentioned types of protections.
- Non-standard or innovative methods.
- Cut & Fill and placement of drainage structures - The BMP Plan will be modified to show additional BMP's such as:
 - Silt Traps Type B in ditches and/or drainways as they are completed
 - Silt Traps Type C in front of pipes and drop inlets after they are placed
 - Channel Lining
 - Erosion Control Blanket
 - Temporary mulch and/or seeding for areas where construction activities will be ceased for 21 days or more.
 - Non-standard or innovative methods
- Profile and X-Section in place – The BMP Plan will be modified to show elimination of BMP's which had to be removed and the addition of new BMP's as the roadway was shaped. Probably changes include:
 - Silt Trap Type A, Brush and/or other barriers, Temporary Mulch, and any other BMP which had to be removed for final grading to take place.
 - Additional Silt Traps Type B and Type C to be placed as final drainage patterns are put in place.
 - Additional Channel Lining and/or Erosion Control Blanket.
 - Temporary Mulch for areas where Permanent Seeding and Protection cannot be done within 21 days.
 - Special BMP's such as Karst Policy
- Finish Work (Paving, Seeding, Protect, etc.) – A final BMP Plan will result from modifications during this phase of construction. Probable changes include:
 - Removal of Silt Traps Type B from ditches and drainways if they are protected with other BMP's which are sufficient to control erosion, i.e. Erosion Control Blanket or Permanent Seeding and Protection on moderate grades.
 - Permanent Seeding and Protection

KYTC BMP Plan for Project CID **20-4206**

- Placing Sod
- Planting trees and/or shrubs where they are included in the project
- BMP's including Storm Water Management Devices such as velocity dissipation devices and Karst policy BMP's to be installed during construction to control the pollutants in storm water discharges that will occur after construction has been completed are: *This project does not include storm water BMPs or flow controls for post-construction use.*

C. Other Control Measures

1. No solid materials, including building materials, shall be discharged to waters of the commonwealth, except as authorized by a Section 404 permit.
2. Waste Materials

All waste materials that may leach pollutants (paint and paint containers, caulk tubes, oil/grease containers, liquids of any kind, soluble materials, etc.) will be collected and stored in appropriate covered waste containers. Waste containers shall be removed from the project site on a sufficiently frequent basis as to not allow wastes to become a source of pollution. All personnel will be instructed regarding the correct procedure for waste disposal. Wastes will be disposed in accordance with appropriate regulations. Notices stating these practices will be posted in the office.

3. Hazardous Waste

All hazardous waste materials will be managed and disposed of in the manner specified by local or state regulation. The contractor shall notify the Section Engineer if there any hazardous wastes being generated at the project site and how these wastes are being managed. Site personnel will be instructed with regard to proper storage and handling of hazardous wastes when required. The Transportation Cabinet will file for generator, registration when appropriate, with the Division of Waste Management and advise the contractor regarding waste management requirements.

4. Spill Prevention

The following material management practices will be used to reduce the risk of spills or other exposure of materials and substances to the weather and/or runoff.

- **Good Housekeeping:**

KYTC BMP Plan for Project CID **20-4206**

The following good housekeeping practices will be followed onsite during the construction project.

- An effort will be made to store only enough product required to do the job
- All materials stored onsite will be stored in a neat, orderly manner in their appropriate containers and, if possible, under a roof or other enclosure
- Products will be kept in their original containers with the original manufacturer's label
- Substances will not be mixed with one another unless recommended by the manufacturer
- Whenever possible, all of the product will be used up before disposing of the container
- Manufacturers' recommendations for proper use and disposal will be followed
- The site contractor will inspect daily to ensure proper use and disposal of materials onsite

➤ **Hazardous Products:**

These practices will be used to reduce the risks associated with any and all hazardous materials.

- Products will be kept in original containers unless they are not resealable
- Original labels and material safety data sheets (MSDS) will be reviewed and retained
- Contractor will follow procedures recommended by the manufacturer when handling hazardous materials
- If surplus product must be disposed of, manufacturers' or state/local recommended methods for proper disposal will be followed

The following product-specific practices will be followed onsite:

➤ **Petroleum Products:**

Vehicles and equipment that are fueled and maintained on site will be monitored for leaks, and receive regular preventative maintenance to reduce the chance of leakage. Petroleum products onsite will be stored in tightly sealed containers, which are clearly labeled and will be protected from exposure to weather.

The contractor shall prepare an Oil Pollution Spill Prevention Control and Countermeasure plan when the project that involves the storage of petroleum products in 55 gallon or larger containers with a total combined storage capacity of 1,320 gallons. This is a requirement of 40 CFR 112.

KYTC BMP Plan for Project CID **20-4206**

This project (will / will not) **(3)** have over 1,320 gallons of petroleum products with a total capacity, sum of all containers 55 gallon capacity and larger.

➤ **Fertilizers:**

Fertilizers will be applied at rates prescribed by the contract, standard specifications or as directed by the resident engineer. Once applied, fertilizer will be covered with mulch or blankets or worked into the soil to limit exposure to storm water. Storage will be in a covered shed. The contents of any partially used bags of fertilizer will be transferred to a sealable plastic bin to avoid spills.

➤ **Paints:**

All containers will be tightly sealed and stored indoors or under roof when not being used. Excess paint or paint wash water will not be discharged to the drainage or storm sewer system but will be properly disposed of according to manufacturers' instructions or state and local regulations.

➤ **Concrete Truck Washout:**

Concrete truck mixers and chutes will not be washed on pavement, near storm drain inlets, or within 75 feet of any ditch, stream, wetland, lake, or sinkhole. Where possible, excess concrete and wash water will be discharged to areas prepared for pouring new concrete, flat areas to be paved that are away from ditches or drainage system features, or other locations that will not drain off site. Where this approach is not possible, a shallow earthen wash basin will be excavated away from ditches to receive the wash water

➤ **Spill Control Practices**

In addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices will be followed for spill prevention and cleanup:

- Manufacturers' recommended methods for spill cleanup will be clearly posted. All personnel will be made aware of procedures and the location of the information and cleanup supplies.
- Materials and equipment necessary for spill cleanup will be kept in the material storage area. Equipment and materials will include as appropriate, brooms, dust pans, mops, rags, gloves, oil absorbents, sand, sawdust, and plastic and metal trash containers.
- All spills will be cleaned up immediately after discovery.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance.

KYTC BMP Plan for Project CID **20-4206**

- Spills of toxic or hazardous material will be reported to the appropriate state/local agency as required by KRS 224 and applicable federal law.
- The spill prevention plan will be adjusted as needed to prevent spills from reoccurring and improve spill response and cleanup.
- Spills of products will be cleaned up promptly. Wastes from spill clean up will be disposed in accordance with appropriate regulations.

D. Other State and Local Plans

This BMP plan shall include any requirements specified in sediment and erosion control plans, storm water management plans or permits that have been approved by other state or local officials. Upon submittal of the NOI, other requirements for surface water protection are incorporated by reference into and are enforceable under this permit (even if they are not specifically included in this BMP plan). This provision does not apply to master or comprehensive plans, non-enforceable guidelines or technical guidance documents that are not identified in a specific plan or permit issued for the construction site by state or local officials. *There are no other local (MS4) requirements that are expected to be necessary for this project.*

E. Maintenance

1. The BMP plan shall include a clear description of the maintenance procedures necessary to keep the control measures in good and effective operating condition.
- Maintenance of BMPs during construction shall be a result of weekly and post rain event inspections with action being taken by the contractor to correct deficiencies.
 - Post Construction maintenance will be a function of normal highway maintenance operations. Following final project acceptance by the cabinet, district highway crews will be responsible for identification and correction of deficiencies regarding ground cover and cleaning of storm water BMPs. The project manager shall identify any BMPs that will be for the purpose of post construction storm water management with specific guidance for any non-routine maintenance. *There are no such BMP's for this project.*

F. Inspections

Inspection and maintenance practices that will be used to maintain erosion and sediment controls:

KYTC BMP Plan for Project CID **20-4206**

- All erosion prevention and sediment control measures will be inspected at least once each week and following any rain of one-half inch or more.
- Inspections will be conducted by individuals that have successfully completed the KEPSC-RI course as required by Section 213.02.02 of the Standard Specifications for Road and Bridge Construction, current edition.
- Inspection reports will be written, signed, dated, and kept on file.
- Areas at final grade will be seeded and mulched within 14 days.
- Areas that are not at final grade where construction has ceased for a period of 21 days or longer and soil stock piles shall receive temporary mulch no later than 14 days from the last construction activity in that area.
- All measures will be maintained in good working order; if a repair is necessary, it will be initiated within 24 hours of being reported.
- Built-up sediment will be removed from behind the silt fence before it has reached halfway up the height of the fence.
- Silt fences will be inspected for bypassing, overtopping, undercutting, depth of sediment, tears, and to ensure attachment to secure posts.
- Sediment basins will be inspected for depth of sediment, and built-up sediment will be removed when it reaches 50 percent of the design capacity and at the end of the job.
- Diversion dikes and berms will be inspected and any breaches promptly repaired. Areas that are eroding or scouring will be repaired and re-seeded / mulched as needed.
- Temporary and permanent seeding and mulching will be inspected for bare spots, washouts, and healthy growth. Bare or eroded areas will be repaired as needed.
- All material storage and equipment servicing areas that involve the management of bulk liquids, fuels, and bulk solids will be inspected weekly for conditions that represent a release or possible release of pollutants to the environment.

G. Non – Storm Water discharges

It is expected that non-storm water discharges may occur from the site during the construction period. Examples of non-storm water discharges include:

- Water from water line flushings.
- Water from cleaning concrete trucks and equipment.
- Pavement wash waters (where no spills or leaks of toxic or hazardous materials have occurred).

KYTC BMP Plan for Project CID **20-4206**

- Uncontaminated groundwater and rain water (from dewatering during excavation).

All non-storm water discharges will be directed to the sediment basin or to a filter fence enclosure in a flat vegetated infiltration area or be filtered via another approved commercial product.

H. Groundwater Protection Plan (3)

This plan serves as the groundwater protection plan as required by 401 KAR 5:037.

- Contractors statement: (3)

The following activities, as enumerated by 401 KAR 5:037 Section 2 that require the preparation and implementation of a groundwater protection plan, will or may be conducted as part of this construction project:

_____ 2. (e) land treatment or land disposal of a pollutant;

_____ 2. (f) Storing, ..., or related handling of hazardous waste, solid waste or special waste, ..., in tanks, drums, or other containers, or in piles, (This does not include wastes managed in a container placed for collection and removal of municipal solid waste for disposal off site);

_____ 2. (g) Handling of materials in bulk quantities (equal or greater than 55 gallons or 100 pounds net dry weight transported held in an individual container) that, if released to the environment, would be a pollutant;

_____ 2. (j) Storing or related handling of road oils, dust suppressants,, at a central location;

_____ 2. (k) Application or related handling of road oils, dust suppressants or deicing materials, (does not include use of chloride-based deicing materials applied to roads or parking lots);

_____ 2. (m) Installation, construction, operation, or abandonment of wells, bore holes, or core holes, (this does not include bore holes for the purpose of explosive demolition);

Or, check the following only if there are no qualifying activities

_____ There are no activities for this project as listed in 401 KAR 5:037 Section 2 that require the preparation and implementation of a groundwater protection plan.

KYTC BMP Plan for Project CID **20-4206**

The contractor is responsible for the preparation of a plan that addresses the

401 KAR 5:037 Section 3. (3) Elements of site specific groundwater protection plan:

- (a) General information about this project is covered in the Project information;
- (b) Activities that require a groundwater protection plan have been identified above;
- (c) Practices that will protect groundwater from pollution are addressed in section C. Other control measures.
- (d) Implementation schedule – all practices required to prevent pollution of groundwater are to be in place prior to conducting the activity;
- (e) Training is required as a part of the ground water protection plan. All employees of the contractor, sub-contractor and resident engineer personnel will be trained to understand the nature and requirements of this plan as they pertain to their job function(s). Training will be accomplished within one week of employment and annually thereafter. A record of training will be maintained by the contractor with a copy provide to the resident engineer.
- (f) Areas of the project and groundwater plan activities will be inspected as part of the weekly sediment and erosion control inspections
- (g) Certification (see signature page.)

KYTC BMP Plan for Project CID **20-4206**

Sub-Contractor Certification

The following sub-contractor shall be made aware of the BMP plan and responsible for implementation of BMPs identified in this plan as follows:

Subcontractor

Name:
Address:
Address:

Phone:

The part of BMP plan this subcontractor is responsible to implement is:

I certify under penalty of law that I understand the terms and conditions of the general Kentucky Pollutant Discharge Elimination System permit that authorizes the storm water discharges, the BMP plan that has been developed to manage the quality of water to be discharged as a result of storm events associated with the construction site activity and management of non-storm water pollutant sources identified as part of this certification.


Signed _____ title _____, _____
Typed or printed name¹ signature

1. Sub Contractor Note: to be signed by a person who is the owner, a responsible corporate officer, a general partner or the proprietor or a person designated to have the authority to sign reports by such a person in accordance with 401 KAR 5:060 Section 9. This delegation shall be in writing to: Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort Kentucky 40601. Reference the Project Control Number (PCN) and KPDES number when one has been issued.

CID 20-4206
Allen County
Highway Safety Improvement Project along KY 100
from MP 0.000 – 8.830
Item No.: 3-9014.00

An electronic Notice of Intent (eNOI) for obtaining coverage under the Kentucky Pollutant Discharge Elimination System (KPDES) General Permit for Stormwater Discharges Associated with Construction Activities (KYR10) has been drafted, a copy of which is attached. Upon award, the Contractor will be identified in Section III of the form as the “Building Contractor” and the eNOI will be submitted for approval to the Kentucky Division of Water. The Contractor shall be responsible for advancing the work within this contract in a manner that is compliant with all applicable and appropriate KYTC specifications for sediment and erosion control, as well as meeting the requirements of the KYR10 permit and the KDOW.

eForm Submittal ID: 182634

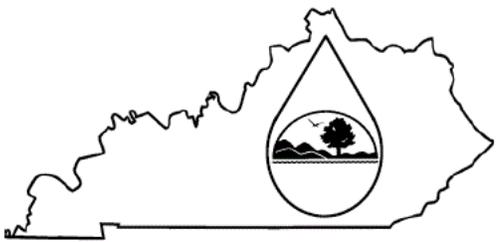	<h2 style="margin: 0;">KENTUCKY POLLUTION DISCHARGE ELIMINATION SYSTEM (KPDES)</h2> <p style="margin: 5px 0;">Notice of Intent (NOI) for coverage of Storm Water Discharge Associated with Construction Activities Under the KPDES Storm Water General Permit KYR100000</p> <p style="margin: 5px 0;">Click here for Instructions (Controls/KPDES_FormKYR10_Instructions.htm)</p> <p style="margin: 5px 0; font-size: small;">Click here to obtain information and a copy of the KPDES General Permit. (http://dep.ky.gov/formslibrary/Documents/KYR10PermitPage.pdf)</p> <p style="margin: 5px 0; font-size: x-small;">(*) indicates a required field; (✓) indicates a field may be required based on user input or is an optionally required field</p>
---	---

Reason for Submittal:(*) <input type="text" value="Application for New Permit Coverage"/>	Agency Interest ID: <input type="text" value="Agency Interest ID"/>	Permit Number:(✓) <input type="text" value="KPDES Permit Number"/>
--	--	---

If change to existing permit coverage is requested, describe the changes for which modification of coverage is being sought:(✓)

ELIGIBILITY:
 Stormwater discharges associated with construction activities disturbing individually one (1) acre or more, including, in the case of a common plan of development, contiguous construction activities that cumulatively equal one (1) acre or more of disturbance.

EXCLUSIONS:
 The following are excluded from coverage under this general permit:
 1) Are conducted at or on properties that have obtained an individual KPDES permit for the discharge of other wastewaters which requires the development and implementation of a Best Management Practices (BMP) plan;
 2) Any operation that the DOW determines an individual permit would better address the discharges from that operation;
 3) Any project that discharges to an Impaired Water listed in the most recent Integrated Report, §305(b) as impaired for sediment and for which an approved TMDL has been developed.

SECTION I -- FACILITY OPERATOR INFORMATION (PERMITTEE)

Company Name:(✓) <input type="text" value="Kentucky Transportation Cabinet, District 3"/>	First Name:(✓) <input type="text" value="Joseph"/>	M.I.: <input type="text" value="MI"/>	Last Name:(✓) <input type="text" value="Plunk"/>
Mailing Address:(*) <input type="text" value="900 Morgantown Road"/>	City:(*) <input type="text" value="Bowling Green"/>	State:(*) <input type="text" value="Kentucky"/>	Zip:(*) <input type="text" value="42101"/>
eMail Address:(*) <input type="text" value="Joseph.Plunk@ky.gov"/>	Business Phone:(*) <input type="text" value="270-746-7898"/>	Alternate Phone: <input type="text" value="Phone"/>	

SECTION II -- GENERAL SITE LOCATION INFORMATION

Project Name:(*) <input type="text" value="KYTC Project: CID 204206"/>	Status of Owner/Operator(*) <input type="text" value="State Government"/>	SIC Code(*) <input type="text" value="1611 Highway and Street Const"/>	
Company Name:(✓) <input type="text" value="Company Name"/>	First Name:(✓) <input type="text" value="First Name"/>	M.I.: <input type="text" value="MI"/>	Last Name:(✓) <input type="text" value="Last Name"/>
Site Physical Address:(*) <input type="text" value="KY 100"/>			
City:(*) <input type="text" value="Adolphus"/>	State:(*) <input type="text" value="Kentucky"/>	Zip:(*) <input type="text" value="42120"/>	
County:(*) <input type="text" value="Allen"/>	Latitude(decimal degrees)(*)DMS to DD Converter <small>(https://www.fcc.gov/media/radio/dms-decimal)</small> <input type="text" value="36.695270"/>	Longitude(decimal degrees)(*) <input type="text" value="-86.341473"/>	

SECTION III -- SPECIFIC SITE ACTIVITY INFORMATION ?

Project Description:(*)

a. For single projects provide the following information

Total Number of Acres in Project:(√) <input style="width:95%;" type="text" value="64.2"/>	Total Number of Acres Disturbed:(√) <input style="width:95%;" type="text" value="34.5"/>
Anticipated Start Date:(√) <input style="width:95%;" type="text"/>	Anticipated Completion Date:(√) <input style="width:95%;" type="text"/>

b. For common plans of development provide the following information

Total Number of Acres in Project:(√) <input style="width:95%;" type="text" value="# Acre(s)"/>	Total Number of Acres Disturbed:(√) <input style="width:95%;" type="text" value="# Acre(s)"/>
Number of individual lots in development, if applicable:(√) <input style="width:95%;" type="text" value="# lot(s)"/>	Number of lots in development:(√) <input style="width:95%;" type="text" value="# lot(s)"/>
Total acreage of lots intended to be developed:(√) <input style="width:95%;" type="text" value="Project Acres"/>	Number of acres intended to be disturbed at any one time:(√) <input style="width:95%;" type="text" value="Disturbed Acres"/>
Anticipated Start Date:(√) <input style="width:95%;" type="text"/>	Anticipated Completion Date:(√) <input style="width:95%;" type="text"/>

List Building Contractor(s) at the time of Application:(*)

	Company Name			
+	<input style="width:95%;" type="text"/>	<input style="width:50%;" type="text"/>	<input style="width:50%;" type="text"/>	<input style="width:50%;" type="text"/>
<div style="border: 1px solid black; background-color: #f0f0f0; padding: 2px;">< ></div>				

SECTION IV -- IF THE PERMITTED SITE DISCHARGES TO A WATER BODY THE FOLLOWING INFORMATION IS REQUIRED

Discharge Point(s):

	Unnamed Tributary?	Latitude	Longitude	Receiving Water Name	
105	Yes	36.724728	-86.284998	Trammel Creek	Delete
106	Yes	36.724868	-86.285069	Trammel Creek	Delete
107	Yes	36.725071	-86.283718	Trammel Creek	Delete
108	Yes	36.725548	-86.280291	Trammel Creek	Delete
109	Yes	36.725690	-86.280310	Trammel Creek	Delete
110	Yes	36.726420	-86.277521	Trammel Creek	Delete
111	Yes	36.726682	-86.277065	Trammel Creek	Delete
112	Yes	36.727497	-86.275668	Trammel Creek	Delete
113	Yes	36.727602	-86.275809	Trammel Creek	Delete
+					

SECTION V -- IF THE PERMITTED SITE DISCHARGES TO A MS4 THE FOLLOWING INFORMATION IS REQUIRED

Name of MS4: <input style="width:95%;" type="text"/>																
Date of application/notification to the MS4 for construction site permit coverage: <input style="width:95%;" type="text" value="Date"/>	Discharge Point(s):(*) <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:5%;"></th> <th style="width:15%;">Latitude</th> <th style="width:15%;">Longitude</th> <th style="width:10%;"></th> <th style="width:10%;"></th> </tr> </thead> <tbody> <tr> <td style="text-align:center;">+</td> <td><input style="width:95%;" type="text"/></td> <td><input style="width:50%;" type="text"/></td> <td><input style="width:50%;" type="text"/></td> <td><input style="width:50%;" type="text"/></td> </tr> <tr> <td colspan="5" style="height: 50px;"><div style="border: 1px solid black; background-color: #f0f0f0; padding: 2px;">< ></div></td> </tr> </tbody> </table>		Latitude	Longitude			+	<input style="width:95%;" type="text"/>	<input style="width:50%;" type="text"/>	<input style="width:50%;" type="text"/>	<input style="width:50%;" type="text"/>	<div style="border: 1px solid black; background-color: #f0f0f0; padding: 2px;">< ></div>				
	Latitude	Longitude														
+	<input style="width:95%;" type="text"/>	<input style="width:50%;" type="text"/>	<input style="width:50%;" type="text"/>	<input style="width:50%;" type="text"/>												
<div style="border: 1px solid black; background-color: #f0f0f0; padding: 2px;">< ></div>																

SECTION VI -- WILL THE PROJECT REQUIRE CONSTRUCTION ACTIVITIES IN A WATER BODY OR THE RIPARIAN ZONE?

Will the project require construction activities in a water body or the riparian zone?: (*)	<input style="width:95%;" type="text" value="No"/>
If Yes, describe scope of activity: (√)	<input style="width:95%;" type="text" value="describe scope of activity"/>
Is a Clean Water Act 404 permit required?:(*)	<input style="width:95%;" type="text" value="No"/>


Is a Clean Water Act 401 Water Quality Certification required?:(*)		No	
SECTION VII -- NOI PREPARER INFORMATION			
First Name:(*) First Name	M.I.: MI	Last Name:(*) Last Name	Company Name:(*) Company Name
Mailing Address:(*) Mailing Address	City:(*) City	State:(*)	Zip:(*) Zip
eMail Address:(*) eMail Address	Business Phone:(*) Phone	Alternate Phone: Phone	
SECTION VIII -- ATTACHMENTS			
Facility Location Map:(*)	Upload file		
Supplemental Information:	Upload file		
SECTION IX -- CERTIFICATION			
I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.			
Signature:(*) Signature		Title:(*) Title	
First Name:(*) First Name	M.I.: MI	Last Name:(*) Last Name	
eMail Address:(*) eMail Address	Business Phone:(*) Phone	Alternate Phone: Phone	Signature Date:(*) Date
<div style="display: flex; justify-content: space-around; margin-top: 20px;"> Click to Save Values for Future Retrieval Click to Submit to EEC </div>			

COUNTY OF	ITEM NO.
ALLEN	3-9014.00




KY 100
ALLEN COUNTY
KENTUCKY
SHEET 1 OF 5

COUNTY OF	ITEM NO.
ALLEN	3-9014.00

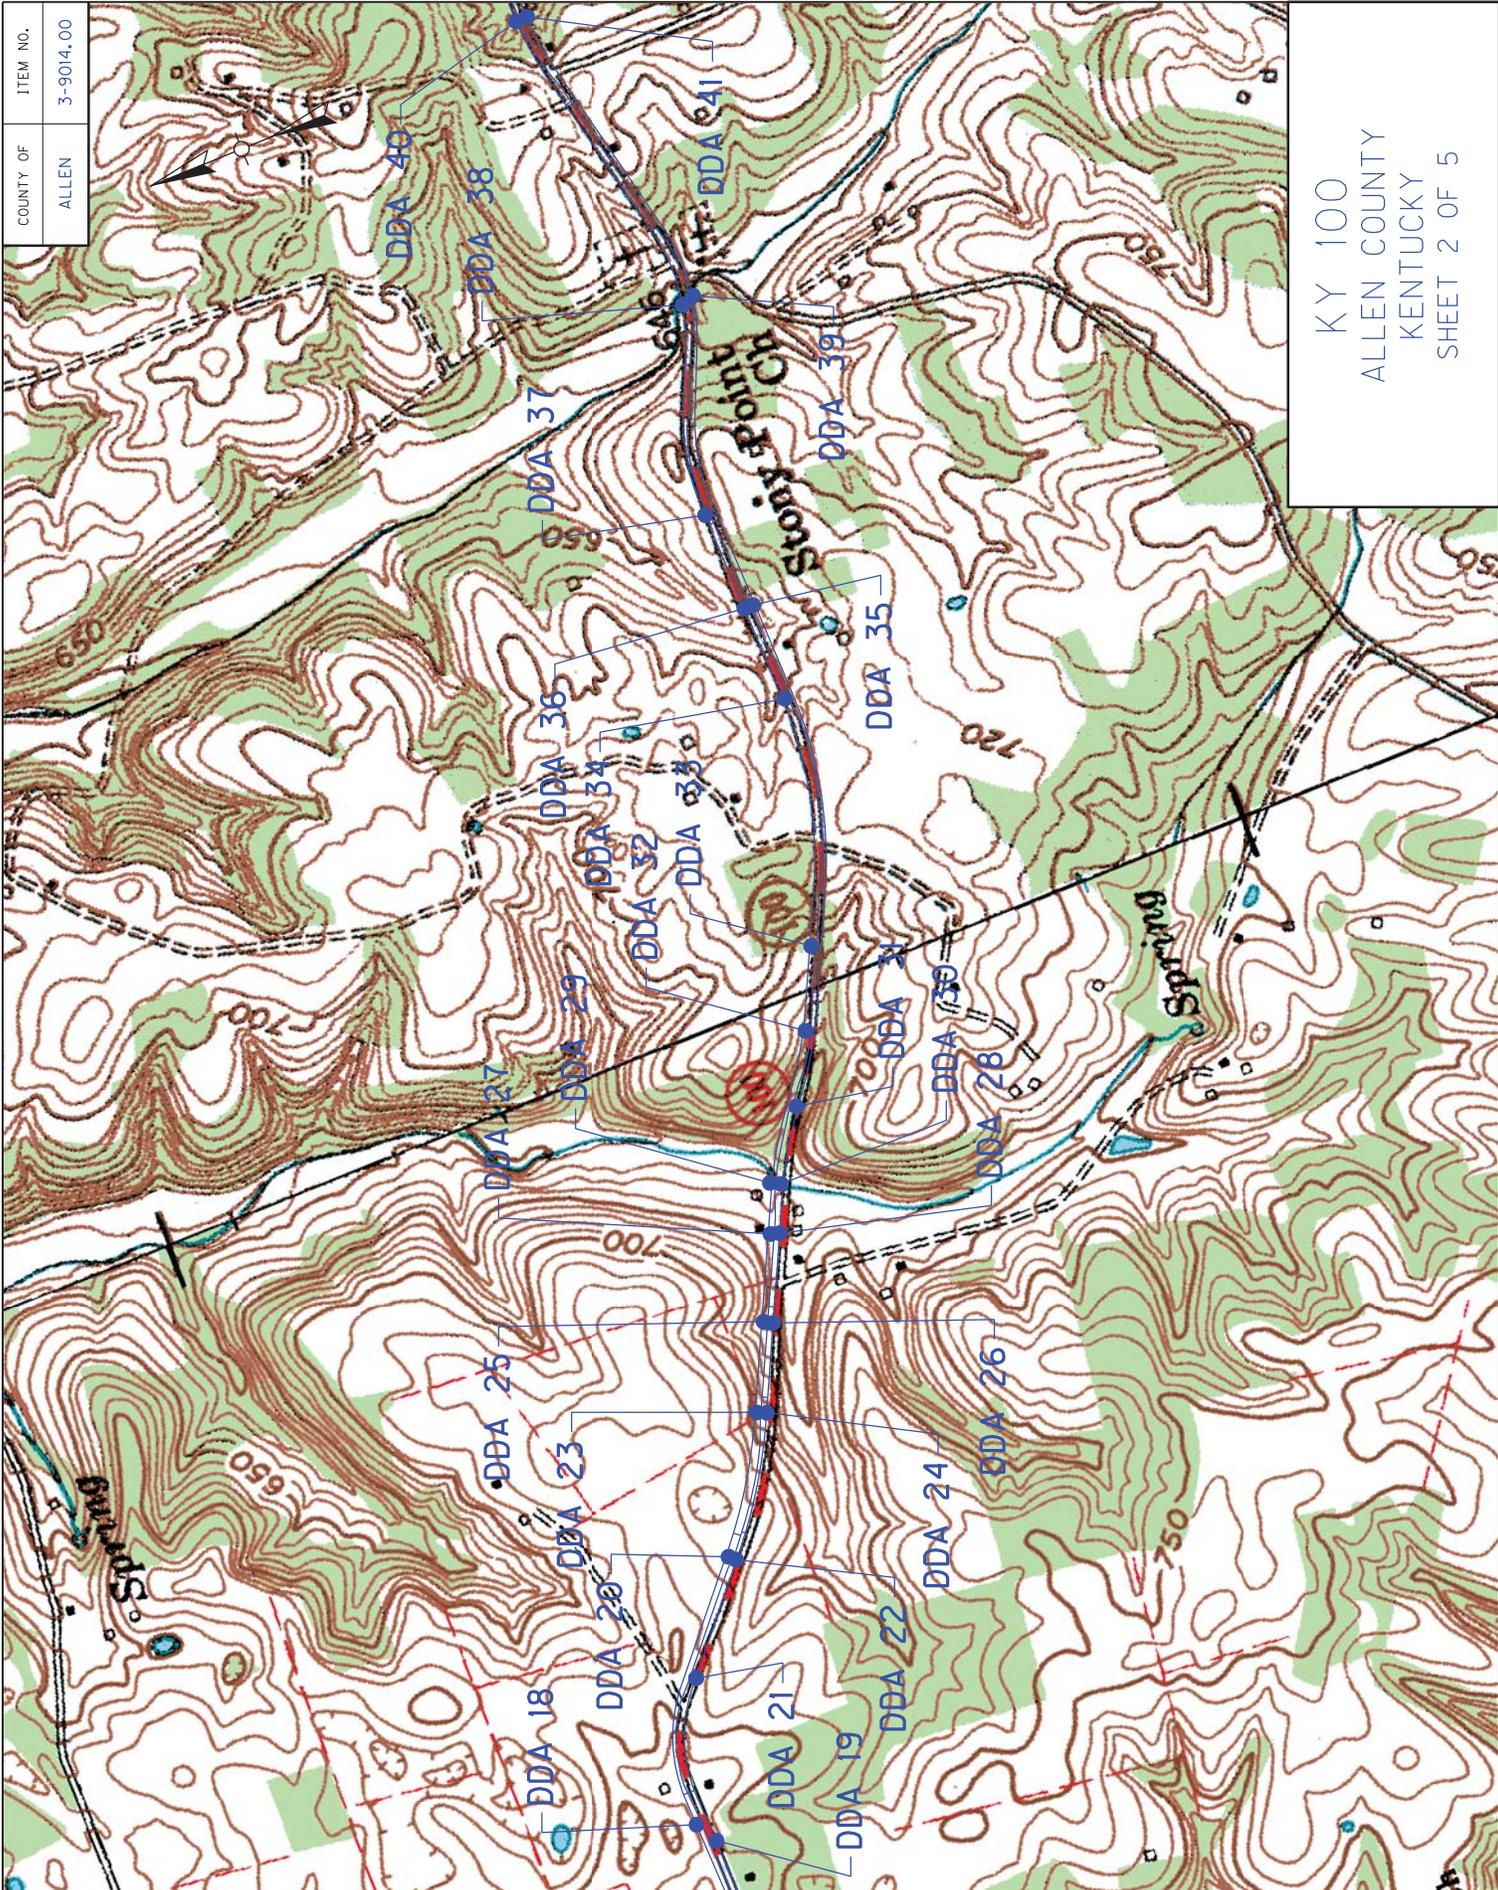


KY 100
ALLEN COUNTY
KENTUCKY
SHEET 2 OF 5

COUNTY OF	ITEM NO.
ALLEN	3-9014.00

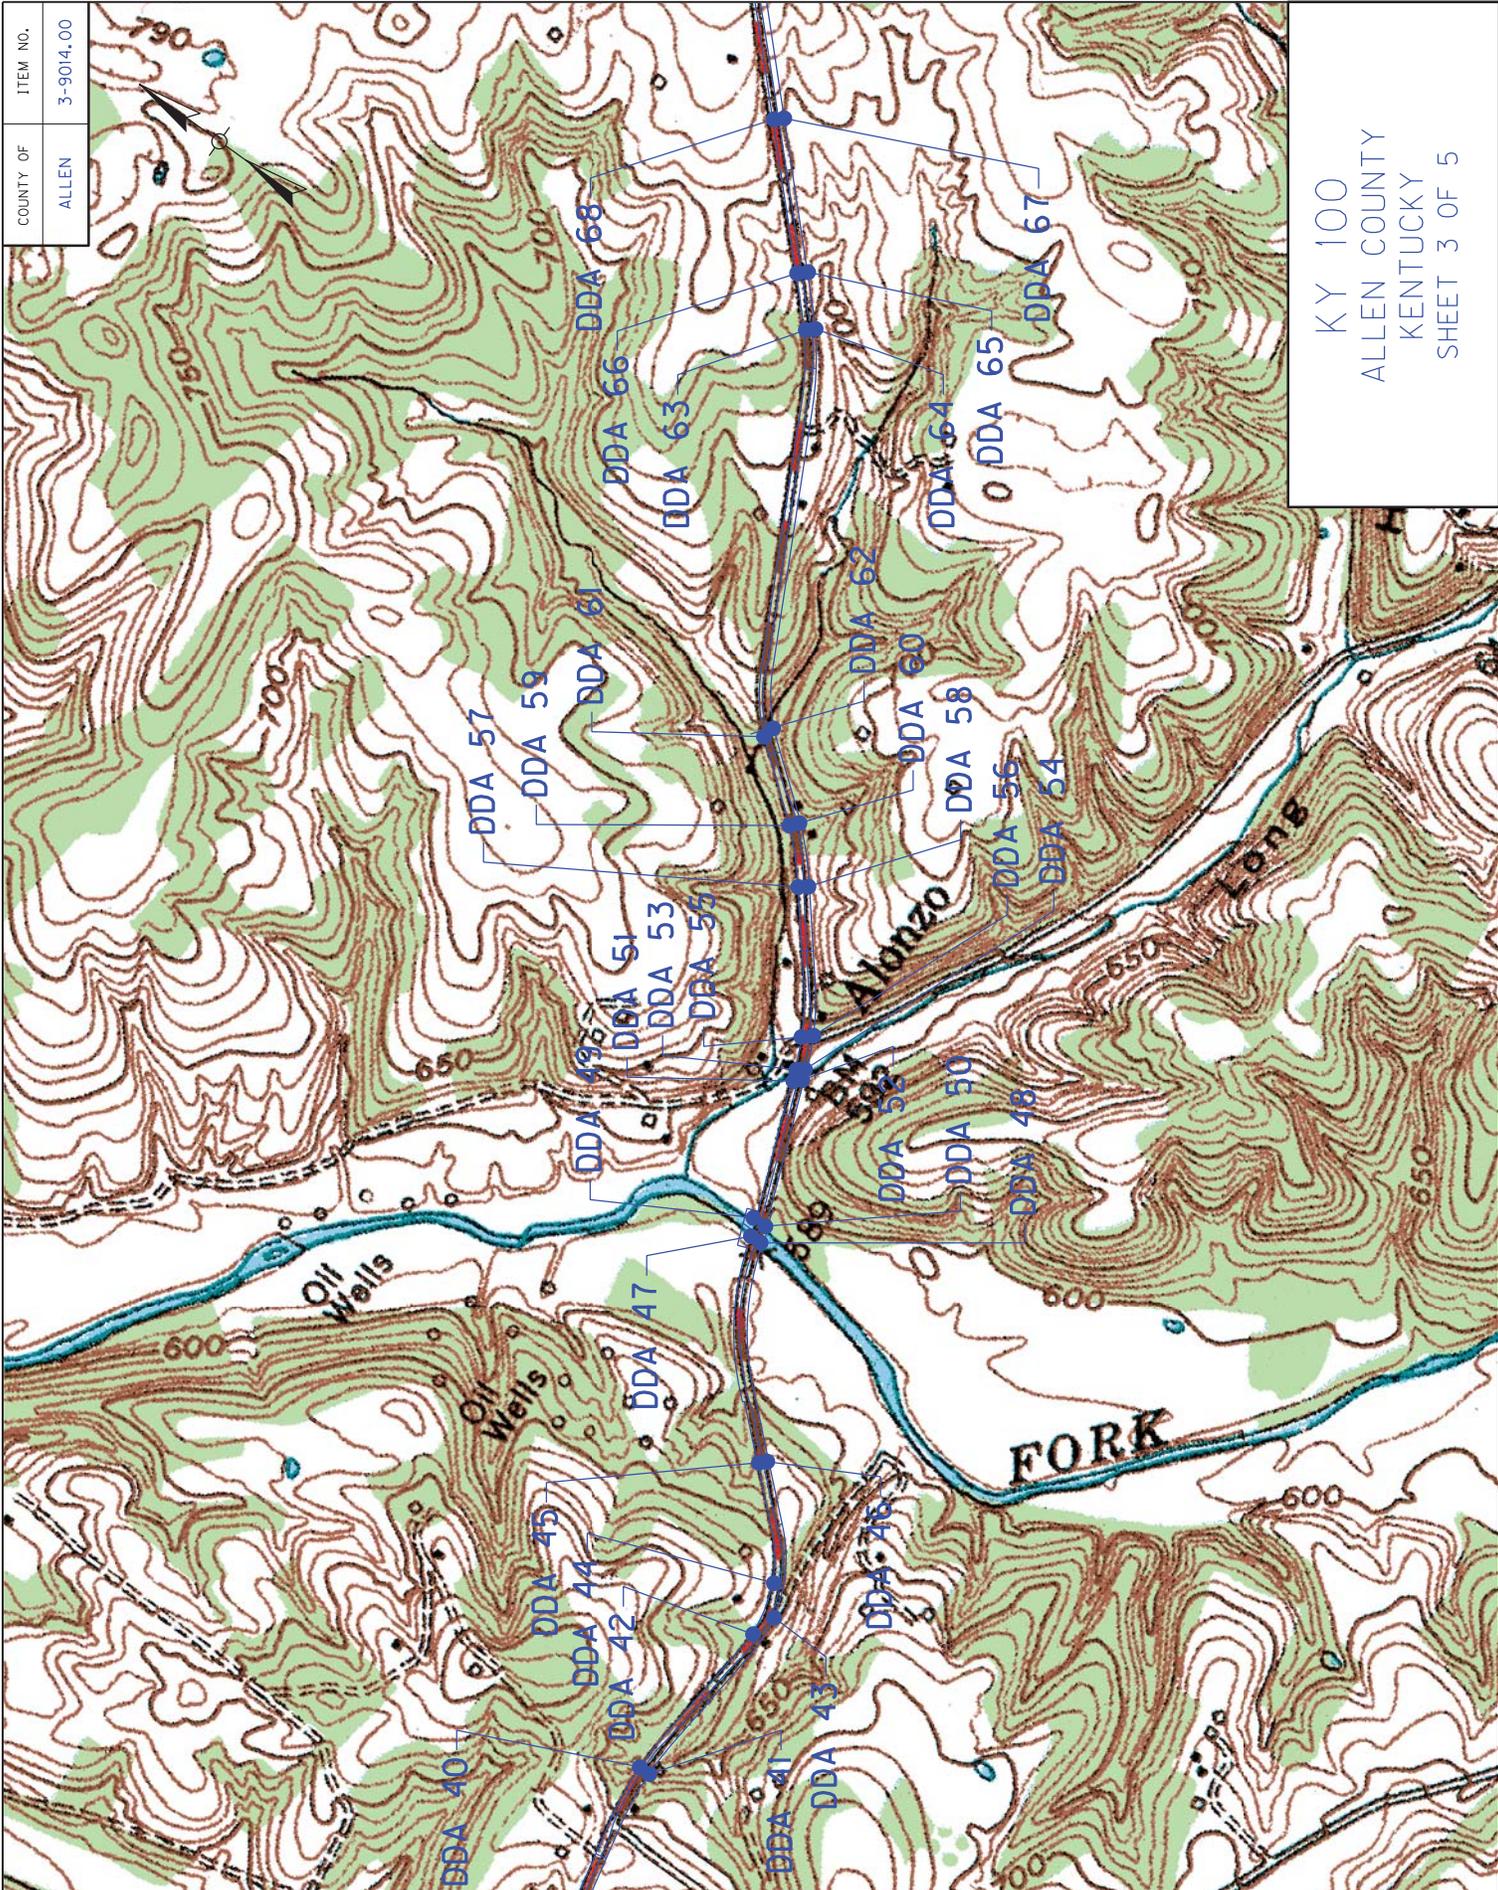


KY 100
ALLEN COUNTY
KENTUCKY
SHEET 3 OF 5

COUNTY OF	ITEM NO.
ALLEN	3-9014.00

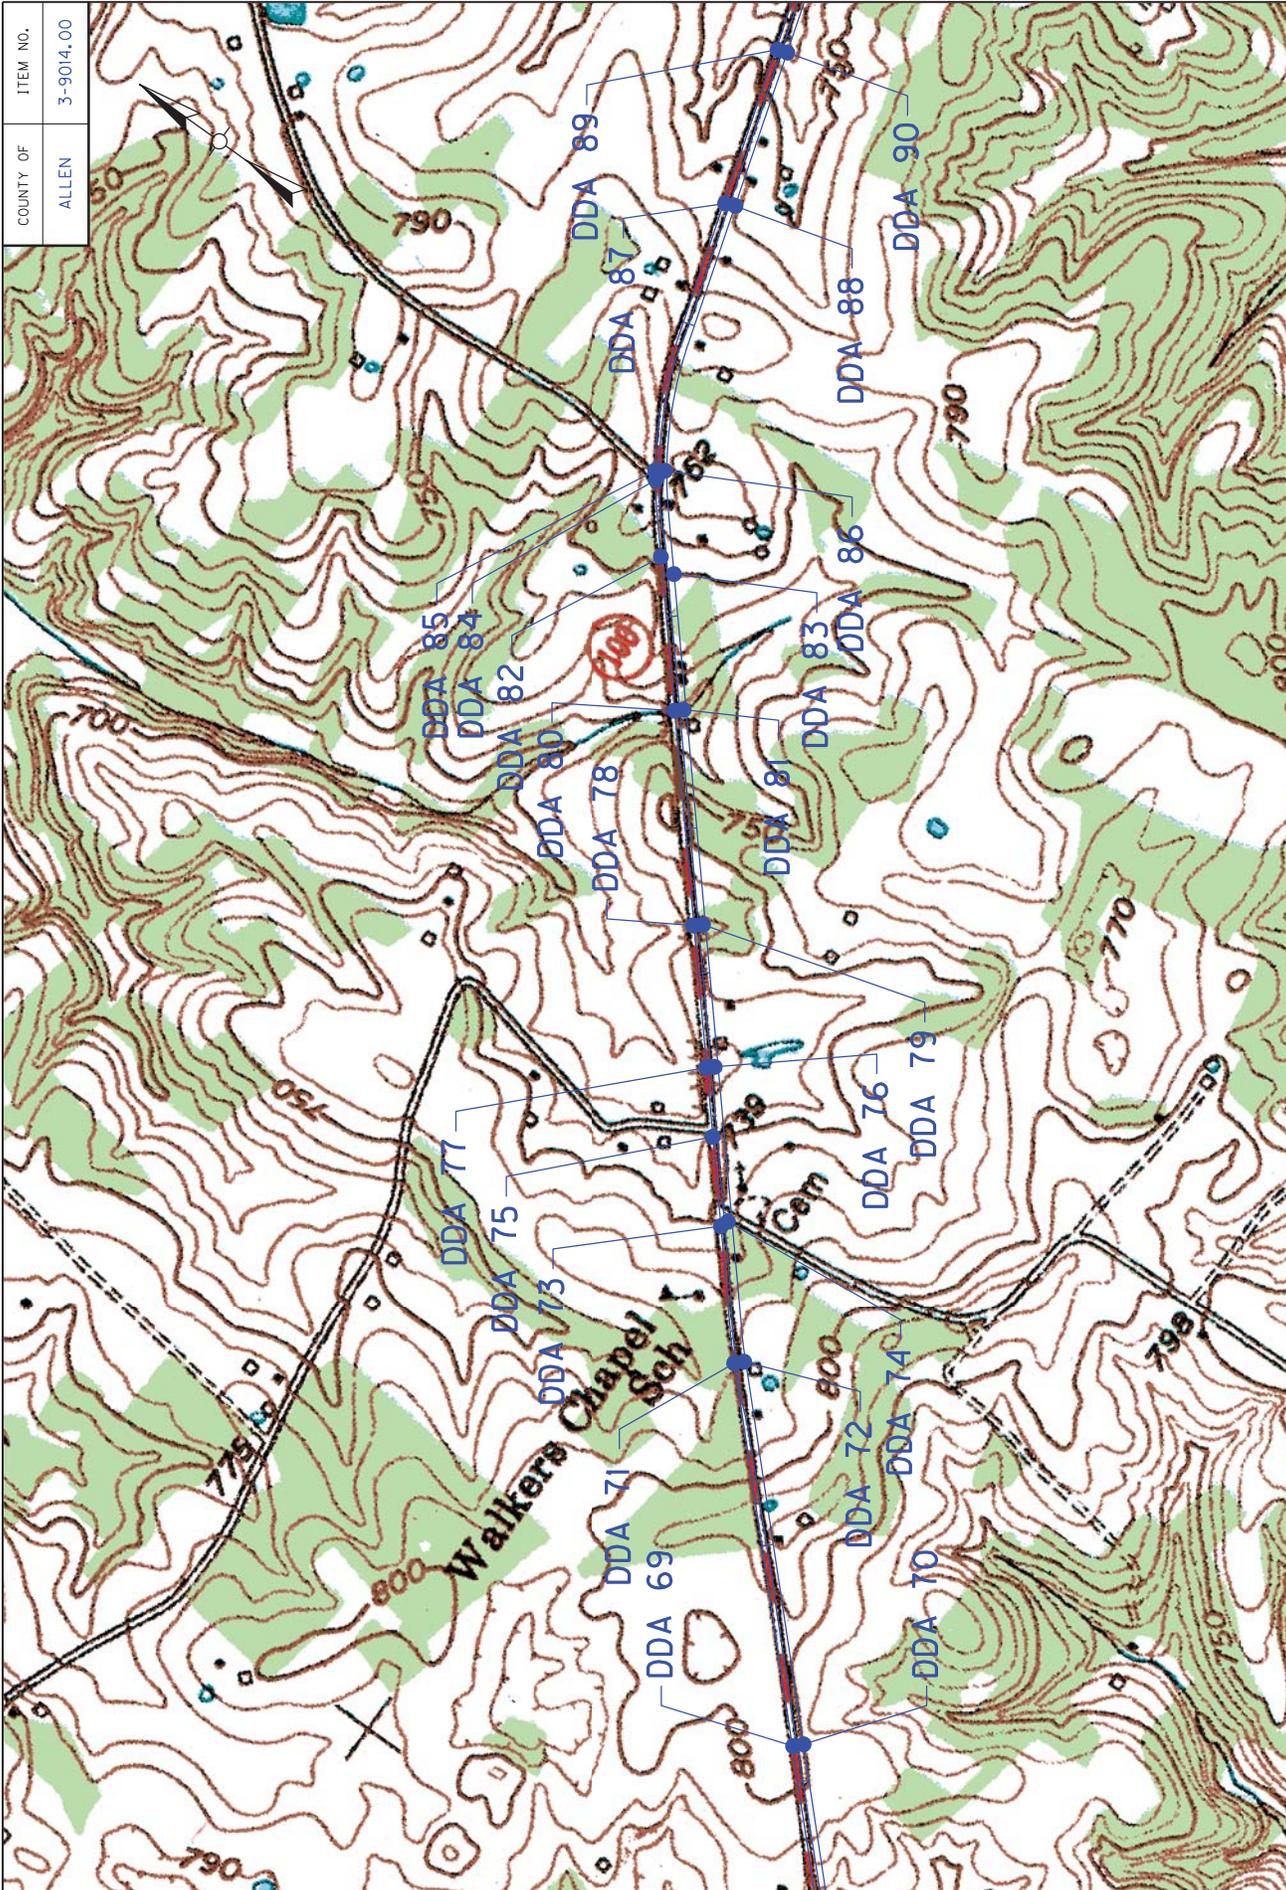

KY 100
ALLEN COUNTY
KENTUCKY
SHEET 4 OF 5

COUNTY OF	ITEM NO.
ALLEN	3-9014.00




END PROJECT
MP 8.830

KY 100
ALLEN COUNTY
KENTUCKY
SHEET 5 OF 5




COUNTY OF	ITEM NO.
ALLEN	3-9014.00

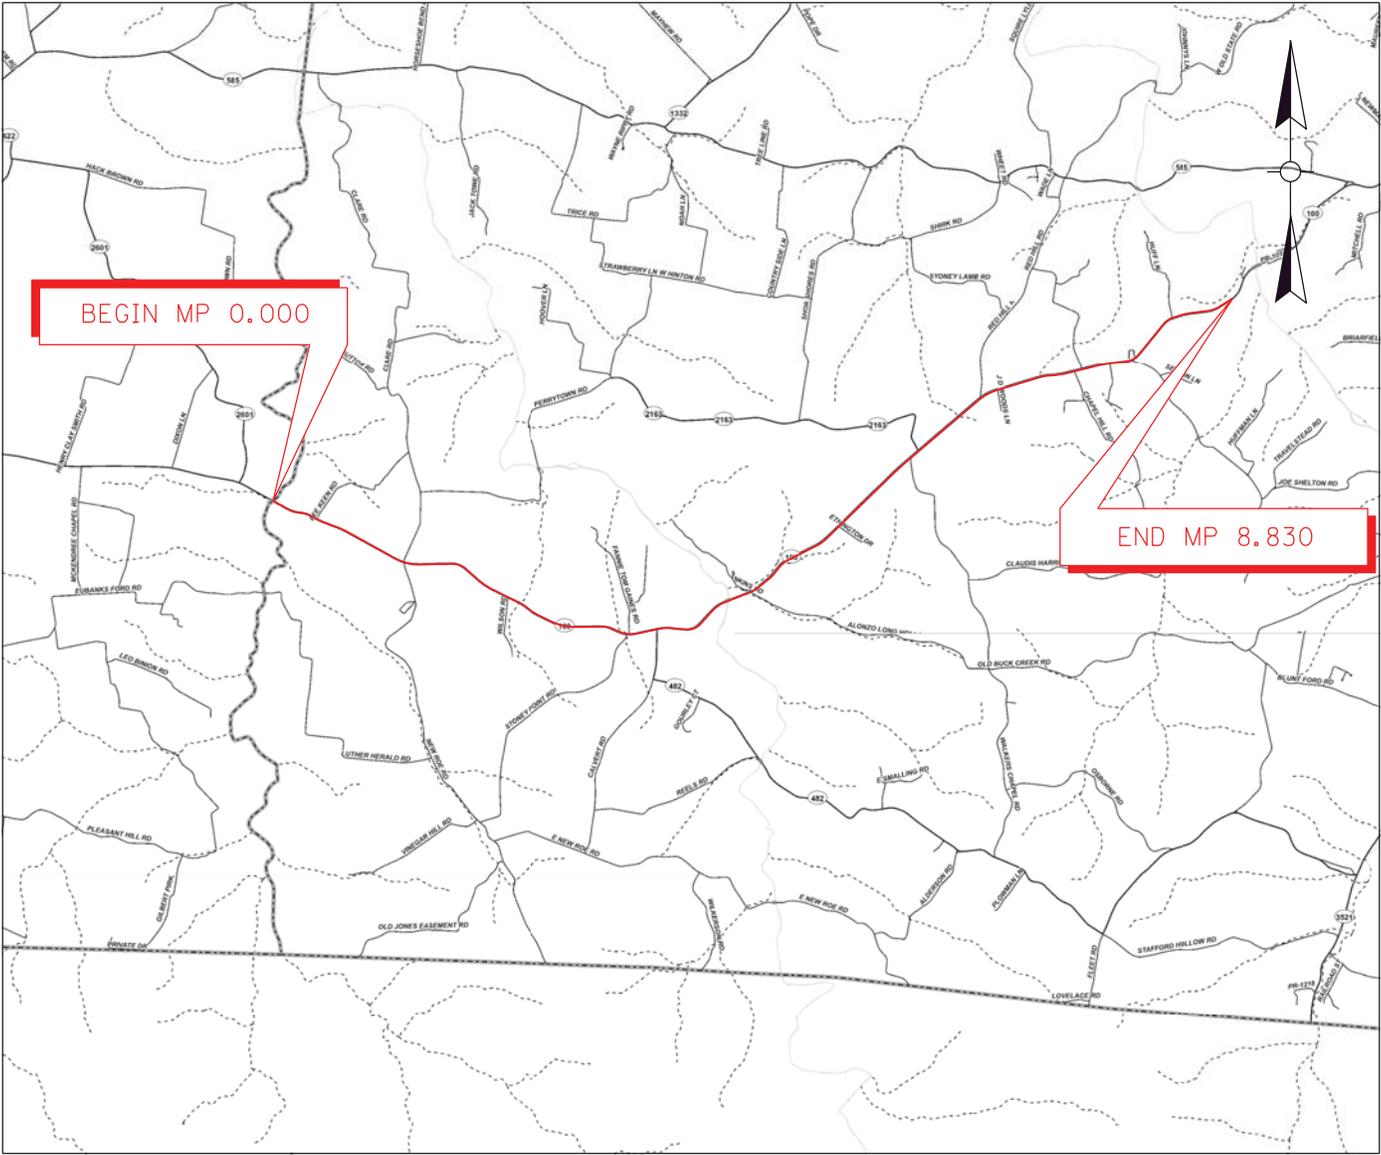

SCALE: 1"=8000'

ALLEN COUNTY KY 100

PROJECT _____
NUMBERS: _____

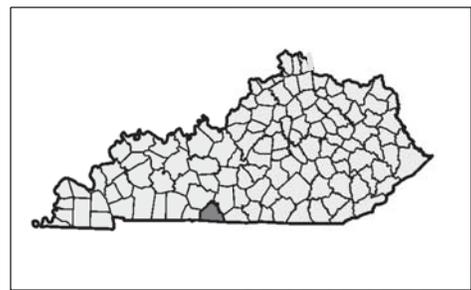

COUNTY OF	ITEM NO.
ALLEN	3-9014

GENERAL SUMMARY

ITEM	DESCRIPTION	UNIT	TOTAL PROJECT
1	DGA BASE (2) (4) (7) (8) (10)	TON	2,467
80	CRUSHED AGGREGATE SIZE NO. 23 (9)	TON	19
100	ASPHALT SEAL AGGREGATE (2) (8)	TON	745
103	ASPHALT SEAL COAT (2) (8)	TON	90
190	LEVELING & WEDGING PG64-22 (1) (9) (10)	TON	685
212	CL2 ASPH BASE 1.00D PG64-22 (3) (9) (10)	TON	740
301	CL2 ASPH SURF 0.38D PG64-22 (1) (8) (10)	TON	7,821
356	ASPHALT MATERIAL FOR TACK (8) (9)	TON	49
441	ENTRANCE PIPE-18 IN (4)	LF	40
450	ENTRANCE PIPE-15 IN EQUIV. (4)	LF	301
462	CULVERT PIPE-18 IN (3)	LF	307
464	CULVERT PIPE-24 IN (3)	LF	34
1310	REMOVE PIPE (3) (4)	LF	475
1726	SAFETY BOX INLET-18 IN SDB-1 (3)	EACH	8
1727	SAFETY BOX INLET-24 IN SDB-1 (3)	EACH	1
1728	SAFETY BOX INLET-18 IN DBL SDB-5 (3)	EACH	1
1987	DELINEATOR FOR GUARDRAIL B/W (2)	EACH	31
1987	DELINEATOR FOR GUARDRAIL B/W (LUCIOL SYSTEMS BIDIRECTIONAL LINEAR DELINEATION) (2) (13)	EACH	40
2159	TEMP DITCH	LF	23,312
2160	CLEAN TEMP DITCH	LF	11,656
2259	FENCE-TEMP (11)	LF	5,065
2268	REMOVE & REPLACE FENCE (11)	LF	5,065
2355	GUARDRAIL-STEEL W BEAM-S FACE A (2)	LF	200
2360	GUARDRAIL TERMINAL SECTION NO 1 (2)	EACH	5
2363	GUARDRAIL CONNECTOR TO BRIDGE END TYPE A (2)	EACH	2
2367	GUARDRAIL END TREATMENT TYPE 1 (2)	EACH	9
2371	GUARDRAIL END TREATMENT TYPE 7 (2)	EACH	2
2381	REMOVE GUARDRAIL (2)	LF	1,788
2483	CHANNEL LINING CLASS II (3) (7) (12)	TON	575
2568	MOBILIZATION	LS	1
2569	DEMOBILIZATION	LS	1
2575	DITCHING AND SHOULDERING (7)	LF	23,830
2603	FABRIC-GEOTEXTILE CLASS 2 (9)	SQYD	126
2625	REMOVE HEADWALL (3)	EACH	30

- ① QUANTITY CARRIED OVER FROM SUPERELEVATION IMPROVEMENT SUMMARY
- ② QUANTITY CARRIED OVER FROM GUARDRAIL SUMMARY
- ③ QUANTITY CARRIED OVER FROM CULVERT PIPE SUMMARY
- ④ QUANTITY CARRIED OVER FROM ENTRANCE PIPE SUMMARY
- ⑤ QUANTITY CARRIED OVER FROM STRIPING SUMMARY
- ⑥ QUANTITY CARRIED OVER FROM SIGNING SUMMARY
- ⑦ QUANTITY CARRIED OVER FROM DITCHING AND SHOULDERING AND DGA WEDGE & CHIP SEAL SUMMARY
- ⑧ QUANTITY CARRIED OVER FROM OVERLAY AND RUMBLE STRIP SUMMARY
- ⑨ QUANTITY CARRIED OVER FROM PAVEMENT REPAIR SUMMARY
- ⑩ QUANTITY CARRIED OVER FROM CURVE WIDENING SUMMARY
- ⑪ QUANTITY CARRIED OVER FROM TEMPORARY FENCE & FENCE REPLACEMENT SUMMARY
- ⑫ ADDITIONAL QUANTITY INCLUDED FOR USE AS DIRECTED BY ENGINEER
- ⑬ LUCIOL SYSTEMS ADVANCED DELINEATION WILL BE ACCEPTED AS THE OFFICIAL PRODUCT FOR THIS BID ITEM. EACH UNIT CONSISTS OF 12.5 LF.

KY 100
GENERAL SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014

GENERAL SUMMARY

ITEM	DESCRIPTION	UNIT	TOTAL PROJECT
2650	MAINTAIN & CONTROL TRAFFIC	LS	1
2671	PORTABLE CHANGEABLE MESSAGE SIGN	EACH	2
2676	MOBILIZATION FOR MILL & TEXT	LS	1
2677	ASPHALT PAVE MILLING & TEXTURING (8)	TON	64
2697	EDGE LINE RUMBLE STRIPS (8)	LF	92,759
2701	TEMP SILT FENCE	LF	23,310
2703	SILT TRAP TYPE A	EACH	35
2704	SILT TRAP TYPE B	EACH	35
2705	SILT TRAP TYPE C	EACH	35
2706	CLEAN SILT TRAP TYPE A	EACH	35
2707	CLEAN SILT TRAP TYPE B	EACH	35
2708	CLEAN SILT TRAP TYPE C	EACH	35
2726	STAKING	LS	1
5950	EROSION CONTROL BLANKET	SQYD	27,500
5952	TEMP MULCH	SQYD	112,933
5953	TEMP SEEDING AND PROTECTION	SQYD	84,700
5963	INITIAL FERTILIZER	TON	3
5964	MAINTENANCE FERTILIZER	TON	3
5985	SEEDING & PROTECTION	SQYD	27,933
5992	AGRICULTURAL LIMESTONE	TON	36
6406	SBM ALUM SHEET SIGNS .080 IN (6)	SQFT	203
6407	SBM ALUM SHEET SIGNS .125 IN (6)	SQFT	6
6410	STEEL POST TYPE I (6)	LF	355
6510	PAVE STRIPING-TEMP PAINT-4 IN (8)	LF	92,759
6556	PAVE STRIPING-DUR TY I-6 IN W (5)	LF	491
6557	PAVE STRIPING-DUR TY I-6 IN Y (5)	LF	493
6568	PAVE MARKING-THERMO STOP BAR-24 IN (5)	LF	48
6572	PAVE MARKING-DOTTED LANE EXTEN (5)	LF	115
8100	CONCRETE-CLASS A (3)	CUYD	33
8806	GUARDRAIL-BRIDGE CASE I-A (2)	LF	525
8810	PRECAST CONC BRIDGE RAIL BLOCK (2)	EACH	8
1002ONS	FUEL ADJUSTMENT	DOLL	15,768
1003ONS	ASPHALT ADJUSTMENT	DOLL	39,604
2019IED	OBJECT MARKER TY 3 (2)	EACH	9

- ① QUANTITY CARRIED OVER FROM SUPERELEVATION IMPROVEMENT SUMMARY
- ② QUANTITY CARRIED OVER FROM GUARDRAIL SUMMARY
- ③ QUANTITY CARRIED OVER FROM CULVERT PIPE SUMMARY
- ④ QUANTITY CARRIED OVER FROM ENTRANCE PIPE SUMMARY
- ⑤ QUANTITY CARRIED OVER FROM STRIPING SUMMARY
- ⑥ QUANTITY CARRIED OVER FROM SIGNING SUMMARY
- ⑦ QUANTITY CARRIED OVER FROM DITCHING AND SHOULDERING AND DGA WEDGE & CHIP SEAL SUMMARY
- ⑧ QUANTITY CARRIED OVER FROM OVERLAY AND RUMBLE STRIP SUMMARY
- ⑨ QUANTITY CARRIED OVER FROM PAVEMENT REPAIR SUMMARY
- ⑩ QUANTITY CARRIED OVER FROM CURVE WIDENING SUMMARY
- ⑪ QUANTITY CARRIED OVER FROM TEMPORARY FENCE & FENCE REPLACEMENT SUMMARY
- ⑫ ADDITIONAL QUANTITY INCLUDED FOR USE AS DIRECTED BY ENGINEER
- ⑬ LUCIOL SYSTEMS ADVANCED DELINEATION WILL BE ACCEPTED AS THE OFFICIAL PRODUCT FOR THIS BID ITEM. EACH UNIT CONSISTS OF 12.5 LF.

KY 100
GENERAL SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014

SUPERELEVATION IMPROVEMENT													
Curve No.	PC Station	PC Milepoint	PT Station	PT Milepoint	Radius	Length of Curve (ft)	Existing Superelevation	Desired Superelevation	Runoff Length	Runout Length	Leveling & Wedging PG 64-22 (ton)	CL2 Asph. Surf. 0.38D PG 64-22 (ton)	Longitudinal Edge Key (LF)
1 EB	7+57.29	0.143	11+36.68	0.215	1,050	380	2.7%	5.0%	128	52	93	*	
1 WB						380	5.1%					*	
4 EB	29+25.69	0.554	32+96.60	0.624	2,500	371	2.4%	3.0%	77	52	128	*	543
4 WB						371	-1.8%					*	
7 EB	94+49.66	1.790	101+74.08	1.927	2,800	725	1.5%	3.5%	90	52	128	*	914
7 WB						725	4.0%					*	
12 EB	159+53.84	3.022	165+80.83	3.140	1,000	627	5.5%	7.0%	179	52	115	7*	935
12 WB						627	7.2%					*	
14 EB	187+15.02	3.545	194+13.24	3.677	750	699	4.5%	6.0%	154	52	121	*	974
14 WB						699	7.5%					*	
SUPERELEVATION TOTALS:											585	7	3987

ITEM	DESCRIPTION	UNIT	QUANTITY
190	LEVELING & WEDGING PG 64-22	TON	585
301	CL2 ASPH SURF 0.38D PG 64-22	TON	7
21289ED	LONGITUDINAL EDGE KEY	LF	3987

* QUANTITIES ARE INCLUDED IN THE OVERLAY AND RUMBLE STRIP SUMMARY
 ** ADDITIONAL QUANTITIES ARE INCLUDED FOR CURVE 12 TO THE STONY POINT RD INTO PROPOSED SUPERELEVATION IMPROVEMENTS.

- NOTES:
 1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY. FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
 2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
 SUPERELEVATION IMPROVEMENT SUMMARY

CULVERT PIPE EXTENSION AND REPLACEMENT TABULATION

Mile Point	Station	Existing Culvert Pipe	Skew	Remove Pipe (LF)	Remove Headwall (ea)	Proposed Culvert Pipe (LF)		Intermediate Anchors (Class "A" Conc. CVD5)	Left Headwall - Proposed	Right Headwall - Proposed
						18"	24"			
0.195	10+32	18" RCP	0°	4	1	16		1.07	Sloped & Mitered Concrete Headwall	---
0.308	16+26	18" RCP	0°	8	2	18		2.14	Safety Box Inlet	Sloped & Mitered Concrete Headwall
0.466	24+60	15" RCP	0°						---	---
0.622	32+83	18" RCP	0°	4	1	13		1.07	Sloped & Mitered Concrete Headwall	---
1.029	54+31	18" RCP	0°	8	2	16		2.14	Safety Box Inlet	Sloped & Mitered Concrete Headwall
1.158	61+13	18" RCP	7° LT						---	---
1.786	94+28	18" RCP	0°	4	1	12		1.07	Sloped & Mitered Concrete Headwall	---
1.933	102+08	18" RCP	0°						---	---
2.023	106+84	18" RCP	0°	4	1	13		1.07	---	Sloped & Mitered Concrete Headwall
2.111	111+46	18" RCP	0°						---	---
2.316	122+26	18" RCP	0°						---	---
2.400	126+73	18" RCP	0°						---	---
2.652	140+03	18" RCP	0°						---	---
3.391	179+04	18" CMP	0°						---	---
3.564	188+19	24" RCP	0°	4	1	7		1.59	Sloped & Mitered Concrete Headwall	---
3.621	191+20	18" PLASTIC/RCP	0°	4		8		1.07	Sloped & Mitered Concrete Headwall	---
3.744	197+69	18" RCP	0°	4	1	12		1.07	Sloped & Mitered Concrete Headwall	---
4.325	228+38	24" STEEL	0°						---	---
4.388	231+68	24" RCP	0°	4	1	10		1.59	Sloped & Mitered Concrete Headwall	---
4.886	258+00	18" RCP	0°	4	1	11		1.07	Sloped & Mitered Concrete Headwall	---
4.943	261+00	24" RCP	0°						---	---
5.098	269+15	24" RCP	0°	8	2	17		3.18	Safety Box Inlet	Sloped & Mitered Concrete Headwall
5.301	279+90	18" RCP	0°	8	2	19		2.14	Sloped & Mitered Concrete Headwall	Sloped & Mitered Concrete Headwall
5.686	300+20	18" RCP	0°	8	2	13		2.14	Sloped & Mitered Concrete Headwall	Double Safety Box Inlet
6.122	323+23	24" RCP	0°						---	---
6.574	347+13	18" RCP	0°	4	1	4		1.07	---	Safety Box Inlet
6.849	361+61	18" RCP	0°	48	2	44		2.14	Safety Box Inlet	Sloped & Mitered Concrete Headwall
7.010	370+13	18" RCP	0°	8	2	13		2.14	Safety Box Inlet	Sloped & Mitered Concrete Headwall
7.123	376+12	24" RCP	0°						---	---
7.490	395+46	18" RCP	0°	4	1	4		1.07	---	Safety Box Inlet
7.590	400+76	24" PLASTIC/18" RCP	0°	34	1	46			Sloped & Mitered Concrete Headwall	Sloped & Mitered Concrete Headwall
7.767	410+11	24" RCP	0°						---	---
7.922	418+26	18" RCP	0°						---	---
8.269	436+59	18" RCP	0°	4	1	12		1.07	---	Sloped & Mitered Concrete Headwall
8.538	450+83	18" RCP	0°	8	2	17		2.14	Sloped & Mitered Concrete Headwall	Sloped & Mitered Concrete Headwall
8.704	459+57	18" RCP	0°	8	2	16		2.14	Sloped & Mitered Concrete Headwall	Safety Box Inlet
CULVERT PIPE EXTENSION/REPLACEMENT TOTALS:				194	30	307	34	32.04		

- NOTES:
 1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY. FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD. THE CONTRACTOR SHALL FIELD VERIFY TYPES AND DIMENSIONS PRIOR TO ORDERING.
 2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.
 3. 250 TONS OF CHANNEL LINING CLASS II HAVE BEEN INCLUDED FOR POTENTIAL USE AROUND SAFETY BOX INLETS, INLETS AND OUTLETS OF PIPES, ALONG AREAS OF REGRADED DITCH LINE AND/OR FILL SLOPE, AND OTHER AREAS AS DIRECTED BY THE ENGINEERING.

KY 100
CULVERT PIPE EXTENSION/REPLACEMENT SUMMARY

ITEM	DESCRIPTION	UNIT	QUANTITY
212	CL2 ASPH BASE 1.00D PG 64-22	TON	340
462	CULVERT PIPE-18 IN	LF	307
464	CULVERT PIPE-24 IN	LF	34
8100	CONCRETE CLASS A	CVD	33
1310	REMOVE PIPE	LF	194
1726	SAFETY BOX INLET-18 IN SDB-1	EACH	8
1727	SAFETY BOX INLET-24 IN SDB-1	EACH	1
1728	SAFETY BOX INLET-18 IN DBL SDB-5	EACH	1
2483	CHANNEL LINING CLASS II	TON	250
2635	REMOVE HEADWALL	EACH	30
2457556510	HEADWALL (SLOPED & MITERED CONCRETE FOR 18 INCH PIPE)	EACH	19
2457556510	HEADWALL (SLOPED & MITERED CONCRETE FOR 24 INCH PIPE)	EACH	3

COUNTY OF	ALLEN
ITEM NO.	3-9014

ENTRANCE CONSTRUCTION & PIPE REPLACEMENT TABULATION							
Mile Point	Station	Offset	Existing Entrance Pipe	Remove Pipe (LF)	Proposed Entrance Pipe		Comments
					15" Equiv.	18"	
0.594	31+35	LT	18"	25	25	18"	In conjunction with SE improvement
1.050	55+43	LT	15" CMP	20	20		In conjunction with ditching & shouldering
1.809	95+49	LT	15" CMP	70	70		In conjunction with ditching & shouldering
1.813	95+75	RT	15" CMP	30	30		In conjunction with SE improvement
1.826	96+40	LT	15"	28	28		In conjunction with ditching & shouldering
2.509	132+48	LT	15"	38	38		In conjunction with ditching & shouldering
3.052	161+13	RT	18" CMP	40	40		In conjunction with SE improvement
3.231	170+60	RT	15" CMP	30	30		In conjunction with ditching & shouldering
3.575	188+76	LT	--	--	60		In conjunction with ditching & shouldering
3.588	189+45	RT	--	--			In conjunction with SE improvement
ENTRANCE PIPE REPLACEMENT TOTALS:				281	301	40	215

ITEM	DESCRIPTION	UNIT	QUANTITY
1	DGA BASE	TON	215
441	ENTRANCE PIPE-18 IN	LF	40
450	ENTRANCE PIPE-15 IN EQUIV	LF	301
1310	REMOVE PIPE	LF	281

STRIPING					
Begin Milepoint	Begin Station	End Milepoint	End Station	Offset	Description
1.153	60+88	1.155	61+00	LT	Stop Bar - Clare Rd
1.163	61+43	1.166	61+55	RT	Stop Bar - New Roe Rd
2.068	109+18	2.070	109+30	RT	Stop Bar - Wilson Rd
3.085	162+88	3.087	163+00	RT	Stop Bar - Stony Point Rd
3.958	208+97	3.998	211+11	LT	Solid White Line (Bridge)
3.956	208+86	3.996	211+01	RT	Solid White Line (Bridge)
3.957	208+91	3.997	211+06	CENTER	Double Solid Yellow Line (Bridge)
4.131	218+12	4.137	218+44	LT	Solid White Line (Bridge)
4.133	218+24	4.139	218+53	RT	Solid White Line (Bridge)
4.132	218+18	4.138	218+50	CENTER	Double Solid Yellow Line (Bridge)
7.803	412+00	7.825	413+15	RT	Dotted White Line

NOTE: SEE OVERLAY AND RUMBLE STRIP SUMMARIES FOR STRIPING QUANTITIES IN OVERLAY SECTIONS.

ITEM	DESCRIPTION	UNIT	QUANTITY
6556	PAVE STRIPING-DUR TY 1-6 IN W	LF	491
6557	PAVE STRIPING-DUR TY 1-6 IN Y	LF	493
6568	PAVE MARKING-THERMO STOP BAR-24 IN	LF	48
6572	PAVE MARKING-DOTTED LANE EXTEN	LF	115

- NOTES:
- 1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY. FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
- 2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
ENTRANCE & STRIPING
SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014

Ditching & Shouldering Summary
Allen County
KY 100

Side of Road	Approx. Station	Approx. BEGIN Milepoint	Approx. END Milepoint	Approx. END Milepoint	Length (LF)	Estimated Excavation Volume** (CU YD)	Estimated Embankment Volume** (CU YD)	Ditching & Shouldering Detail Sheet Figure Ref.**	Add'l DGA**** (TONS)	Asphalt Seal Coat (TON)	Asphalt Seal Aggregate	Channel Line Ditch, Fill Slope	Channel Lining Class II (TONS)	Geotex. Fabric Type IV (SQ YD)	Remarks
LT	7+00	0.133	12+00	0.265	700	130	130	Figure 9				No			Clean and reshape existing ditch to drain SE Improvement
RT	6+30	0.119	12+60	0.239	630	0	210	Figure 4				No			Pipe Extension
RT	15+25	0.289	17+25	0.327	200	0	22	Figure 2				No			Pipe Extension
LT	16+25	0.308	17+25	0.327	100	11	4	Figure 8				No			Pipe Extension
LT	28+30	0.536	60+00	1.136	3,170	352	0	Figure 7				No			Clean and reshape existing ditch to drain Pipe Extension
RT	53+30	1.009	55+30	1.047	200	0	22	Figure 2				No			Pipe Extension
LT	87+50	1.657	91+00	1.723	350	39	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	89+00	1.686	91+00	1.723	200	22	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	93+50	1.771	101+85	1.929	835	0	62	Figure 3				No			SE Improvement
LT	93+50	1.771	97+50	1.847	400	44	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	101+85	1.929	105+00	1.989	315	0	0	Figure 1	7	***	***	No			DGA Wedge
LT	101+00	1.913	112+50	2.131	1,150	85	43	Figure 8				Yes - Ditch	7		Clean and reshape existing ditch to drain Pipe Extension
RT	105+80	2.004	107+80	2.042	200	0	15	Figure 3				No			Flatten Slope
LT	117+00	2.216	119+50	2.263	250	0	74	Figure 2				Yes - Ditch	12		DGA Wedge
LT	119+50	2.263	120+00	2.273	50	0	0	Figure 4	1	***	***	No			Clean and reshape existing ditch to drain SE Improvement
LT	120+00	2.273	130+00	2.462	1,000	370	407	Figure 9				Yes - Ditch	6		Clean and reshape existing ditch to drain SE Improvement
RT	158+00	2.992	167+40	3.170	940	0	0	Figure 4				No			Clean and reshape existing ditch to drain
LT	170+00	3.220	174+00	3.295	400	74	74	Figure 9				No			Clean and reshape existing ditch to drain
RT	170+00	3.220	174+00	3.295	400	74	74	Figure 9				No			Clean and reshape existing ditch to drain
RT	185+80	3.519	195+50	3.703	970	0	251	Figure 4				No			SE Improvement
LT	187+50	3.551	196+00	3.712	850	94	94	Figure 9				No			Clean and reshape existing ditch to drain Pipe Extension
LT	196+00	3.712	198+50	3.759	250	28	15	Figure 7				No			Pipe Extension
LT	230+70	4.369	232+70	4.407	200	0	0	Figure 3				No			Pipe Extension
LT	252+00	4.773	270+25	5.118	1,825	338	338	Figure 9				No			Clean and reshape existing ditch to drain Pipe Extension
RT	268+15	5.079	270+25	5.118	210	0	23	Figure 2				No			Pipe Extension
LT	275+00	5.208	283+00	5.360	800	148	148	Figure 9				No			Clean and reshape existing ditch to drain DGA Wedge
RT	278+00	5.265	282+00	5.341	400	74	74	Figure 1	8	***	***	No			Clean and reshape existing ditch to drain DGA Wedge
LT	295+00	5.587	299+00	5.663	400	44	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	295+00	5.587	299+00	5.663	400	44	0	Figure 7				No			Clean and reshape existing ditch to drain
LT	299+75	5.677	305+00	5.777	525	58	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	299+75	5.677	301+25	5.705	150	17	0	Figure 7				No			Pipe Extension
RT	323+50	6.127	325+00	6.155	150	0	0	Figure 1	3	***	***	No			DGA Wedge
LT	328+50	6.222	330+50	6.259	200	22	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	328+50	6.222	330+50	6.259	200	22	0	Figure 7				No			Clean and reshape existing ditch to drain
LT	333+75	6.321	336+25	6.368	250	0	0	Figure 1	5	***	***	No			DGA Wedge
RT	338+00	6.402	340+00	6.439	200	22	0	Figure 7				No			Clean and reshape existing ditch to drain
LT	347+10	6.574	348+10	6.593	100	11	0	Figure 7				No			Pipe Extension
RT	347+10	6.574	348+10	6.593	100	11	0	Figure 7				No			Pipe Extension
RT	360+00	6.818	362+50	6.866	250	28	0	Figure 7				No			Clean and reshape existing ditch to drain
LT	360+00	6.818	364+00	6.894	400	44	0	Figure 7				No			Clean and reshape existing ditch to drain

NOTES:
1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY, FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
DITCHING AND SHOULDERING AND
DGA WEDGE & CHIP SEAL SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014

Ditching & Shouldering Summary

Allen County

KY 100

* The "Figure References" noted below refer to the Figure number within the Ditching & Shouldering Detail Sheet that is the closest representation of the intended Ditching & Shouldering.	
** The Estimated Volumes of Excavation and Embankment are provided for informational purposes ONLY. The Department gives no guarantee to the accuracy of the estimated volumes. The Bidder must draw his/her own conclusion.	
***Quantities are included in the overlay and rumble strip summary.	
****The additional DGA quantities are for locations that may require additional DGA to construct a DGA Wedge.	

Side of Road	Approx. BEGIN Station	Approx. BEGIN Milepoint	Approx. END Station	Approx. END Milepoint	Length (LF)	Estimated Excavation Volume** (CU YD)	Estimated Embankment Volume** (CU YD)	Ditching & Shouldering Detail Sheet Figure Ref. *	Add'l DGA**** (TONS)	Asphalt Seal Coat (TON)	Asphalt Seal Aggregate	Channel Line Ditch, Fill Slope	Channel Lining Class II (TONS)	Geotex. Fabric Type IV (SQ YD)	Remarks
LT	369+10	6.991	371+10	7.028	200	22	0	Figure 7				No			Pipe Extension
RT	369+10	6.991	371+10	7.028	200	0	15	Figure 2				No			Pipe Extension
RT	374+50	7.093	375+50	7.112	100	11	0	Figure 1	2	***	***	No			DGA Wedge
LT	385+00	7.292	391+00	7.405	600	67	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	385+00	7.292	391+00	7.405	600	67	0	Figure 7				No			Clean and reshape existing ditch to drain
RT	395+00	7.481	395+50	7.491	50	6	0	Figure 7				No			Pipe Extension
RT	396+00	7.500	398+00	7.538	200	22	0	Figure 7				No			Clean and reshape existing ditch to drain
LT	399+30	7.563	401+50	7.604	220	0	16	Figure 2				No			Replace Pipe
RT	400+30	7.581	401+50	7.604	120	13	0	Figure 7				No			Replace Pipe
RT	432+00	8.182	437+00	8.277	500	93	93	Figure 9				No			Clean and reshape existing ditch to drain
LT	449+80	8.519	451+80	8.557	200	0	22	Figure 2				No			Pipe Extension
RT	449+80	8.519	451+00	8.542	120	13	0	Figure 7				No			Pipe Extension
LT	458+50	8.684	460+50	8.722	200	0	22	Figure 2				No			Pipe Extension
RT	458+50	8.684	460+50	8.722	200	22	0	Figure 7				No			Pipe Extension

Item	LF	TONS	Asphalt Seal Coat	Asphalt Seal Aggregate	TONS	TONS	Channel Lining Class II	TONS	Geotexile Fabric Type IV	TONS
Ditching & Shouldering	23,830		0.00		0		25		0	
DGA	26									

- NOTES:
- THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY. FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
 - ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
DITCHING AND SHOULDERING AND
DGA WEDGE & CHIP SEAL SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014

PAVEMENT REPAIR										
Offset	Begin Milepoint	Begin Station	End Milepoint	End Station	Length	Width	Crushed Aggregate Size No. 23 (Ton)	Asphalt Base 1,000 P664-22 (Ton)	Fabric - Geotextile Class 2 (SQYD)	
Both	3.997	211+06	4.007	211+56	50	22	19	54	126	
PAVEMENT REPAIR TOTALS:								19	54	126

ITEM	DESCRIPTION	UNIT	QUANTITY
80	CRUSHED AGGREGATE SIZE NO. 23	TON	19
190	LEVELING & WEDGING	TON	50
212	CL2 ASPH BASE 1,000 P664-22	TON	54
356	ASPHALT MATERIAL FOR TACK	TON	0.1
2603	FABRIC-GEOTEXTILE CLASS 2	SQYD	126

NOTE: ASPHALT SURFACE QUANTITIES ARE INCLUDED IN THE OVERLAY AND RUMBLE STRIP SUMMARY

CURVE WIDENING							
Curve No.	Begin Milepoint	Begin Station	End Milepoint	End Station	Additional Width	Asphalt Base 1,000 P664-22 (Ton)	CL2 Asph Surf 0.38D P664-22 (tons)
14	3.516	185+65	3.705	195+63	3	346	20
CURVE WIDENING TOTALS:						346	20

ITEM	DESCRIPTION	UNIT	QUANTITY
1	DGA BASE	TON	236
190	LEVELING & WEDGING	TON	50
212	CL2 ASPH BASE 1,000 P664-22	TON	346
301	CL2 ASPH SURE 0.38D P664-22	TON	20
20748ED	SHOULDER MILLING/TRENCHING	SQYD	444
21289ED	LONGITUDINAL EDGE KEY	LF	1996

NOTE: ADDITIONAL ASPHALT SURFACE QUANTITIES ARE INCLUDED IN THE OVERLAY AND RUMBLE STRIP SUMMARY

- NOTES:
- THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY, FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
 - ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
PAVEMENT REPAIR & CURVE WIDENING
SUMMARY

COUNTY OF	ALLEN	ITEM NO.	3-9014
-----------	-------	----------	--------

ASPHALT OVERLAY								
Begin Milepoint	End Milepoint	Length of Section (ft)	Asph Surf Width of Section (ft)	Asph Surf Depth (in)	CL2 Asph Surf 0.38D PG64-22 (tons)	DGA Width of Section (ft)	DGA Depth (in)	DGA Base (tons)
0.000	3.957	20893	22	1.25	3511	3 (1.5' per side)	2	801
3.997	4.132	713	22	1.25	120	3 (1.5' per side)	2	27
4.138	8.830	24774	22	1.25	4163	3 (1.5' per side)	2	950
ASPHALT OVERLAY TOTALS:					7794			1778

ITEM	DESCRIPTION	UNIT	QUANTITY
1	DGA BASE	TON	1778
100	ASPHALT SEAL AGGREGATE	TON	722
103	ASPHALT SEAL COAT	TON	87
301	CL2 ASPH SURF 0.38D PG 64-22	TON	7794
356	ASPHALT MATERIAL FOR TACK	TON	48
2677	ASPHALT PAVE MILLING & TEXTURING	TON	64
6510	PAVE STRIPING-TEMP PAINT-4 IN	LF	92759
24995EC	PAVE STRIPING-SPRAY THERMO-6 IN W	LF	92759
24996EC	PAVE STRIPING-SPRAY THERMO-6 IN Y	LF	92759

EDGE LINE RUMBLE STRIPS				
Begin Milepoint	End Milepoint	Offset	Length of Section (ft)	Edgeline Rumble Strips (LF)
0.000	3.957	LT & RT	20893	41786
3.997	4.132	LT & RT	713	1426
4.138	8.830	LT & RT	24774	49548
EDGE LINE RUMBLE STRIP TOTALS:				92759

ITEM	DESCRIPTION	UNIT	QUANTITY
2697	EDGE LINE RUMBLE STRIPS	LF	92759

- NOTES:
- THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY. FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
 - ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
OVERLAY & RUMBLE STRIP
SUMMARY

COUNTY OF	ALLEN	ITEM NO.	3-9014
-----------	-------	----------	--------

TEMPORARY FENCE AND FENCE REPLACEMENT							
Offset	Begin Milepoint	Begin Station	End Milepoint	End Station	Temporary Fence (LF)	Remove & Replace Fence (LF)	Existing Fence Type
LT	0.189	10+00	0.256	13+50	350	350	Two strand barbed wire fence with T-posts
LT	0.308	16+25	0.327	17+25	100	100	Two strand barbed wire fence with T-posts
LT	2.254	119+00	2.292	121+00	200	200	Woven wire fence with single strand barbed wire
LT	2.292	121+00	2.372	125+25	425	425	Woven wire fence with single strand barbed wire
LT	3.551	187+50	3.569	188+43	100	100	Five strand barbed wire fence with wood and metal posts
LT	3.607	190+45	3.759	198+50	805	805	Five strand barbed wire fence with wood and metal posts
RT	3.608	190+50	3.703	195+50	500	500	Five strand barbed wire fence with wood and metal posts
LT	4.780	252+40	5.118	270+25	1785	1785	Woven wire/barbed wire fence
RT	6.848	361+60	6.863	362+35	75	75	Three plank wood fence
RT	6.991	369+10	7.028	371+10	200	200	Two strand barbed wire fence (1 electrified) with metal T-posts
LT	7.563	399+30	7.601	401+35	205	205	Five strand barbed wire fence with T-posts and wood posts
RT	7.581	400+30	7.604	401+50	120	120	Woven wire fence with wood posts and two barbed wire strands (1 electrified)
LT	8.519	449+80	8.557	451+80	200	200	Five strand barbed wire fence with T-posts and wood posts
FENCE TOTALS:					5065	5065	

ITEM	DESCRIPTION	UNIT	QUANTITY
2259	FENCE-TEMP	LF	5065
2268	REMOVE & REPLACE FENCE	LF	5065

- NOTES:
- THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY. FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
 - ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.
 - THE CONTRACTOR SHALL INSTALL TEMPORARY FENCE EQUIVALENT TO, OR EXCEEDING, THAT OF THE EXISTING FENCE.
 - EXISTING FENCES LINES WILL BE REPLACED WITH LIKE KIND.

KY 100
TEMPORARY FENCE & FENCE REPLACEMENT
SUMMARY

Guardrail Summary

Allen County

KY 100

COUNTY OF	ALLEN
ITEM NO.	3-9014

Notes: Begin/End Milepoints are estimated to include the entire length of the Rail AND the End Treatments. The Engineer may adjust the proposed guardrail termini to ensure proper installation of the guardrail system.

Proposed Guardrail to be Constructed										Existing Guardrail to be Removed				
Side of Road	Proposed BEGINNING Station	Approx. BEGIN Milepoint	Approx. END Station	Approx. END Milepoint	Proposed ENDING Treatment	Proposed Length (LF)	Number of Radius	Remarks	Side of Road	Approx. BEGIN Station	Approx. BEGIN Milepoint	Approx. END Station	Approx. END Milepoint	Existing Length (LF)
LT	Connector Type A	0+71	0.013	4+24	0.080	Terminal Section 1	1	Replace existing guardrail to meet height requirements	LT	0+71	0.013	4+24	0.080	362.50
RT	Connector Type A	0+58	0.011	2+58	0.049	Type 1	0	Replace existing guardrail to meet height requirements	RT	0+58	0.011	2+00	0.038	150.00
LT	Type 1	160+04	3.031	161+91	3.066	Terminal Section 1	1	Replace existing guardrail to meet height requirements. Install 13 units of Luciol Systems Delineation.	LT	160+04	3.031	161+91	3.066	187.50
RT	Terminal Section 1	161+30	3.055	162+70	3.081	Type 7	3	Replace existing guardrail to meet height requirements. Install 16 units of Luciol Systems Delineation. Type 7 along Stony Point Rd.	RT	161+30	3.055	162+70	3.081	150.00
LT	Terminal Section 1	162+24	3.073	163+65	3.099	Type 7	2	Replace existing guardrail to meet height requirements. Install 11 units of Luciol Systems Delineation. Type 7 along Fanny Tom Gains Rd.	LT	162+24	3.073	163+60	3.098	137.50
RT	Type 1	207+86	3.937	208+86	3.956	Single Face A	0	At Ending, install 25 ft of Single Face A and connect to Guardrail-Bridge Case I-A	RT	208+36	3.946	208+86	3.956	50.00
RT		208+86	3.956	211+01	3.996	Bridge Case I-A	0	Bridge Case I-A	RT	208+86	3.956	211+01	3.996	225.00
RT	Single Face A	211+01	3.996	212+01	4.015	Type 1	0	At Beginning, connect to Guardrail-Bridge Case I-A and install 25 ft of Single Face A	RT	211+01	3.996	211+26	4.001	25.00
LT	Type 1	207+96	3.939	208+96	3.958	Single Face A	0	At Ending, install 25 ft of Single Face A and connect to Guardrail-Bridge Case I-A	LT	208+72	3.953	208+96	3.958	25.00
LT		208+96	3.958	211+11	3.998	Bridge Case I-A	0	Bridge Case I-A	LT	208+96	3.958	211+11	3.998	225.00
LT	Single Face A	211+11	3.998	212+11	4.017	Type 1	0	At Beginning, connect to Guardrail-Bridge Case I-A and install 25 ft of Single Face A	LT	211+11	3.998	211+36	4.003	25.00
LT	Type 1	217+00	4.110	218+12	4.131	Single Face A	0	At Ending, install 25 ft of Single Face A and connect to Guardrail-Bridge Case I-A	LT	217+91	4.127	218+12	4.131	25.00
LT		218+12	4.131	218+44	4.137	Bridge Case I-A	0	Bridge Case I-A	LT	218+12	4.131	218+44	4.137	37.50
LT	Single Face A	218+44	4.137	219+00	4.148	Terminal Section 1	1	At Beginning, connect to Guardrail-Bridge Case I-A and install 25 ft of Single Face A	LT	218+44	4.137	218+68	4.142	25.00
RT	Type 1	217+00	4.110	218+25	4.134	Single Face A	0	At Ending, install 25 ft of Single Face A and connect to Guardrail-Bridge Case I-A	RT	218+05	4.130	218+25	4.134	25.00
RT		218+25	4.134	218+53	4.139	Bridge Case I-A	0	Bridge Case I-A	RT	218+25	4.134	218+53	4.139	37.50
RT	Single Face A	218+53	4.139	219+53	4.158	Type 1	0	At Beginning, connect to Guardrail-Bridge Case I-A and install 25 ft of Single Face A	RT	218+53	4.139	219+20	4.152	75.00

Summary of Items

Item Description	Quantity	Unit	Material	Notes
G/R Steel W Beam-S Face (7 FT Post)	1,255.00	LF	LF	Delineator for Guardrail B/W
Remove Guardrail	1,787.50	LF	LF	
End Treatment Type 1	9	EACH	EACH	GR Connector to Bridge End Type A
End Treatment Type 2A	0	EACH	EACH	GR Connector to Bridge End Type A-1
End Treatment Type 3	0	EACH	EACH	GR Connector to Bridge End Type C
End Treatment Type 4A	0	EACH	EACH	GR Connector to Bridge End Type D
End Treatment Type 7	2	EACH	TONS	DGA
Terminal Section No. 1	5	EACH	TONS	Asphalt Seal Coat
Guardrail-Steel W Beam-S Face A	200	LF	TONS	Asphalt Seal Aggregate
Precast Concrete Bridge Rail Block	8	EACH	LF	Guardrail-Bridge Case I-A
Object Marker TY 3	9	EACH	EACH	Delineator for Guardrail Bi Directional W

* EACH UNIT CONSISTS OF 12.5 LF OF LUCIOL SYSTEMS BIDIRECTIONAL LINEAR DELINEATION.

- NOTES:
1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY, FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
GUARDRAIL SUMMARY

Assembly ID	Side of Road	Approx Offset (ft)	Approx Station	Approx. Mile Point	Fading Traffic Travelling	MUTCD Code	Sign Description	Sign Text/Remarks	Sign Dimensions (ft x in)	SHEETING			S&M Alum		Installation Type	Bracing Req'd	# of Sign Posts	Estimated Length of 2-1/2" Post (ft)	Estimated Length of 2-1/4" Stiffener Req'd (includ to post)	TOTAL Estimated Sign Post Length (LF)	Barcode Sign Inv. (EACH)
										Text/Symbol Color	Background Color	Sheeting Type	Sheet Signs (SQ FT)	Sheet Signs (SQ FT)							
1	RT	17	39+95	0.757	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	3.00		Strnd w/ Soil Plate		1			9	1
	LT	17	39+95	0.757	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	3.00		Strnd w/ Soil Plate		1			9	2
2	RT	17	39+95	0.757	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			9	2
	LT	17	39+95	0.757	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			9	2
3	RT	18	58+00	1.098	EB	W2-1	Cross Road		30 x 30	Black	Yellow	III or IV	6.25		Strnd w/ Soil Plate		1			14	1
	LT	18	58+00	1.098	EB	W2-1	Cross Road		30 x 30	Black	Yellow	III or IV	6.25		Strnd w/ Soil Plate		1			14	1
4	RT	40	60+86	1.153	EB	W13-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25		Strnd w/ Soil Plate		1			10	1
	LT	40	60+86	1.153	EB	W13-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25		Strnd w/ Soil Plate		1			10	1
5	RT	30	61+62	1.167	NB	R1-1	Stop	Clare Rd	36 x 36	White	Red	IX	9.00		Strnd w/ Soil Plate		1			11	1
	LT	30	61+62	1.167	NB	R1-1	Stop	New Roe Rd	36 x 36	White	Red	IX	9.00		Strnd w/ Soil Plate		1			11	1
6	RT	18	81+80	1.549	EB	W1-8R	Right Chevron		2 x 60	Black	FL Yellow	IX	0.84							9	1
	LT	18	81+80	1.549	EB	W1-8R	Right Chevron		2 x 60	Black	FL Yellow	IX	0.84							9	1
7	RT	18	83+40	1.580	EB	W1-8R	Right Chevron		2 x 60	Black	FL Yellow	IX	3.00		Strnd w/ Soil Plate		1			9	1
	LT	18	83+40	1.580	EB	W1-8R	Right Chevron		2 x 60	Black	FL Yellow	IX	3.00		Strnd w/ Soil Plate		1			9	1
8	RT	18	85+00	1.610	WB	W1-8L	Left Chevron		2 x 60	Black	FL Yellow	IX	0.84							9	1
	LT	18	85+00	1.610	WB	W1-8L	Left Chevron		2 x 60	Black	FL Yellow	IX	0.84							9	1
9	RT	18	86+60	1.640	EB	W1-8R	Right Chevron		2 x 60	Black	FL Yellow	IX	3.00		Strnd w/ Soil Plate		1			9	1
	LT	18	86+60	1.640	EB	W1-8R	Right Chevron		2 x 60	Black	FL Yellow	IX	3.00		Strnd w/ Soil Plate		1			9	1
10	RT	30	109+30	2.070	NB	R1-1	Stop	Wilson Rd	36 x 36	White	Red	IX	9.00		Strnd w/ Soil Plate		1			11	2
	LT	30	109+30	2.070	NB	R1-1	Stop	Wilson Rd	36 x 36	White	Red	IX	9.00		Strnd w/ Soil Plate		1			11	2
11	RT	17	114+10	2.161	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			8	2
	LT	17	114+10	2.161	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			8	2
12	RT	17	117+91	2.233	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			10	2
	LT	17	117+91	2.233	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			10	2
13	RT	19	118+26	2.240	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			9	2
	LT	19	118+26	2.240	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			9	2
14	RT	17	145+18	2.750	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			9	2
	LT	17	145+18	2.750	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00		Strnd w/ Soil Plate		1			9	2
15	RT	15	173+00	3.277	WB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
	LT	15	173+00	3.277	WB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
16	RT	15	178+00	3.371	EB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
	LT	15	178+00	3.371	EB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
17	RT	15	178+00	3.371	EB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
	LT	15	178+00	3.371	EB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
18	RT	15	178+00	3.371	EB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
	LT	15	178+00	3.371	EB	M1-5a	State Route Sign (3 or 4)		30 x 24	Black	White	III or IV	5.00		Strnd w/ Soil Plate		1			11	1
19	RT	14	191+14	3.601	BOTH				2 x 60				1.67							1	1
	LT	14	191+14	3.601	BOTH				2 x 60				1.67							1	1
20	RT	14	191+32	3.623	BOTH				2 x 60				1.67							1	1
	LT	14	191+32	3.623	BOTH				2 x 60				1.67							1	1
21	RT	14	193+70	3.669	BOTH				2 x 60				1.67							1	1
	LT	14	193+70	3.669	BOTH				2 x 60				1.67							1	1

NOTES:
1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY, FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

ALLEN COUNTY
HSIP 5071 (049)

COUNTY OF	ALLEN
ITEM NO.	3-9014

ALLEN COUNTY
HSIP 5071 (049)

Sign Summary										Allen County		KY 100		TOTAL		Barcode					
Assembly ID	Side of Road	Approx Offset (ft)	Approx Station	Approx Mile Point	Facing Traffic	MUTCD Code	Sign Description	Sign Text/Remarks	Sign Dimensions (in x in)	SHEETING		Sheet Signs (SQ FT)	Sheet Signs (SQ FT)	Installation Type	Bracing Req'd	# of Sign Posts	Estimated Length of 2'-1/2" Post (ft)	Estimated Length of 2'-1/2" Post (ft)	Stiffener Req'd (inches to post)	Estimated Sign Post Length (LF)	Sign Inv. (EACH)
										Text/Symbol	Background Color										
24	RT	23	315+75	5.980	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00	Stnd w/ Soil Plate		1				9	2
	LT	8	315+75	5.980	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00	Stnd w/ Soil Plate		1				9	2
26	RT	15	334+54	6.336	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00	Stnd w/ Soil Plate		1				8	2
	LT	13	334+54	6.336	BOTH	OM2-2V	Object Marker Type 2		6 x 12	n/a	Yellow	III or IV	1.00	Stnd w/ Soil Plate		1				8	2
28	RT	18	409+00	7.746	EB	W2-2R	Side Road Right		30 x 30	Black	Yellow	III or IV	6.25	Stnd w/ Soil Plate		1			14	1	
	LT	18	409+10	7.767	EB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	IX	3.00	Stnd w/ Soil Plate		1			11	1	
29	RT	18	410+10	7.767	EB				2 x 60				0.84								1
	LT	18	410+10	7.767	WB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	IX	3.00	Stnd w/ Soil Plate		1				9	1
30	RT	18	411+60	7.795	EB				2 x 60				0.84								1
	LT	18	411+60	7.795	WB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	IX	3.00	Stnd w/ Soil Plate		1					1
31	RT	18	413+20	7.826	EB				2 x 60				0.84								1
	LT	18	413+20	7.826	WB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	IX	3.00	Stnd w/ Soil Plate		1					1
32	RT	18	414+80	7.856	EB				2 x 60				0.84								1
	LT	18	414+80	7.856	WB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	IX	3.00	Stnd w/ Soil Plate		1					1
33	RT	18	416+00	7.879	WB	W2-2L	Side Road Left		30 x 30	Black	Yellow	III or IV	6.25	Stnd w/ Soil Plate		1				11	1
	LT	18	416+00	7.879	BOTH	D10-1	No Passing Zone	two signs	10 x 18	White	Green	III or IV	2.50	Stnd w/ Soil Plate		1				11	1
34	RT	18	428+50	8.116	EB	W1-5L	Left Winding Road		48 x 48 x 36	Black	Yellow	III or IV	5.56	Stnd w/ Soil Plate		1				11	1
	LT	18	428+50	8.116	EB	W1-5L	Left Winding Road		30 x 30	Black	FL Yellow	IX	6.25	Stnd w/ Soil Plate		1				12	1
35	RT	18	6+40	0.121	EB	W1-3-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25	Stnd w/ Soil Plate		1				11	1
	LT	18	23+24	0.440	WB	W1-5R	Right Winding Road		30 x 30	Black	FL Yellow	IX	6.25	Stnd w/ Soil Plate		1				11	1
36	RT	18	23+24	0.440	WB	W1-3-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25	Stnd w/ Soil Plate		1				13	1
	LT	18	148+98	2.822	EB	W1-10eR	RT Reverse Curve & Cross Rd		36 x 36	Black	FL Yellow	IX	9.00	Stnd w/ Soil Plate		1				13	1
37	RT	18	170+04	3.220	WB	W1-10eR	RT Reverse Curve & Cross Rd		36 x 36	Black	FL Yellow	IX	9.00	Stnd w/ Soil Plate		1				12	1
	LT	18	170+04	3.220	WB	W1-3-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25	Stnd w/ Soil Plate		1				12	1
38	RT	18	184+14	3.488	EB	W1-2L	Left Curve		30 x 30	Black	FL Yellow	IX	6.25	Stnd w/ Soil Plate		1				12	1
	LT	18	184+14	3.488	EB	W1-2L	Left Curve		30 x 30	Black	FL Yellow	IX	6.25	Stnd w/ Soil Plate		1				12	1
39	RT	18	184+14	3.488	EB	W1-3-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25	Stnd w/ Soil Plate		1				12	1
	LT	18	184+14	3.488	EB	W1-3-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25	Stnd w/ Soil Plate		1				12	1
40	RT	18	198+12	3.752	WB	W1-2R	Right Curve		30 x 30	Black	FL Yellow	IX	6.25	Stnd w/ Soil Plate		1				12	1
	LT	18	198+12	3.752	WB	W1-3-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	IX	2.25	Stnd w/ Soil Plate		1				12	1

Summary of Items

SBM Alum Sheet Signs 0.080 INCH	202.79	SQ FT
SBM Alum Sheet Signs 0.125 INCH	5.56	SQ FT
Barcode Sign Inventory	83	EACH

Summary of Items

Steel Post - Type 1	355	LF
GNSS Type D	0	EACH
GNSS Type D (Surface Mount)	0	EACH
Class A Concrete for Signs	0	CU YD

NOTES:
1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY, FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
SIGNING SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014


REMOVE SIGN			
Milepoint	Station	Offset	Description
0.121	6+40	RT	Curve/Advisory Speed
0.440	23+24	RT	Curve/Advisory Speed
1.098	58+00	RT	Cross Road/Advisory Speed
1.153	60+86	LT	Clare Rd Stop Sign
1.167	61+62	RT	New Roe Rd Stop Sign
2.070	109+30	RT	Wilson Rd Stop Sign
2.822	148+98	RT	Curve/Advisory Speed
3.220	170+04	LT	Curve/Advisory Speed
3.488	184+14	RT	Curve/Advisory Speed
3.752	198+12	LT	Curve/Advisory Speed

ITEM DESCRIPTION UNIT QUANTITY
21373ND REMOVE SIGN EACH 10

- NOTES:
1. THESE NUMBERS ARE FOR ESTIMATE PURPOSES ONLY, FINAL LOCATIONS AND QUANTITIES WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
2. ALL QUANTITIES CARRIED OVER TO THE GENERAL SUMMARY.

KY 100
SIGNING SUMMARY

COUNTY OF	ITEM NO.
ALLEN	3-9014.00

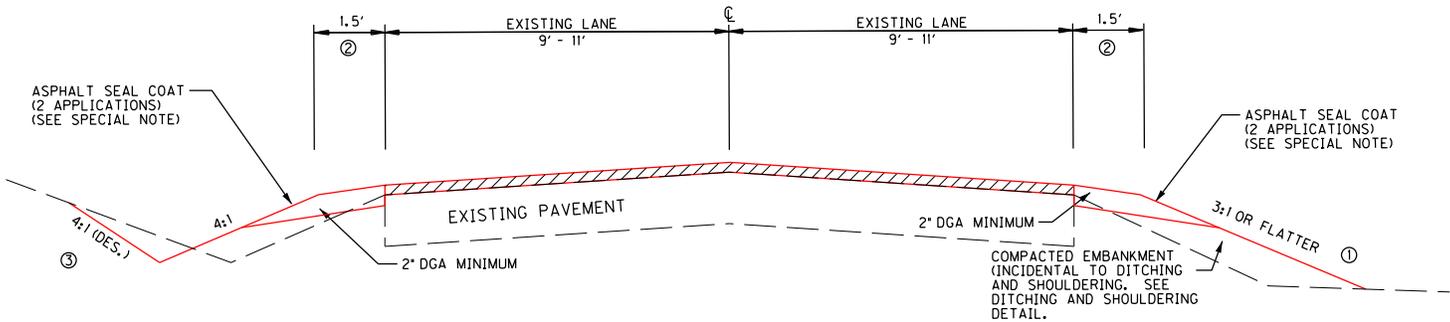


NOTES:

- 1 CONTRACTOR SHALL PROPERLY BENCH INTO EXISTING SLOPE AND APPLY PROPER COMPACTION.
- 2 COMPACT MATERIAL ACCORDING TO STANDARD SPECIFICATIONS (SECT. 206).
- 3 FINAL PAYMENT FOR DITCHING AND SHOULDERING WILL BE PAID PER LF AND WILL INCLUDE ALL WORK NECESSARY TO PERFORM WORK.
- 4 SHOULDER EMBANKMENT MATERIAL SHALL BE SUITABLE FOR VEGETATION GROWTH.

- ① 3:1 OR FLATTER IS DESIRABLE, LOCATIONS THAT ARE LIMITED DUE TO RIGHT-OF-WAY, UTILITY POLES, TREES, FENCES, OR OTHER SENSITIVE OBSTRUCTIONS MAY REQUIRE EMBANKMENT BUT ONLY OUT TO THE EDGE OF THE RIGHT-OF-WAY OR SENSITIVE OBSTRUCTIONS). (SLOPE MAY BE STEEPER THAN 3:1)
- ② A 1.5' SHOULDER IS DESIRABLE BUT MAY HAVE TO BE ELIMINATED IN ORDER TO REMAIN ON RIGHT-OF-WAY OR AVOID A SENSITIVE OBSTRUCTION.
- ③ FLATTEN DITCH BACKSLOPE WHEN POSSIBLE TO REMAIN IN RIGHT-OF-WAY. IN AREAS WHERE THE BACKSLOPE MUST REMAIN STEEP, THE ENGINEER MAY DETERMINE THAT CHANNEL LINING NEEDS TO BE INSTALLED TO HELP STABILIZE THE BACKSLOPE.

**ASPHALT OVERLAY SECTION WITH
DITCHING AND SHOULDERING DETAIL**

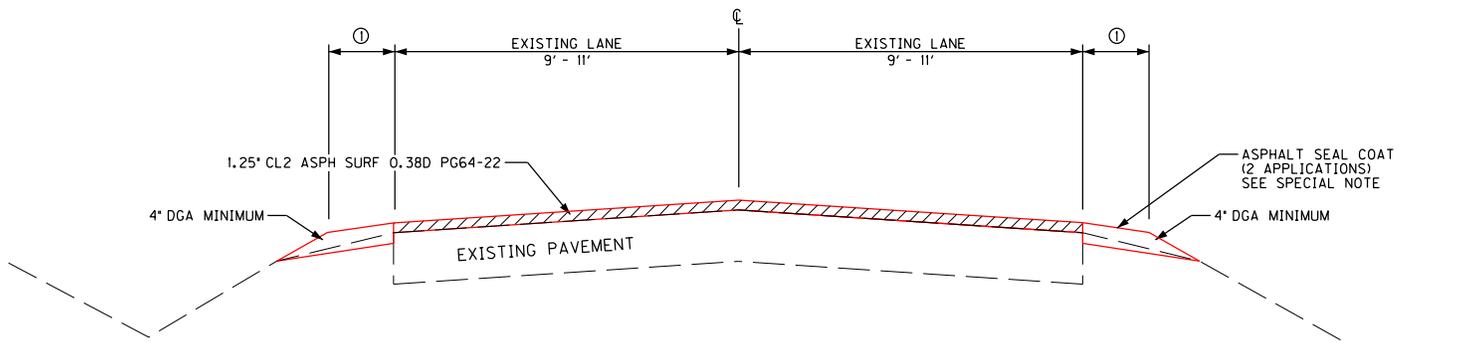

NOTES:


- ① A 1.5' SHOULDER IS DESIRABLE BUT MAY HAVE TO BE NARROWED OR ELIMINATED BASED ON FIELD CONDITIONS.

**ASPHALT OVERLAY WITH
DGA WEDGE & CHIP SEAL DETAIL**

NOT TO SCALE

KY 100
ASPHALT OVERLAY DETAIL


COUNTY OF	ITEM NO.
ALLEN	3-9014.00

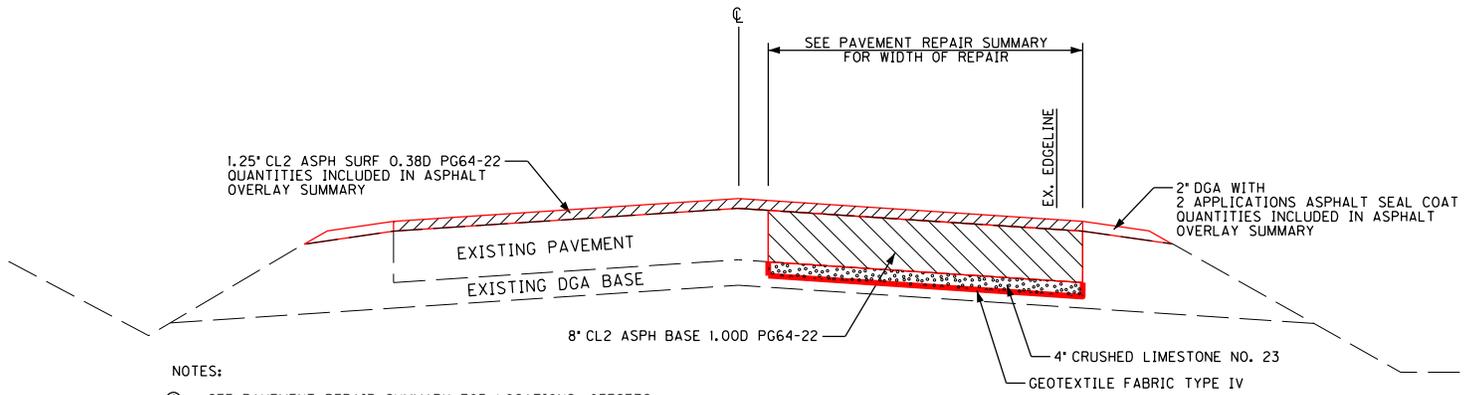

NOTES:

- ① SEE PAVEMENT REPAIR SUMMARY FOR LOCATIONS, OFFSETS, AND WIDTHS OF PAVEMENT REPAIR.
- ② APPLY ASPHALT BASE IN LIFTS NOT TO EXCEED 4".

PAVEMENT REPAIR DETAIL

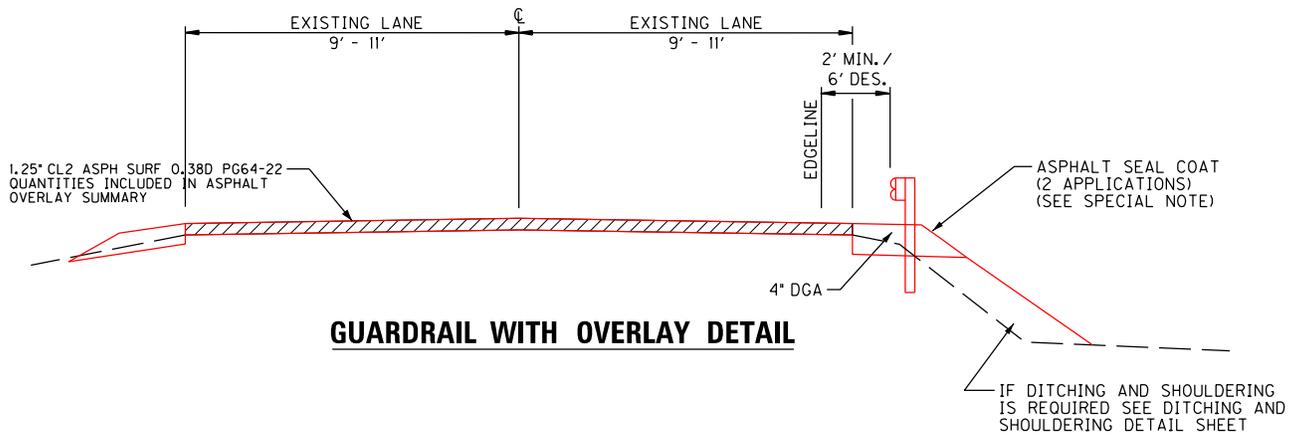

GUARDRAIL WITH OVERLAY DETAIL


NOTES:

- 1. SEE GUARDRAIL SUMMARY FOR GUARDRAIL LOCATIONS.
- 2. CONSTRUCT DITCHING AND SHOULDERING, DGA WEDGE, OR CRIBBING (AS APPLICABLE) BEFORE INSTALLING GUARDRAIL. REMOVAL OF EXISTING CRIBBING IS INCIDENTAL TO EXCAVATION & BACKFILL.

NOT TO SCALE

KY 100
GUARDRAIL &
PAVEMENT REPAIR DETAILS


COUNTY OF	ITEM NO.
ALLEN	3-9014.00

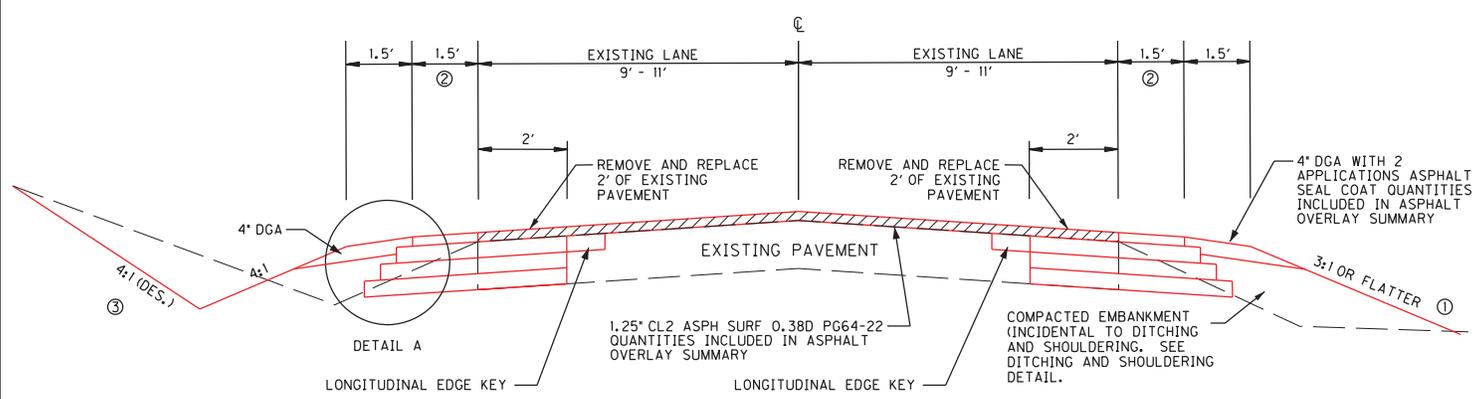

CURVE WIDENING DETAIL

SHOULDER WIDENING
 1.25" CL2 ASPH SURF 0.38D PG64-22
 4.00" CL2 ASPH BASE 1.00D PG64-22
 4.00" CL2 ASPH BASE 1.00D PG64-22
 4.00" DGA

- NOTES:
- CONTRACTOR SHALL PROPERLY BENCH INTO EXISTING SLOPE AND APPLY PROPER COMPACTION.
 - COMPACT MATERIAL ACCORDING TO STANDARD SPECIFICATIONS (SECT. 206).
 - SHOULDER EMBANKMENT MATERIAL SHALL BE SUITABLE FOR VEGETATION GROWTH.
 - CURVE WIDENING LOCATION FALLS WITHIN THE LIMITS OF ASPHALT OVERLAY. SEE CURVE WIDENING SUMMARY FOR LOCATION.

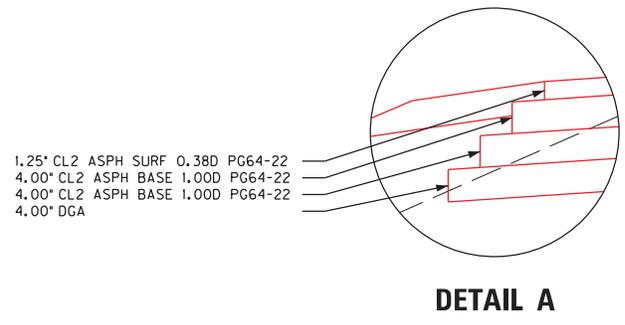


DETAIL A

- 3:1 OR FLATTER IS DESIRABLE, LOCATIONS THAT ARE LIMITED DUE TO RIGHT-OF-WAY, UTILITY POLES, TREES, FENCES, OR OTHER SENSITIVE OBSTRUCTIONS MAY REQUIRE EMBANKMENT BUT ONLY OUT TO THE EDGE OF THE RIGHT-OF-WAY OR SENSITIVE OBSTRUCTION(S). (SLOPE MAY BE STEEPER THAN 3:1)
- A 1.5' SHOULDER IS DESIRABLE BUT MAY HAVE TO BE ELIMINATED IN ORDER TO REMAIN ON RIGHT-OF-WAY OR AVOID A SENSITIVE OBSTRUCTION.
- FLATTEN DITCH BACKSLOPE WHEN POSSIBLE TO REMAIN IN RIGHT-OF-WAY. IN AREAS WHERE THE BACKSLOPE MUST REMAIN STEEP, THE ENGINEER MAY DETERMINE THAT CHANNEL LINING NEEDS TO BE INSTALLED TO HELP STABILIZE THE BACKSLOPE.

NOT TO SCALE


KY 100
CURVE WIDENING DETAIL

COUNTY OF	ITEM NO.
ALLEN	3-9014.00

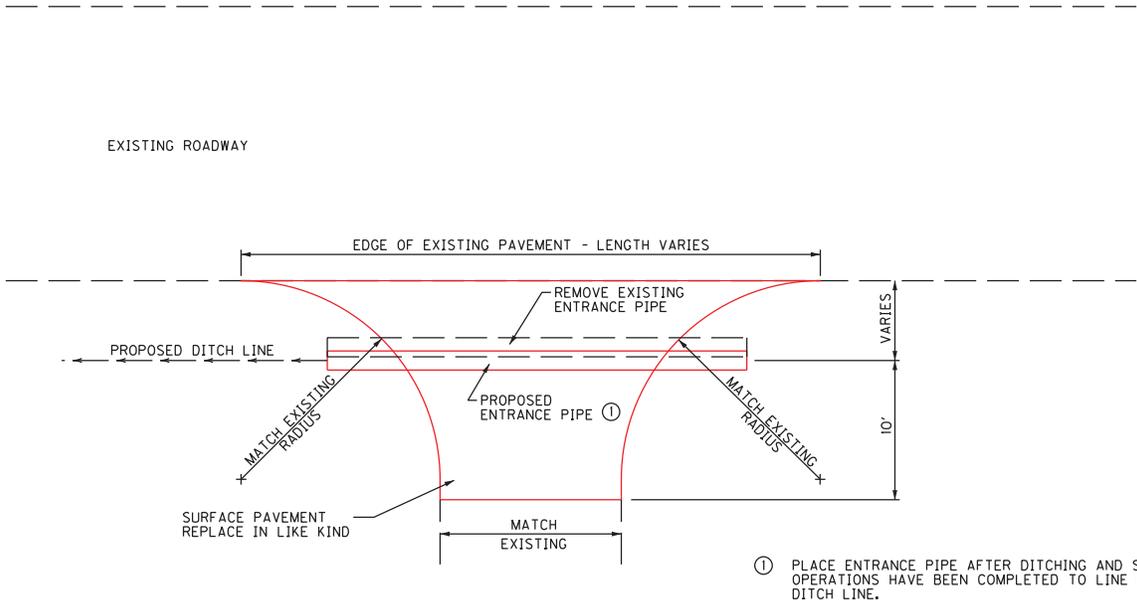


① PLACE ENTRANCE PIPE AFTER DITCHING AND SHOULDERING OPERATIONS HAVE BEEN COMPLETED TO LINE UP WITH NEW DITCH LINE.

ENTRANCE DETAIL



ASPHALT ENTRANCE
NTS

- ① 1.25" CL2 ASPH SURFACE 0.38D PG64-22
- ② 2.00" CL2 ASPH BASE 1.00D PG64-22
- ③ 4.00" DGA




GRAVEL ENTRANCE
NTS

- ④ 6.00" DGA


NOT TO SCALE

KY 100
ENTRANCE AND ENTRANCE PIPE
DETAILS


COUNTY OF	ITEM NO.
ALLEN	3-9014.00

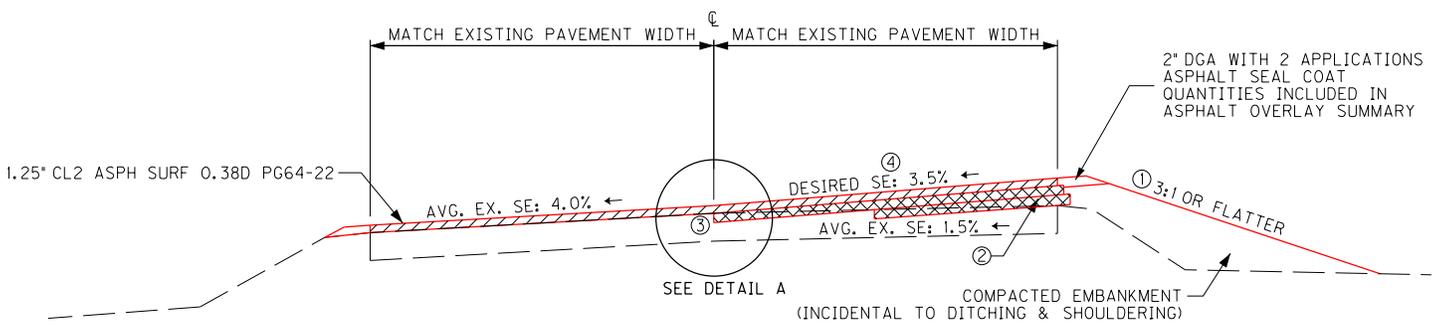

CURVE 7 SUPERELEVATION IMPROVEMENT

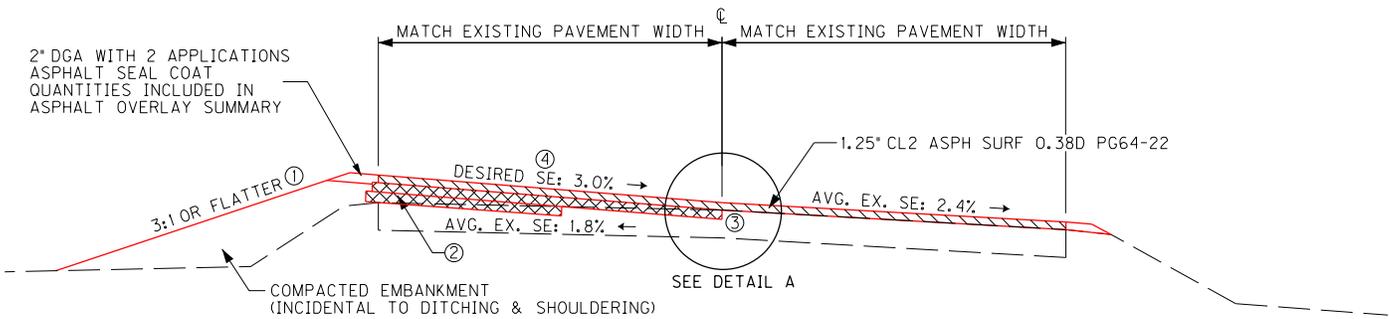


CURVE 4 SUPERELEVATION IMPROVEMENT

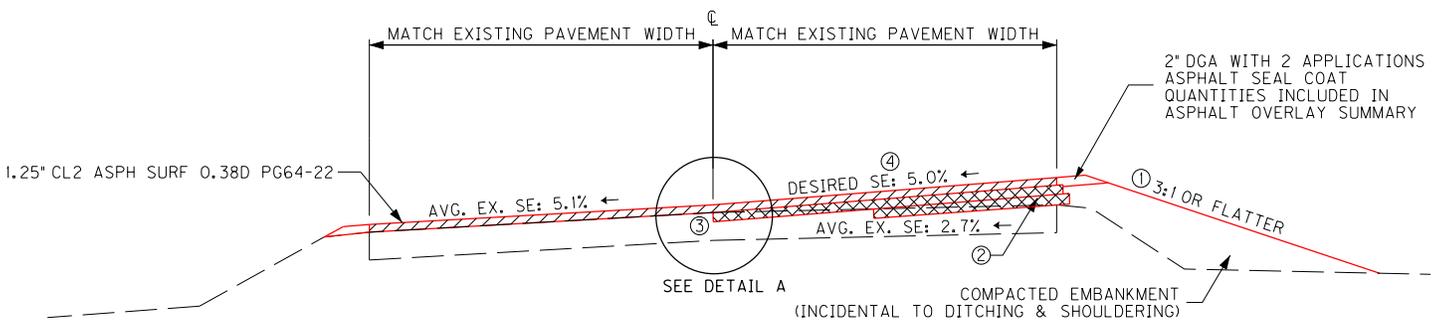

CURVE 1 SUPERELEVATION IMPROVEMENT

- ① 3:1 OR FLATTER IS DESIRABLE. LOCATIONS THAT ARE LIMITED DUE TO RIGHT-OF-WAY, UTILITY POLES, TREES, FENCES, OR OTHER SENSITIVE OBSTRUCTIONS MAY REQUIRE EMBANKMENT BUT ONLY OUT TO THE EDGE OF THE RIGHT-OF-WAY OR SENSITIVE OBSTRUCTION(S). (SLOPE MAY BE STEEPER THAN 3:1)
- ② LEVELING & WEDGING MIX DESIGN WILL BE BASED ON THE LIFT THICKNESSES BEING PLACED FOR EACH CURVE. NUMBER AND THICKNESS OF LIFTS SHOWN IN THESE DETAILS ARE GRAPHICAL REPRESENTATIONS ONLY AND ARE NOT MEANT TO BE TAKEN AS AN INDICATION OF ACTUAL FIELD CONDITIONS.
- ③ MAXIMUM DEPTH OF MILLING AT LONGITUDINAL EDGE KEY SHALL BE 2.5\".
- ④ FINAL SUPERELEVATION RATE TO BE DETERMINED BY THE ENGINEER IN THE FIELD. DESIRED SUPERELEVATION RATE MAY NEED TO BE MODIFIED IN ORDER TO REMAIN WITHIN RIGHT-OF-WAY OR AVOID A SENSITIVE OBSTRUCTION.




DETAIL A


NOT TO SCALE

KY 100
SUPERELEVATION IMPROVEMENT
TYPICAL SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014.00

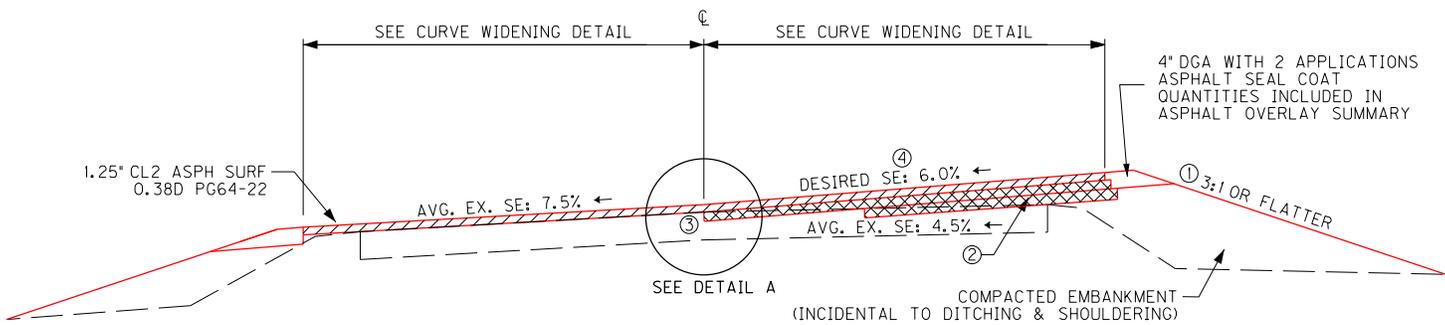


CURVE 14 SUPERELEVATION IMPROVEMENT AND CURVE WIDENING

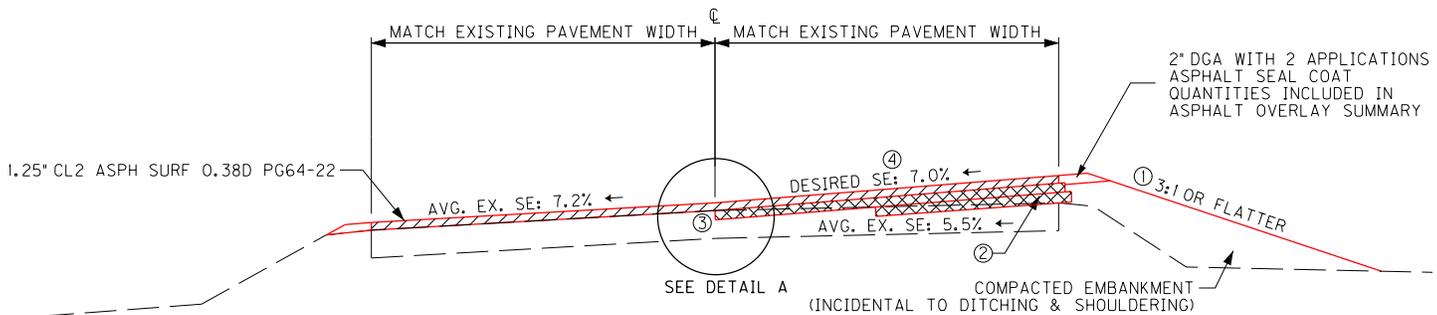

CURVE 12 SUPERELEVATION IMPROVEMENT

- ① 3:1 OR FLATTER IS DESIRABLE. LOCATIONS THAT ARE LIMITED DUE TO RIGHT-OF-WAY, UTILITY POLES, TREES, FENCES, OR OTHER SENSITIVE OBSTRUCTIONS MAY REQUIRE EMBANKMENT BUT ONLY OUT TO THE EDGE OF THE RIGHT-OF-WAY OR SENSITIVE OBSTRUCTION(S). (SLOPE MAY BE STEEPER THAN 3:1)
- ② LEVELING & WEDGING MIX DESIGN WILL BE BASED ON THE LIFT THICKNESSES BEING PLACED FOR EACH CURVE. NUMBER AND THICKNESS OF LIFTS SHOWN IN THESE DETAILS ARE GRAPHICAL REPRESENTATIONS ONLY AND ARE NOT MEANT TO BE TAKEN AS AN INDICATION OF ACTUAL FIELD CONDITIONS.
- ③ MAXIMUM DEPTH OF MILLING AT LONGITUDINAL EDGE KEY SHALL BE 2.5".
- ④ FINAL SUPERELEVATION RATE TO BE DETERMINED BY THE ENGINEER IN THE FIELD. DESIRED SUPERELEVATION RATE MAY NEED TO BE MODIFIED IN ORDER TO REMAIN WITHIN RIGHT-OF-WAY OR AVOID A SENSITIVE OBSTRUCTION.




DETAIL A

NOT TO SCALE

KY 100
SUPERELEVATION IMPROVEMENT
TYPICAL SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014



MATCHLINE STA. 9+00

SUPERELEVATION IMPROVEMENT		
CURVE NO.	PC STA.	PT STA.
1 (EB)	7+57.29	11+36.68

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	6+30 - 9+00

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
35	RT (EB)	6+40	LEFT WINDING ROAD
35	RT (EB)	6+40	ADVISORY SPEED

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	7+00 - 9+00

PC 7+57.29
CURVE 1

STA. 6+40
REMOVE EXISTING
WARNING SIGN



W1-5L
30" X 30"

W13-1P
18" X 18"

5+00

1/E=606.71
0/E=605.22
1/E=600.85
0/E=599.27
15' CMP
15' CMP
TOP CMP 1/E=602.89
SIGN
TOP CMP 0/E=602.12

Q KY 100

REMOVE EXISTING GUARDRAIL		
OFFSET	STA. TO STA.	LENGTH
LT	0+71 - 4+24	363
RT	0+58 - 2+00	150

INSTALL GUARDRAIL				
OFFSET	STA. TO STA.	LENGTH	BEGIN E.T.	END E.T.
LT	0+71 - 4+24	367	BR. END TY A	T.S. 1
RT	0+58 - 2+58	150	BR. END TY A	TYPE 1

STA. 0+00/MP 0.000
BEGIN ASPHALT OVERLAY,
EDGE LINE RUMBLE STRIPS &
PAVE STRIPING-SPRAY THERMO-6 IN

0+00

POB 0+00.00


BEGIN PROJECT
STA. 0+00.00 Q KY 100
MP 0.000

NOTE: LOCATION OF EXISTING UNDERGROUND UTILITIES IS APPROXIMATE AND NOT ALL UTILITIES MAY BE SHOWN. CONTRACTOR IS RESPONSIBLE FOR VERIFYING LOCATIONS WHEN PERFORMING WORK IN THESE AREAS. THERE WILL BE NO MONETARY CLAIMS FOR UTILITIES.

SCALE: 1" = 100'

KY 100
PLAN SHEET 1
BEGIN PROJECT TO STA. 9+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



MATCHLINE STA. 18+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	16+25 - 17+25

STA. 16+26
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
SAFETY BOX INLET
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 14 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	16+25 - 17+25

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	16+25 - 17+25

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	15+25 - 17+25

PI 15+54.56
15+00

PC 13+49.20
CURVE 2

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	9+00 - 14+00

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	10+00 - 13+50

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	10+00 - 13+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	9+00 - 12+60

STA. 10+32
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 16 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

10+00

PT 11+36.68
CURVE 1

PI 9+49.08

MATCHLINE STA. 9+00

SCALE: 1" = 100
KY 100
PLAN SHEET 2
STA. 9+00 TO STA. 18+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



STA. 23+24
REMOVE EXISTING
WARNING SIGN



PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
36	LT (WB)	23+24	RIGHT WINDING ROAD
36	LT (WB)	23+24	ADVISORY SPEED

MATCHLINE STA. 18+00

SCALE: 1"= 100

KY 100
PLAN SHEET 3
STA. 18+00 TO STA. 27+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



STA. 32+83
 EXTEND 18" RCP
 LEFT:
 REMOVE 4 L.F. EXISTING PIPE
 INSTALL 13 L.F. 18" CULVERT PIPE WITH
 SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	28+30 - 36+00

STA. 31+35
 REPLACE ENTRANCE PIPE


SUPERELEVATION IMPROVEMENT		
CURVE NO.	PC STA.	PT STA.
4 (WB)	29+25.69	32+96.60

KY 100
 PLAN SHEET 4
 STA. 27+00 TO STA. 36+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 45+00



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	36+00 - 45+00

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
1	LT (EB)	39+95	OBJECT MARKER TYPE 2
1	LT (WB)	39+95	OBJECT MARKER TYPE 2
2	RT (EB)	39+95	OBJECT MARKER TYPE 2
2	RT (WB)	39+95	OBJECT MARKER TYPE 2

40+00

3' X 3' RCBC
I/E=696.83 O/E=696.45

OM2-2V
6' X 12"


I/E=709.57
O/E=709.23
BURIED PIPE

MATCHLINE STA. 36+00

SCALE: 1"= 100

KY 100
PLAN SHEET 5
STA. 36+00 TO STA. 45+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

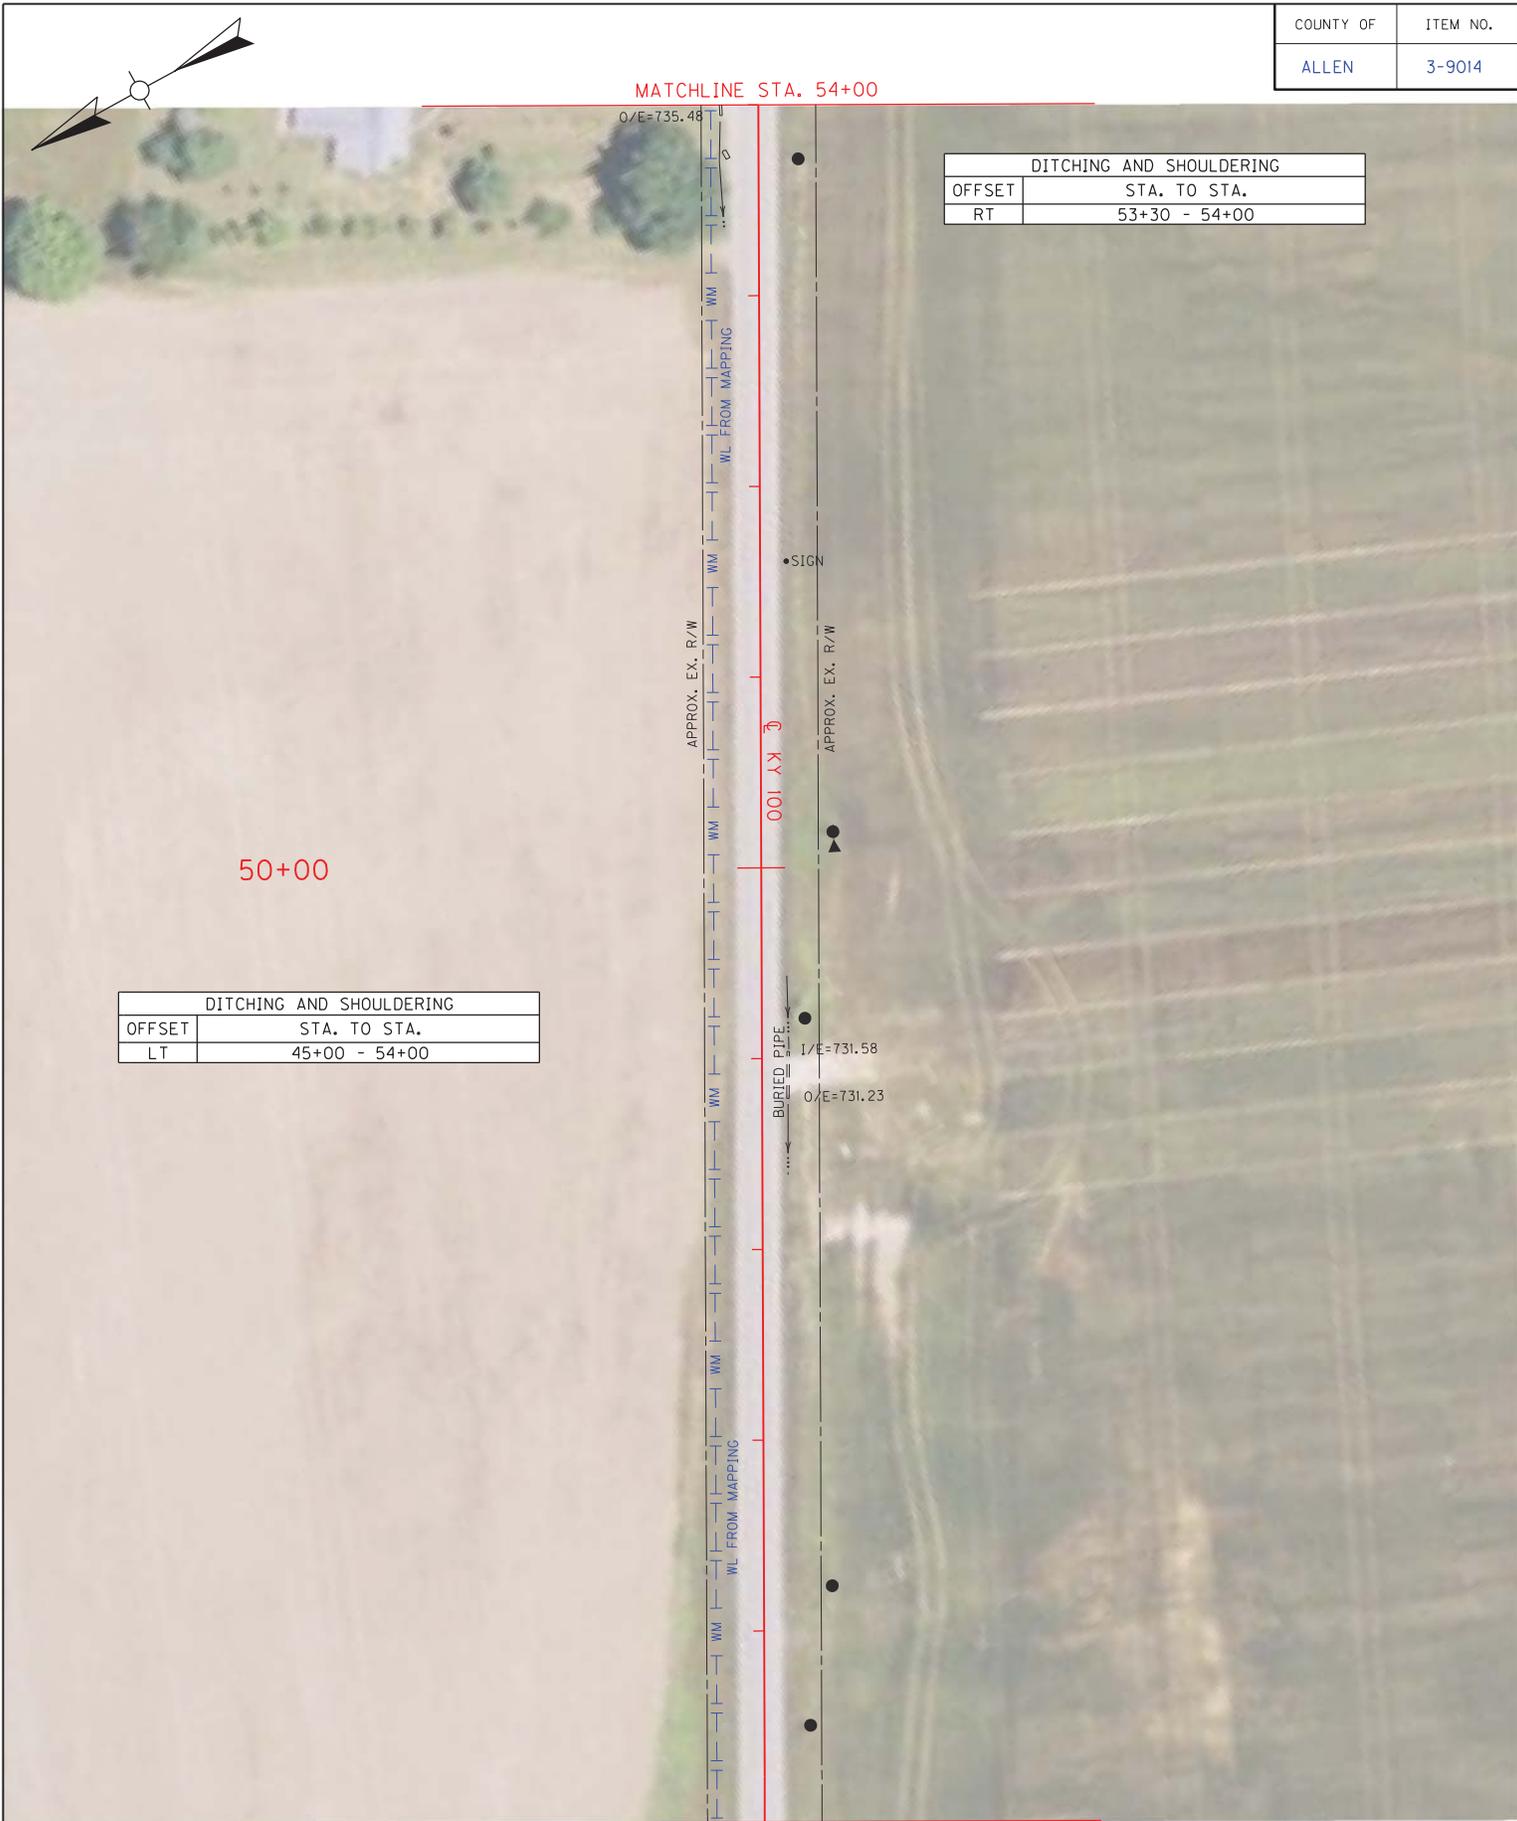

MATCHLINE STA. 54+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	53+30 - 54+00

50+00


DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	45+00 - 54+00

MATCHLINE STA. 45+00

SCALE: 1"= 100

KY 100
 PLAN SHEET 6
 STA. 45+00 TO STA. 54+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

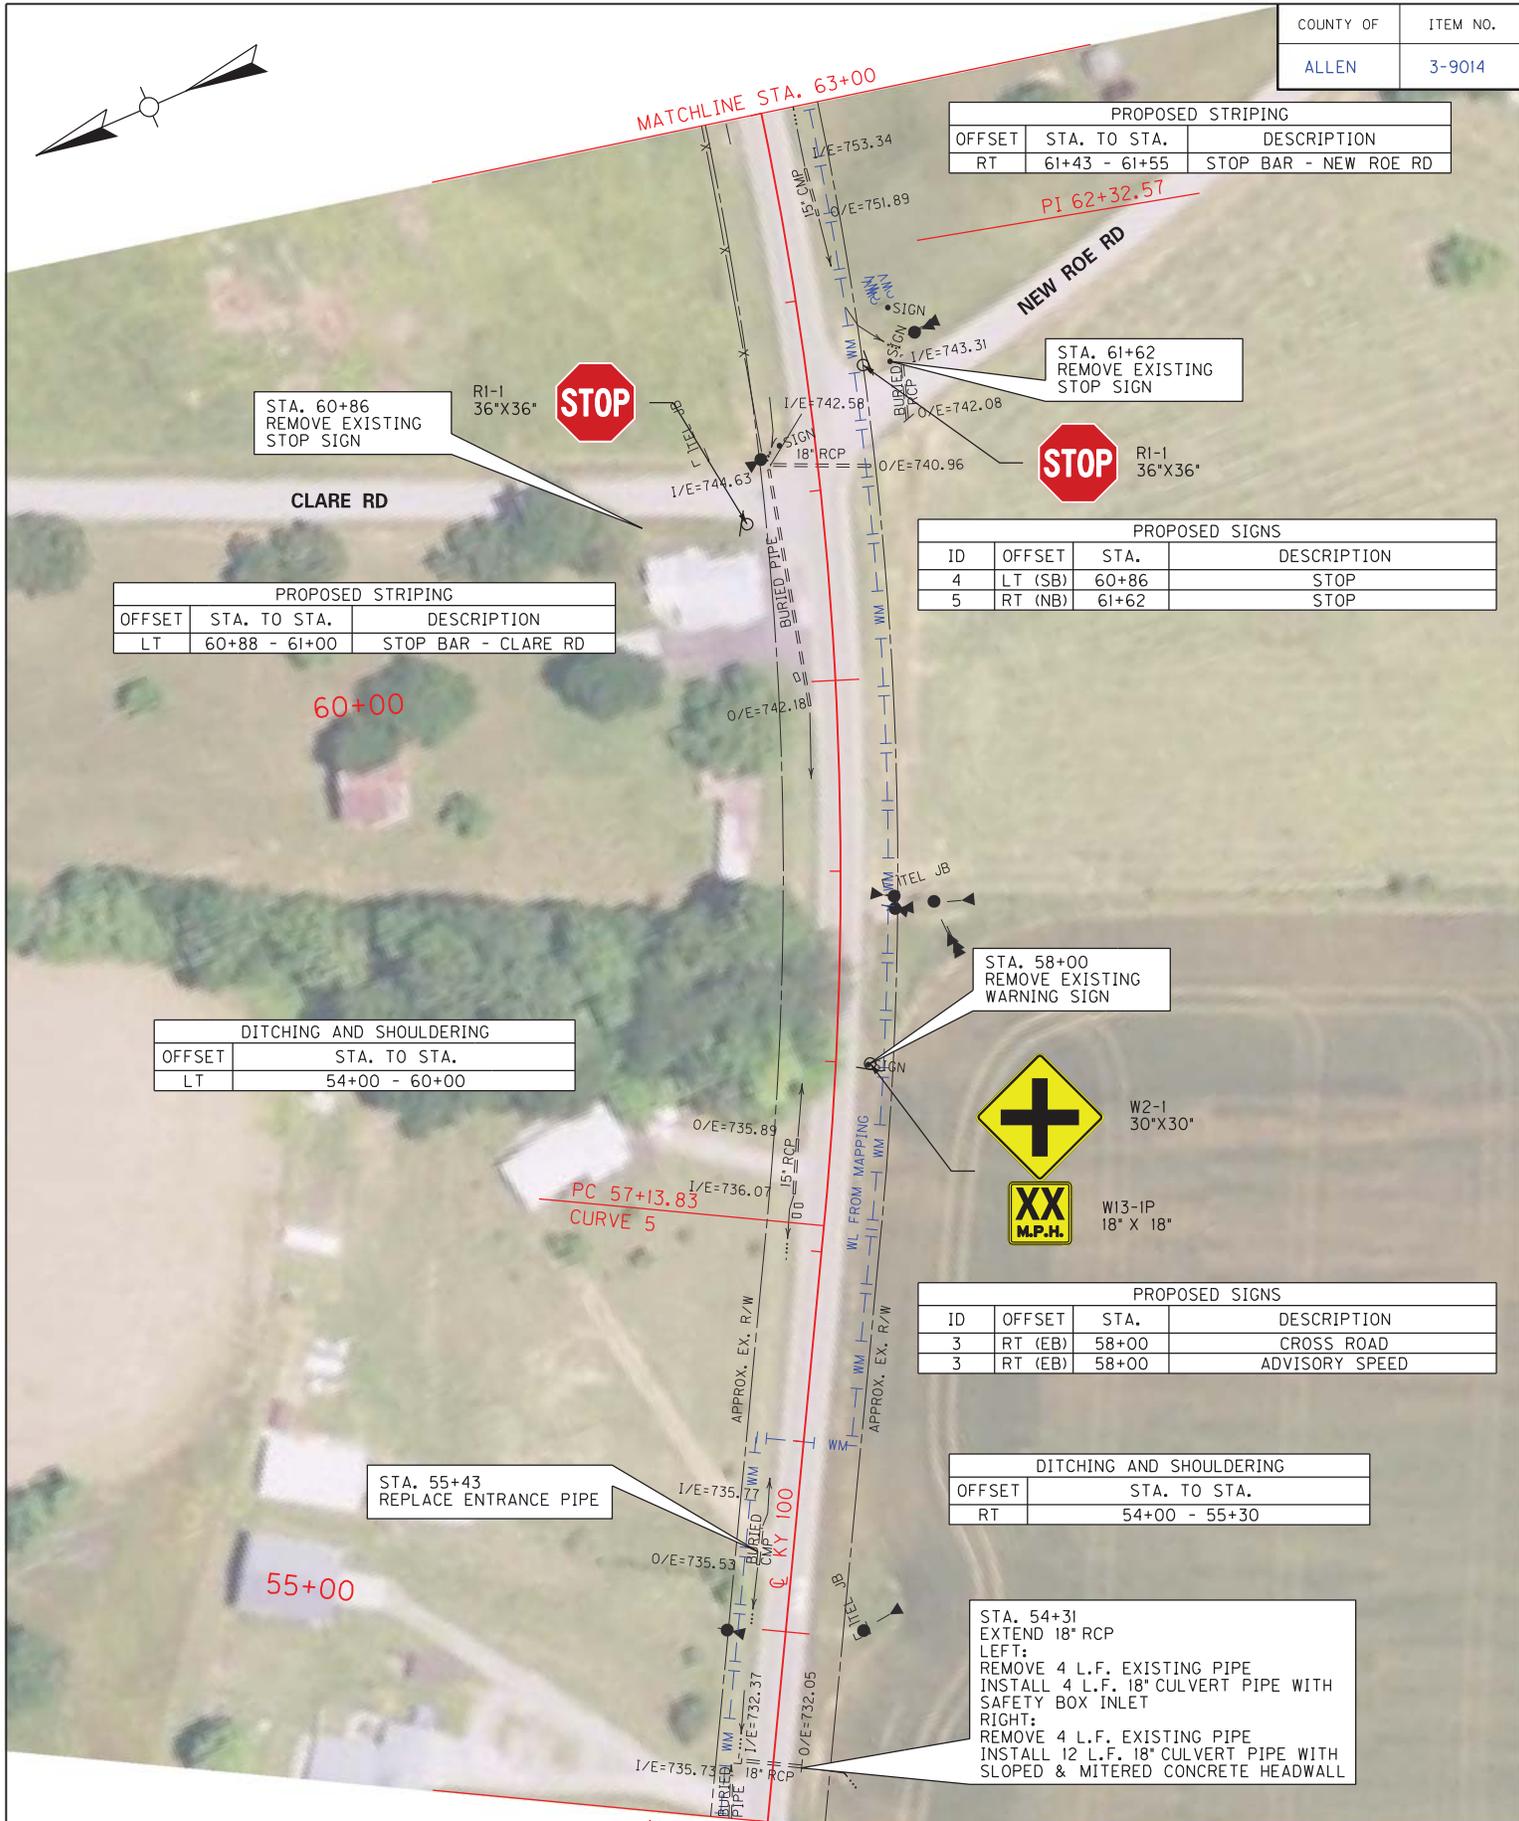

PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
RT	61+43 - 61+55	STOP BAR - NEW ROE RD

STA. 60+86
REMOVE EXISTING
STOP SIGN

STA. 61+62
REMOVE EXISTING
STOP SIGN

PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
LT	60+88 - 61+00	STOP BAR - CLARE RD

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
4	LT (SB)	60+86	STOP
5	RT (NB)	61+62	STOP

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	54+00 - 60+00

W2-1
30\"/>

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
3	RT (EB)	58+00	CROSS ROAD
3	RT (EB)	58+00	ADVISORY SPEED

STA. 55+43
REPLACE ENTRANCE PIPE

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	54+00 - 55+30


STA. 54+31
EXTEND 18\"/>

MATCHLINE STA. 54+00

SCALE: 1\"/>


KY 100
PLAN SHEET 7
STA. 54+00 TO STA. 63+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



KY 100
PLAN SHEET 8
STA. 63+00 TO STA. 72+00

SCALE: 1" = 100'



COUNTY OF	ITEM NO.
ALLEN	3-9014




MATCHLINE STA. 72+00

SCALE: 1"= 100

KY 100
PLAN SHEET 9
STA. 72+00 TO STA. 81+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

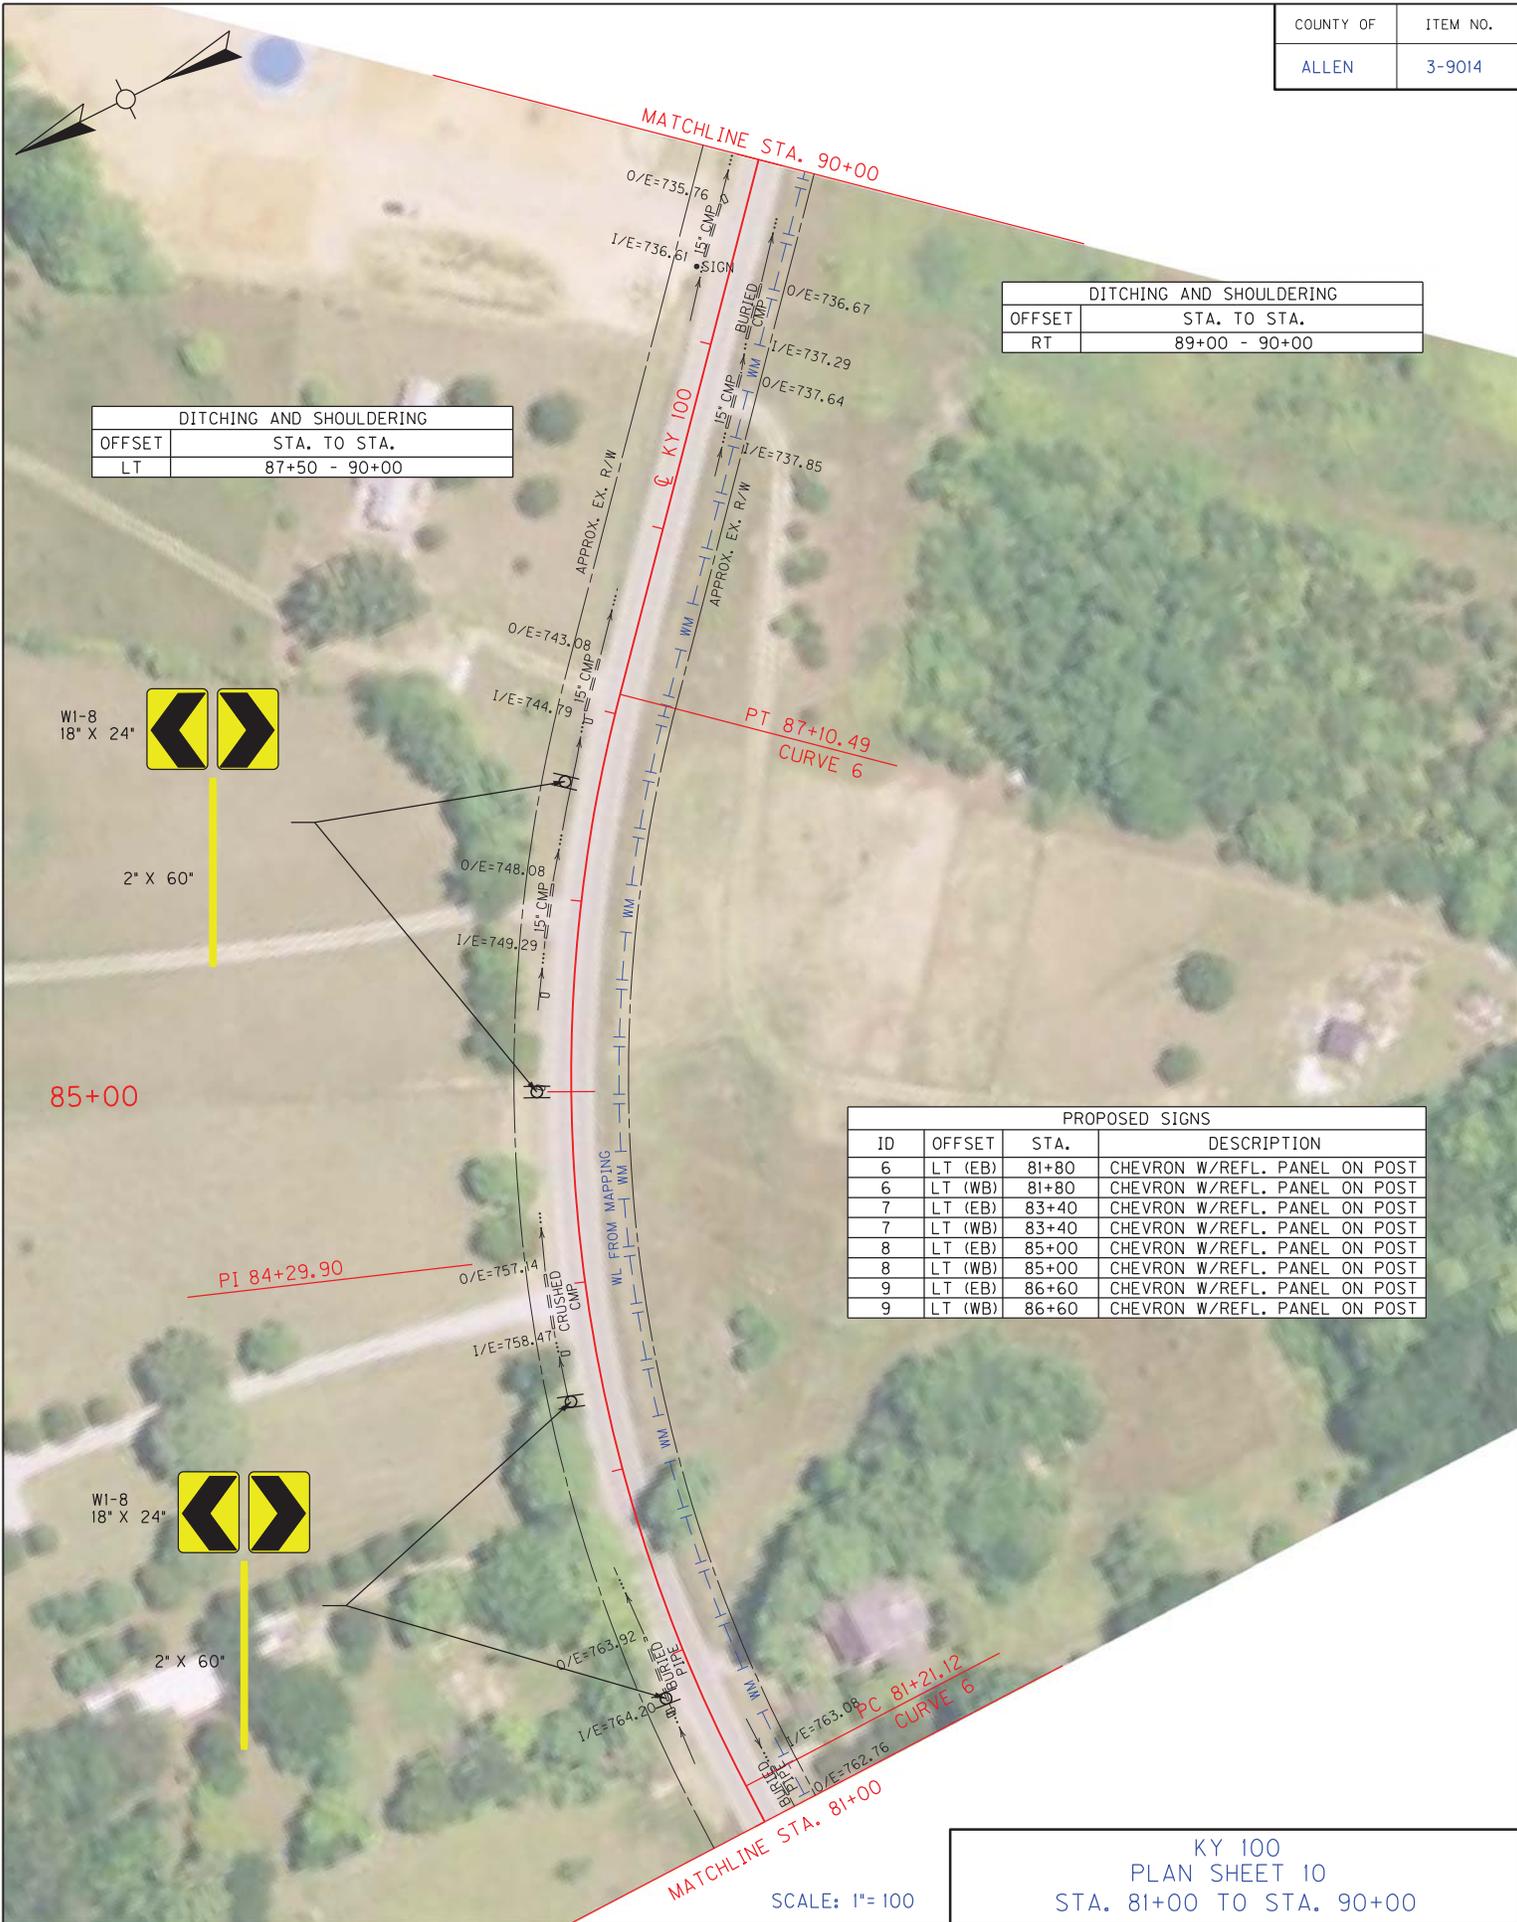

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	89+00 - 90+00

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
6	LT (EB)	81+80	CHEVRON W/REFL. PANEL ON POST
6	LT (WB)	81+80	CHEVRON W/REFL. PANEL ON POST
7	LT (EB)	83+40	CHEVRON W/REFL. PANEL ON POST
7	LT (WB)	83+40	CHEVRON W/REFL. PANEL ON POST
8	LT (EB)	85+00	CHEVRON W/REFL. PANEL ON POST
8	LT (WB)	85+00	CHEVRON W/REFL. PANEL ON POST
9	LT (EB)	86+60	CHEVRON W/REFL. PANEL ON POST
9	LT (WB)	86+60	CHEVRON W/REFL. PANEL ON POST

KY 100
 PLAN SHEET 10
 STA. 81+00 TO STA. 90+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014



SUPERELEVATION IMPROVEMENT		
CURVE NO.	PC STA.	PT STA.
7 (EB)	94+49.66	101+74.08

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	93+50 - 99+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	93+50 - 97+50

STA. 94+28
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 12 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	90+00 - 91+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	90+00 - 91+00


MATCHLINE STA. 90+00

SCALE: 1"= 100

KY 100
PLAN SHEET 11
STA. 90+00 TO STA. 99+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 108+00



STA. 106+84
EXTEND 18" RCP
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 13 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	105+80 - 107+80

105+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	101+00 - 108+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	101+85 - 105+00

APPROX. EX. R/W
APPROX. EX. R/W

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	99+00 - 101+85

PT. 101+74.08
CURVE 7

18" RCP
I/E=686.61 O/E=679.62

18" C/P
O/E=697.98 I/E=699.19


100+00

MATCHLINE STA. 99+00

SCALE: 1"= 100

KY 100
PLAN SHEET 12
STA. 99+00 TO STA. 108+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

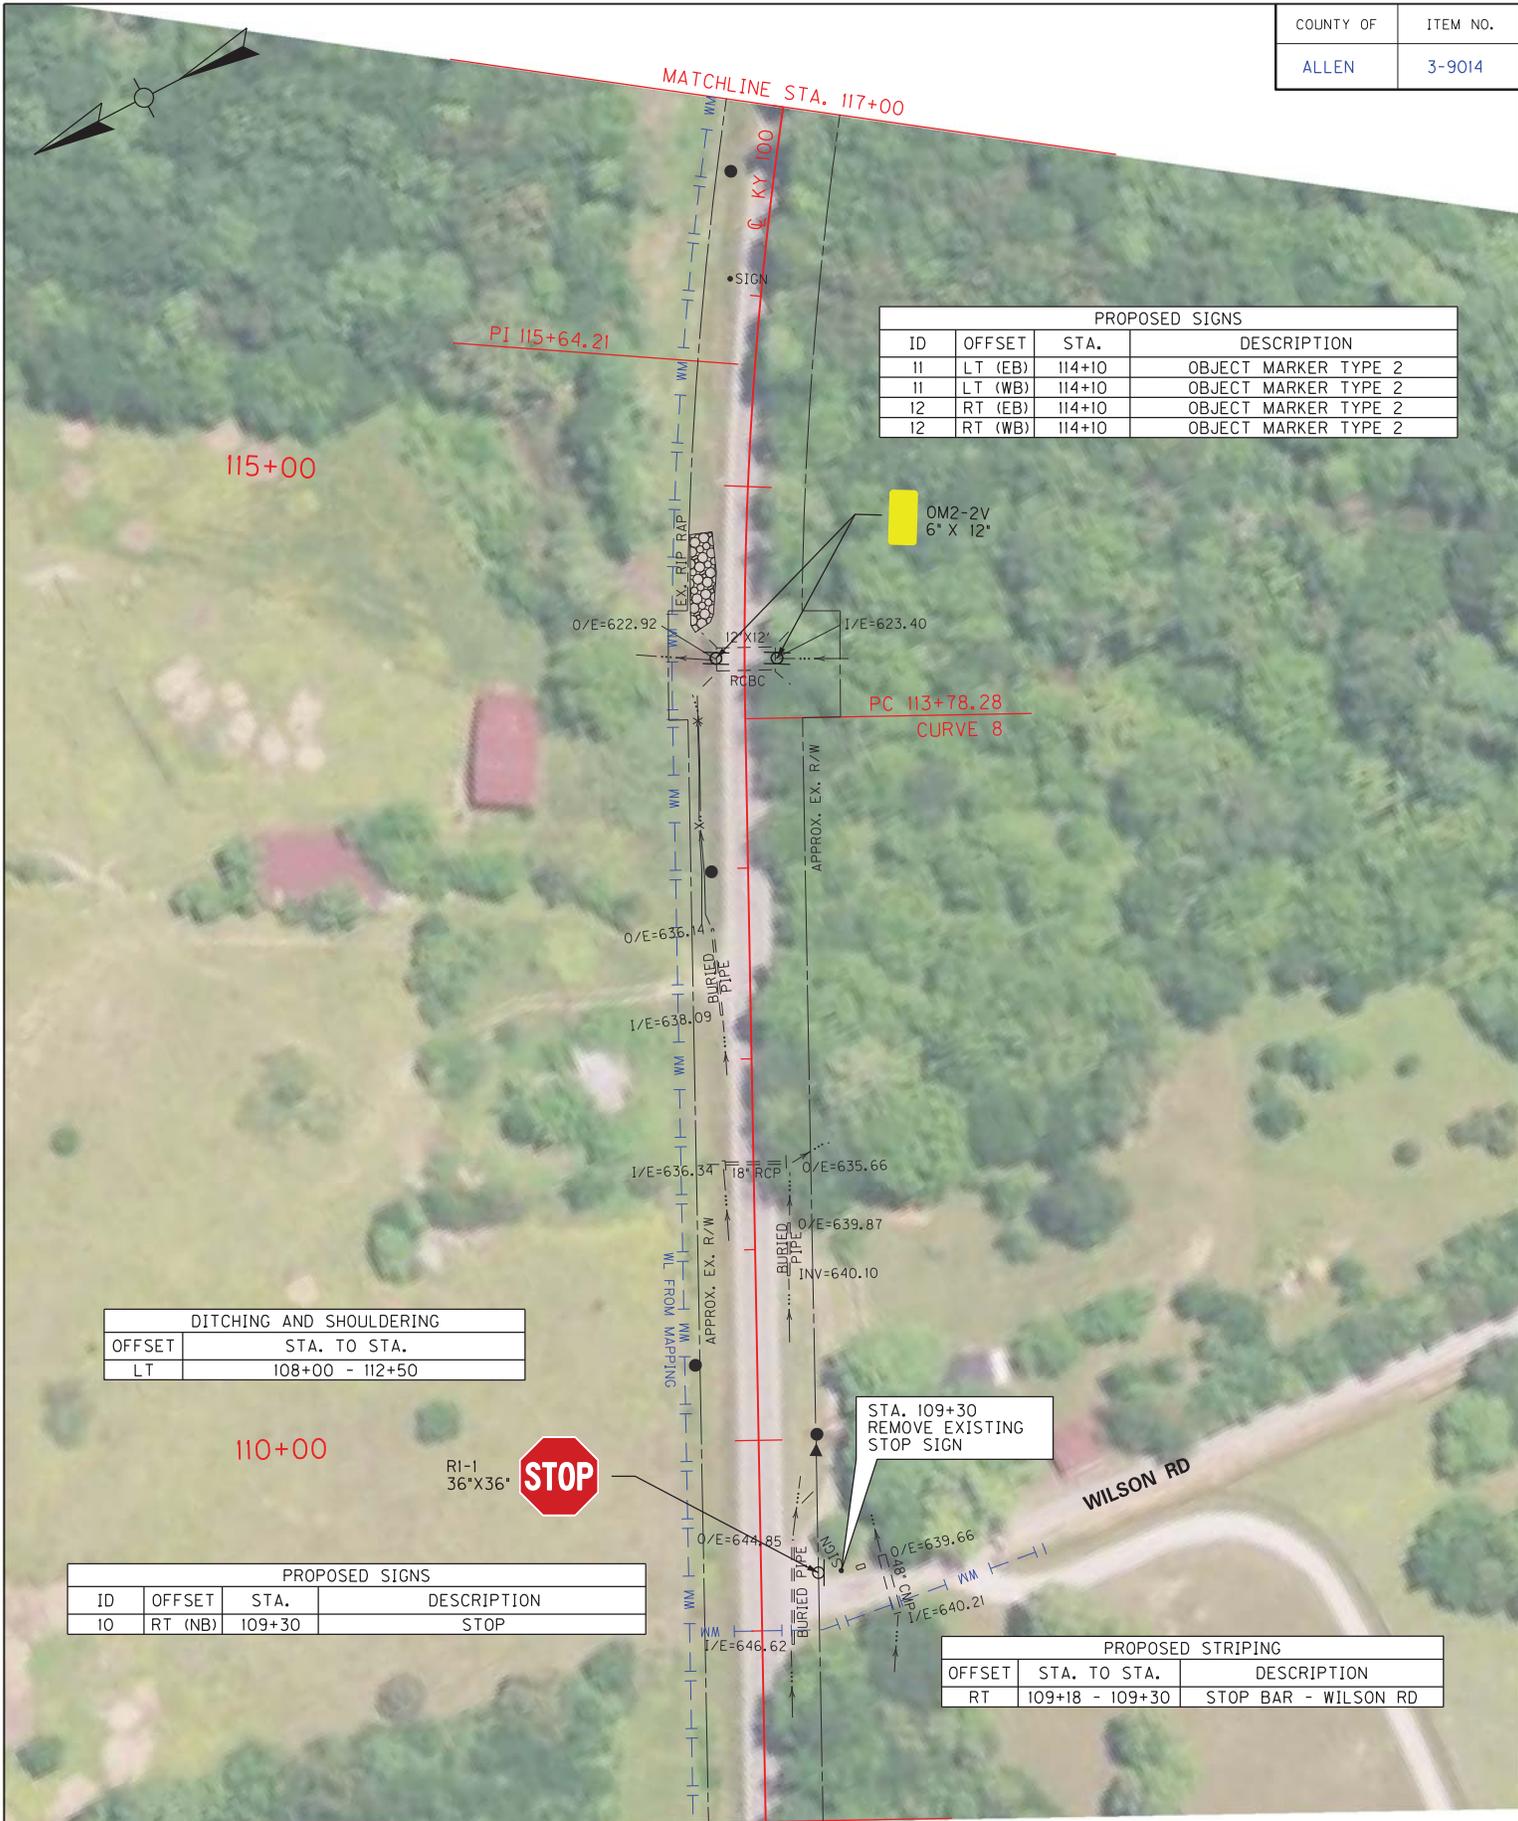

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
11	LT (EB)	114+10	OBJECT MARKER TYPE 2
11	LT (WB)	114+10	OBJECT MARKER TYPE 2
12	RT (EB)	114+10	OBJECT MARKER TYPE 2
12	RT (WB)	114+10	OBJECT MARKER TYPE 2

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	108+00 - 112+50

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
10	RT (NB)	109+30	STOP

PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
RT	109+18 - 109+30	STOP BAR - WILSON RD




STA. 109+30
REMOVE EXISTING
STOP SIGN

MATCHLINE STA. 108+00

SCALE: 1"= 100

KY 100
PLAN SHEET 13
STA. 108+00 TO STA. 117+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

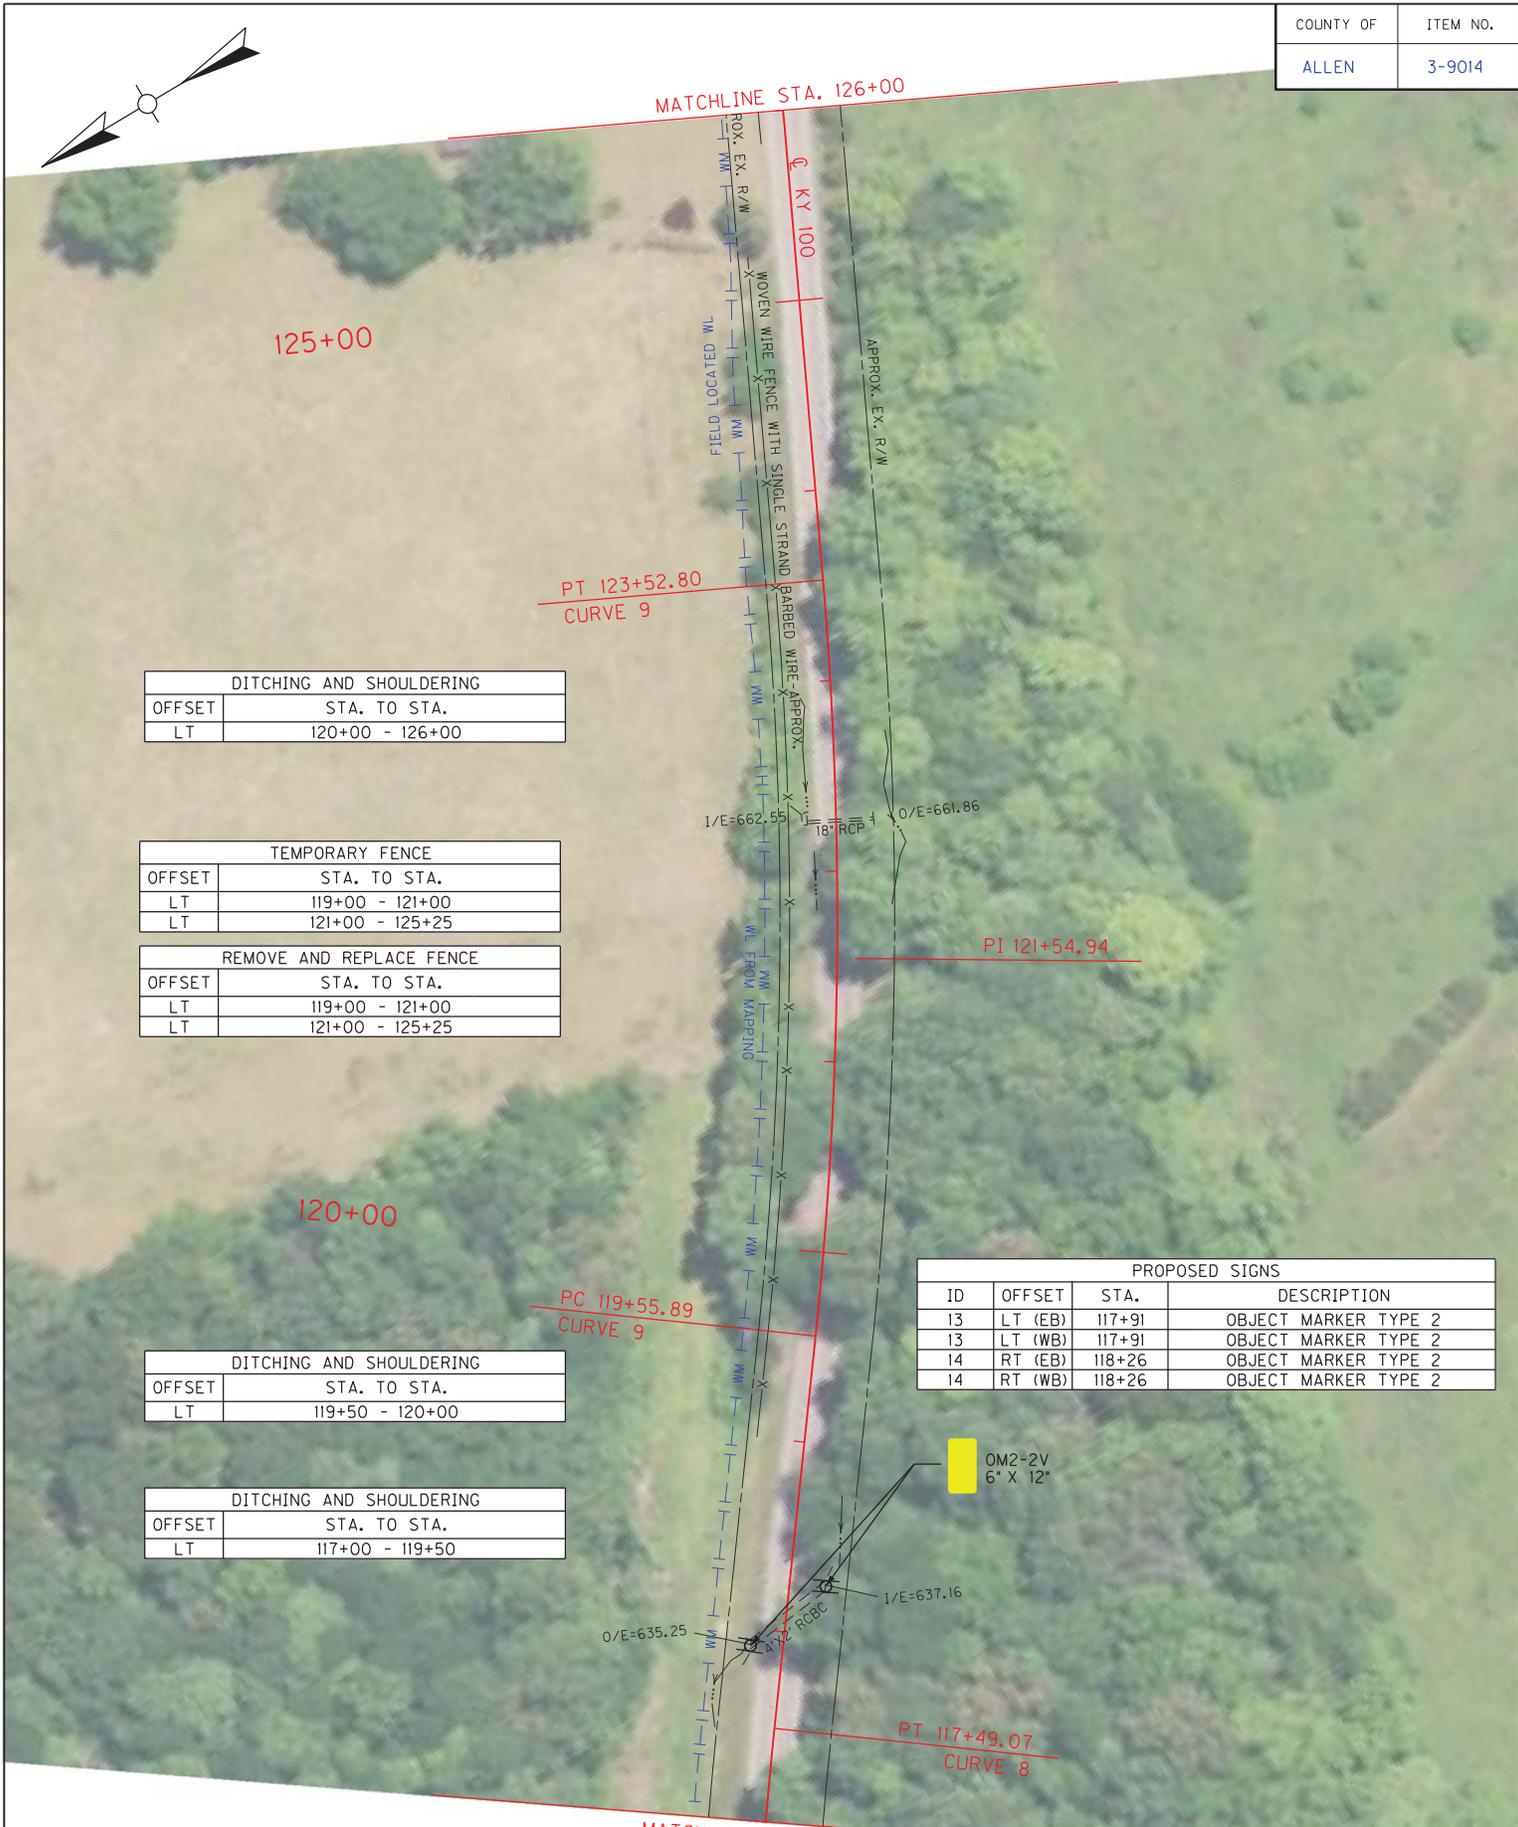

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	120+00 - 126+00

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	119+00 - 121+00
LT	121+00 - 125+25

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	119+00 - 121+00
LT	121+00 - 125+25

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	119+50 - 120+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	117+00 - 119+50

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
13	LT (EB)	117+91	OBJECT MARKER TYPE 2
13	LT (WB)	117+91	OBJECT MARKER TYPE 2
14	RT (EB)	118+26	OBJECT MARKER TYPE 2
14	RT (WB)	118+26	OBJECT MARKER TYPE 2

OM2-2V
6" X 12"

1/E=637.16

18' RCP

0/E=635.25

PT 117+49.07

CURVE 8

PC 119+55.89

CURVE 9

PI 121+54.94

1/E=662.59

0/E=661.86

APPROX. EX. R/W

MOVEN WIRE FENCE WITH SINGLE STRAND BARBED WIRE APPROX.

FIELD LOCATED WL

R/W, EX. R/W

125+00

120+00

117+00


MATCHLINE STA. 126+00

MATCHLINE STA. 117+00

SCALE: 1" = 100

KY 100
PLAN SHEET 14
STA. 117+00 TO STA. 126+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



STA. 132+48
REPLACE ENTRANCE PIPE

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	126+00 - 130+00

KY 100
PLAN SHEET 15
STA. 126+00 TO STA. 135+00

SCALE: 1"= 100


COUNTY OF	ITEM NO.
ALLEN	3-9014



KY 100
PLAN SHEET 16
STA. 135+00 TO STA. 144+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014

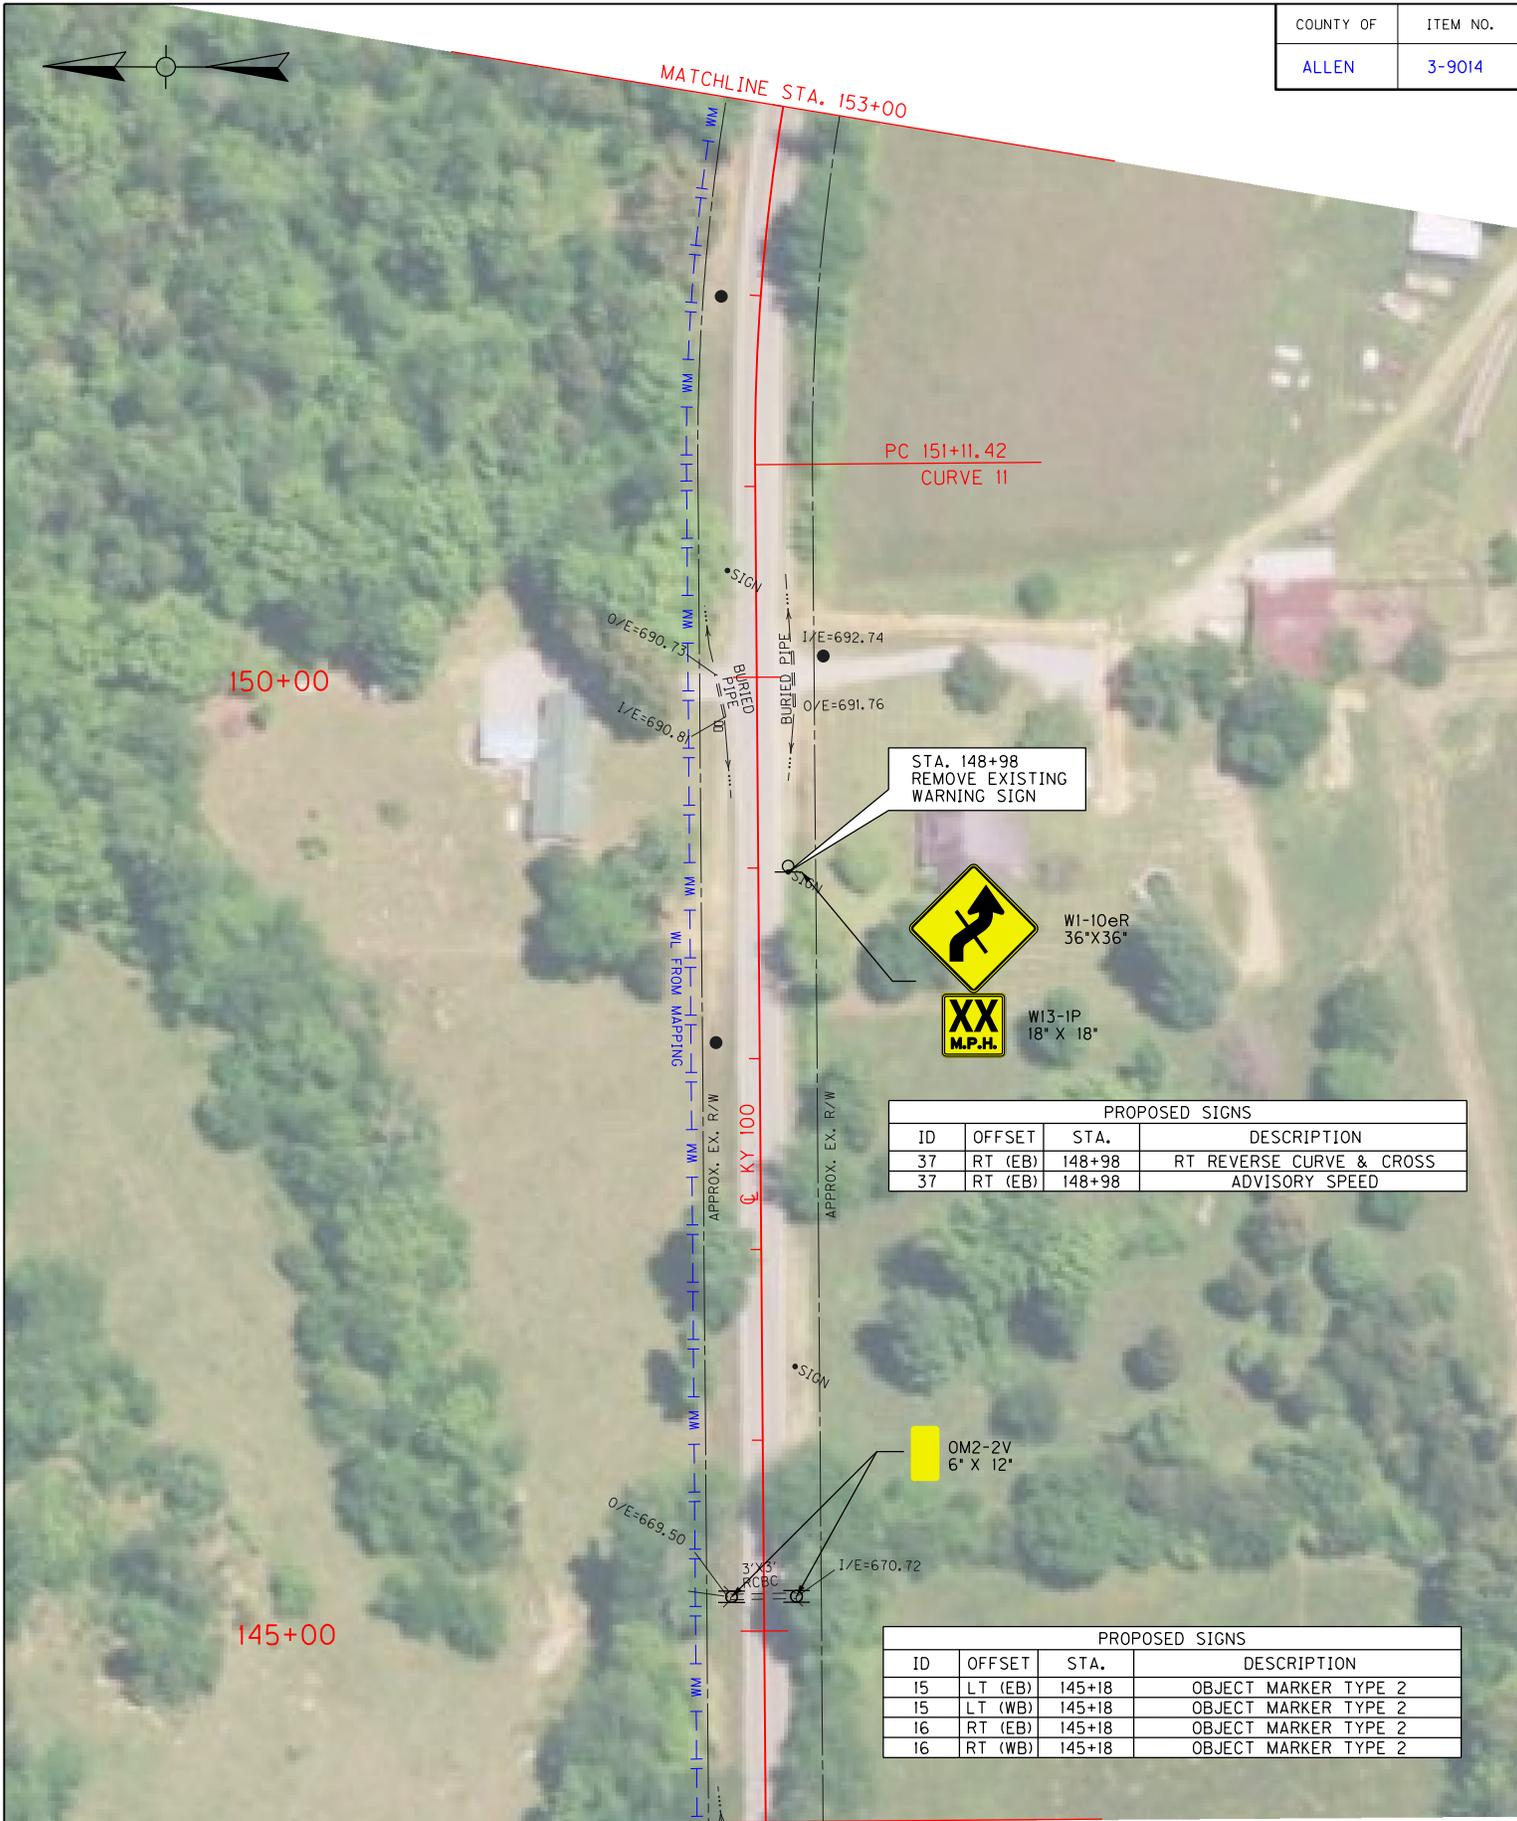

STA. 148+98
REMOVE EXISTING
WARNING SIGN



W1-10eR
36" X 36"



W13-1P
18" X 18"

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
37	RT (EB)	148+98	RT REVERSE CURVE & CROSS
37	RT (EB)	148+98	ADVISORY SPEED


PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
15	LT (EB)	145+18	OBJECT MARKER TYPE 2
15	LT (WB)	145+18	OBJECT MARKER TYPE 2
16	RT (EB)	145+18	OBJECT MARKER TYPE 2
16	RT (WB)	145+18	OBJECT MARKER TYPE 2

MATCHLINE STA. 144+00

SCALE: 1"= 100

KY 100
PLAN SHEET 17
STA. 144+00 TO STA. 153+00

COUNTY OF	ITEM NO.
ALLEN	3-9014




REMOVE EXISTING GUARDRAIL		
OFFSET	STA. TO STA.	LENGTH
LT	160+04 - 161+91	188
RT	161+30 - 162+70	150

INSTALL GUARDRAIL				
OFFSET	STA. TO STA.	LENGTH	BEGIN E. T.	END E. T.
LT	160+04 - 161+91	142	TYPE 1	T.S. 1
RT	161+30 - 162+70	112	T.S. 1	TYPE 7

SUPERELEVATION IMPROVEMENT		
CURVE NO.	PC STA.	PT STA.
12 (EB)	159+53.84	165+80.83

STA. 161+13
REPLACE ENTRANCE PIPE


DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	158+00 - 162+00

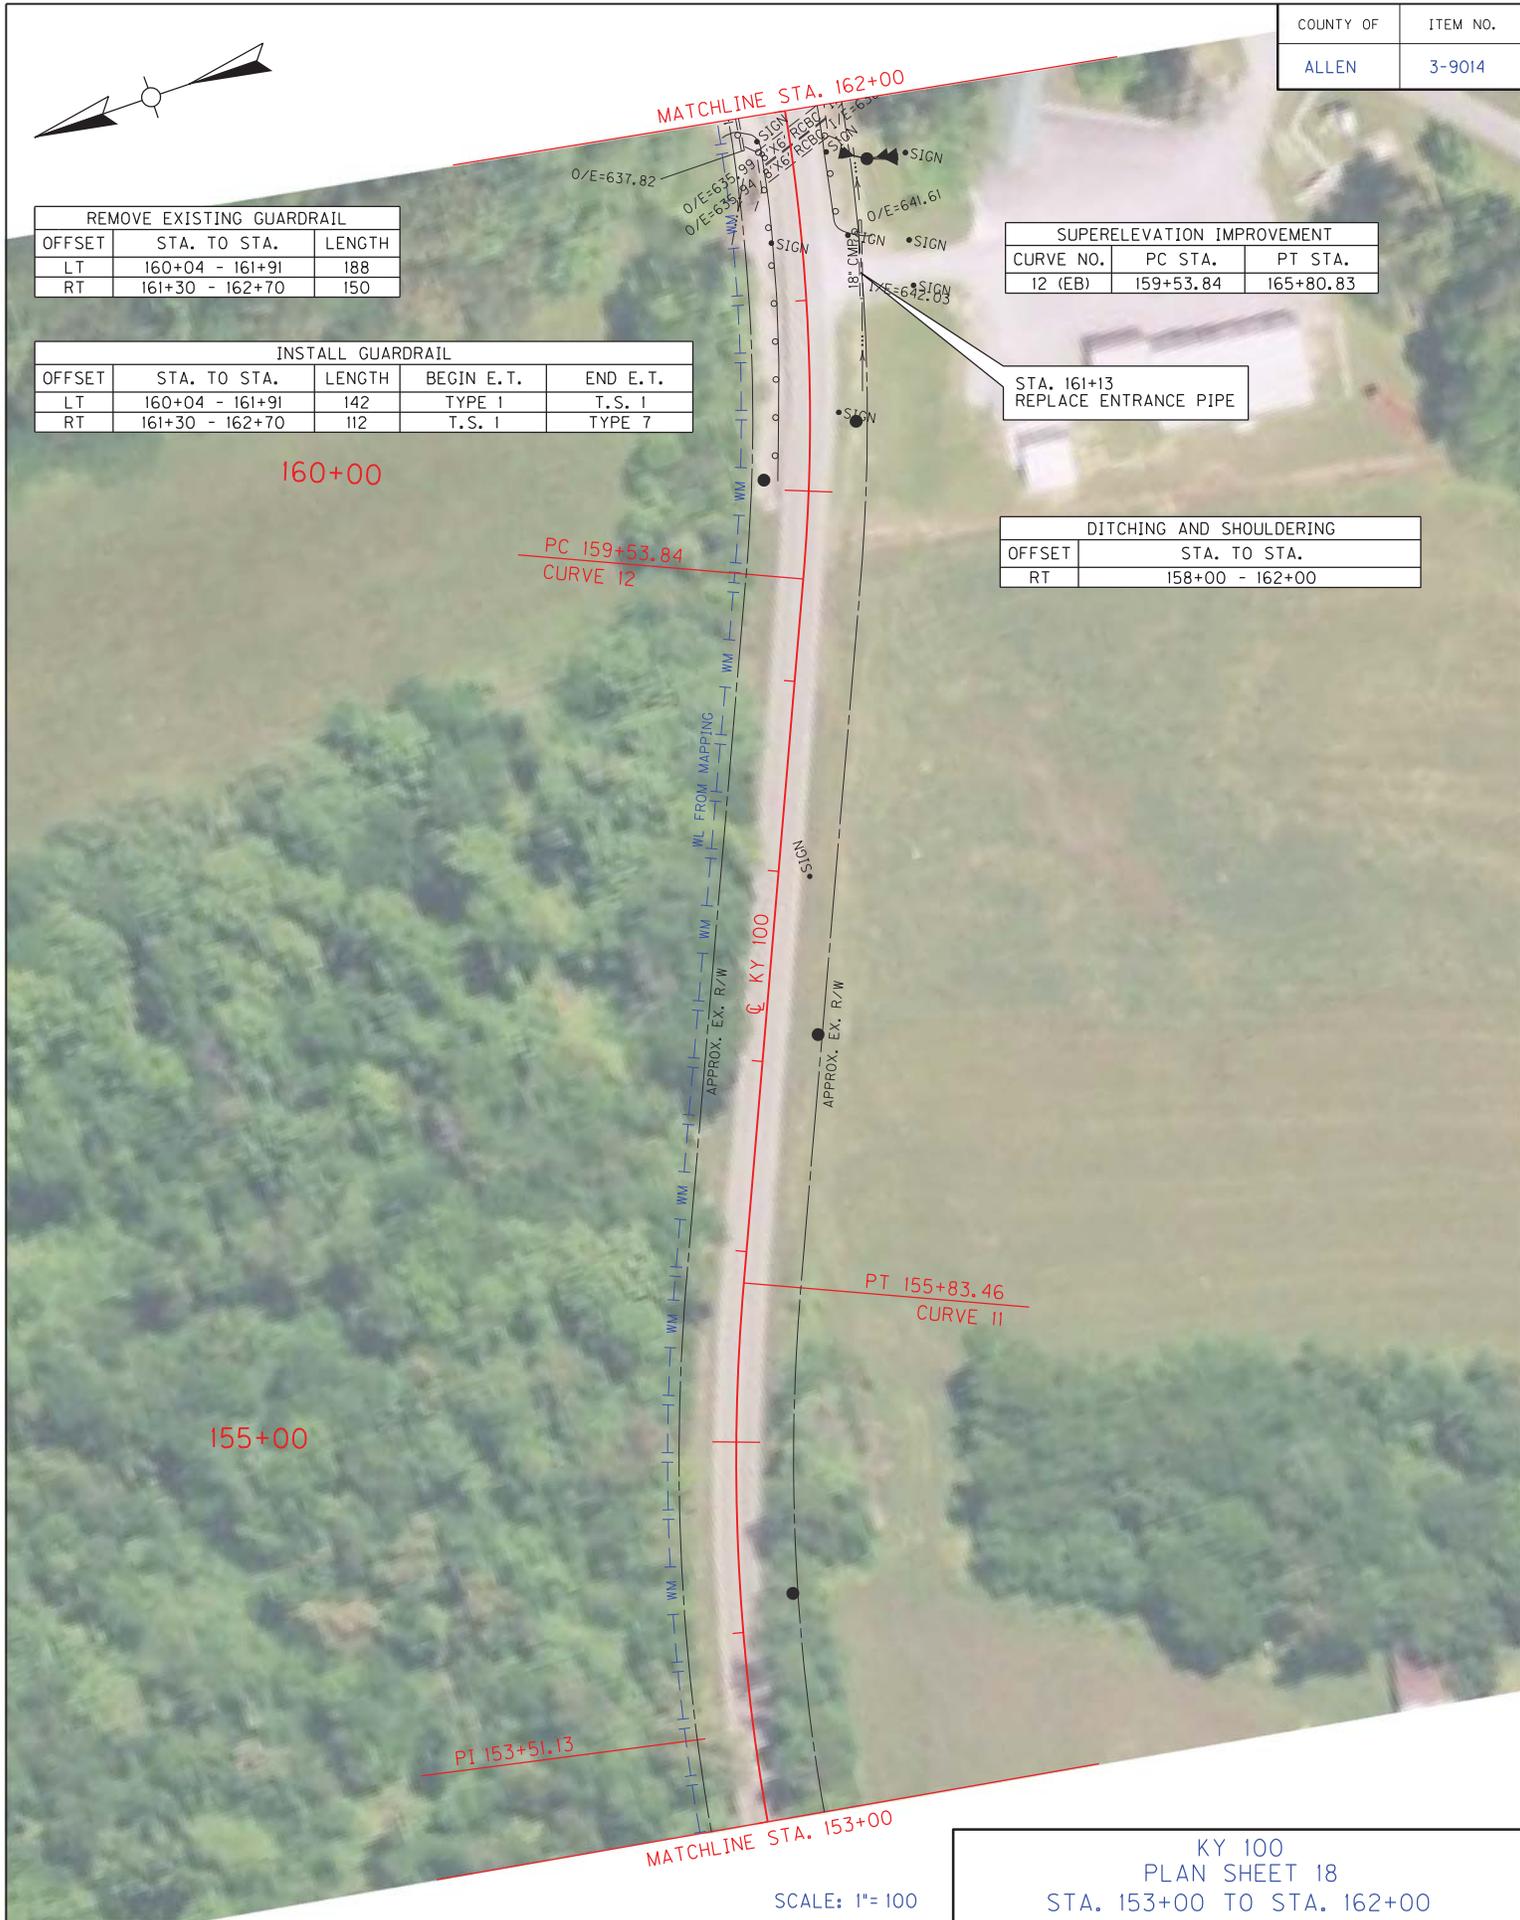

KY 100
PLAN SHEET 18
STA. 153+00 TO STA. 162+00

SCALE: 1"= 100'

COUNTY OF	ITEM NO.
ALLEN	3-9014




DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	170+00 - 171+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	170+00 - 171+00

STA. 170+60
REPLACE ENTRANCE PIPE

STA. 170+04
REMOVE EXISTING
WARNING SIGN



PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
38	LT (WB)	170+04	RT REVERSE CURVE & CROSS
38	LT (WB)	170+04	ADVISORY SPEED

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	162+00 - 167+40

PT 165+80.83
CURVE 12

165+00

REMOVE EXISTING GUARDRAIL		
OFFSET	STA. TO STA.	LENGTH
LT	162+24 - 163+60	138

FANNY TOM
GAINS RD

INSTALL GUARDRAIL				
OFFSET	STA. TO STA.	LENGTH	BEGIN E.T.	END E.T.
LT	162+24 - 163+65	108	T.S. 1	TYPE 7

PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
RT	162+88 - 163+00	STOP BAR - STONY POINT RD


STONY
POINT
RD

PI 162+78.03

MATCHLINE STA. 162+00

SCALE: 1" = 100
KY 100
PLAN SHEET 19
STA. 162+00 TO STA. 171+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

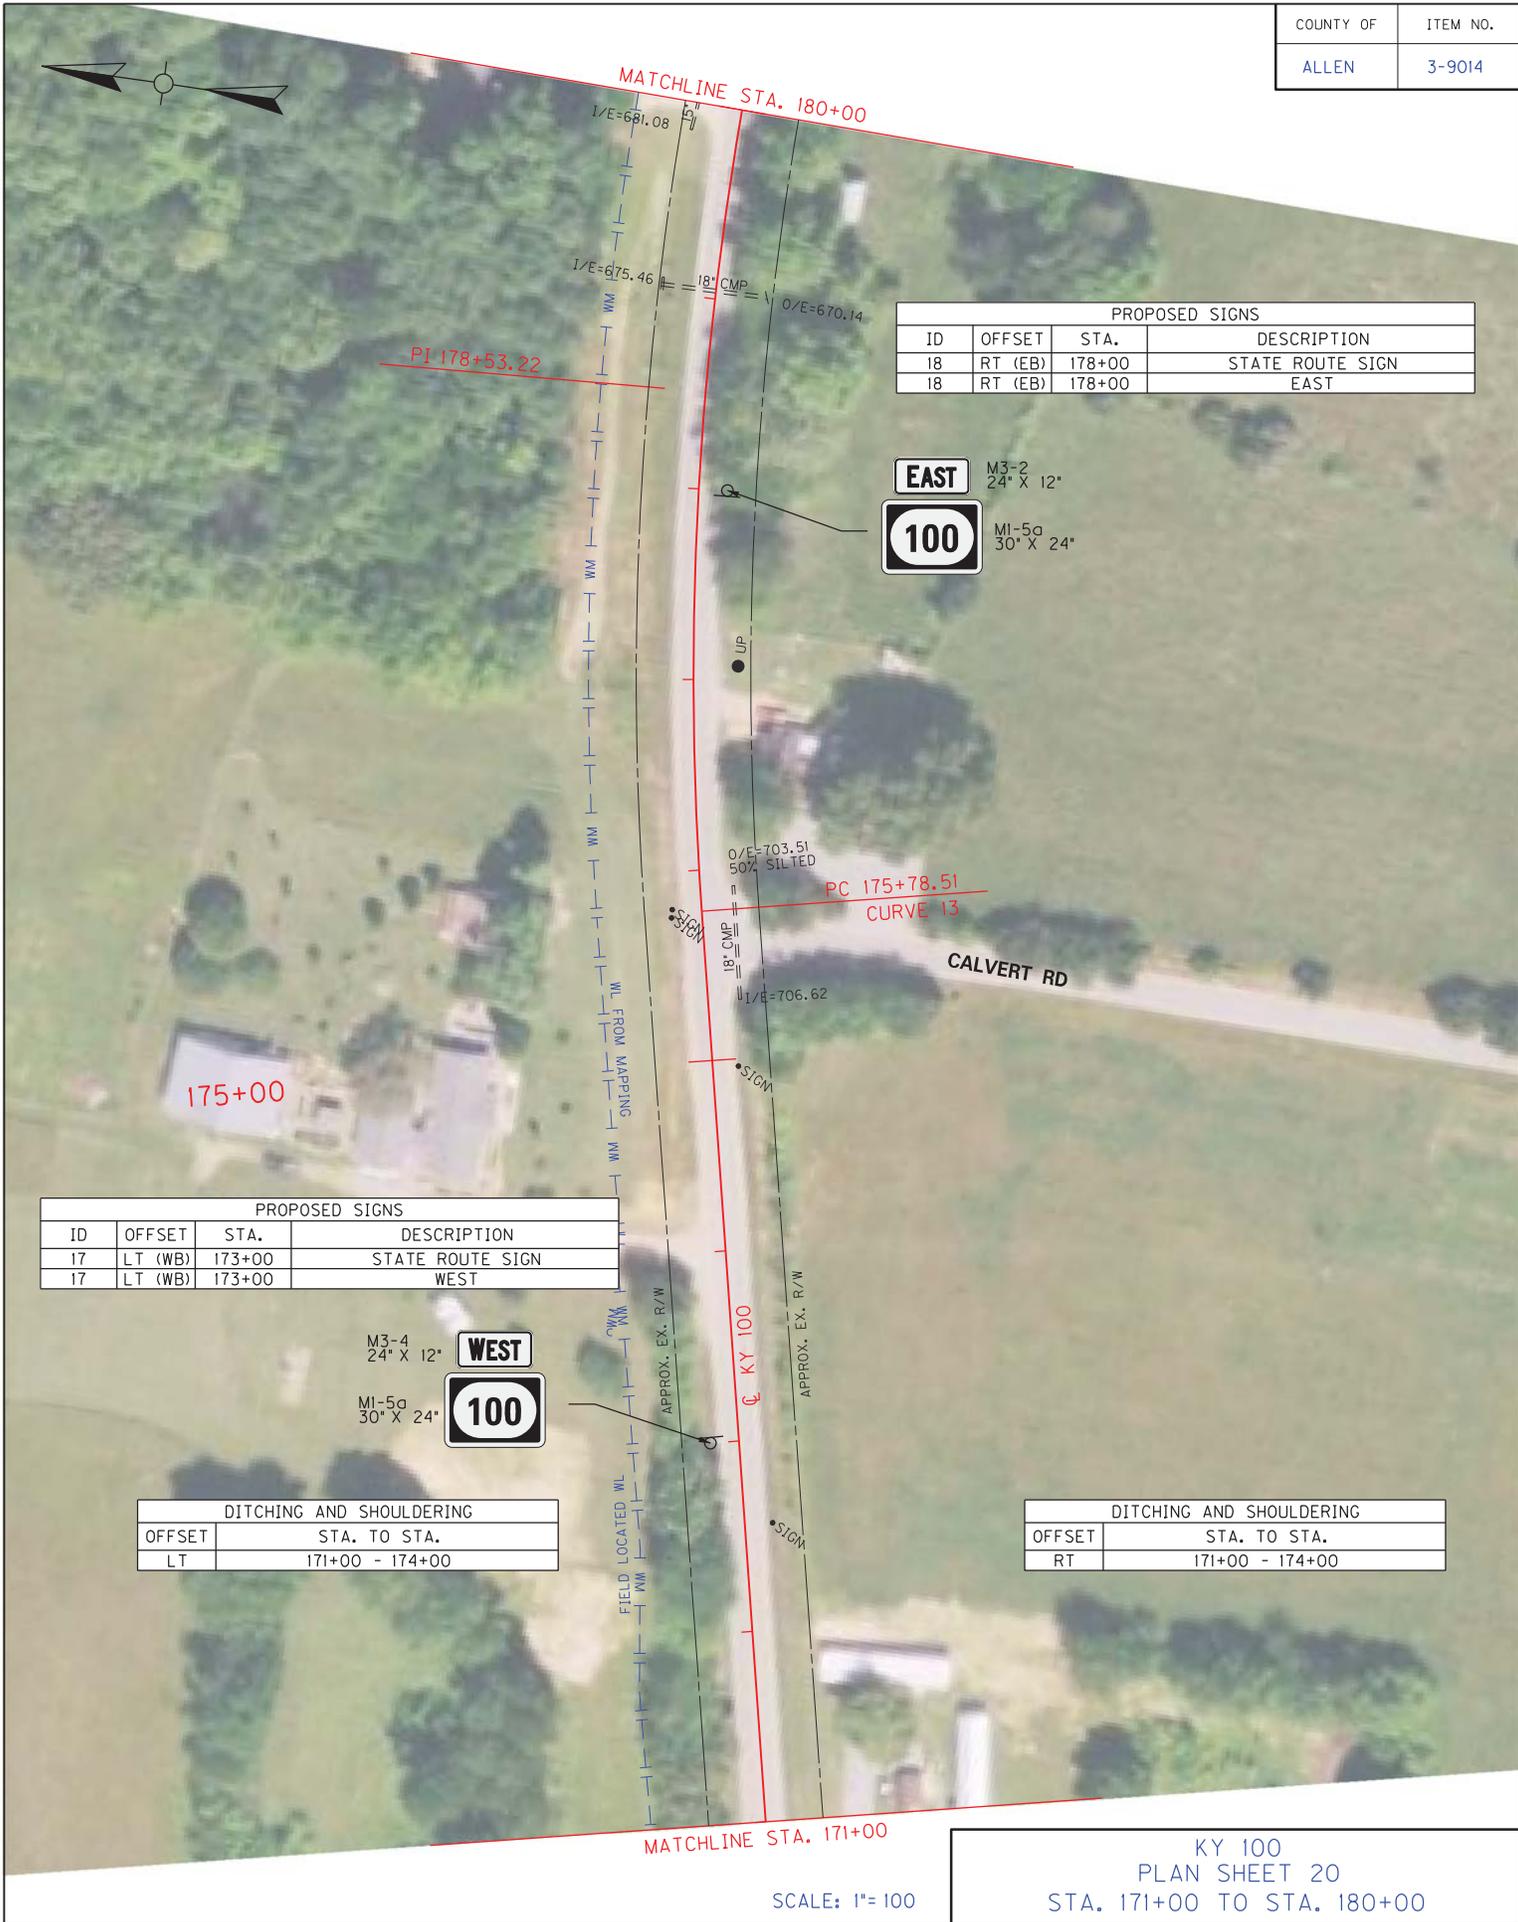

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
18	RT (EB)	178+00	STATE ROUTE SIGN
18	RT (EB)	178+00	EAST

EAST M3-2
24" X 12"

100 MI-5a
30" X 24"

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
17	LT (WB)	173+00	STATE ROUTE SIGN
17	LT (WB)	173+00	WEST

M3-4
24" X 12" **WEST**

MI-5a
30" X 24" **100**


DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	171+00 - 174+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	171+00 - 174+00

KY 100
PLAN SHEET 20
STA. 171+00 TO STA. 180+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014



NOTE: CURVE WIDENING WILL DISTURB 700 FT OF EXISTING FENCE. SEE CROSS SECTIONS.

STA. 197+69
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 12 L.F. 18" CULVERT PIPE WITH SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	196+00 - 198+00

STA. 195+63
END CURVE WIDENING

CURVE WIDENING & ENTRANCE CONSTRUCTION DISTURB LIMITS

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	189+00 - 195+50

195+00

PT 194+13.24
CURVE 14

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	190+45 - 198+50
RT	190+50 - 195+50

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
20	RT (EB)	190+14	REFL. PANEL ON EX. CHEVRON POST
20	RT (WB)	190+14	REFL. PANEL ON EX. CHEVRON POST
21	RT (EB)	191+32	REFL. PANEL ON EX. CHEVRON POST
21	RT (WB)	191+32	REFL. PANEL ON EX. CHEVRON POST
22	RT (EB)	192+50	REFL. PANEL ON EX. CHEVRON POST
22	RT (WB)	192+50	REFL. PANEL ON EX. CHEVRON POST
23	RT (EB)	193+70	REFL. PANEL ON EX. CHEVRON POST
23	RT (WB)	193+70	REFL. PANEL ON EX. CHEVRON POST

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	190+45 - 198+50
RT	190+50 - 195+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	189+00 - 196+00

STA. 191+20
EXTEND 18" PLASTIC/RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 8 L.F. 18" CULVERT PIPE WITH SLOPED & MITERED CONCRETE HEADWALL

INSTALL REFLECTIVE PANEL ON EXISTING CHEVRON POSTS (ONE PER DIRECTION OF TRAVEL)

190+00

PI 190+91.74

STA. 189+45
RECONSTRUCT ENTRANCE

MATCHLINE STA. 189+00

KY 100
PLAN SHEET 22
STA. 189+00 TO STA. 198+00

SCALE: 1" = 100'

COUNTY OF	ITEM NO.
ALLEN	3-9014



PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
40	LT (WB)	198+12	RIGHT CURVE
40	LT (WB)	198+12	ADVISORY SPEED

200+00

W1-2R
30" X 30"



W13-1P
18" X 18"



STA. 198+12
REMOVE EXISTING
WARNING SIGN

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	198+00 - 198+50


APPROX. EX. R/W
KY 100
APPROX. EX. R/W

MATCHLINE STA. 198+00

SCALE: 1"= 100

KY 100
PLAN SHEET 23
STA. 198+00 TO STA. 207+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



MATCHLINE STA. 216+00

215+00

210+00

APPROX. EX. R/W

APPROX. EX. R/W

• SIGN

STA. 211+05.93/MP 3.997
BEGIN ASPHALT OVERLAY,
EDGE LINE RUMBLE STRIPS &
PAVE STRIPING-SPRAY THERMO-6 IN

PAVEMENT REPAIR		
OFFSET	STA. TO STA.	
BOTH	211+06 - 211+56	

PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
LT	208+97 - 211+11	SOLID WHITE LINE-TAPE
RT	208+86 - 211+01	SOLID WHITE LINE-TAPE
CENTER	208+91 - 211+06	DOUBLE SOLID YELLOW LINE-TAPE

REMOVE EXISTING GUARDRAIL		
OFFSET	STA. TO STA.	LENGTH
LT	208+72 - 211+36	275
RT	208+36 - 211+26	300

INSTALL GUARDRAIL				
OFFSET	STA. TO STA.	LENGTH	BEGIN E.T.	END E.T.
LT	207+96 - 208+96	25	TYPE I	SINGLE FACE A
LT	208+96 - 211+11	225	-	-
LT	211+11 - 212+11	25	SINGLE FACE A	TYPE I
RT	207+86 - 208+86	25	TYPE I	SINGLE FACE A
RT	208+86 - 211+01	225	-	-
RT	211+01 - 212+01	25	SINGLE FACE A	TYPE I

STA. 208+91.19/MP 3.957
END ASPHALT OVERLAY,
EDGE LINE RUMBLE STRIPS &
PAVE STRIPING-SPRAY THERMO-6 IN

PT 208+13.08
CURVE 15

MATCHLINE STA. 207+00

SCALE: 1"= 100

KY 100
PLAN SHEET 24
STA. 207+00 TO STA. 216+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



REMOVE EXISTING GUARDRAIL		
OFFSET	STA. TO STA.	LENGTH
LT	217+91 - 218+68	88
RT	218+05 - 219+20	138

INSTALL GUARDRAIL				
OFFSET	STA. TO STA.	LENGTH	BEGIN E.T.	END E.T.
LT	217+00 - 218+12	38	TYPE 1	SINGLE FACE A
LT	218+12 - 218+44	38	-	-
LT	218+44 - 219+00	42	SINGLE FACE A	T.S. 1
RT	217+00 - 218+25	50	TYPE 1	SINGLE FACE A
RT	218+25 - 218+53	38	-	-
RT	218+53 - 219+53	25	SINGLE FACE A	TYPE 1



STA. 218+49.64/MP 4.138
BEGIN ASPHALT OVERLAY,
EDGE LINE RUMBLE STRIPS &
PAVE STRIPING-SPRAY THERMO-6 IN

PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
LT	218+12 - 218+44	SOLID WHITE LINE-TAPE
RT	218+24 - 218+53	SOLID WHITE LINE-TAPE
CENTER	218+18 - 218+50	DOUBLE SOLID YELLOW LINE-TAPE

STA. 218+18.00/MP 4.132
END ASPHALT OVERLAY,
EDGE LINE RUMBLE STRIPS &
PAVE STRIPING-SPRAY THERMO-6 IN

SCALE: 1" = 100
KY 100
PLAN SHEET 25
STA. 216+00 TO STA. 225+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

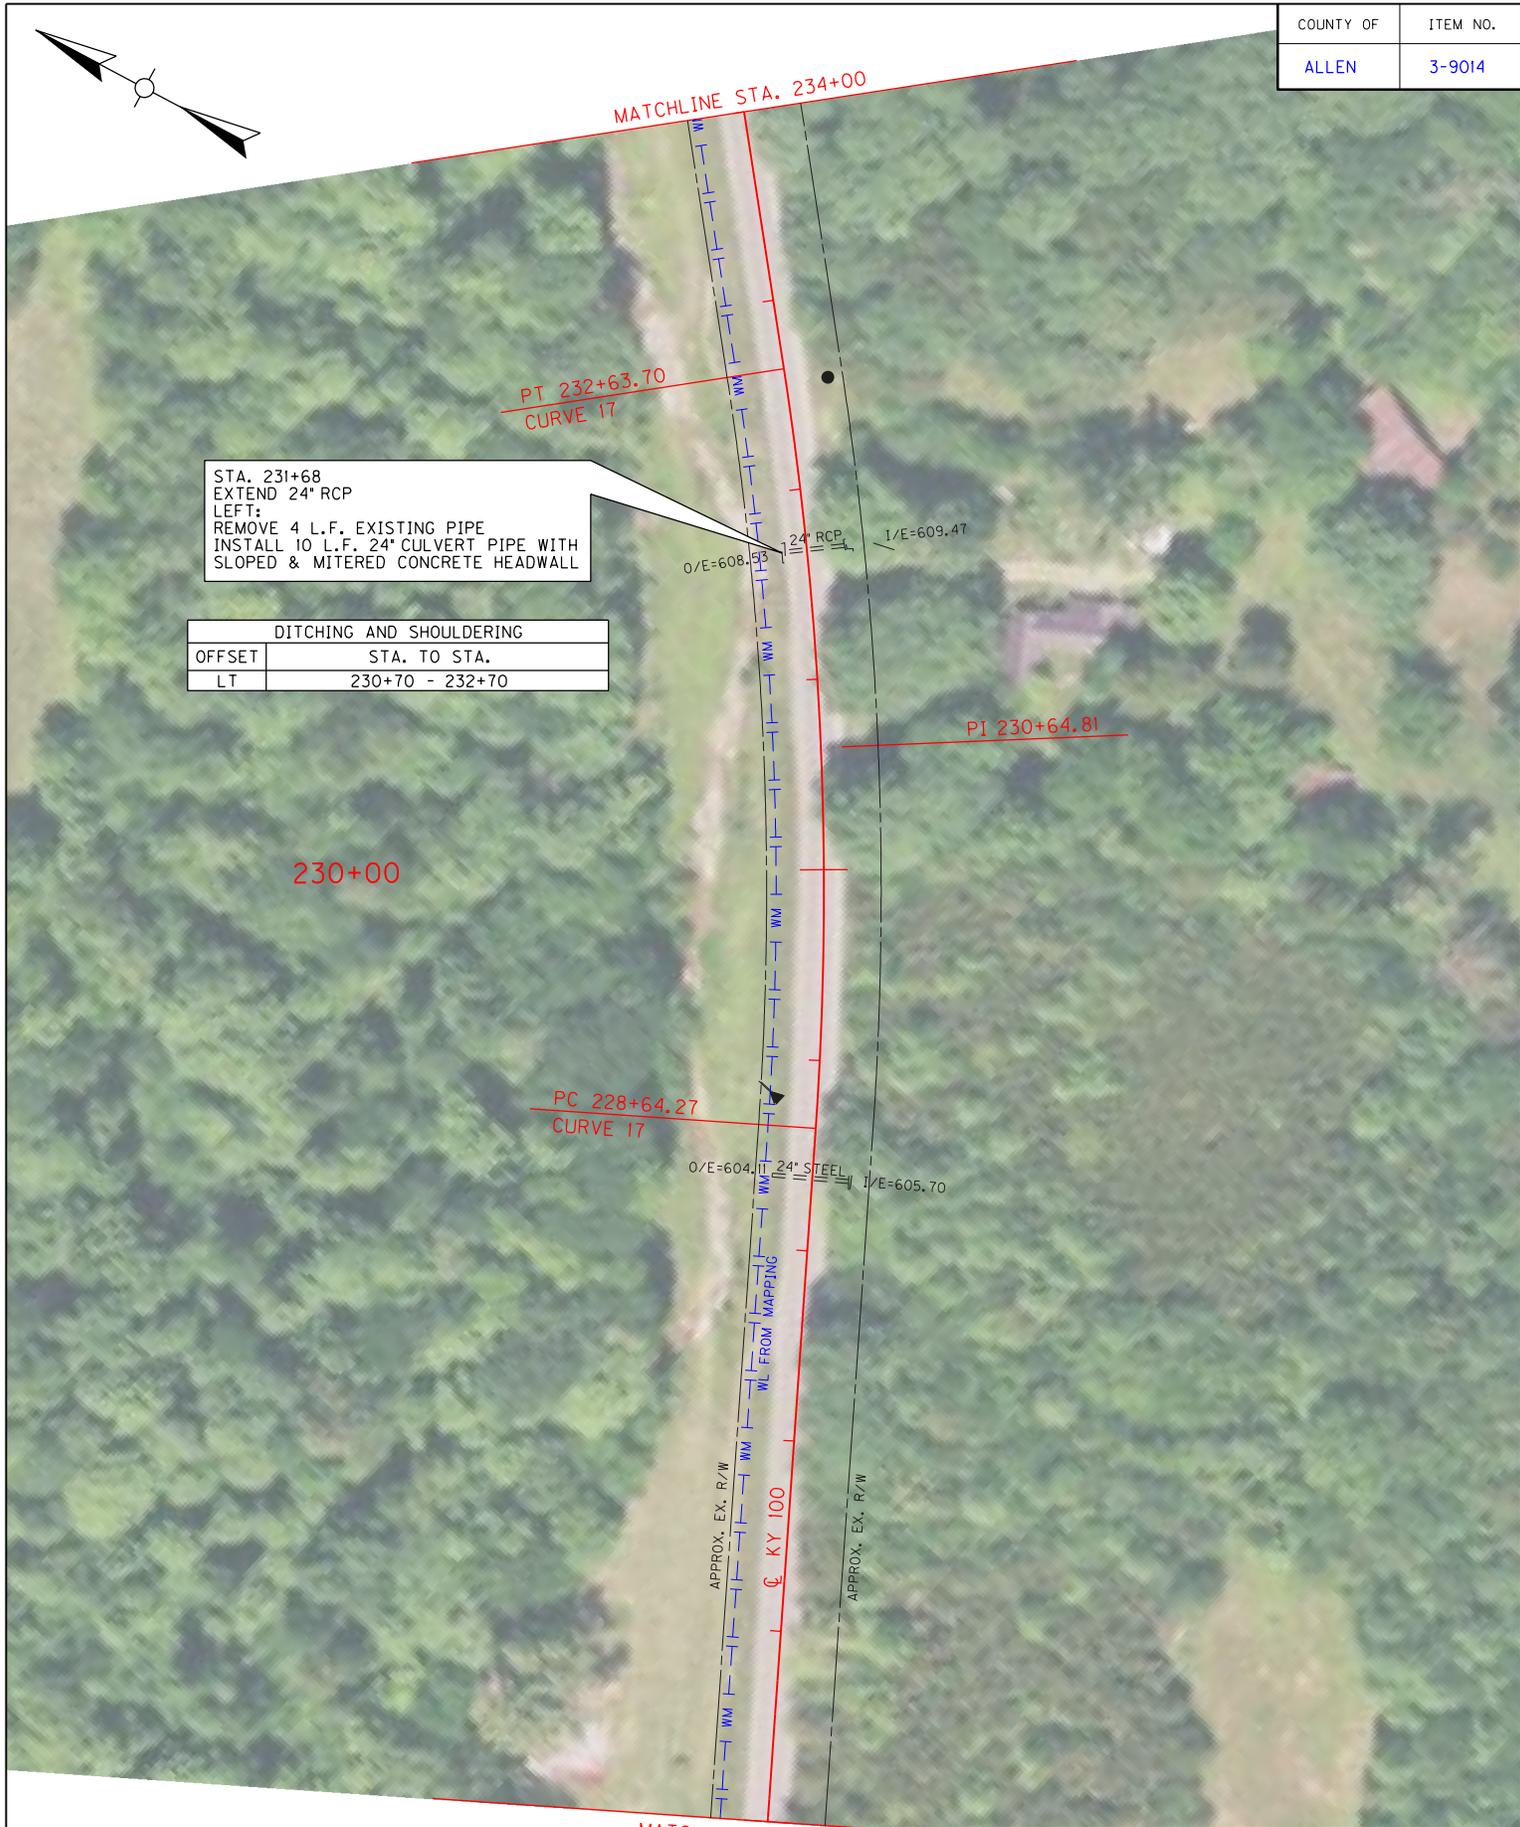

STA. 231+68
EXTEND 24\"/>

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	230+70 - 232+70

MATCHLINE STA. 225+00

SCALE: 1" = 100

KY 100
PLAN SHEET 26
STA. 225+00 TO STA. 234+00


COUNTY OF	ITEM NO.
ALLEN	3-9014



KY 100
PLAN SHEET 27
STA. 234+00 TO STA. 243+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014



MATCHLINE STA. 252+00

250+00

245+00

WL FROM MAPPING
APPROX. EX. R/W

C KY 100


APPROX. EX. R/W

MATCHLINE STA. 243+00

SCALE: 1"= 100

KY 100
PLAN SHEET 28
STA. 243+00 TO STA. 252+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

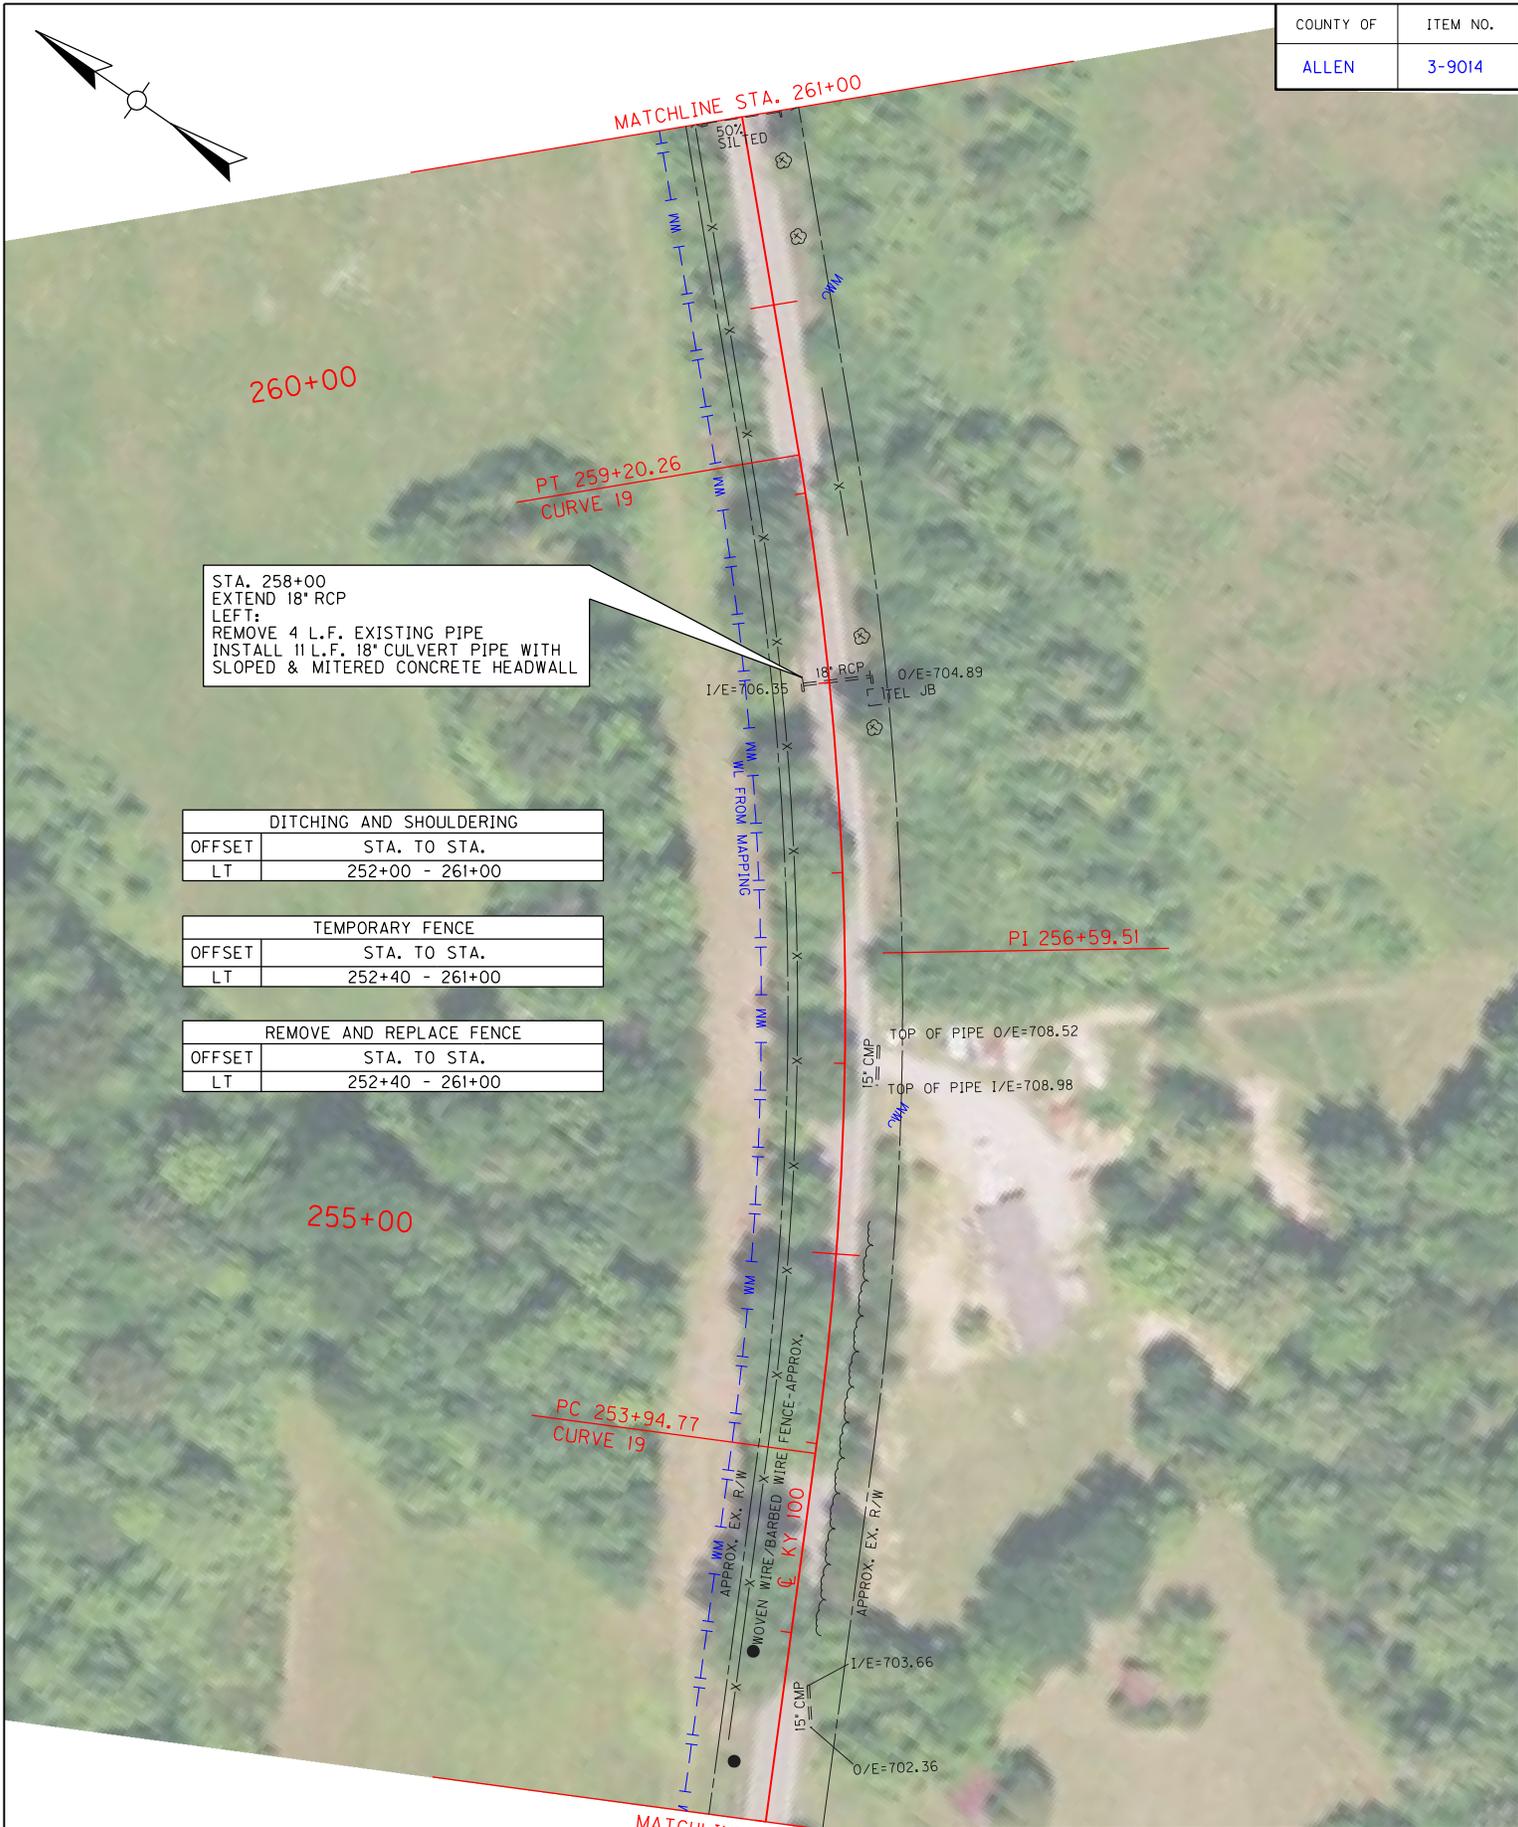

STA. 258+00
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 11 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	252+00 - 261+00

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	252+40 - 261+00

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	252+40 - 261+00

KY 100
PLAN SHEET 29
STA. 252+00 TO STA. 261+00

SCALE: 1" = 100'

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 270+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	268+15 - 270+00

STA. 269+15
EXTEND 24" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 24" CULVERT PIPE WITH
SAFETY BOX INLET
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 13 L.F. 24" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	261+00 - 270+00

265+00


TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	261+00 - 270+25

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	261+00 - 270+25

MATCHLINE STA. 261+00

SCALE: 1"= 100

KY 100
PLAN SHEET 30
STA. 261+00 TO STA. 270+00

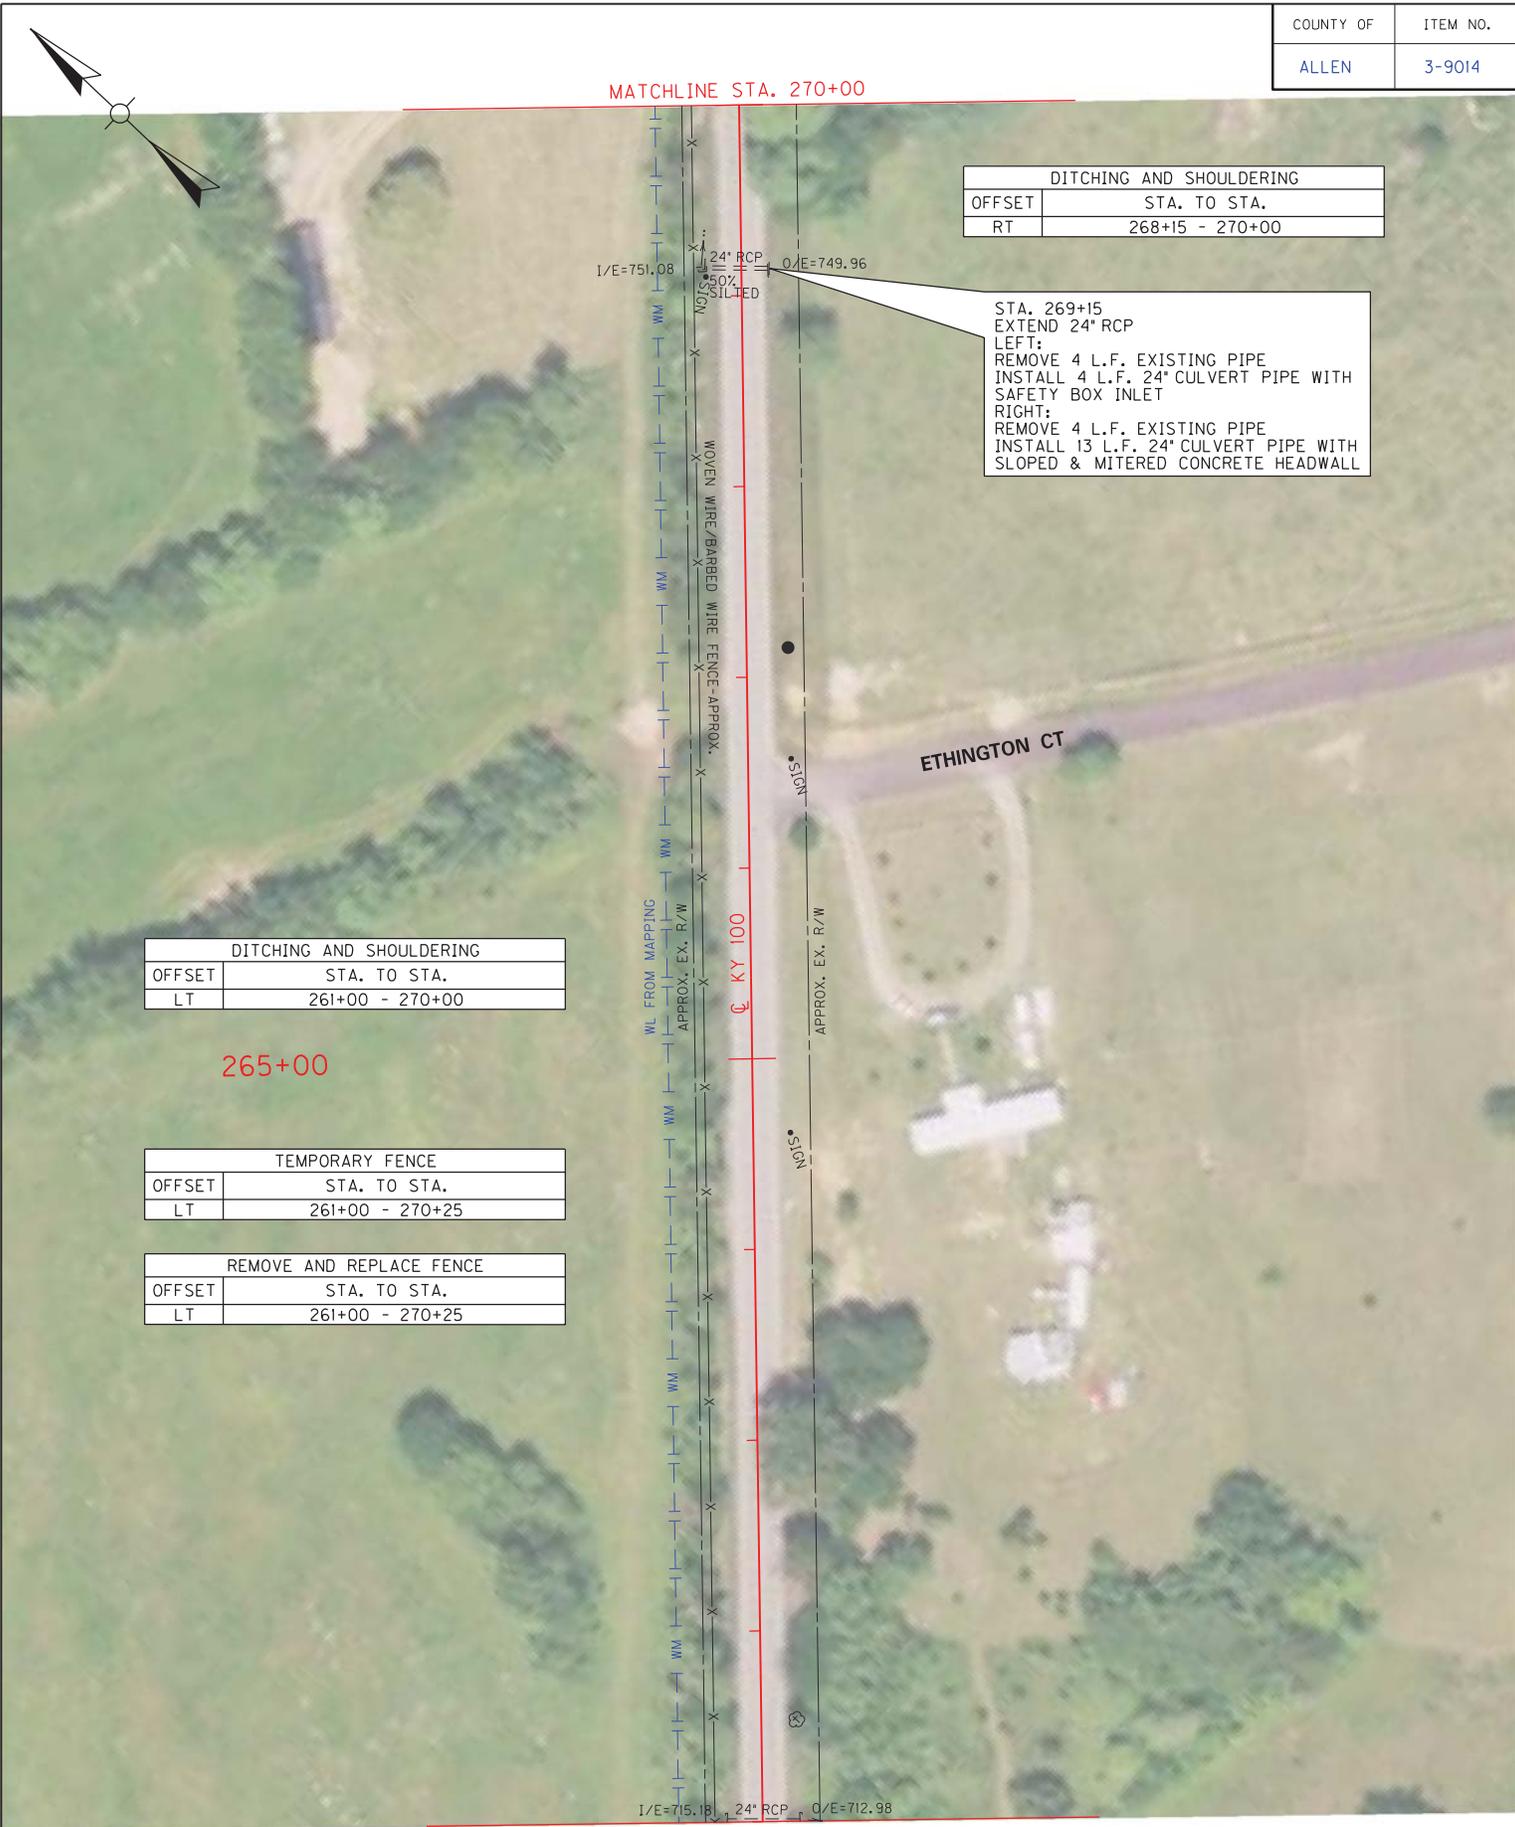


COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 279+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	278+00 - 279+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	275+00 - 279+00

275+00

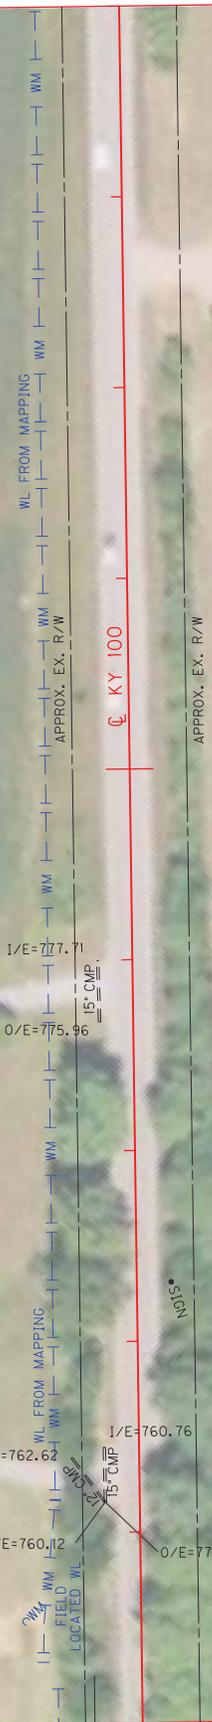

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	270+00 - 270+25

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	270+00 - 270+25

MATCHLINE STA. 270+00

SCALE: 1"= 100

KY 100
PLAN SHEET 31
STA. 270+00 TO STA. 279+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	279+00 - 283+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	279+00 - 282+00

STA. 279+90
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 9 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 10 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

MATCHLINE STA. 279+00

SCALE: 1"= 100


KY 100
PLAN SHEET 32
STA. 279+00 TO STA. 288+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 297+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	295+00 - 297+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	295+00 - 297+00




MATCHLINE STA. 288+00

SCALE: 1"= 100

KY 100
PLAN SHEET 33
STA. 288+00 TO STA. 297+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

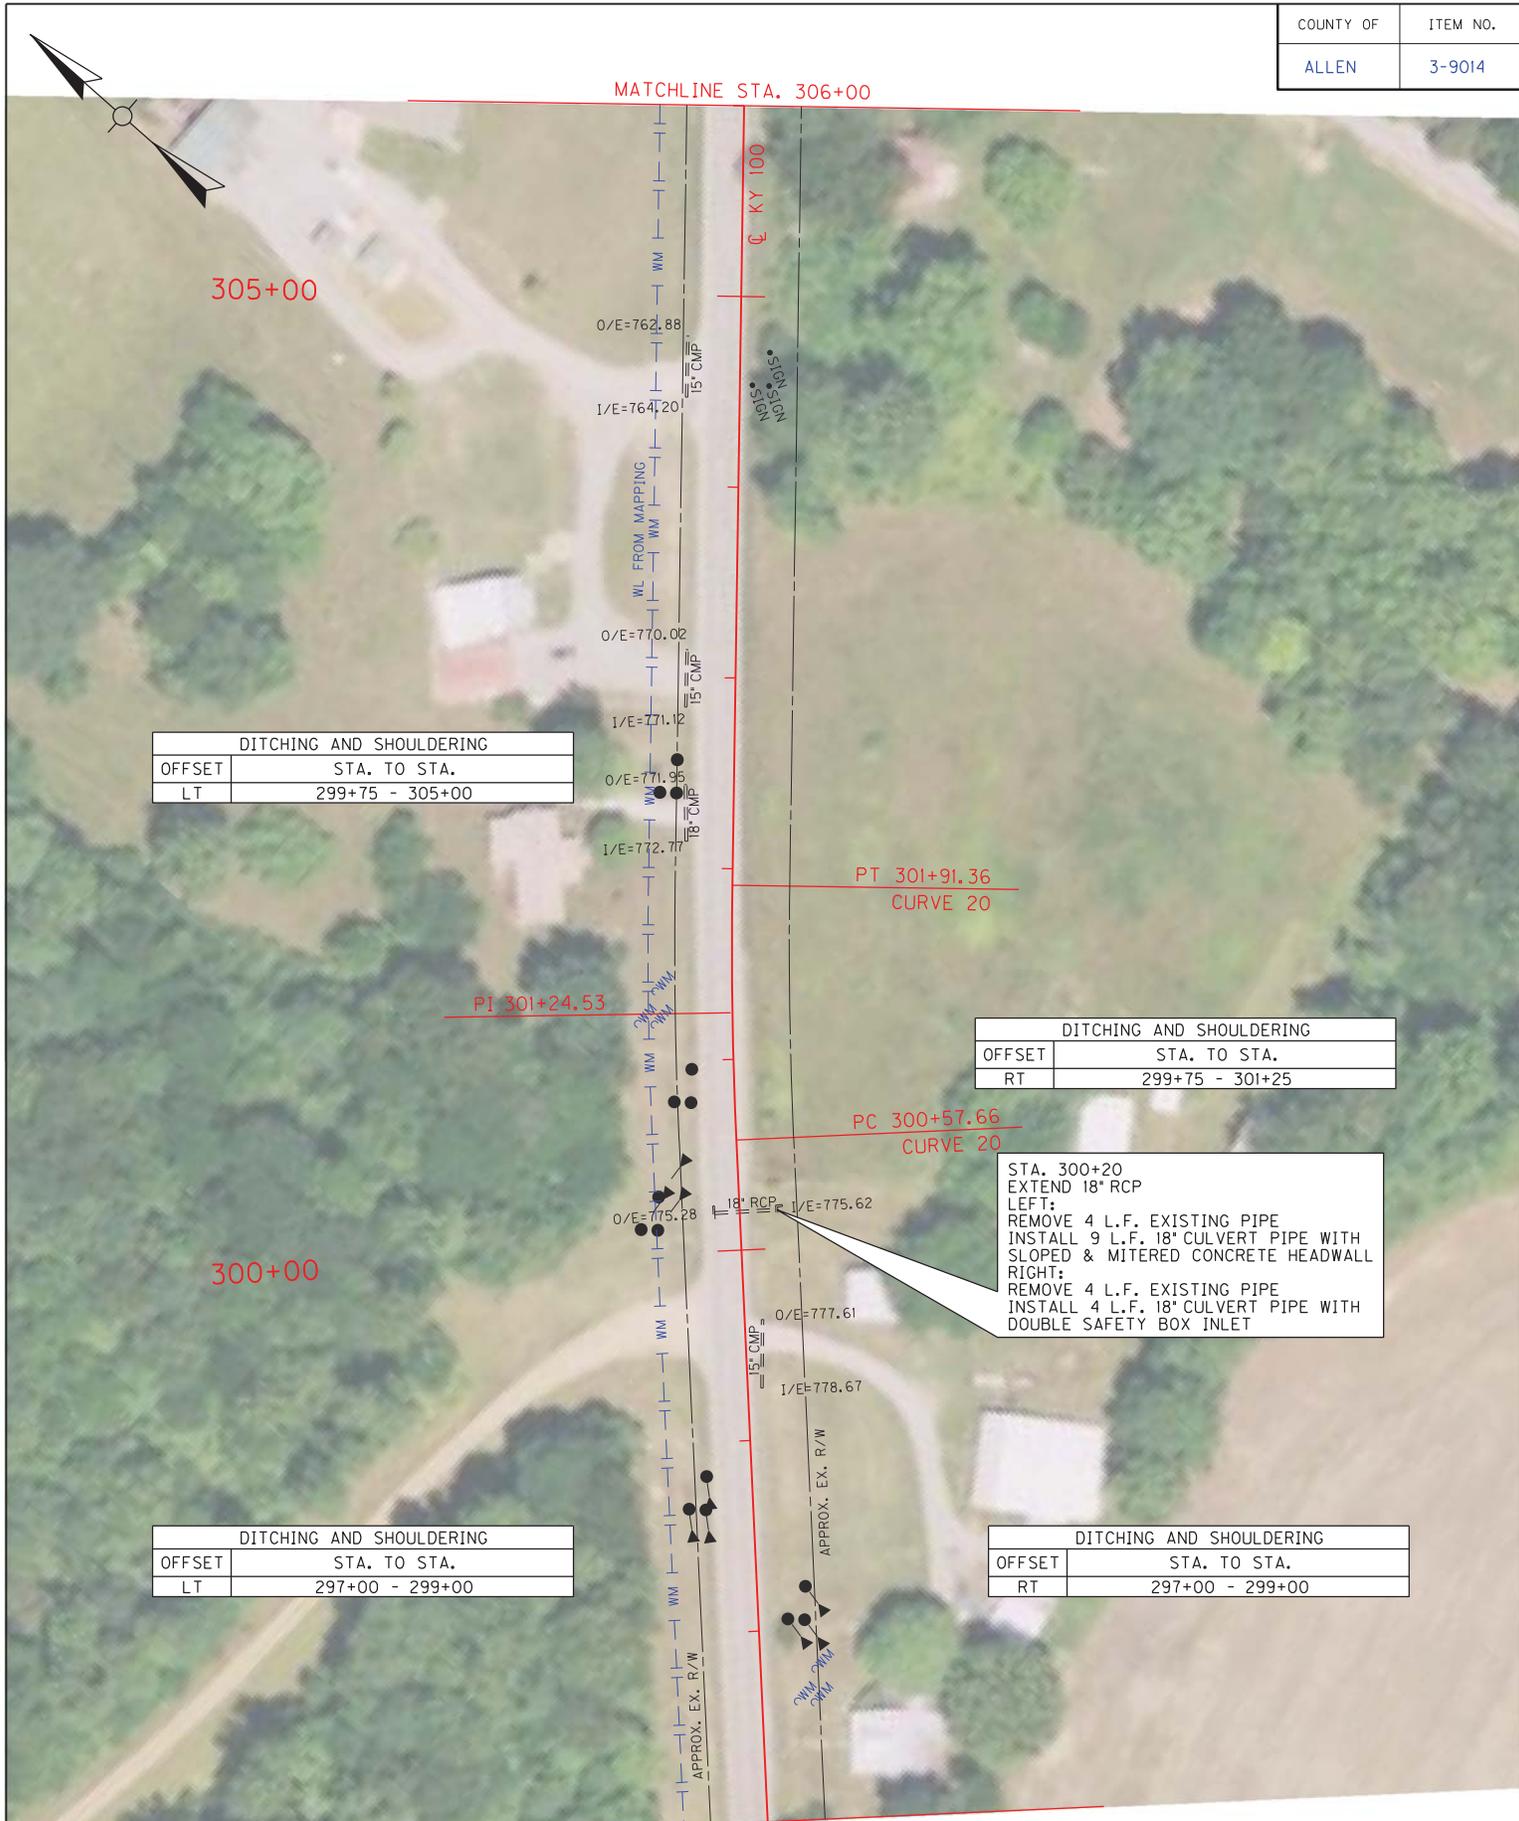

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	299+75 - 305+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	299+75 - 301+25

STA. 300+20
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 9 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
DOUBLE SAFETY BOX INLET


DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	297+00 - 299+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	297+00 - 299+00

SCALE: 1"= 100

KY 100
PLAN SHEET 34
STA. 297+00 TO STA. 306+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



KY 100
 PLAN SHEET 35
 STA. 306+00 TO STA. 315+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 324+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	323+50 - 324+00



PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
24	LT (EB)	315+75	OBJECT MARKER TYPE 2
24	LT (WB)	315+75	OBJECT MARKER TYPE 2
25	RT (EB)	315+75	OBJECT MARKER TYPE 2
25	RT (WB)	315+75	OBJECT MARKER TYPE 2


MATCHLINE STA. 315+00

SCALE: 1"= 100

KY 100
PLAN SHEET 36
STA. 315+00 TO STA. 324+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 333+00



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	328+50 - 330+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	328+50 - 330+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	324+00 - 325+00


MATCHLINE STA. 324+00

SCALE: 1"= 100

KY 100
PLAN SHEET 37
STA. 324+00 TO STA. 333+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 342+00



340+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	338+00 - 340+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	333+75 - 336+25

335+00


PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
26	LT (EB)	334+54	OBJECT MARKER TYPE 2
26	LT (WB)	334+54	OBJECT MARKER TYPE 2
27	RT (EB)	334+54	OBJECT MARKER TYPE 2
27	RT (WB)	334+54	OBJECT MARKER TYPE 2

OM2-2V
6" X 12"


MATCHLINE STA. 333+00

SCALE: 1"= 100

KY 100
PLAN SHEET 38
STA. 333+00 TO STA. 342+00

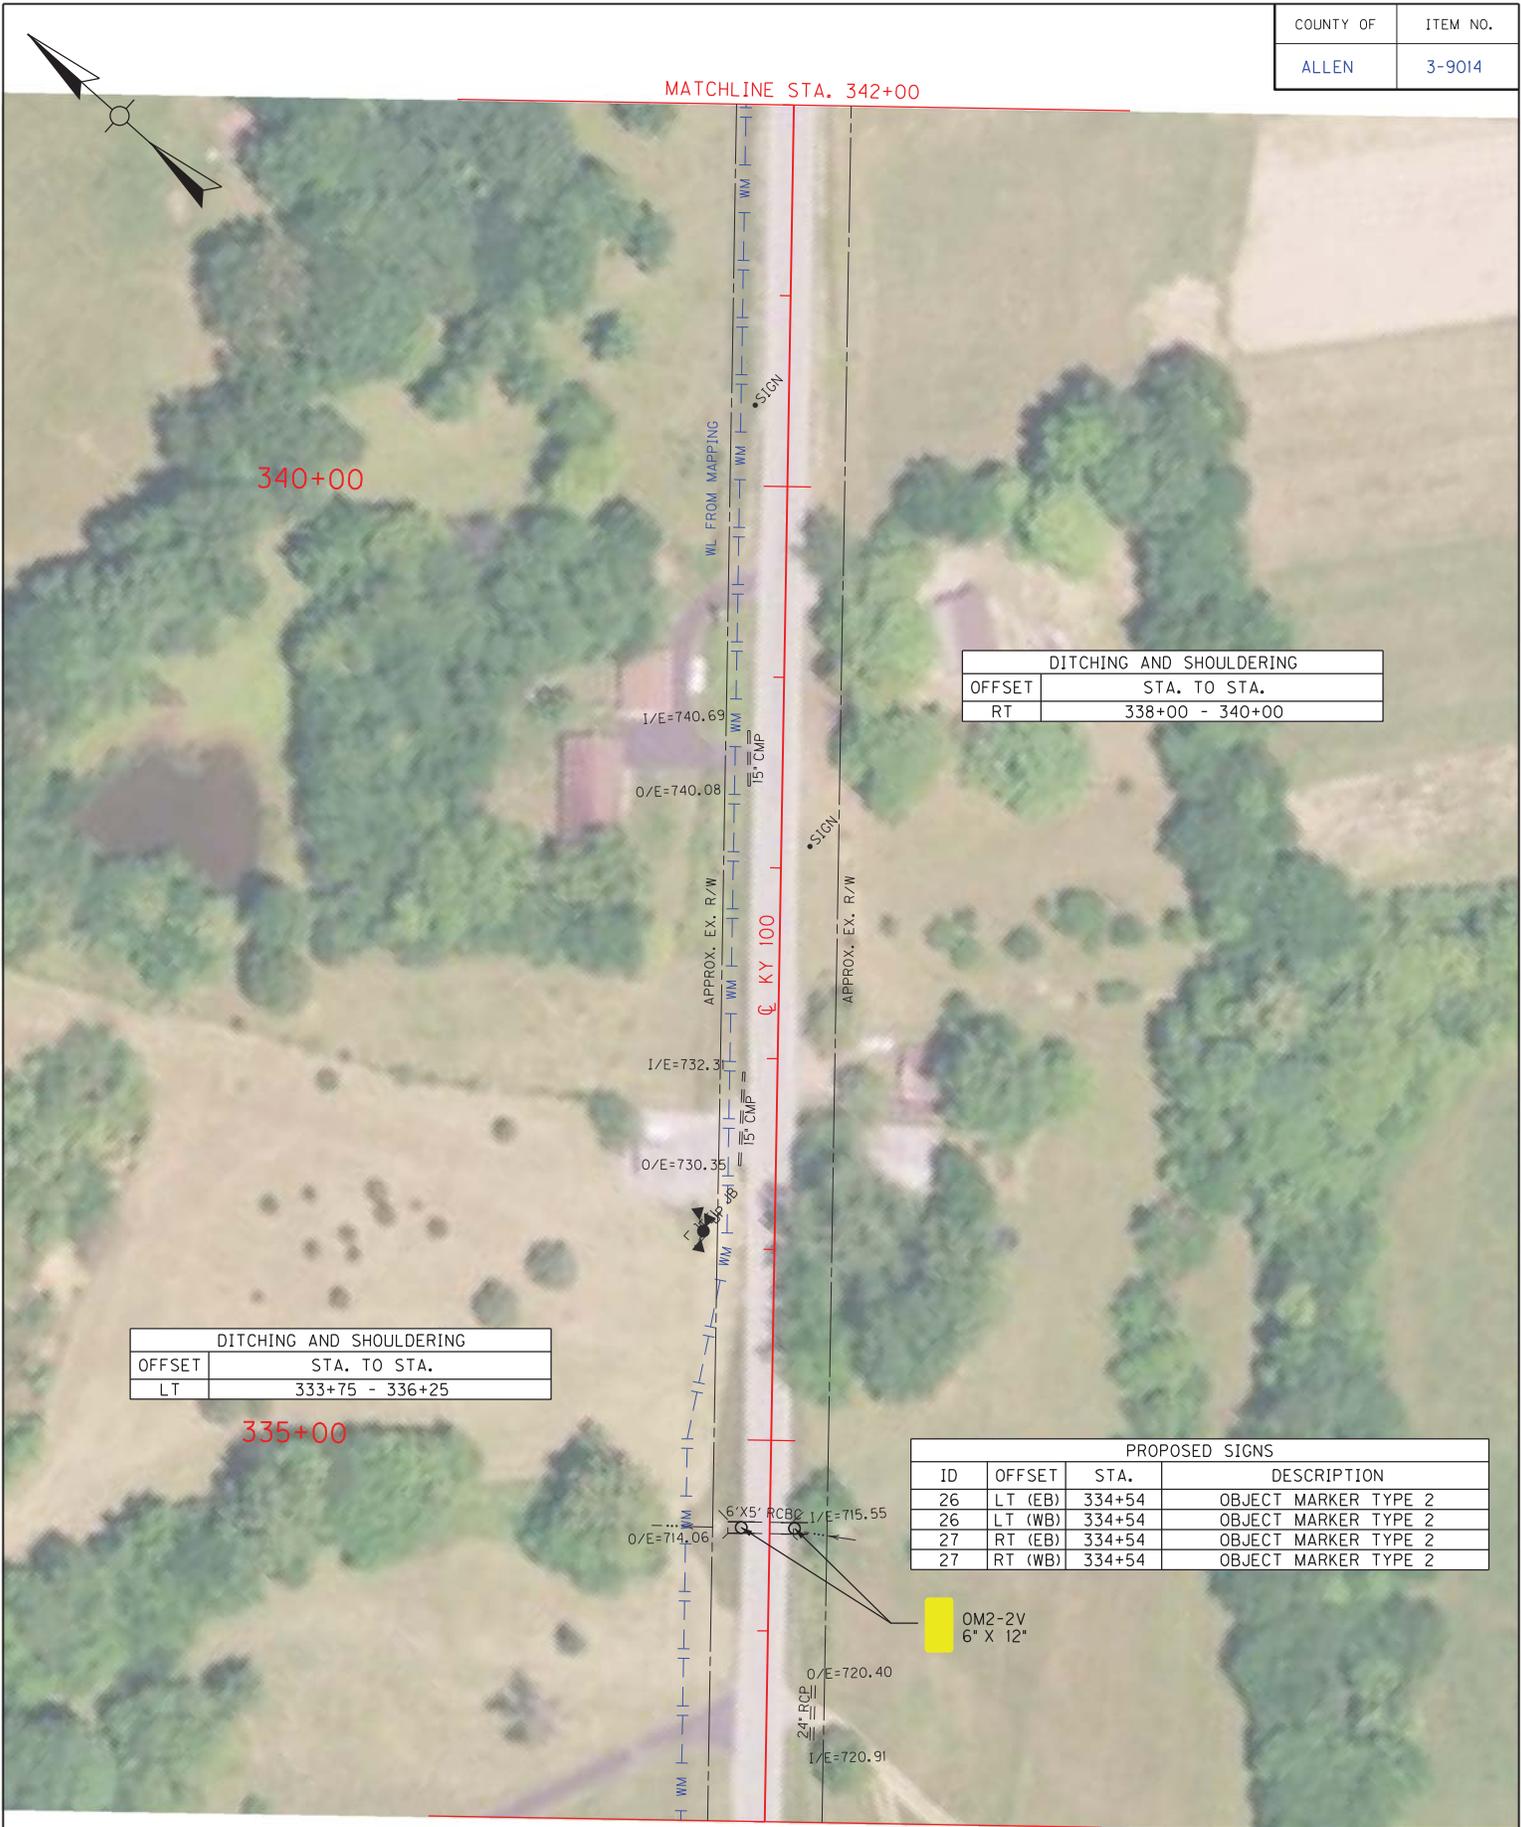

COUNTY OF	ITEM NO.
ALLEN	3-9014

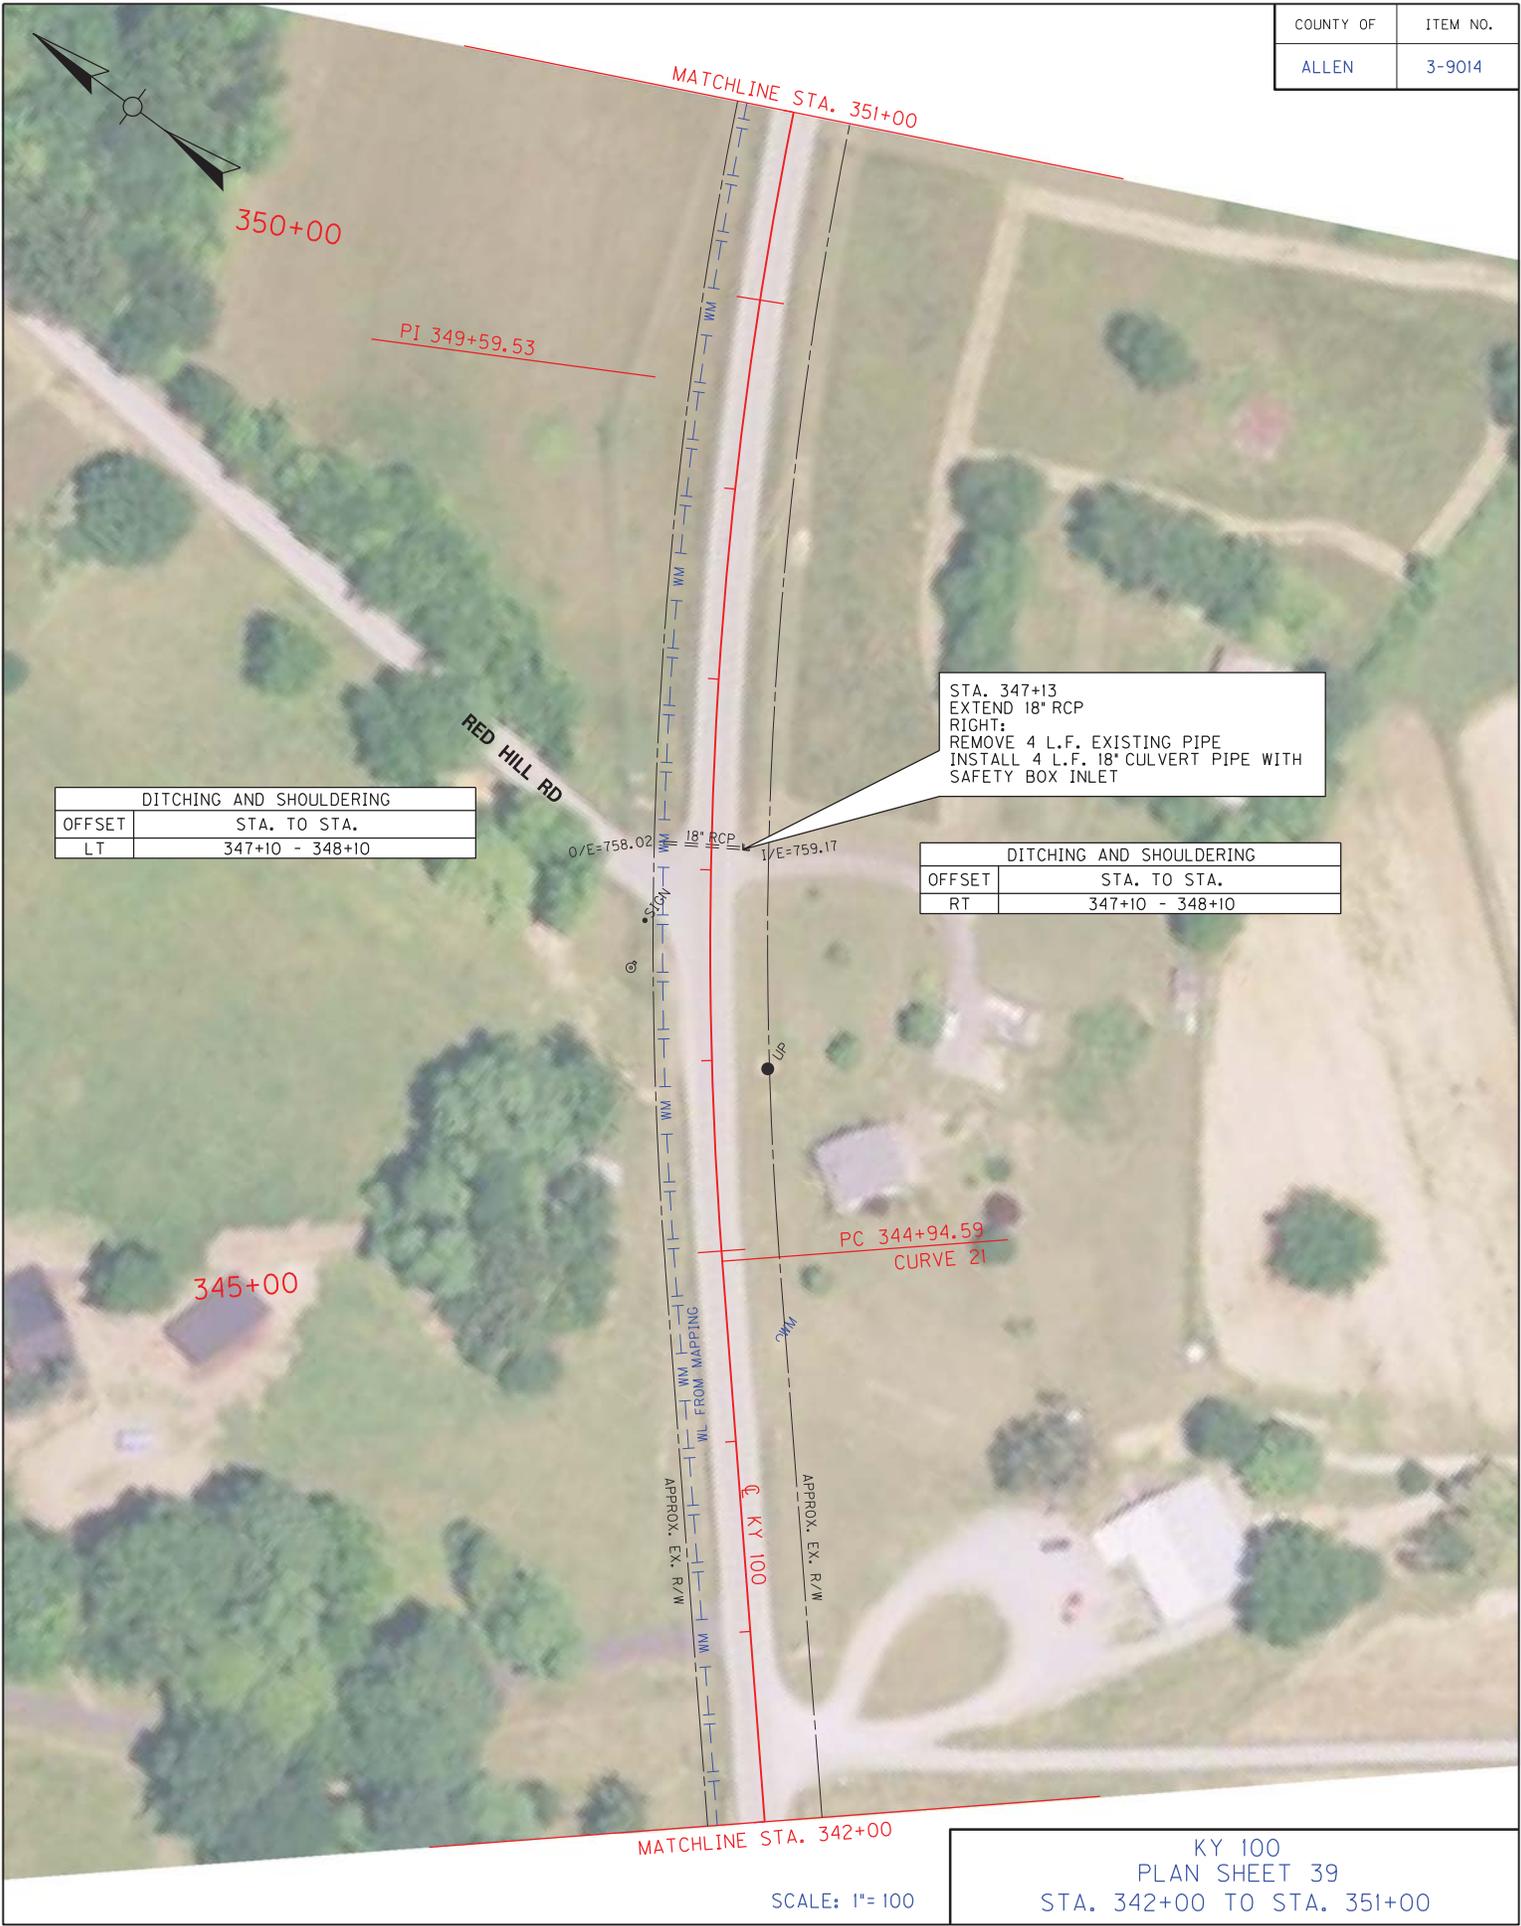

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	347+10 - 348+10


STA. 347+13
EXTEND 18" RCP
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
SAFETY BOX INLET

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	347+10 - 348+10

KY 100
PLAN SHEET 39
STA. 342+00 TO STA. 351+00

SCALE: 1"= 100

COUNTY OF	ITEM NO.
ALLEN	3-9014




MATCHLINE STA. 351+00

SCALE: 1"= 100

KY 100
 PLAN SHEET 40
 STA. 351+00 TO STA. 360+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	360+00 - 362+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	360+00 - 364+00

STA. 361+60
PR. DITCH DISTURB LIMITS

STA. 361+61
REPLACE 18" RCP
REMOVE 48 L.F. EXISTING 18" PIPE
INSTALL 44 L.F. OF 18" PIPE
LEFT:
SAFETY BOX INLET
RIGHT:
SLOPED & MITERED CONCRETE HEADWALL
CONSTRUCT DITCH

TEMPORARY FENCE	
OFFSET	STA. TO STA.
RT	361+60 - 362+35


REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
RT	361+60 - 362+35

MATCHLINE STA. 360+00

SCALE: 1" = 100

KY 100
PLAN SHEET 41
STA. 360+00 TO STA. 369+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

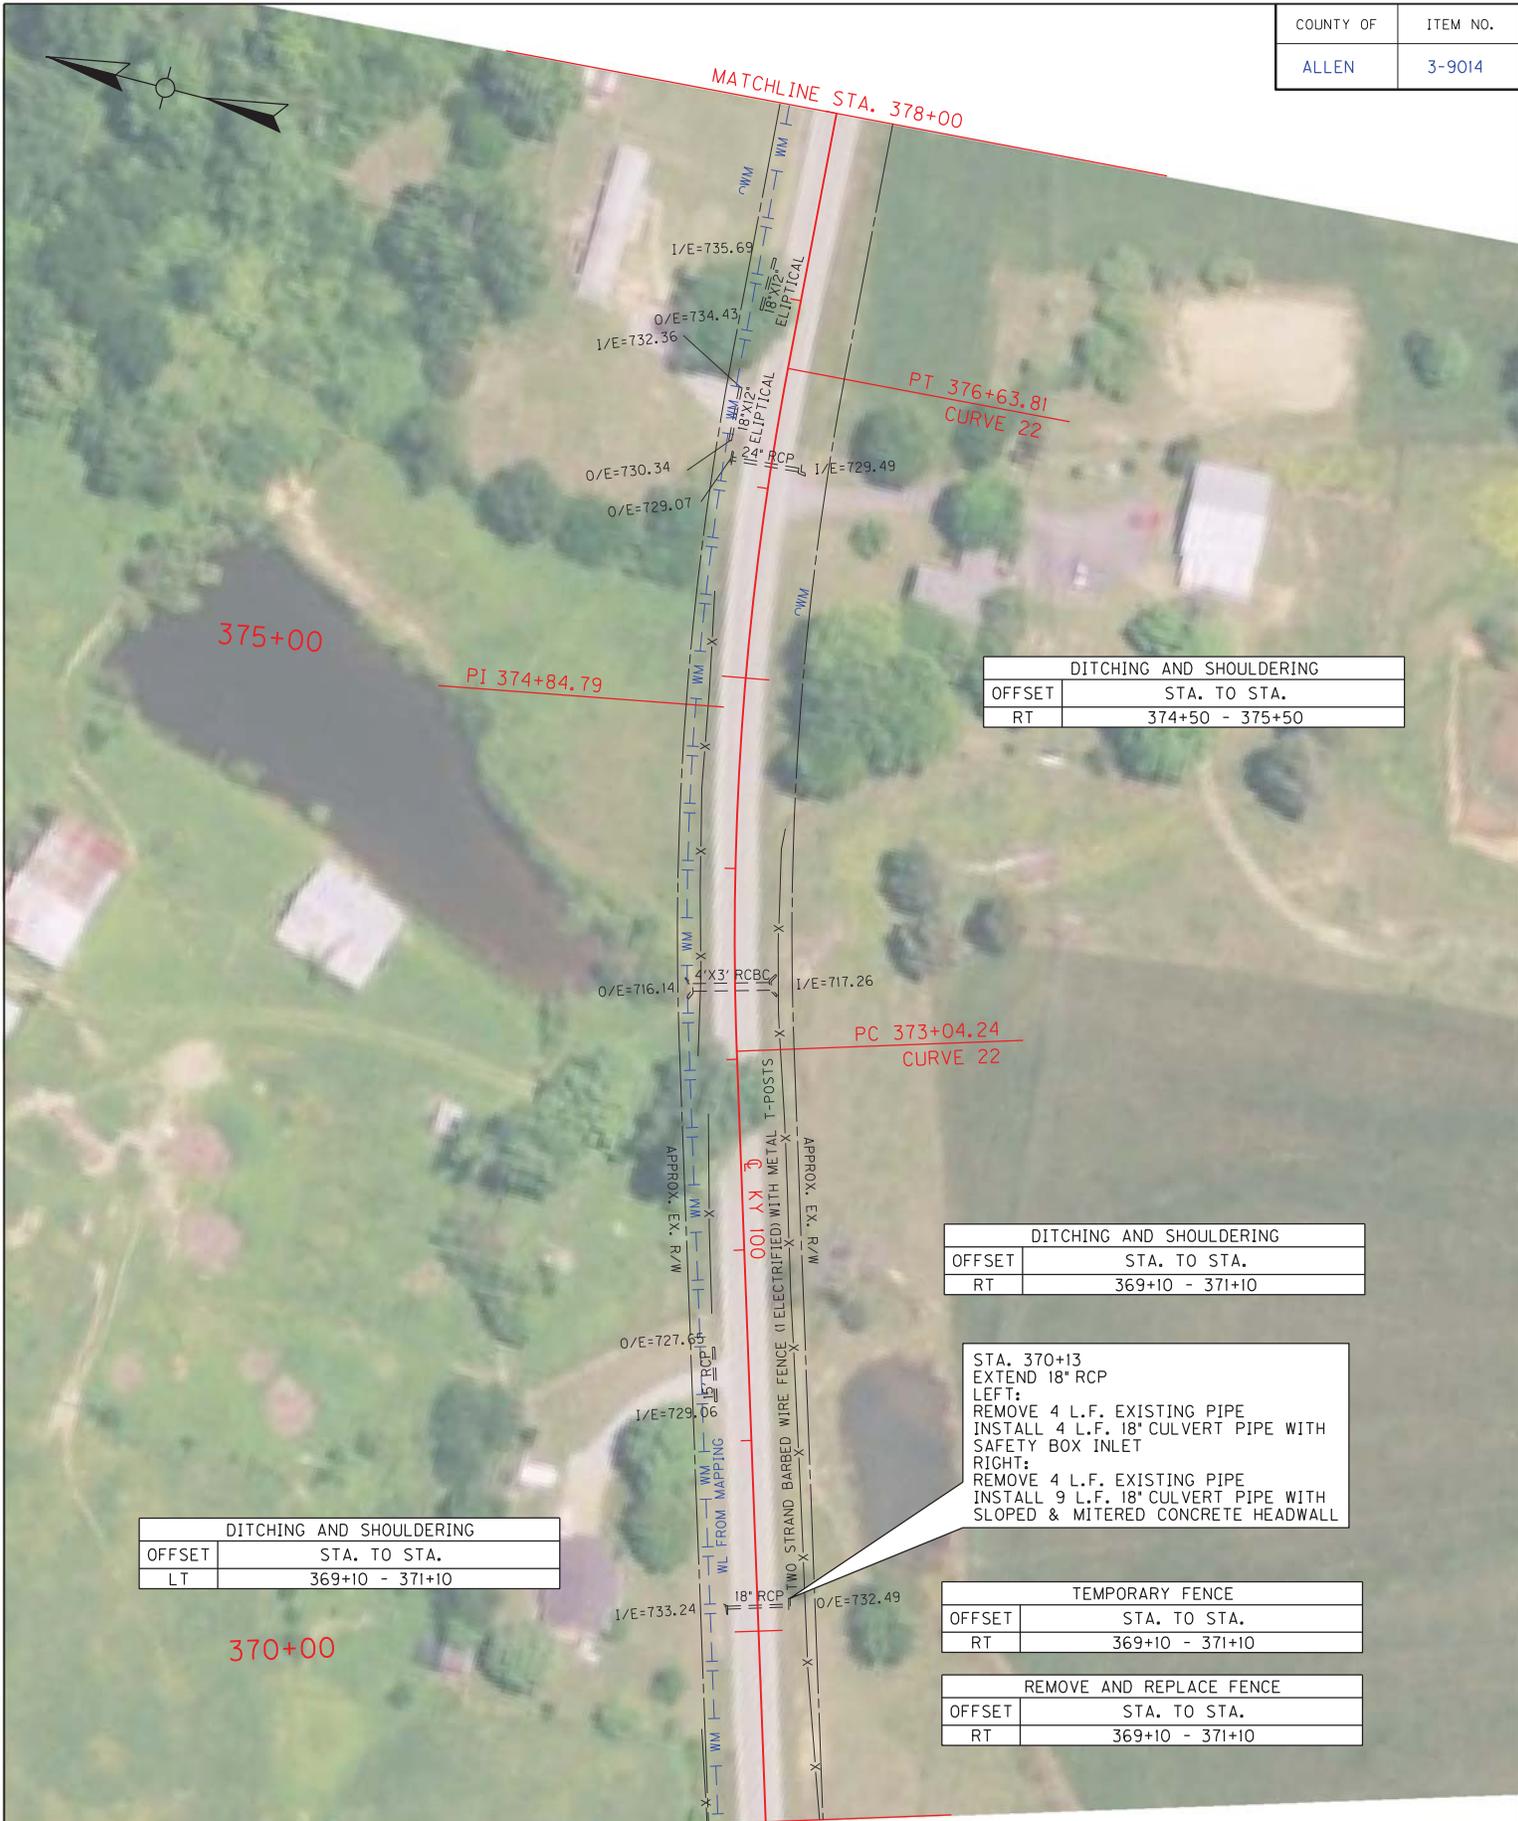

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	374+50 - 375+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	369+10 - 371+10

STA. 370+13
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
SAFETY BOX INLET
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 9 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	369+10 - 371+10

TEMPORARY FENCE	
OFFSET	STA. TO STA.
RT	369+10 - 371+10

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
RT	369+10 - 371+10

SCALE: 1" = 100'

KY 100
PLAN SHEET 42
STA. 369+00 TO STA. 378+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



MATCHLINE STA. 396+00

395+00

STA. 395+46
REPLACE HW
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
SAFETY BOX INLET

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	395+00 - 395+50

NEW MT GILEAD CHURCH RD

390+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	387+00 - 391+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	387+00 - 391+00


MATCHLINE STA. 387+00

SCALE: 1"= 100

KY 100
PLAN SHEET 44
STA. 387+00 TO STA. 396+00



COUNTY OF	ITEM NO.
ALLEN	3-9014

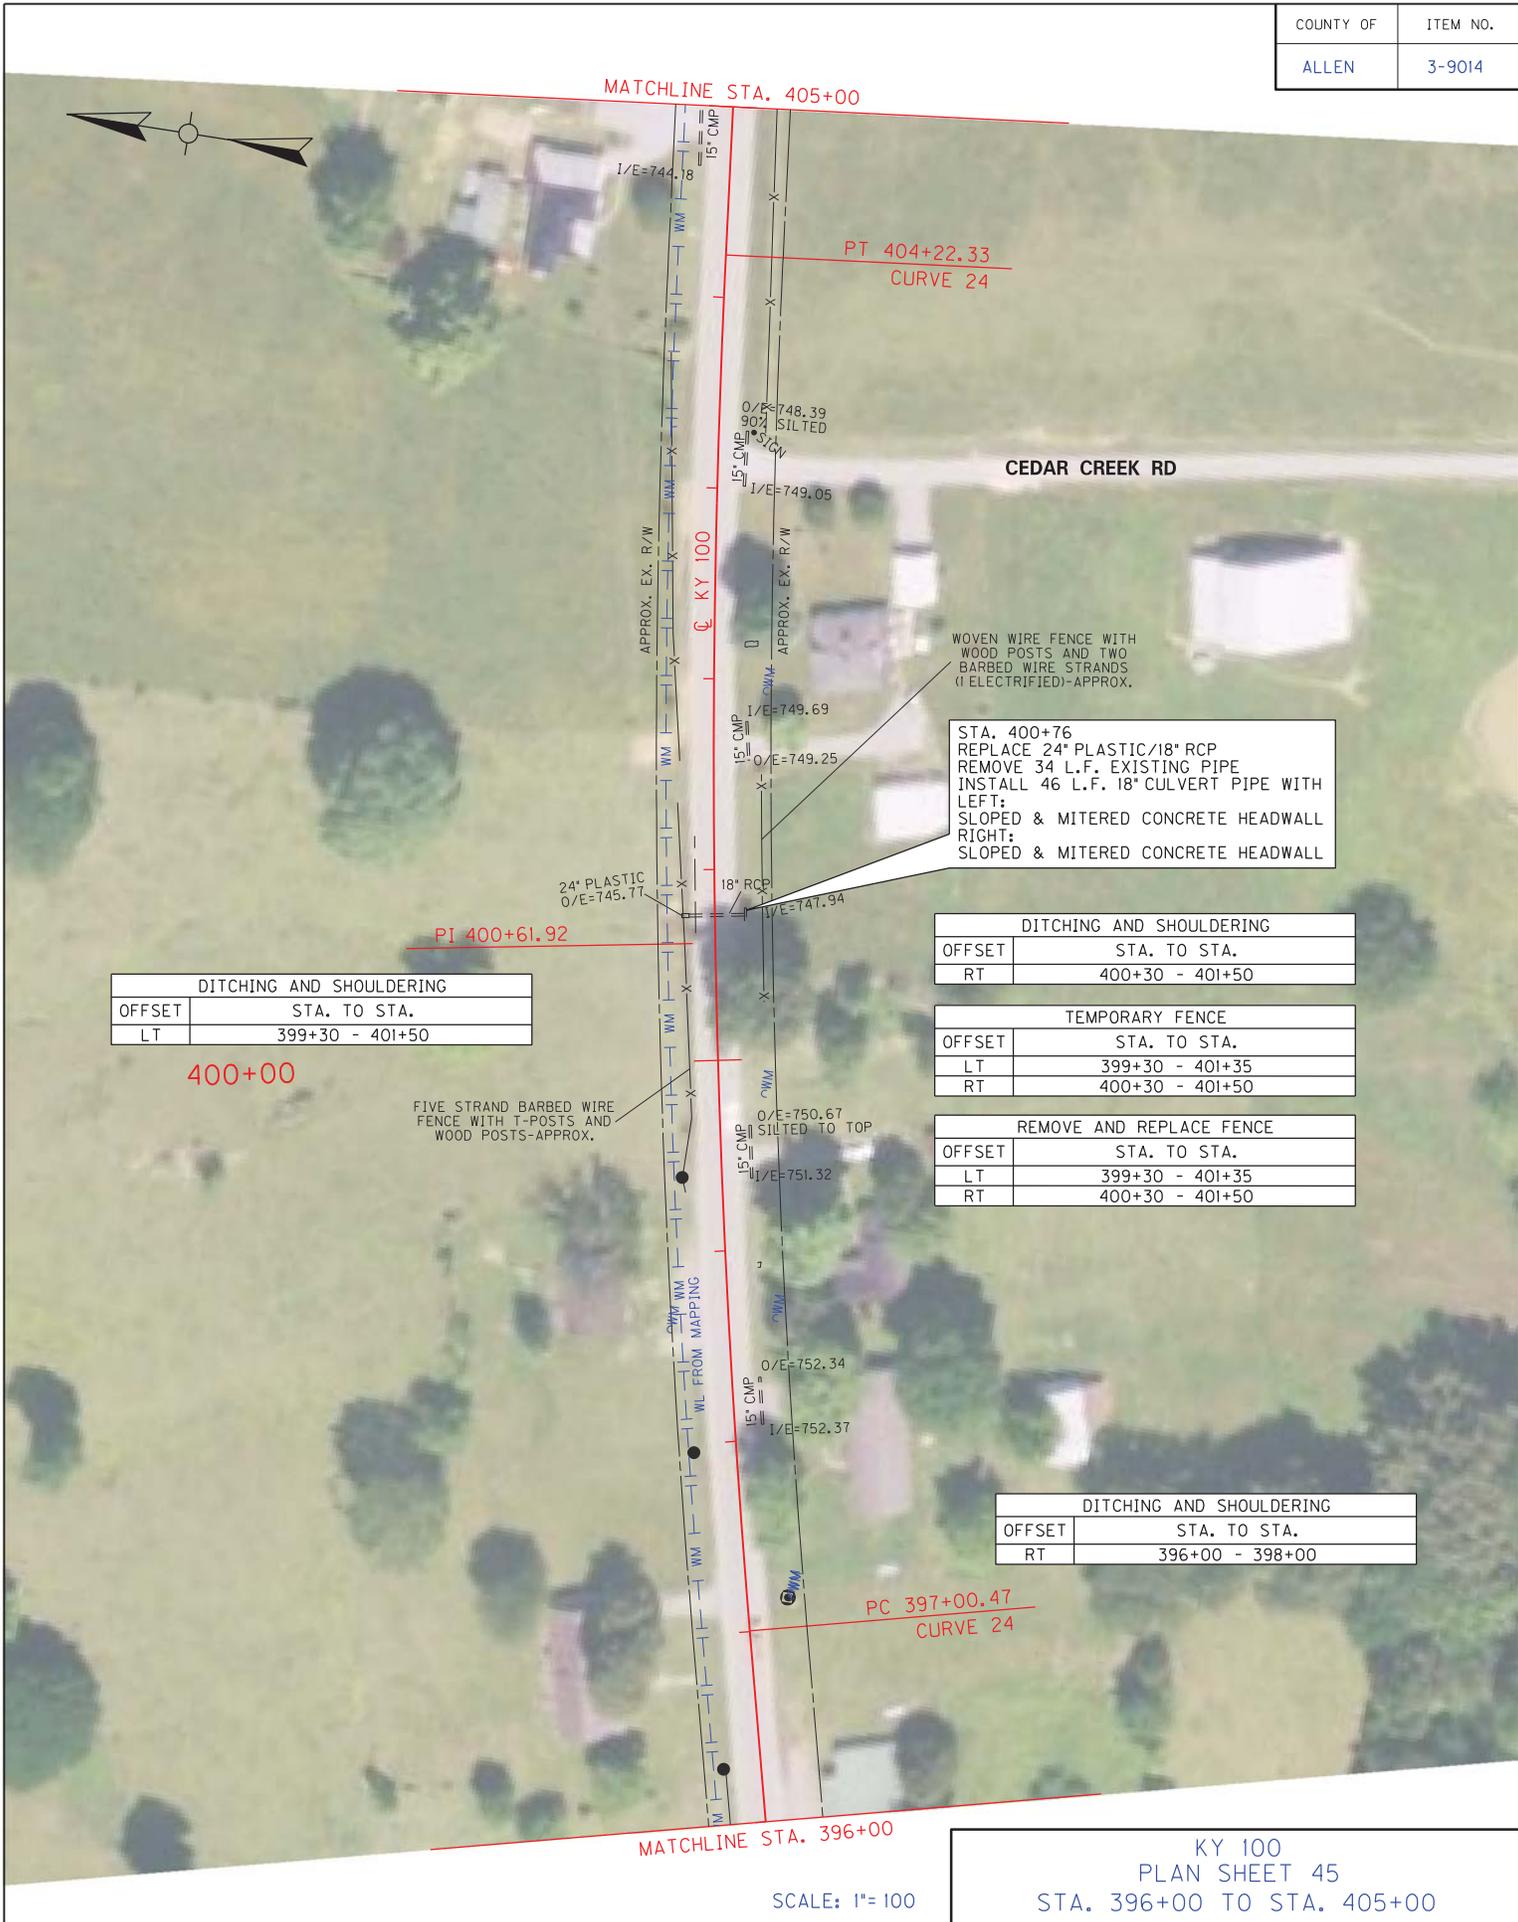

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	399+30 - 401+50

400+00

FIVE STRAND BARBED WIRE FENCE WITH T-POSTS AND WOOD POSTS-APPROX.

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	400+30 - 401+50

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	399+30 - 401+35
RT	400+30 - 401+50


REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	399+30 - 401+35
RT	400+30 - 401+50

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	396+00 - 398+00

STA. 400+76
REPLACE 24\"/>

SCALE: 1"= 100
KY 100
PLAN SHEET 45
STA. 396+00 TO STA. 405+00


COUNTY OF	ITEM NO.
ALLEN	3-9014



PROPOSED STRIPING		
OFFSET	STA. TO STA.	DESCRIPTION
RT	412+00 - 413+15	DOTTED WHITE LINE

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
29	RT (EB)	410+10	CHEVRON W/REFL. PANEL ON POST
29	RT (WB)	410+10	CHEVRON W/REFL. PANEL ON POST
30	RT (EB)	411+60	CHEVRON W/REFL. PANEL ON POST
30	RT (WB)	411+60	CHEVRON W/REFL. PANEL ON POST
31	RT (EB)	413+20	CHEVRON W/REFL. PANEL ON POST
31	RT (WB)	413+20	CHEVRON W/REFL. PANEL ON POST

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
28	RT (EB)	409+00	SIDE ROAD RIGHT

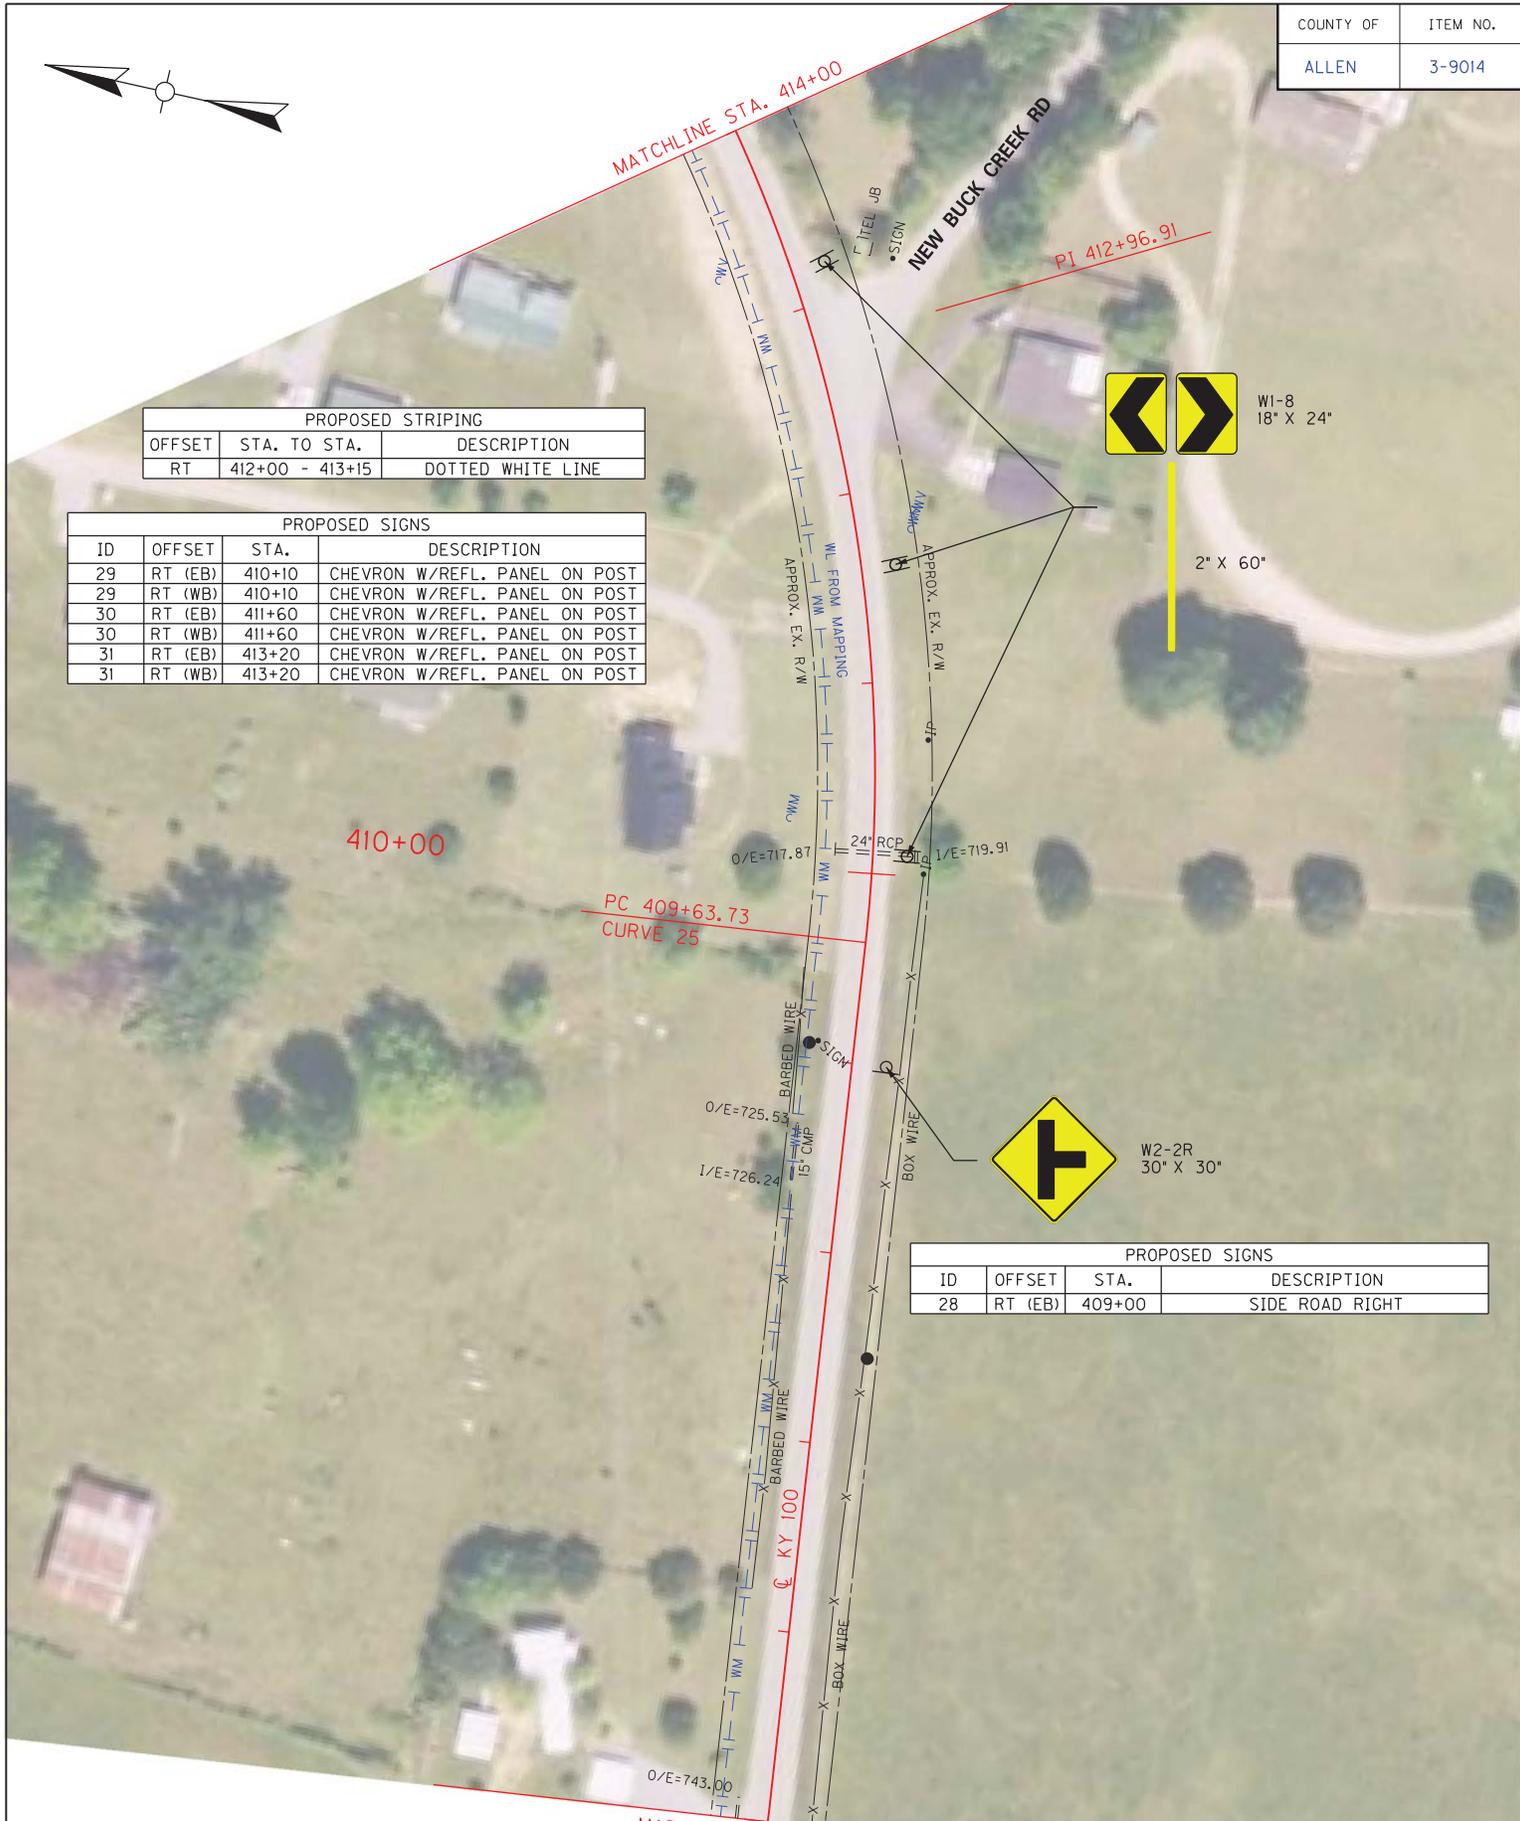


MATCHLINE STA. 405+00

SCALE: 1" = 100'

KY 100
PLAN SHEET 46
STA. 405+00 TO STA. 414+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



MATCHLINE STA. 423+00

420+00

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
33	LT (WB)	416+00	SIDE ROAD LEFT
33	LT (WB)	416+00	MILE POINT 8
33	LT (EB)	416+00	MILE POINT 8

W2-2L
30" X 30"



10" X 18"
MILE
8

PT 415+95.91
CURVE 25

415+00

CALEB CT

MATCHLINE STA. 414+00

SCALE: 1" = 100

PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
32	RT (EB)	414+80	CHEVRON W/REFL. PANEL ON POST
32	RT (WB)	414+80	CHEVRON W/REFL. PANEL ON POST



W1-8
18" X 24"

2" X 60"

KY 100
PLAN SHEET 47
STA. 414+00 TO STA. 423+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



W14-3
48"X48"X36"



PROPOSED SIGNS			
ID	OFFSET	STA.	DESCRIPTION
34	LT (EB)	428+50	NO PASSING ZONE

MATCHLINE STA. 423+00

SCALE: 1"= 100

KY 100
PLAN SHEET 48
STA. 423+00 TO STA. 432+00

COUNTY OF	ITEM NO.
ALLEN	3-9014



STA. 436+59
 EXTEND 18" RCP
 RIGHT:
 REMOVE 4 L.F. EXISTING PIPE
 INSTALL 12 L.F. 18" CULVERT PIPE WITH
 SLOPED & MITERED CONCRETE HEADWALL

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	432+00 - 437+00

SCALE: 1"= 100

KY 100
 PLAN SHEET 49
 STA. 432+00 TO STA. 441+00

COUNTY OF	ITEM NO.
ALLEN	3-9014

MATCHLINE STA. 450+00




FIVE STRAND BARBED WIRE FENCE
 WITH T-POSTS AND WOOD POSTS

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	449+80 - 450+00

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	449+80 - 450+00

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	449+80 - 450+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	449+80 - 450+00

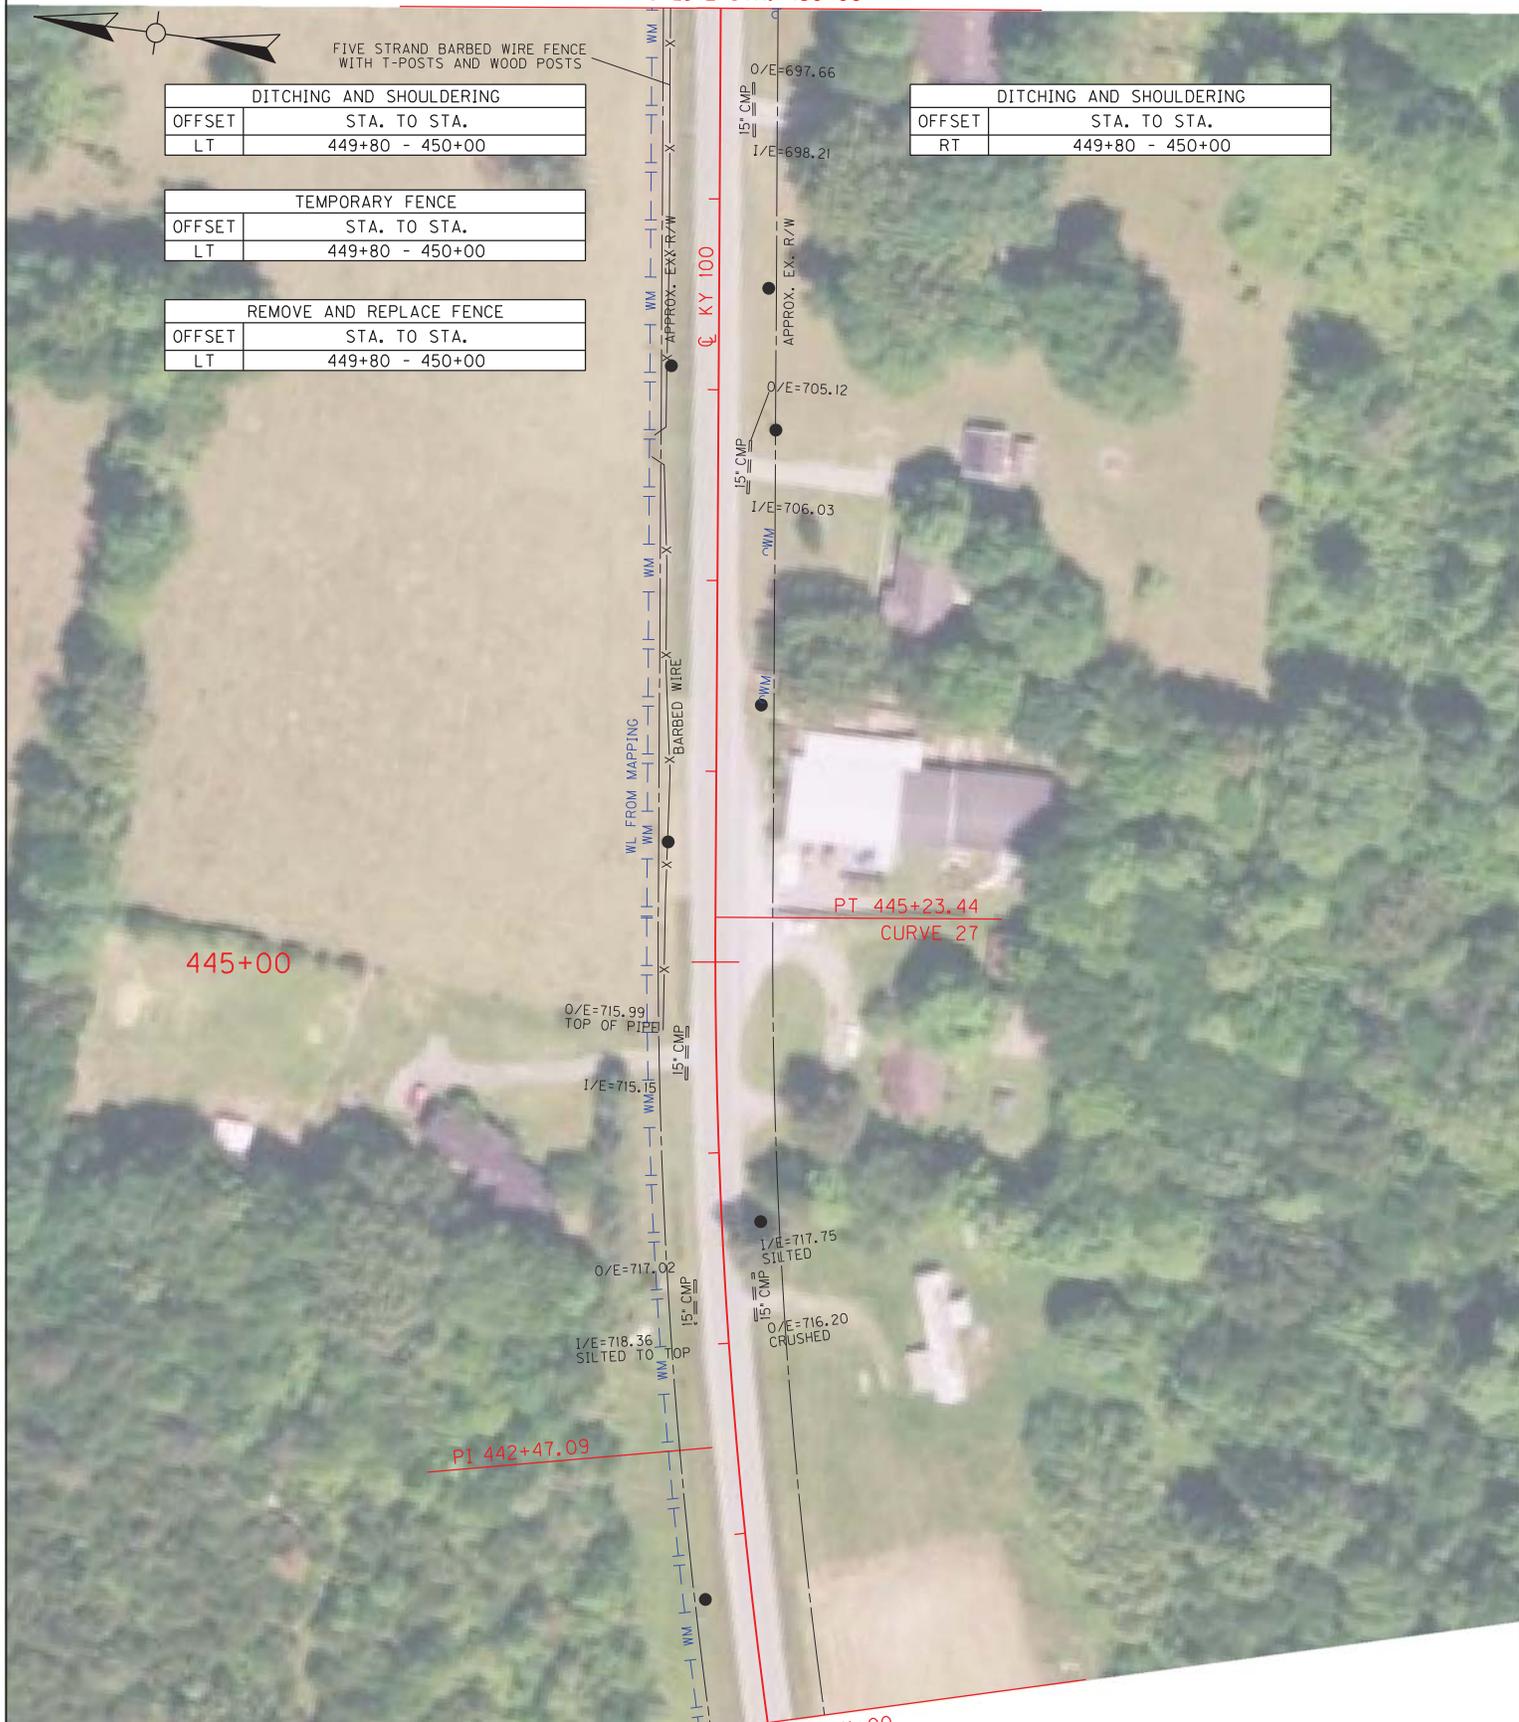


MATCHLINE STA. 441+00

KY 100
 PLAN SHEET 50
 STA. 441+00 TO STA. 450+00


SCALE: 1"= 100'

COUNTY OF	ITEM NO.
ALLEN	3-9014



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	458+50 - 459+00

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	458+50 - 459+00

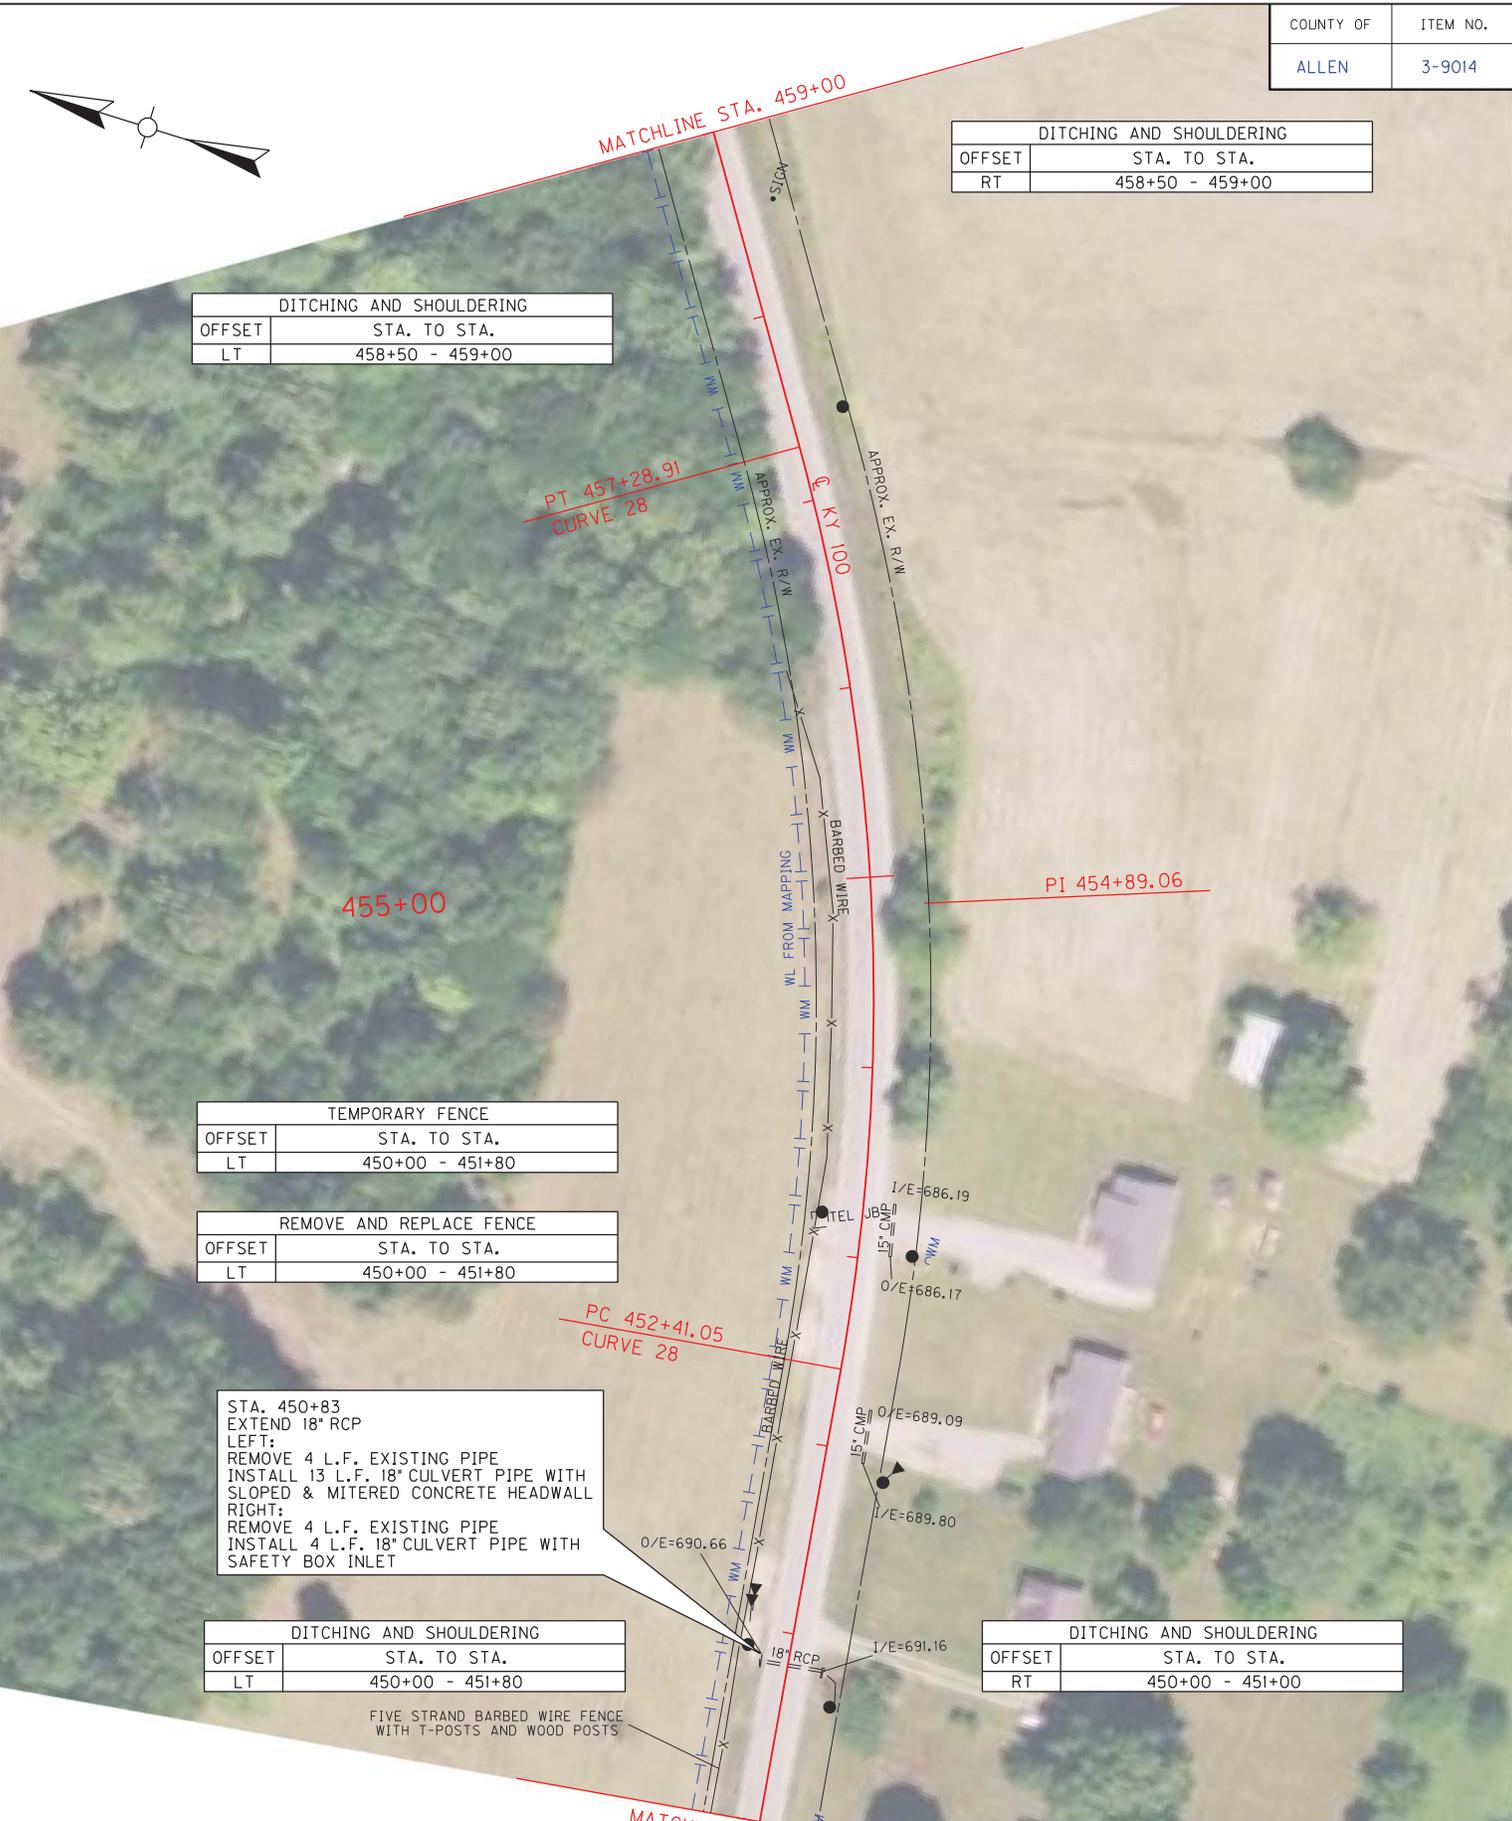

TEMPORARY FENCE	
OFFSET	STA. TO STA.
LT	450+00 - 451+80

REMOVE AND REPLACE FENCE	
OFFSET	STA. TO STA.
LT	450+00 - 451+80

STA. 450+83
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 13 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
SAFETY BOX INLET

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	450+00 - 451+80


DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	450+00 - 451+00

FIVE STRAND BARBED WIRE FENCE
WITH T-POSTS AND WOOD POSTS

KY 100
PLAN SHEET 51
STA. 450+00 TO STA. 459+00

SCALE: 1" = 100'

COUNTY OF	ITEM NO.
ALLEN	3-9014

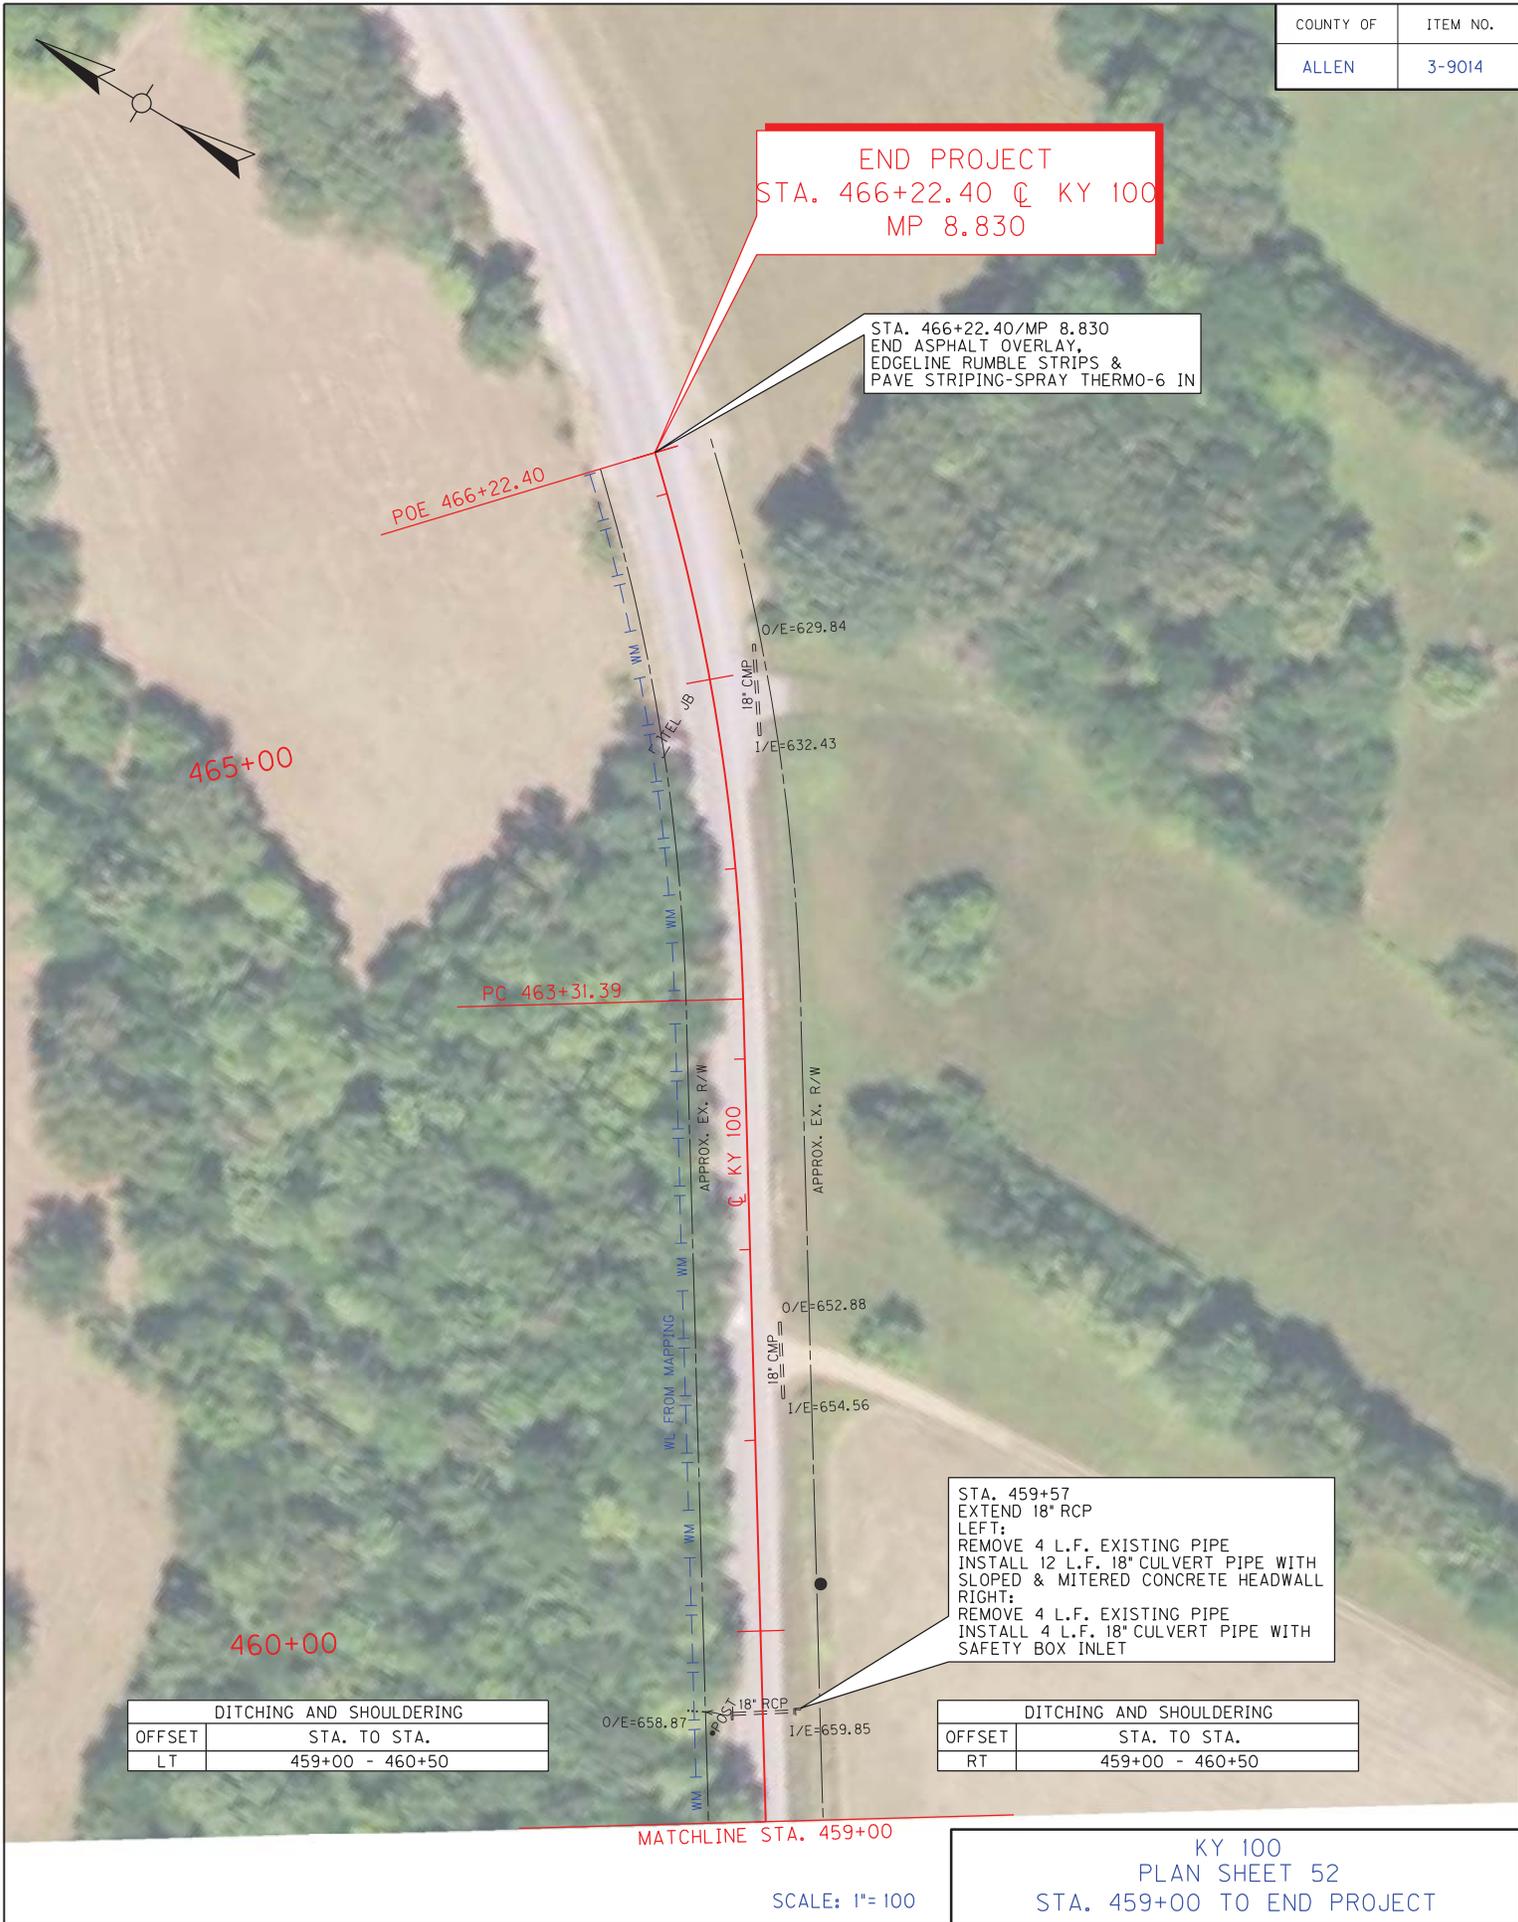

END PROJECT
STA. 466+22.40 \oslash KY 100
MP 8.830

STA. 466+22.40/MP 8.830
END ASPHALT OVERLAY,
EDGE LINE RUMBLE STRIPS &
PAVE STRIPING-SPRAY THERMO-6 IN

POE 466+22.40

465+00

PC 463+31.39

\oslash KY 100

460+00

STA. 459+57
EXTEND 18" RCP
LEFT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 12 L.F. 18" CULVERT PIPE WITH
SLOPED & MITERED CONCRETE HEADWALL
RIGHT:
REMOVE 4 L.F. EXISTING PIPE
INSTALL 4 L.F. 18" CULVERT PIPE WITH
SAFETY BOX INLET

DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	459+00 - 460+50



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
RT	459+00 - 460+50

MATCHLINE STA. 459+00

SCALE: 1"= 100

KY 100
PLAN SHEET 52
STA. 459+00 TO END PROJECT

COUNTY OF	ITEM NO.
ALLEN	3-9014

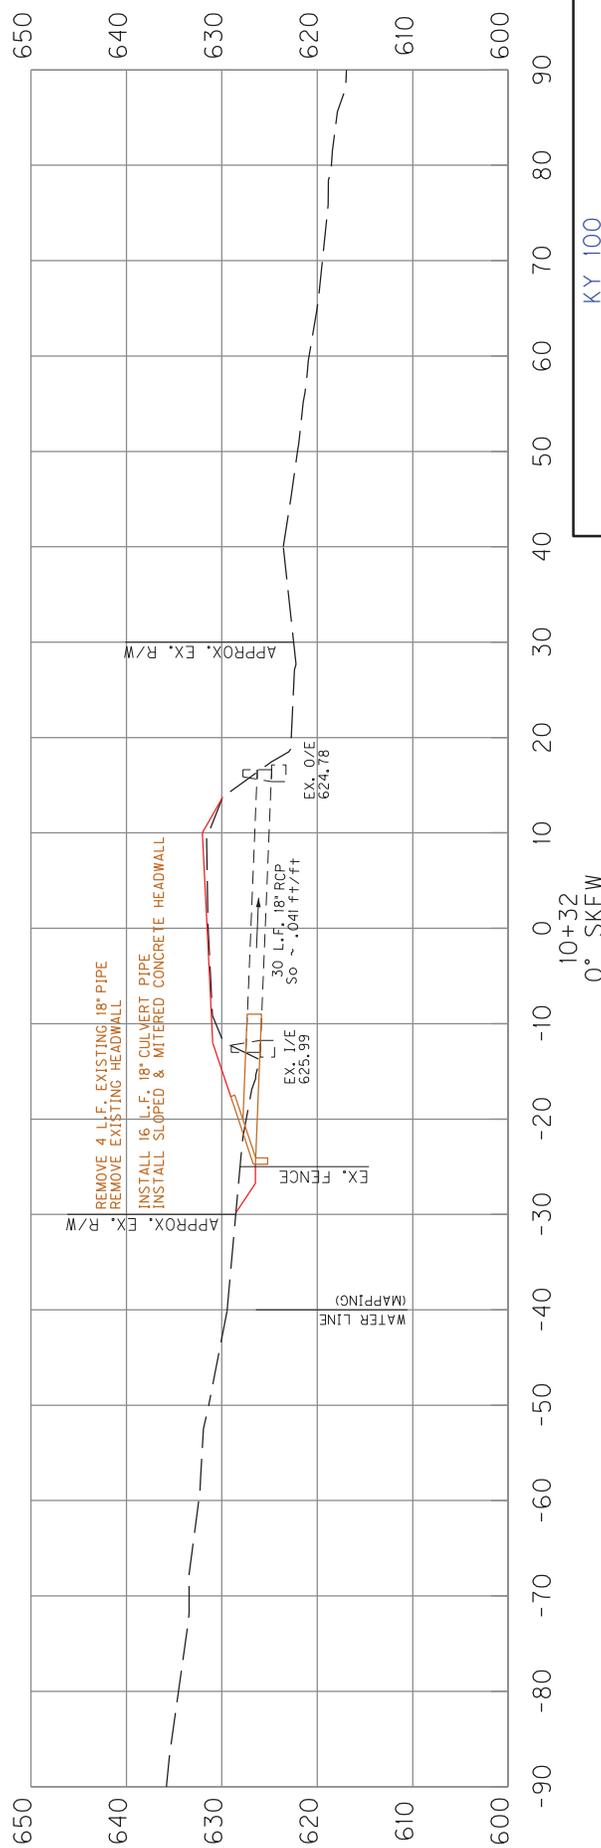
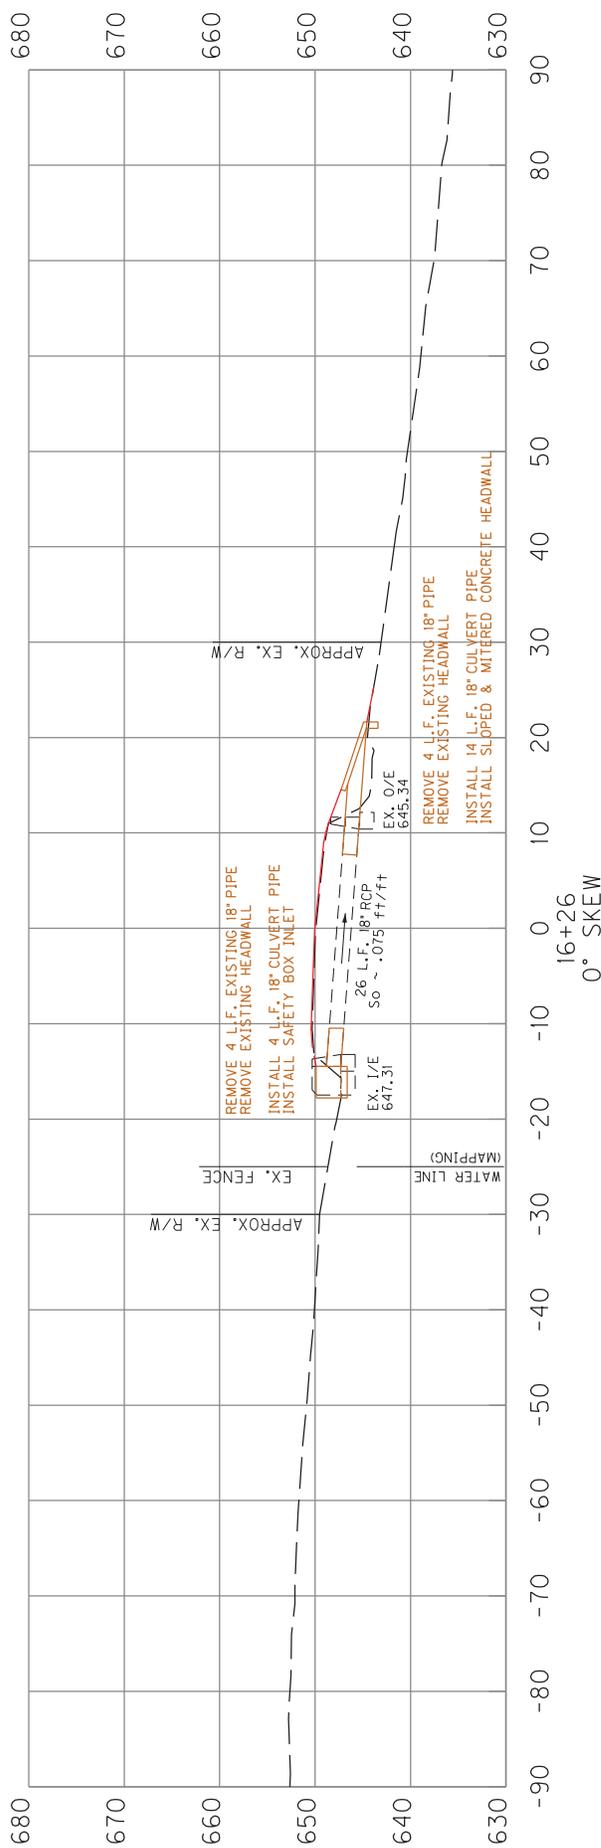


16+26
 0° SKEW

10+32
 0° SKEW



KY 100
 PIPE SECTION SHEET 1

COUNTY OF	ITEM NO.
ALLEN	3-9014

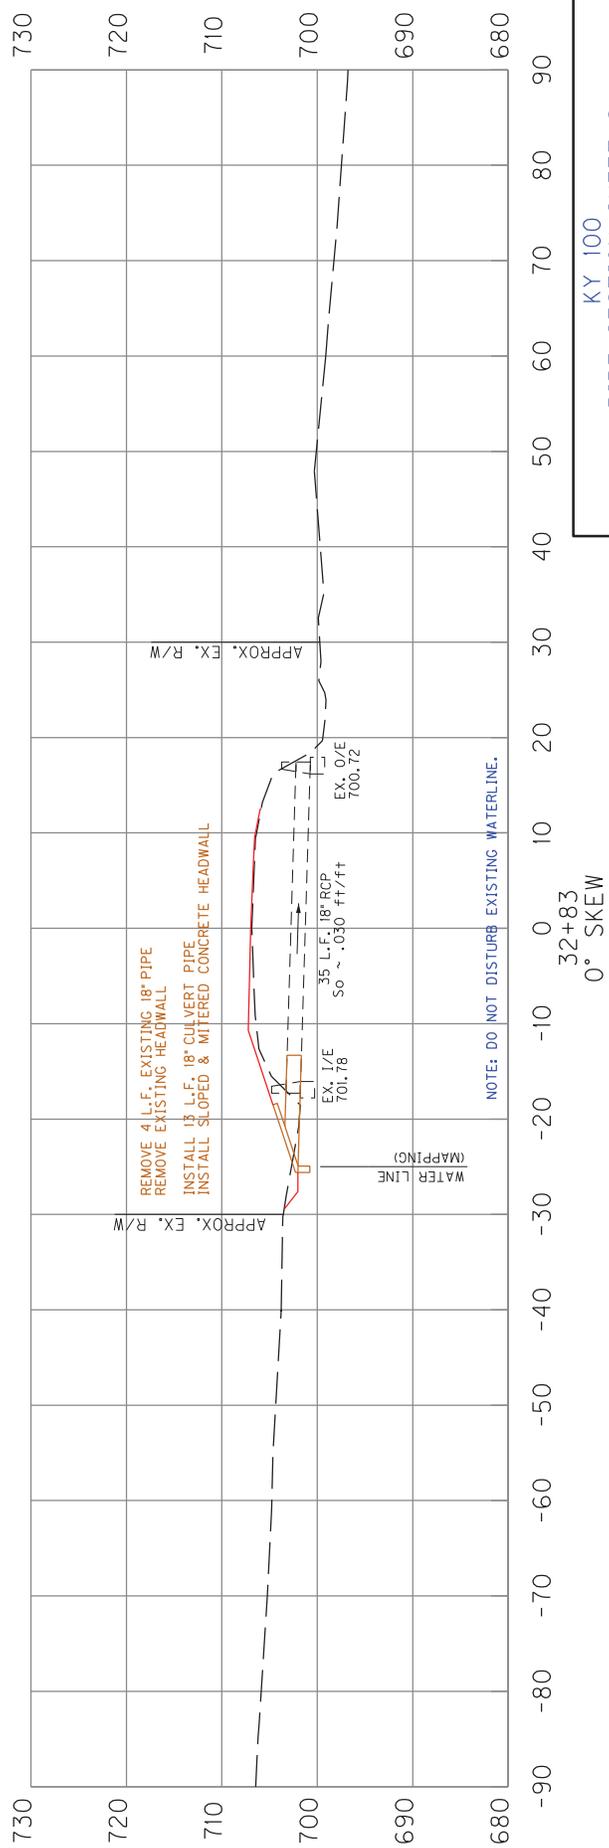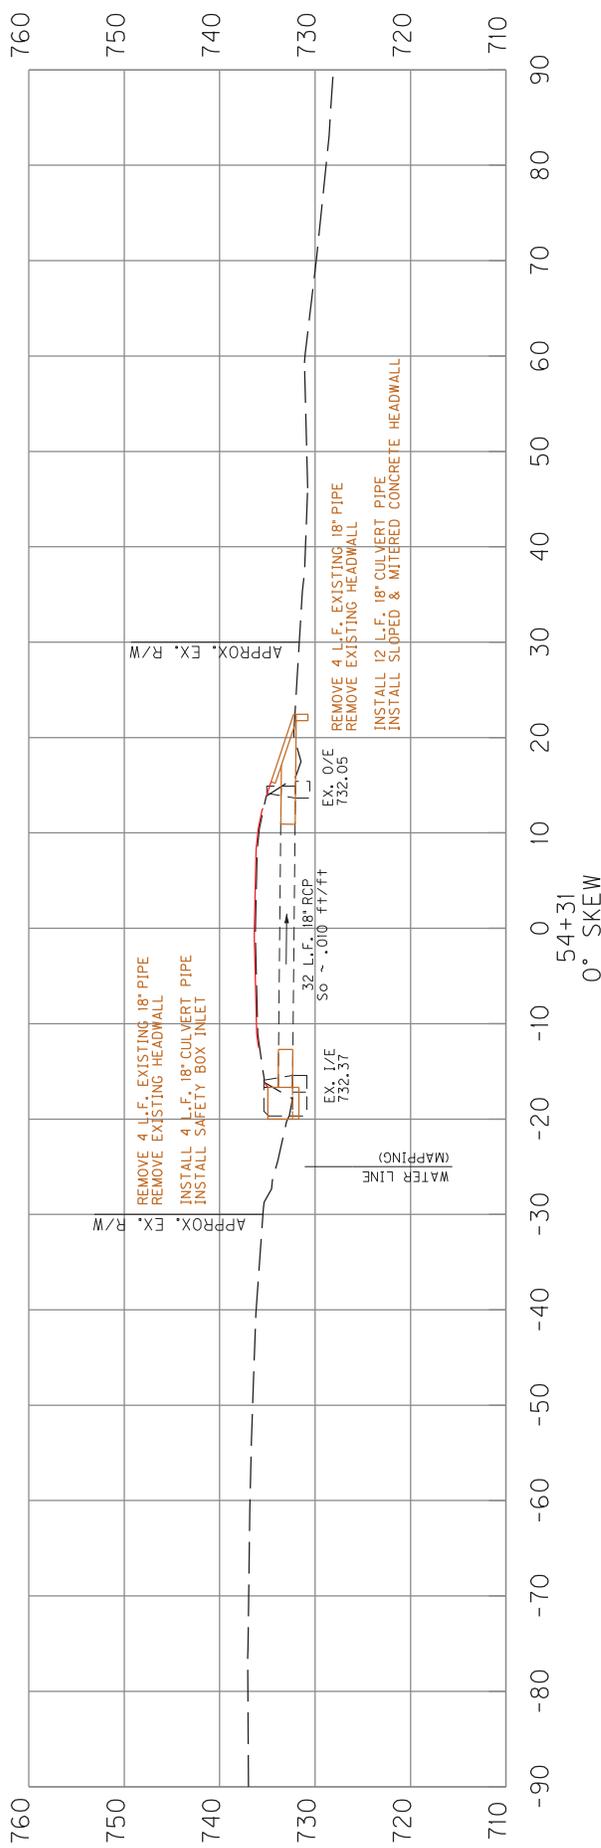



KY 100
PIPE SECTION SHEET 2

COUNTY OF	ITEM NO.
ALLEN	3-9014

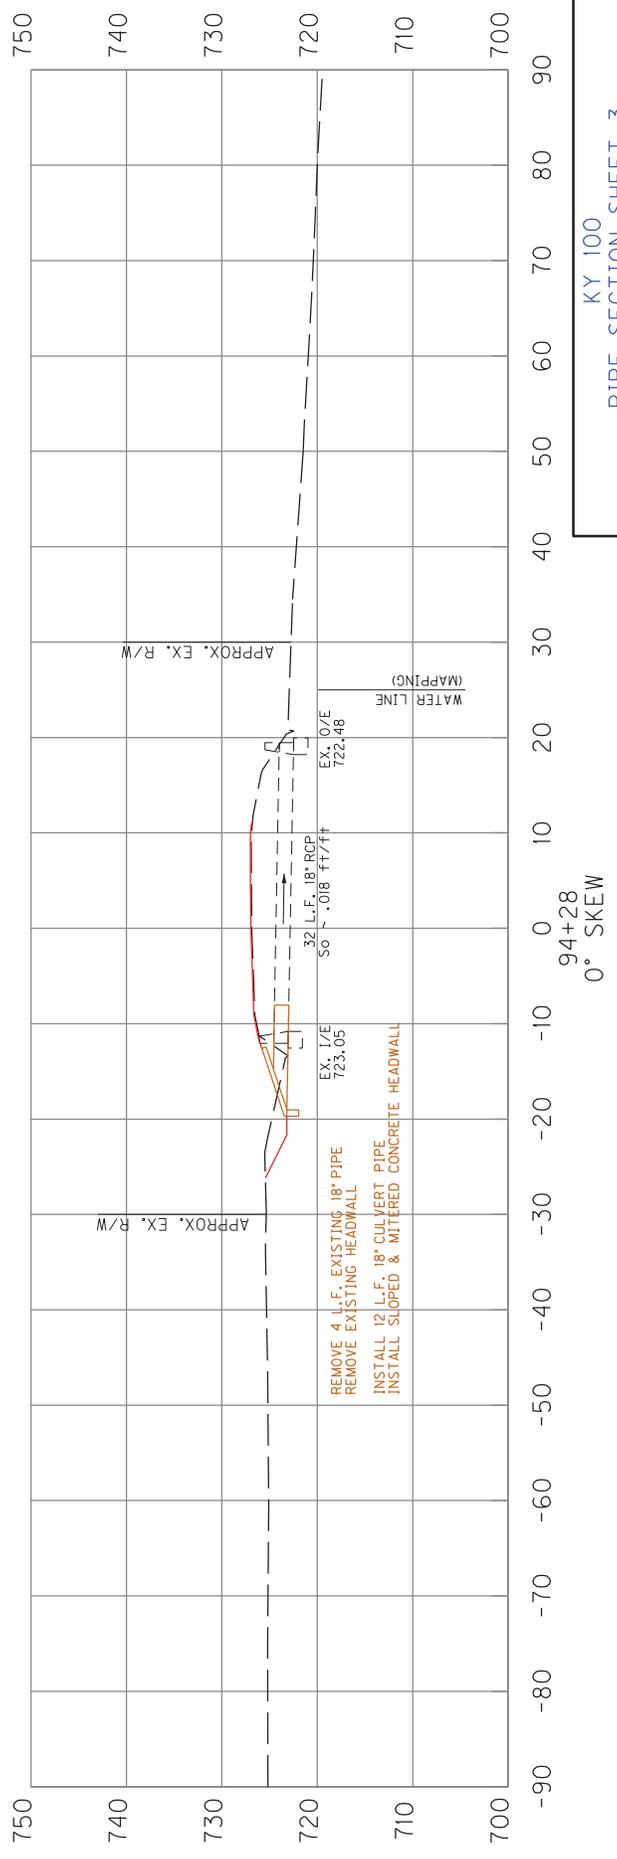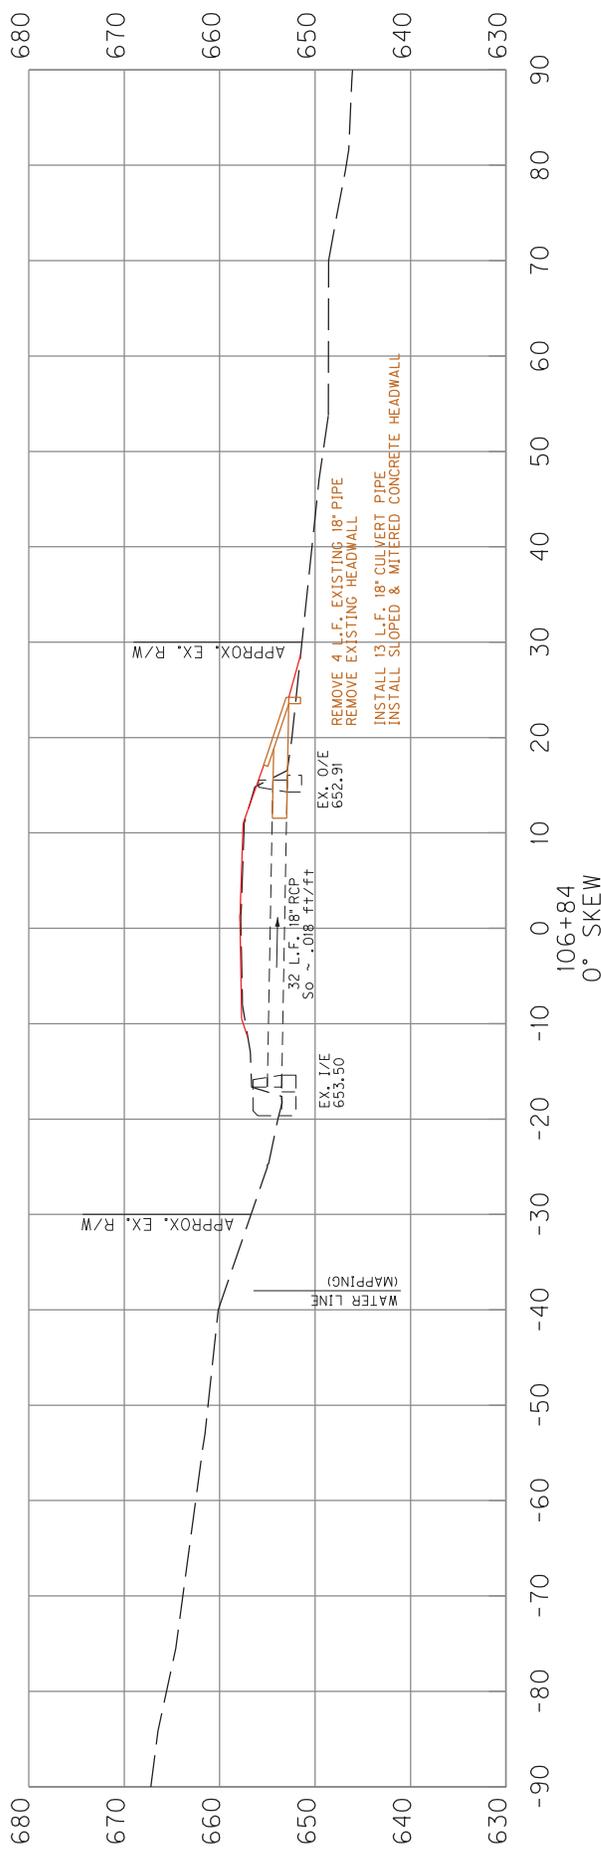



KY 100
PIPE SECTION SHEET 3

COUNTY OF	ITEM NO.
ALLEN	3-9014

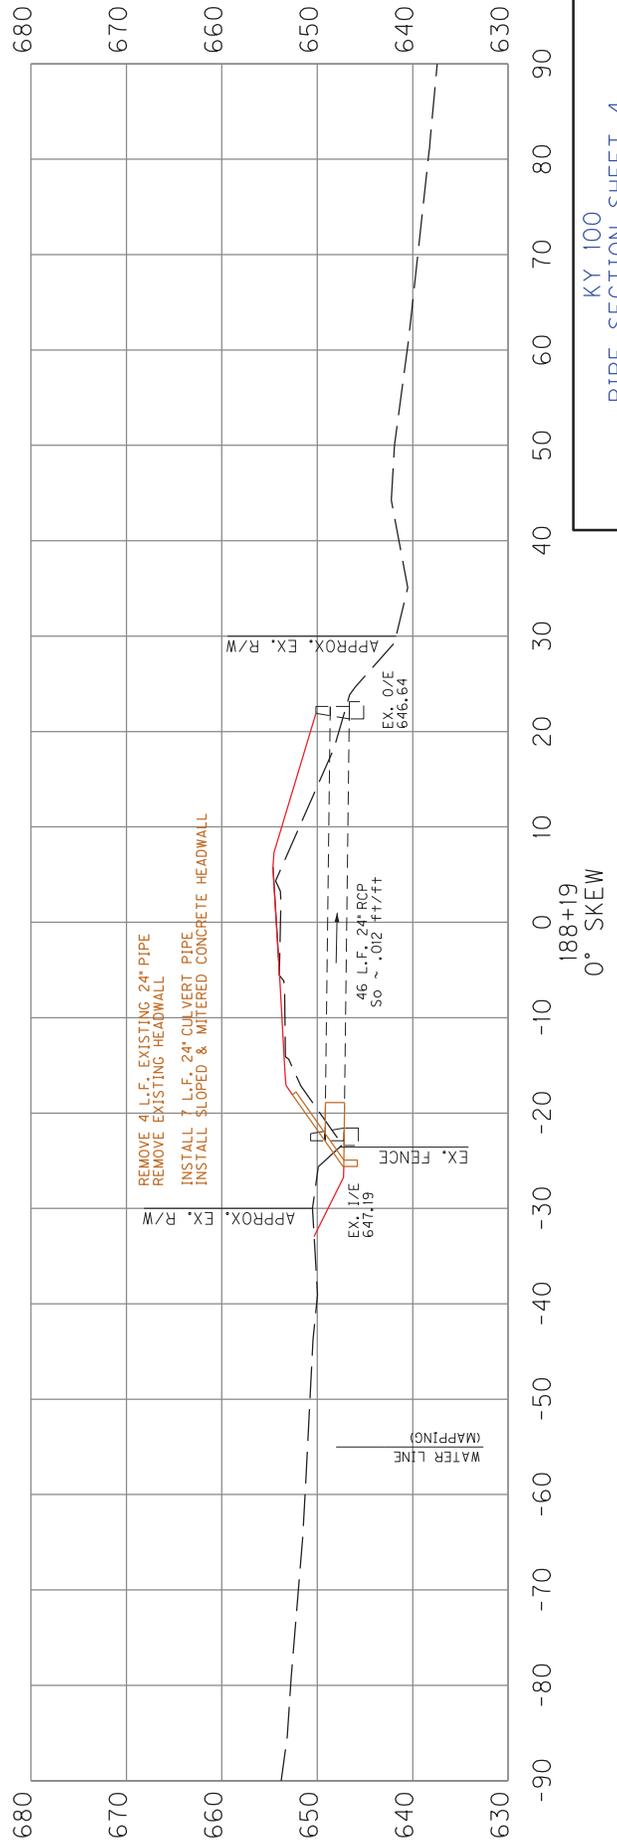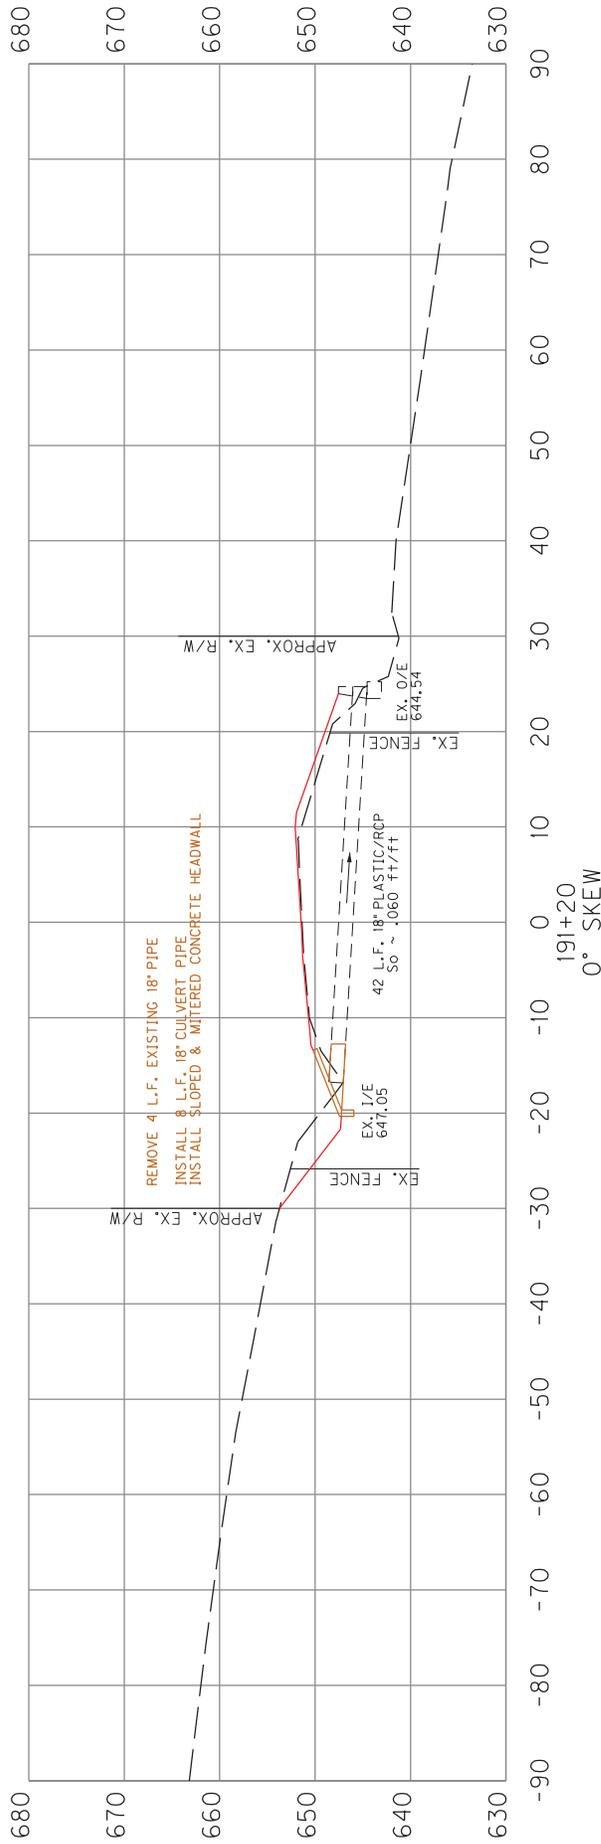



KY 100
 PIPE SECTION SHEET 4

COUNTY OF	ITEM NO.
ALLEN	3-9014

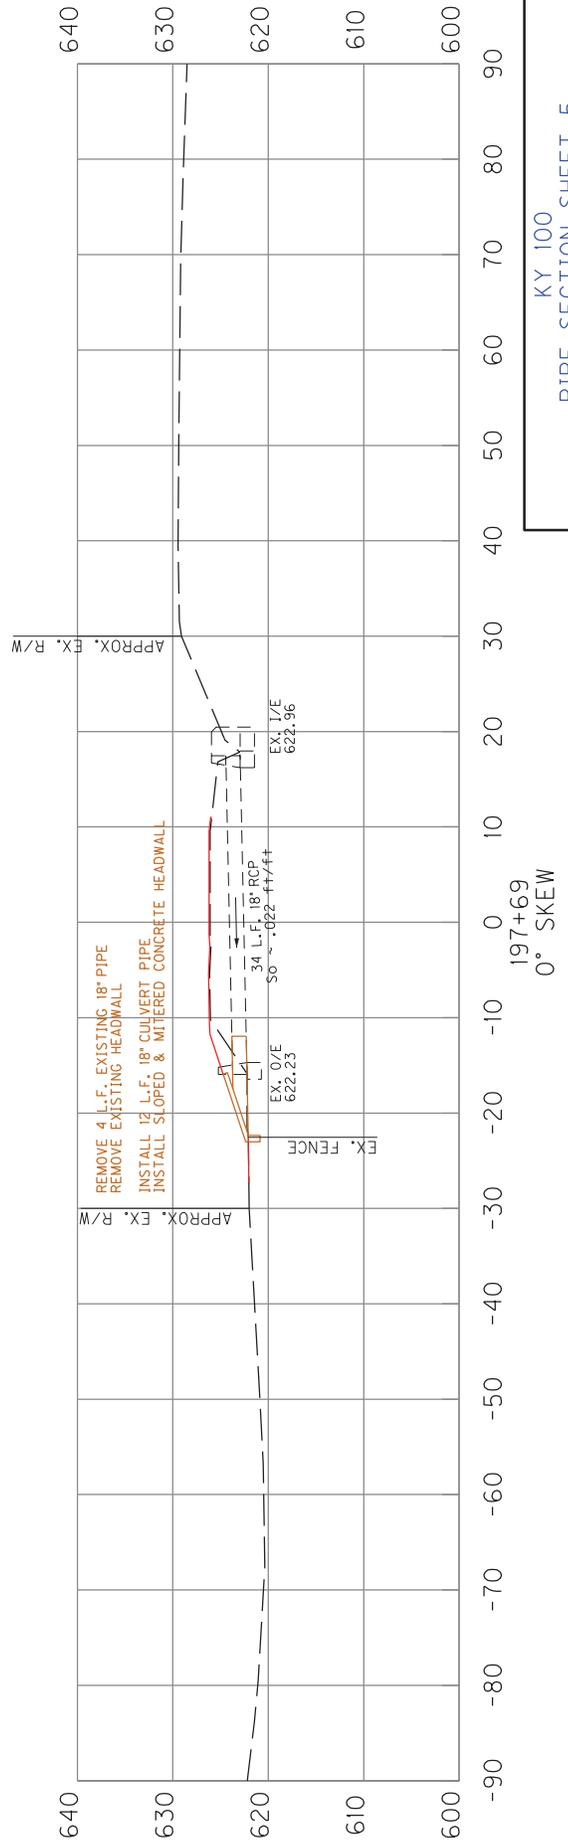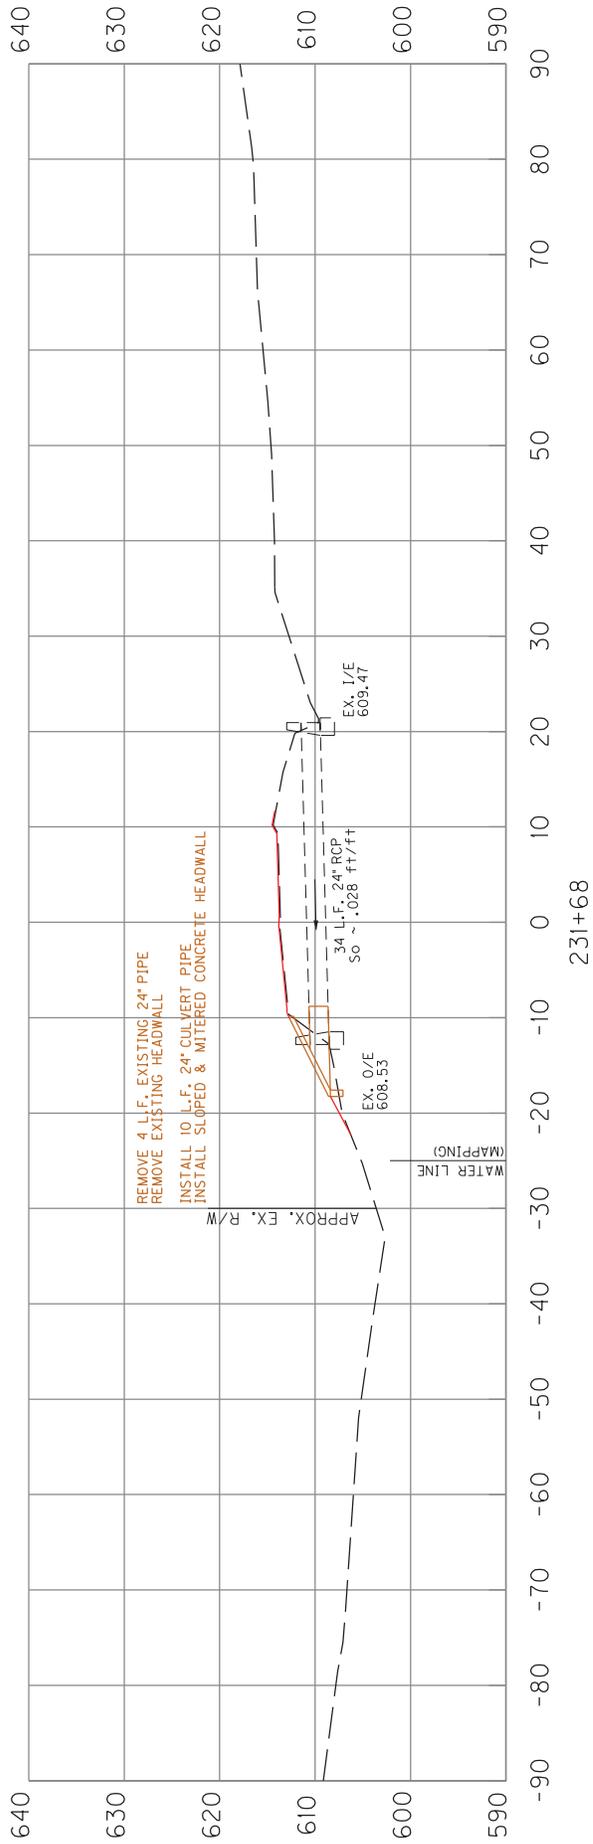



KY 100
 PIPE SECTION SHEET 5

COUNTY OF	ITEM NO.
ALLEN	3-9014

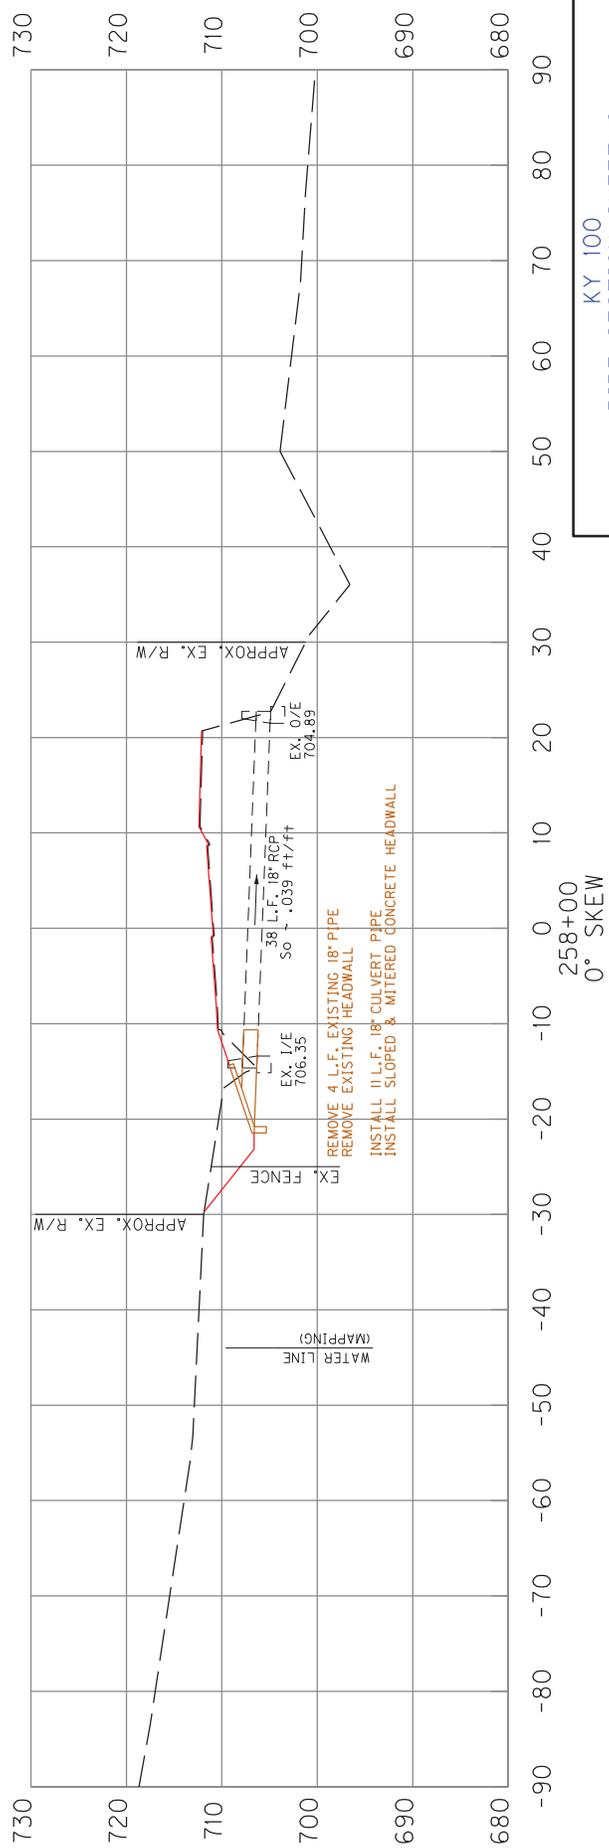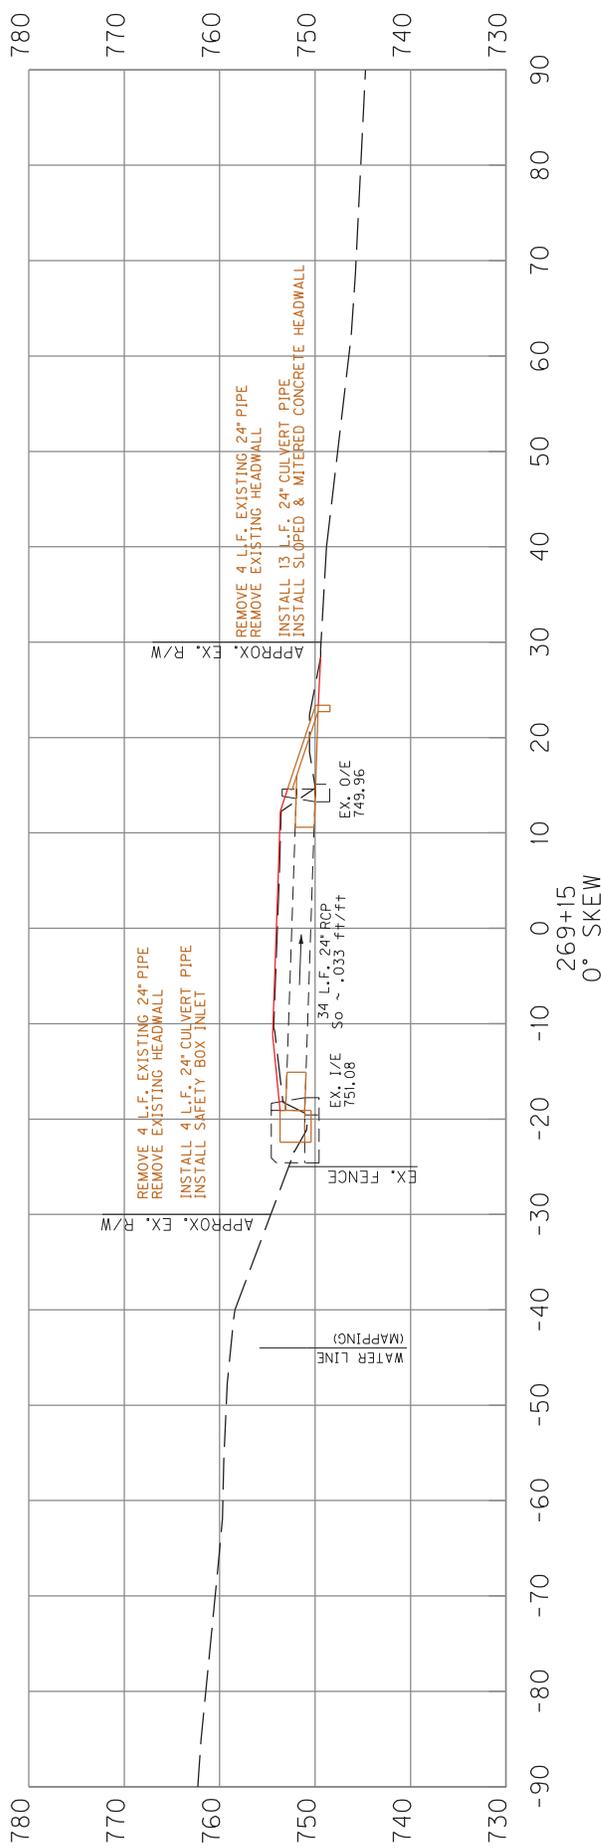



KY 100
 PIPE SECTION SHEET 6

COUNTY OF	ITEM NO.
ALLEN	3-9014

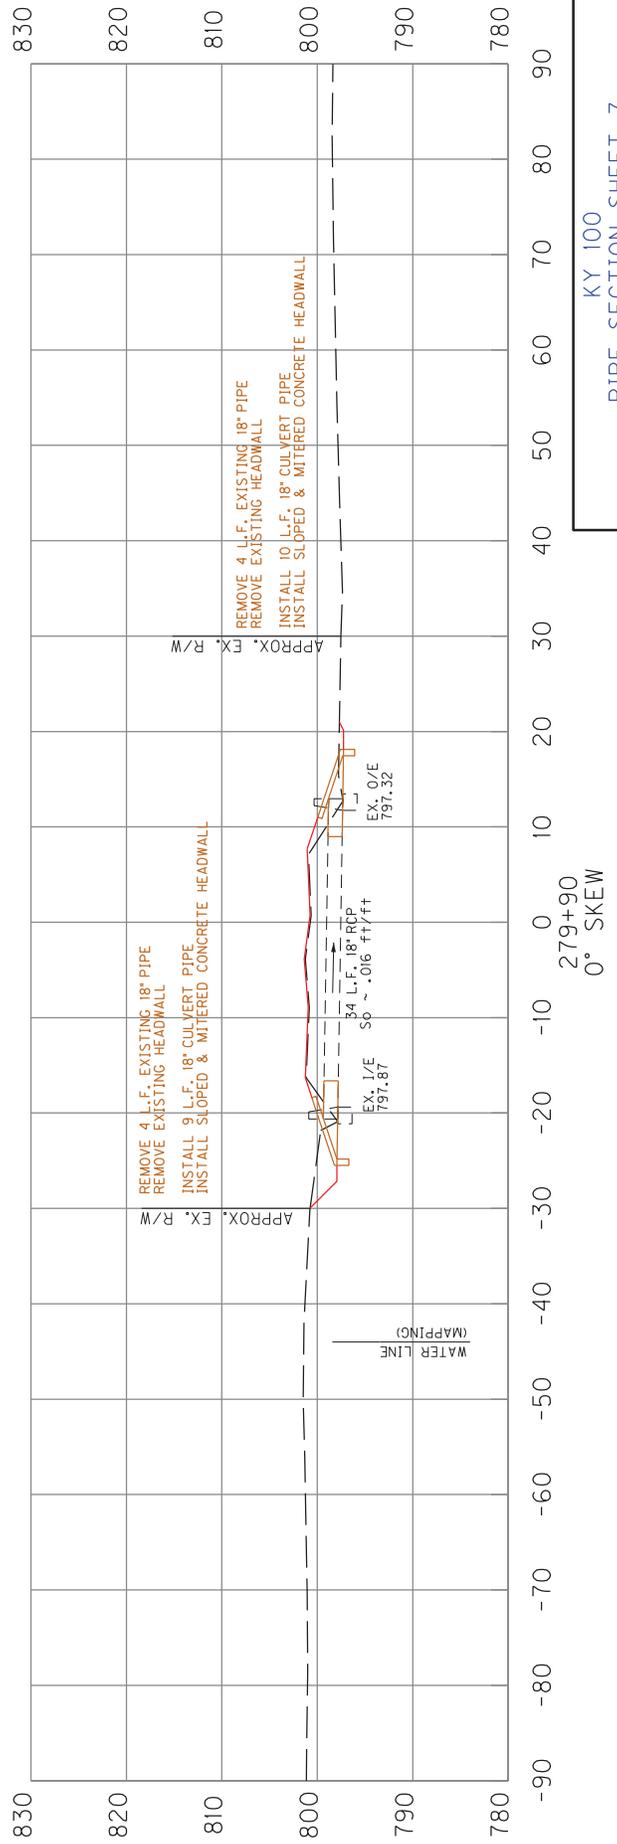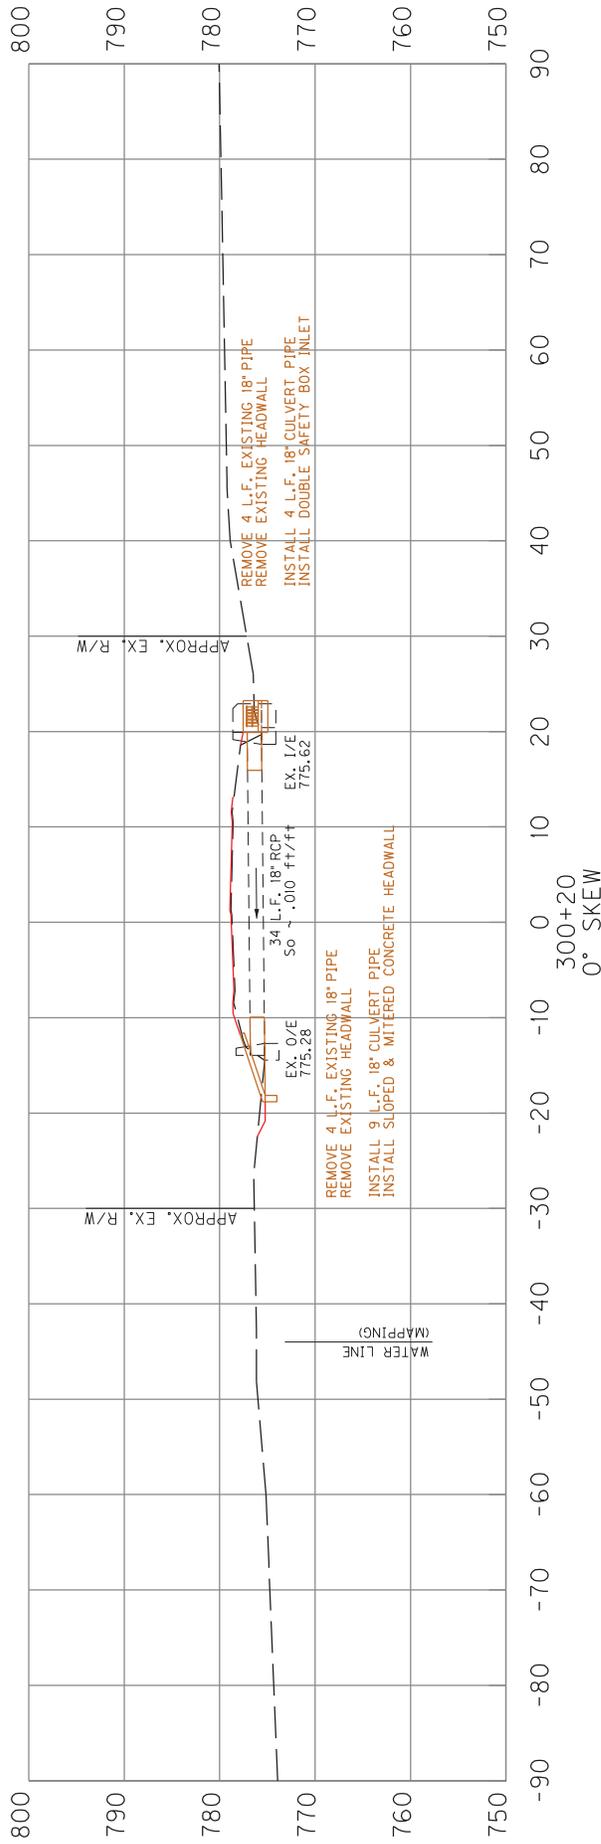



KY 100
PIPE SECTION SHEET 7

COUNTY OF	ITEM NO.
ALLEN	3-9014

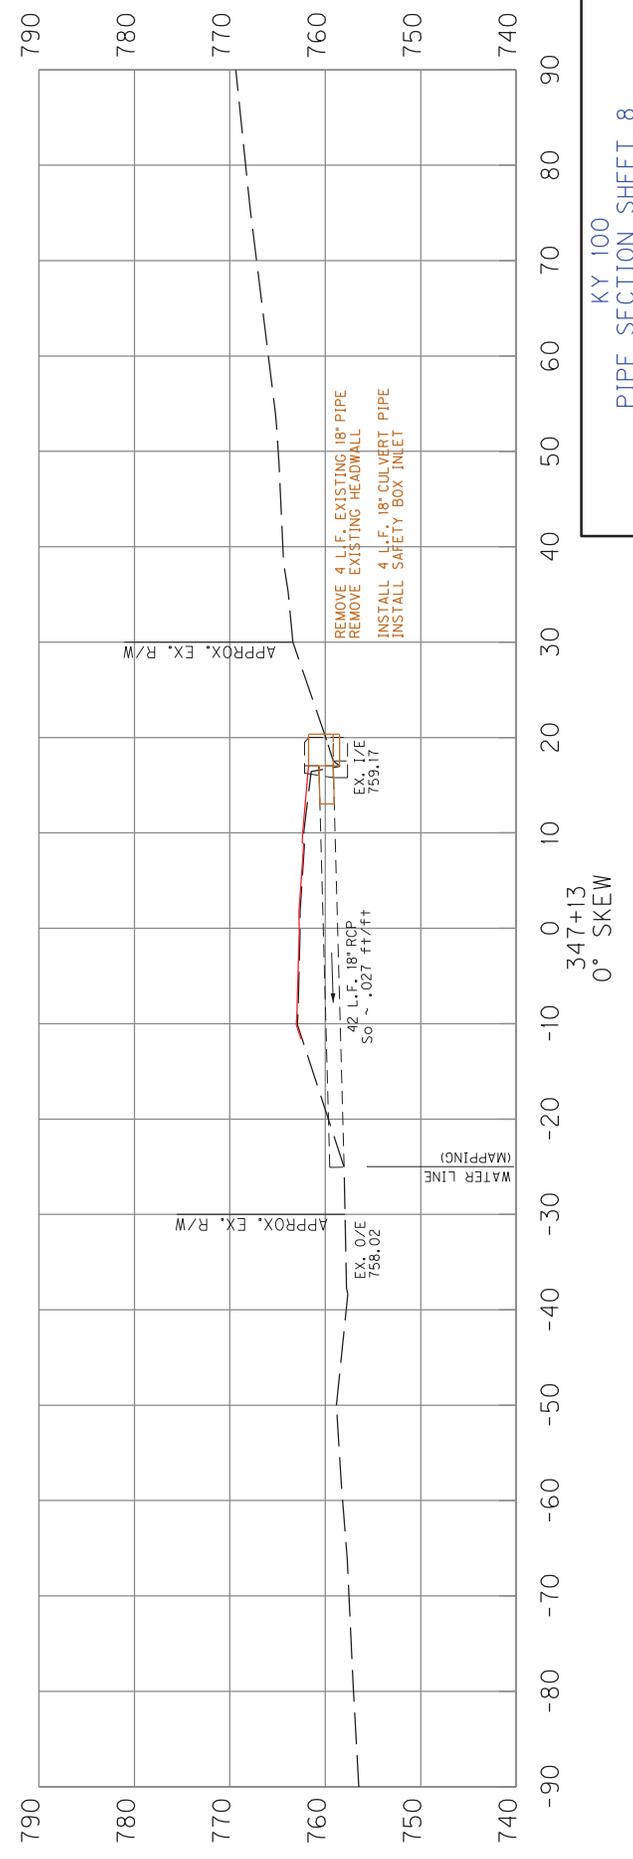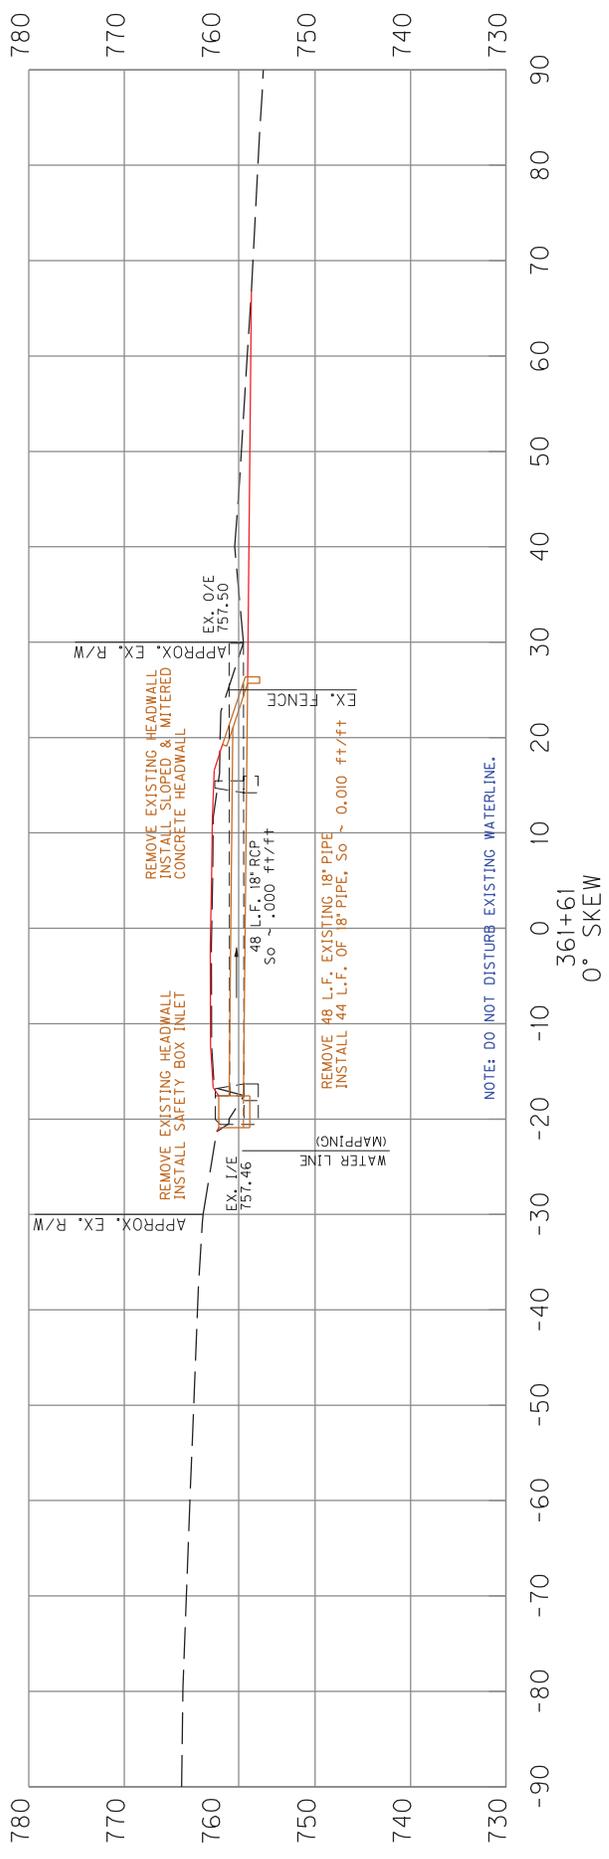



KY 100
 PIPE SECTION SHEET 8

COUNTY OF	ITEM NO.
ALLEN	3-9014

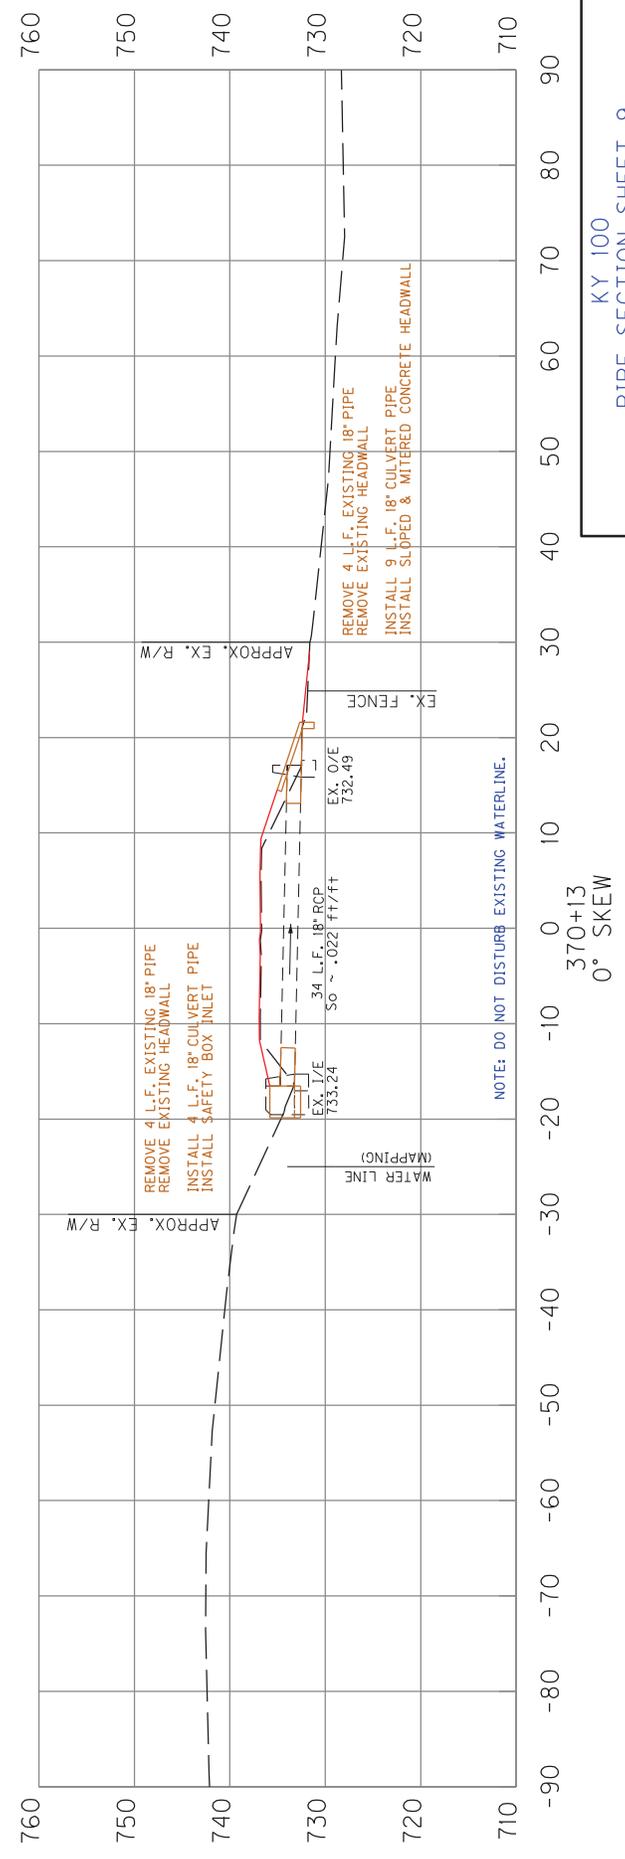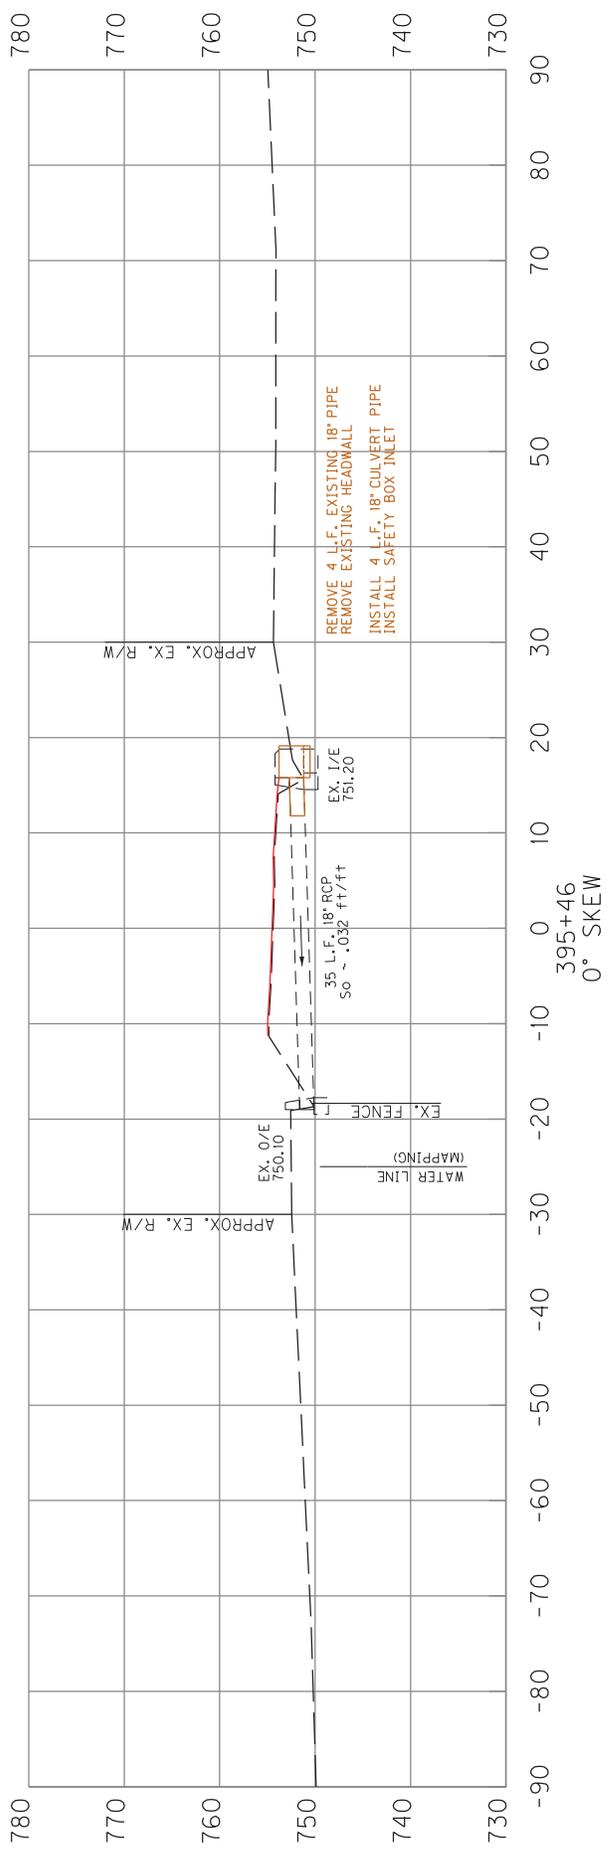



KY 100
PIPE SECTION SHEET 9

COUNTY OF	ITEM NO.
ALLEN	3-9014

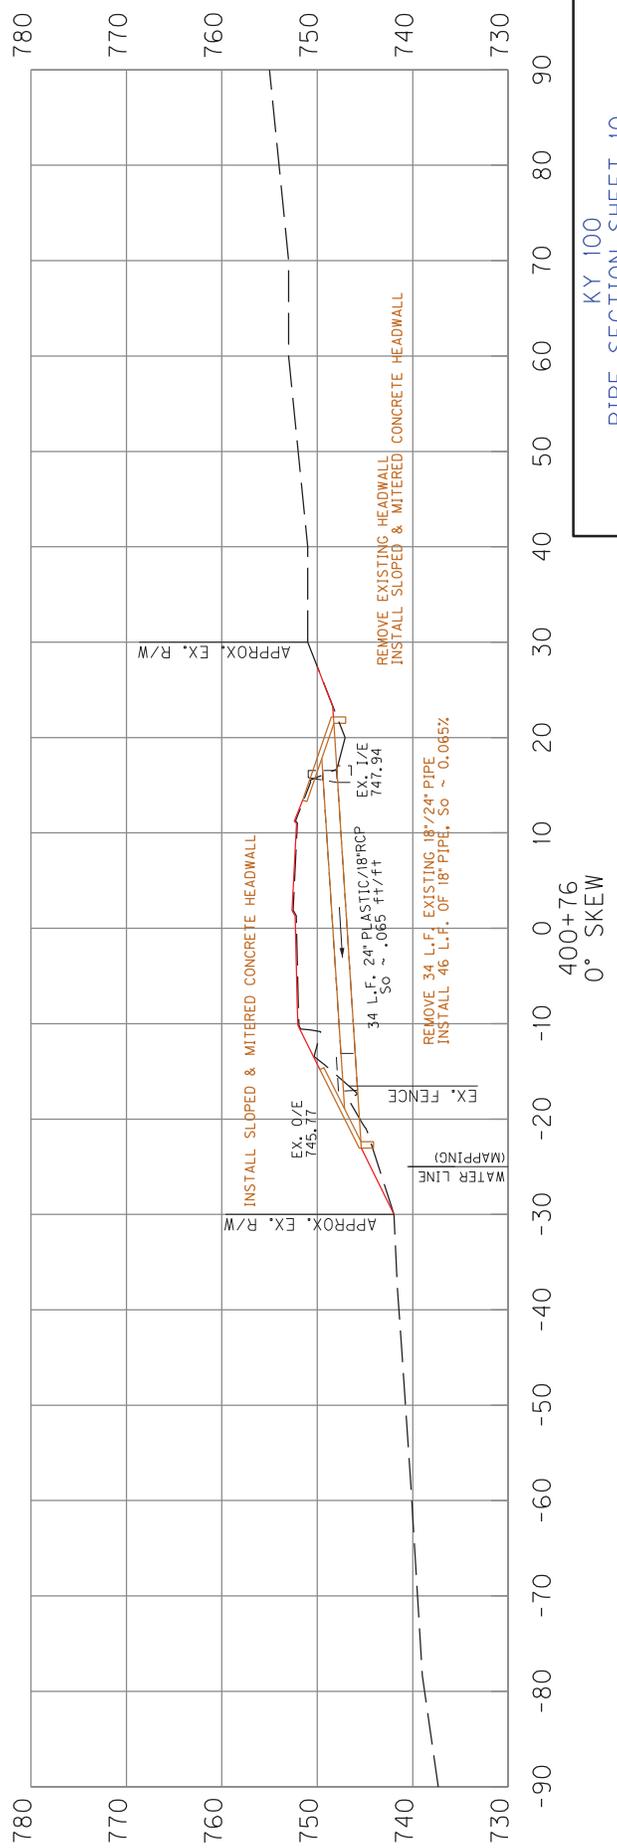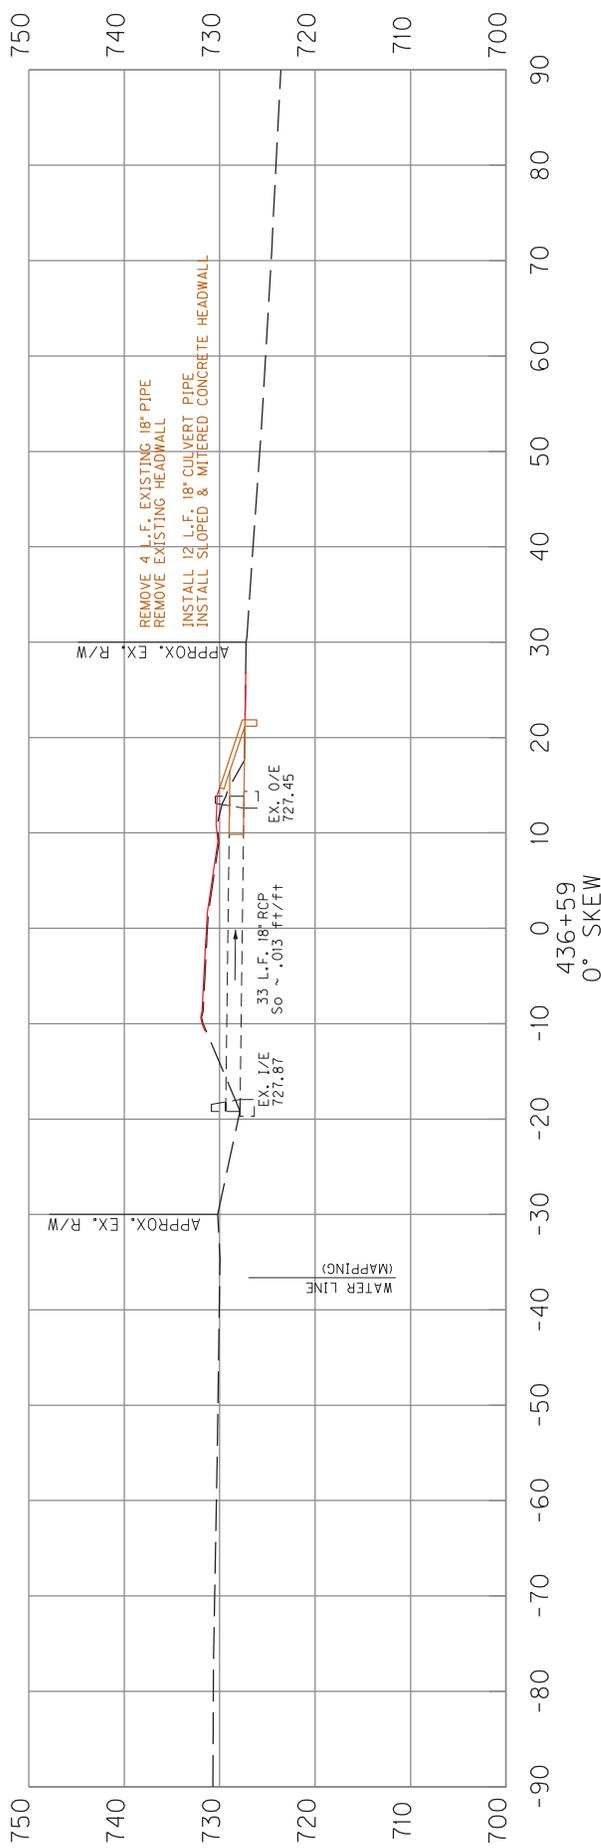



KY 100
PIPE SECTION SHEET 10

COUNTY OF	ITEM NO.
ALLEN	3-9014

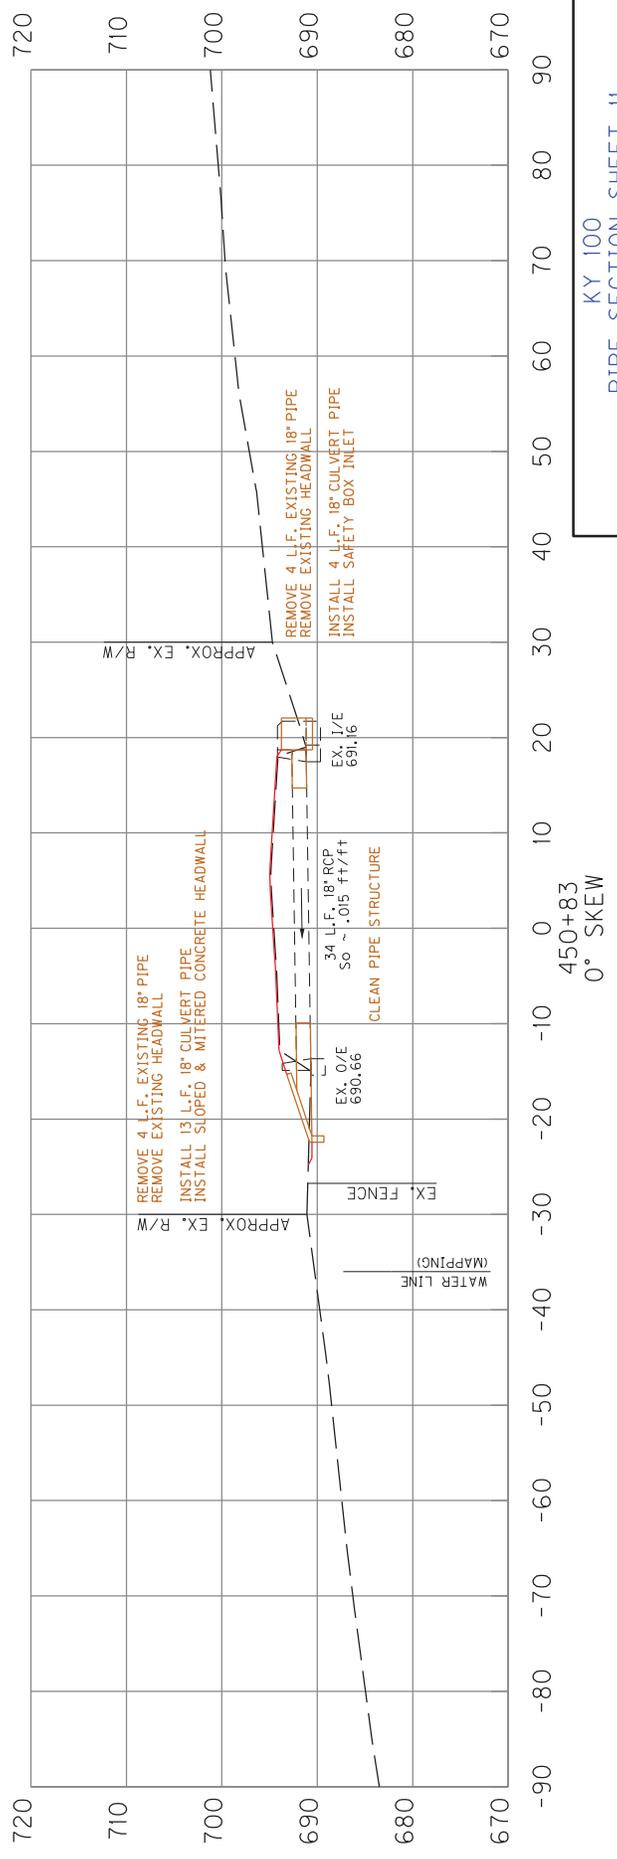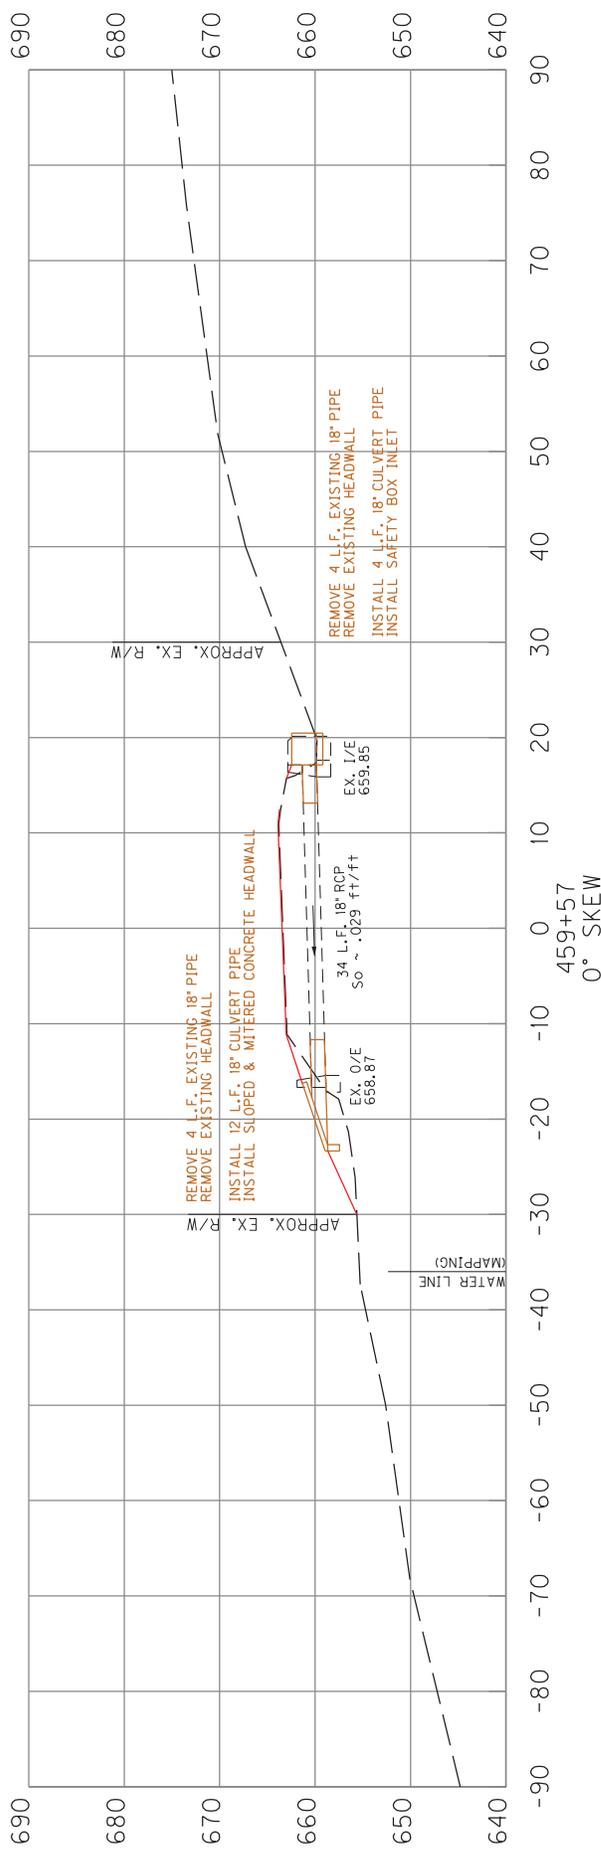



KY 100
PIPE SECTION SHEET 11

COUNTY OF	ALLEN
ITEM NO.	3-9014

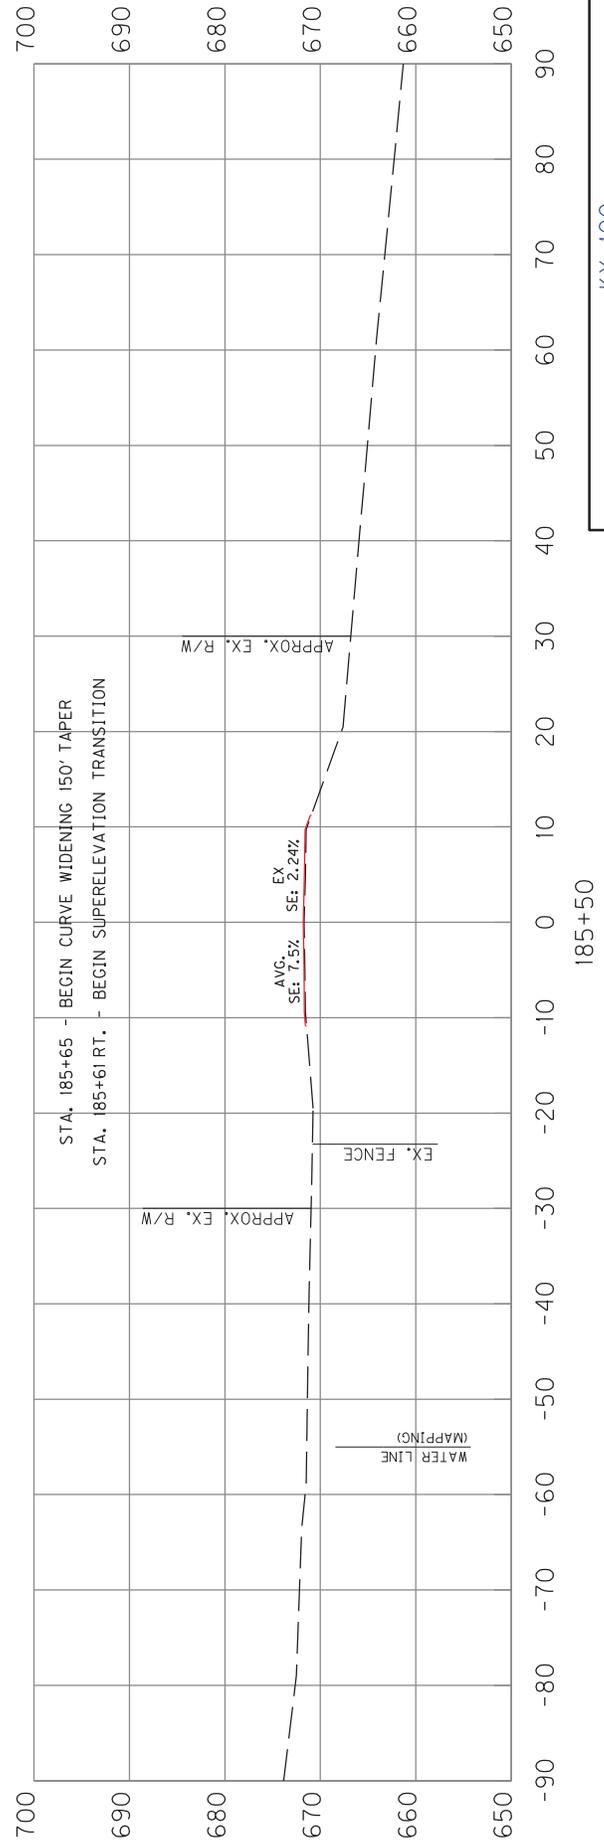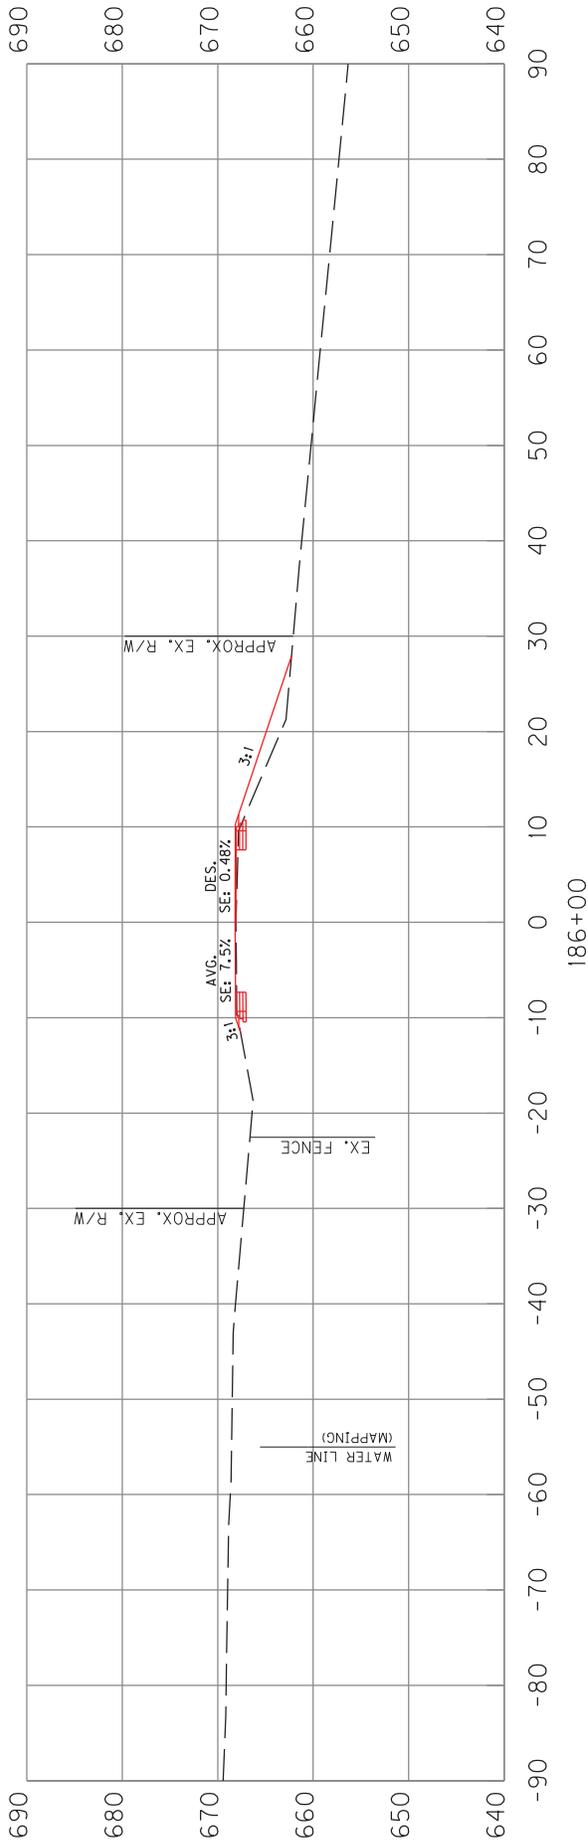



KY 100
CURVE 14
CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

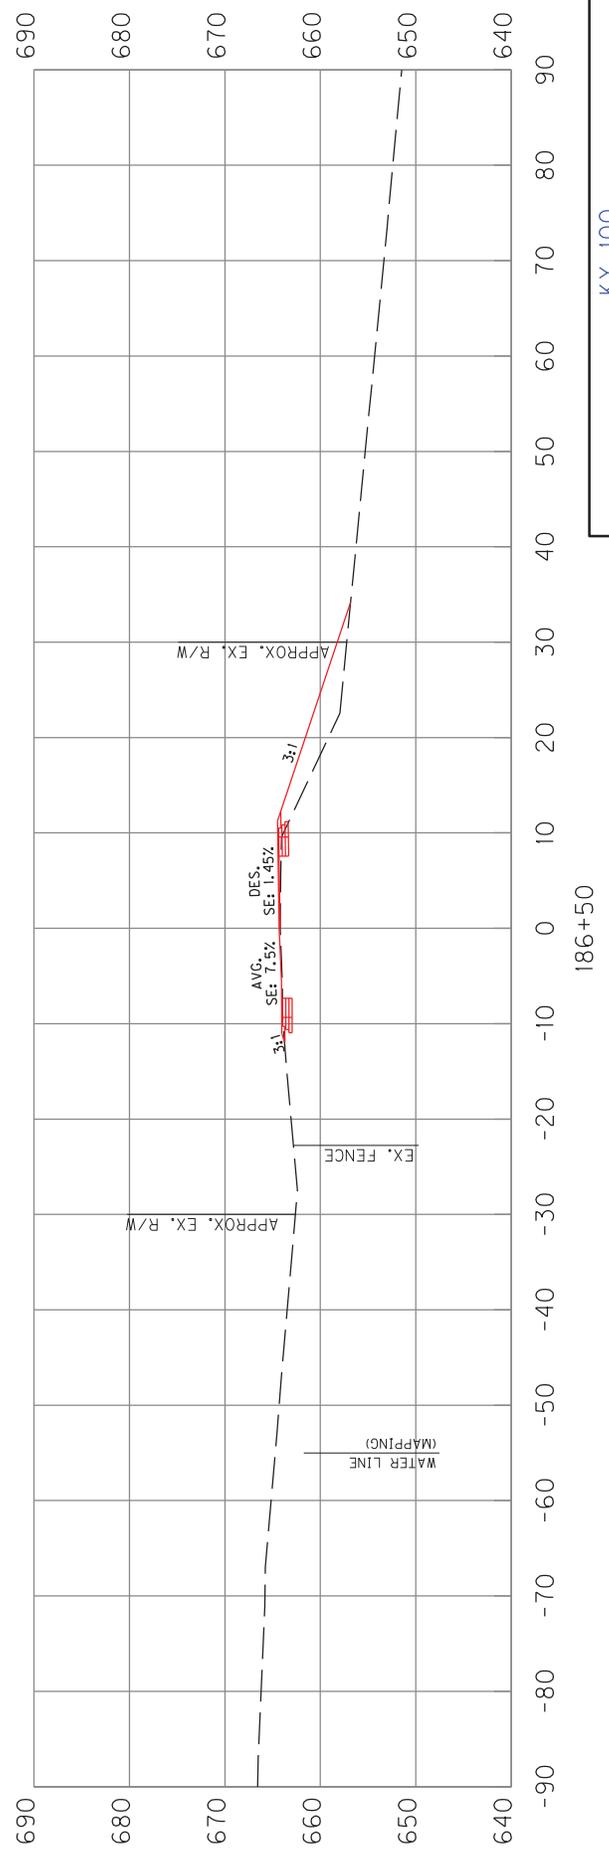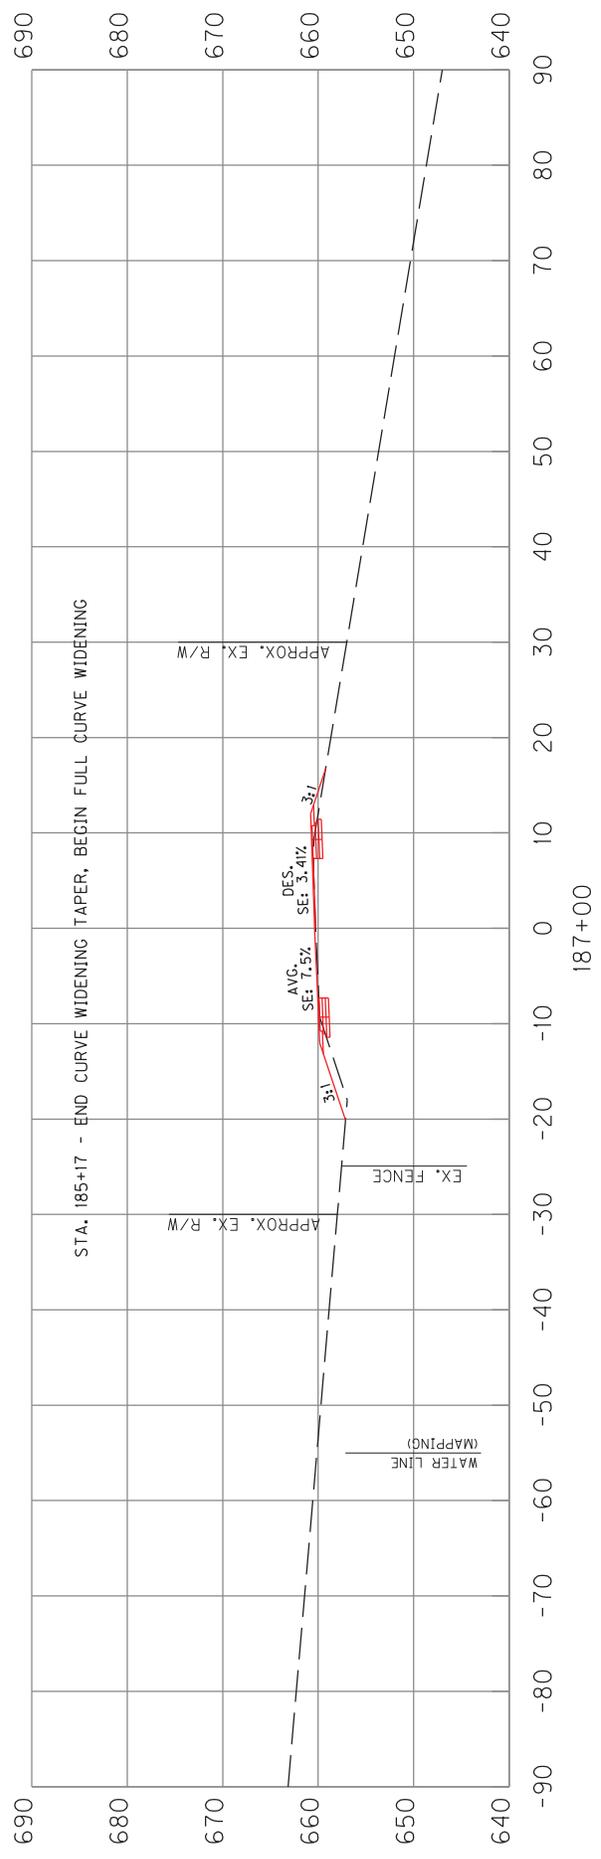



KY 100
 CURVE 14
 CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

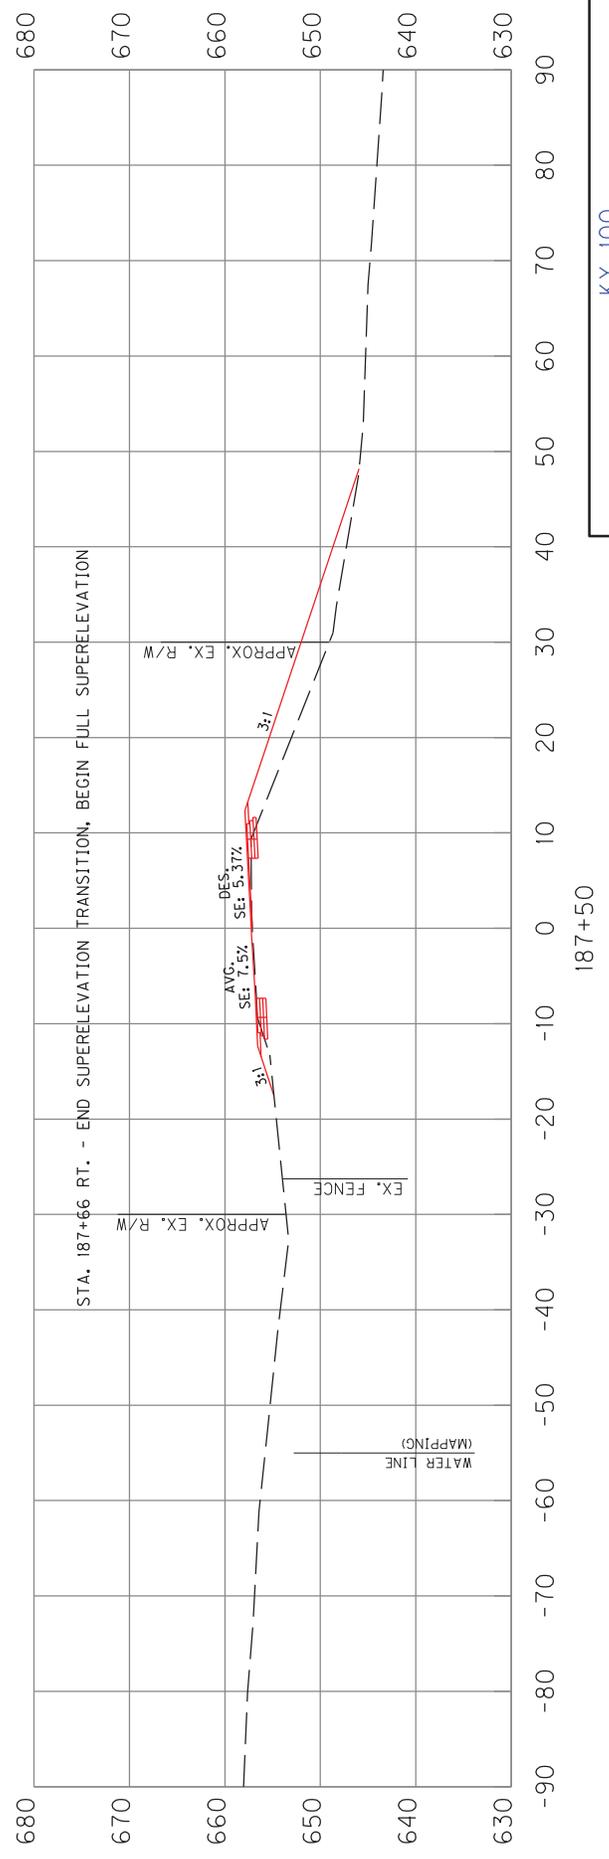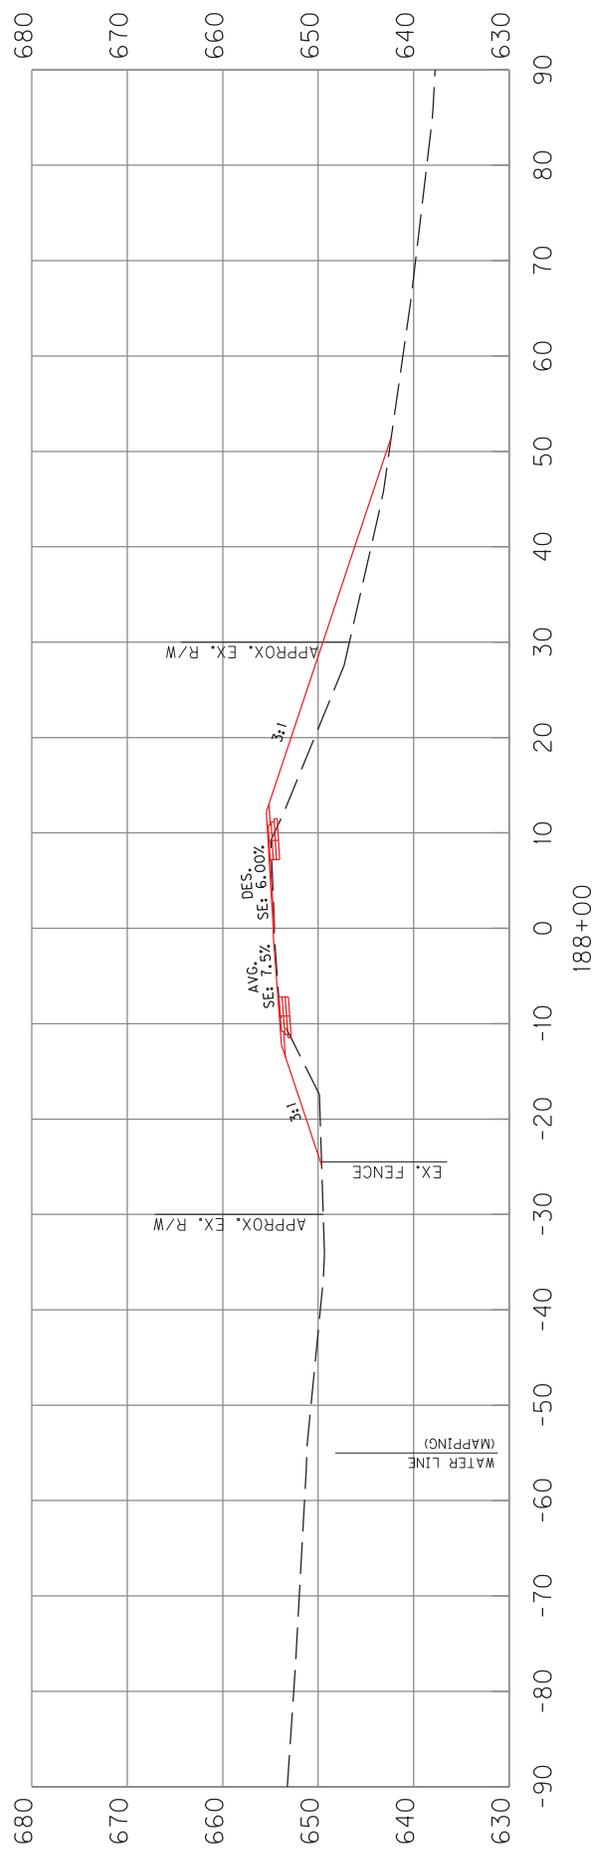



KY 100
 CURVE 14
 CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

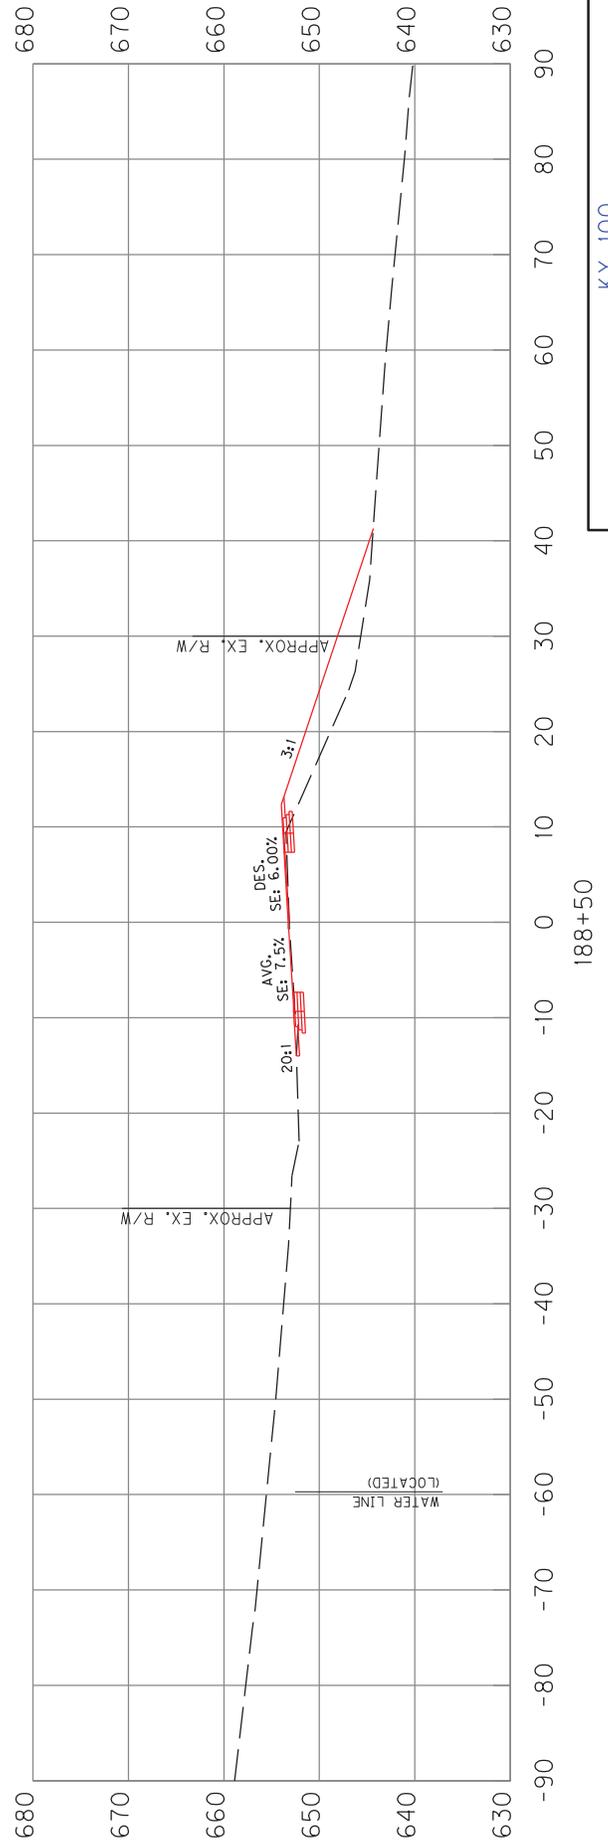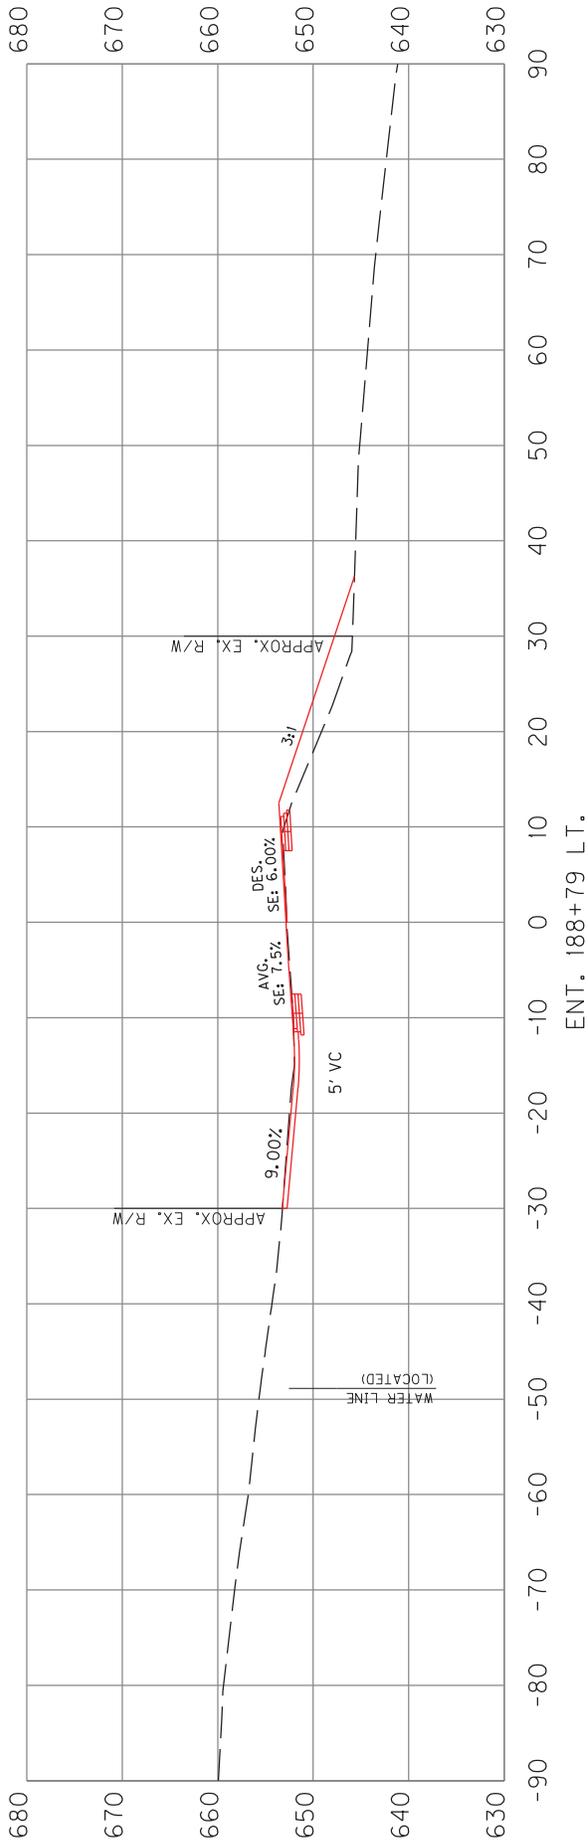



KY 100
CURVE 14
CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

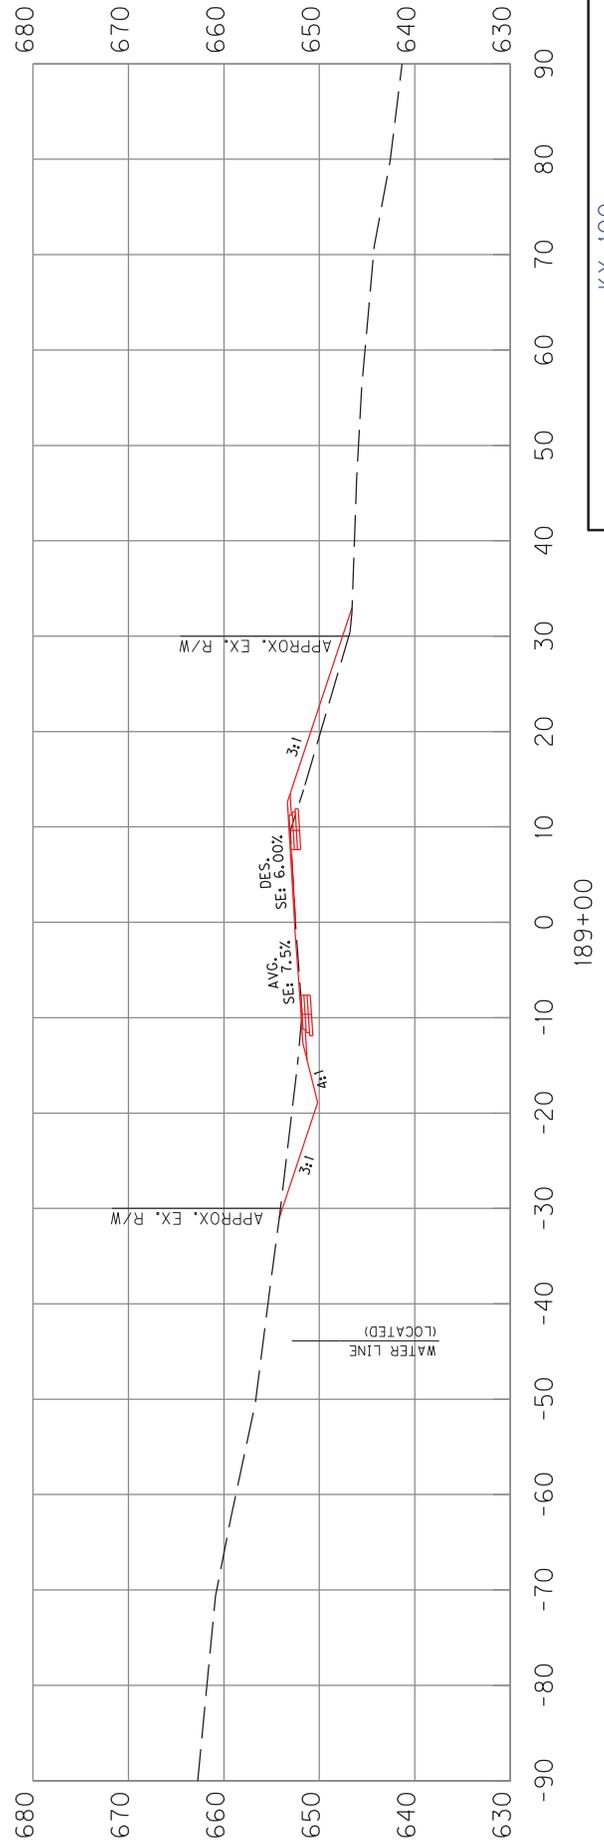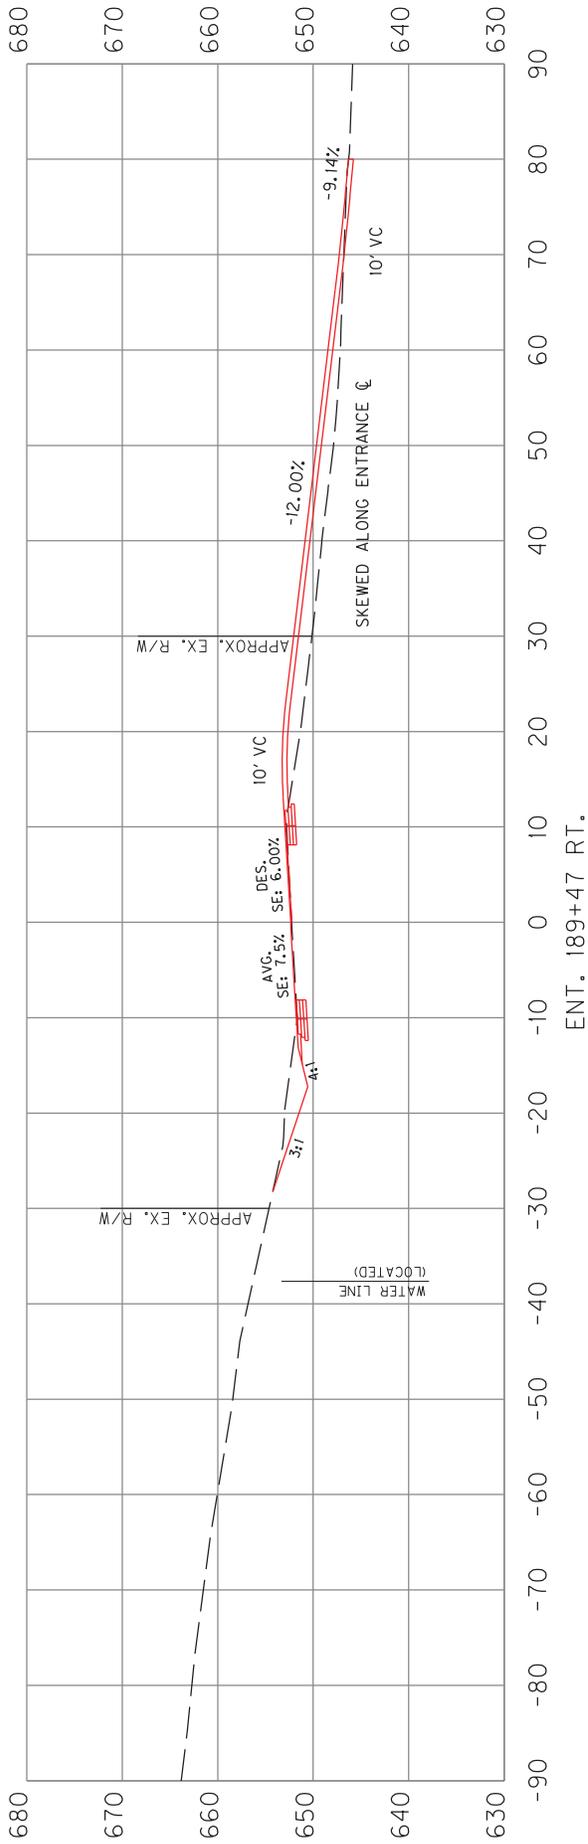



KY 100
 CURVE 14
 CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

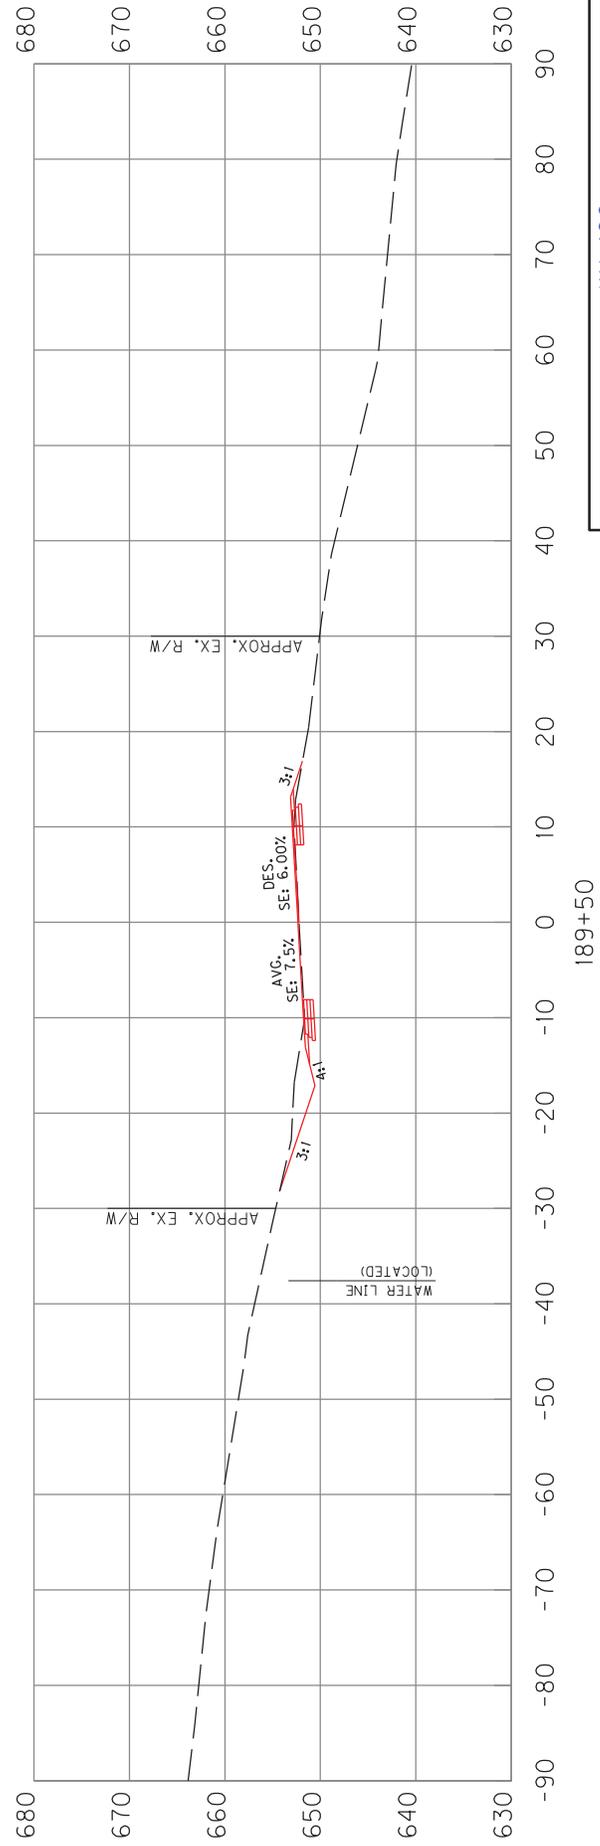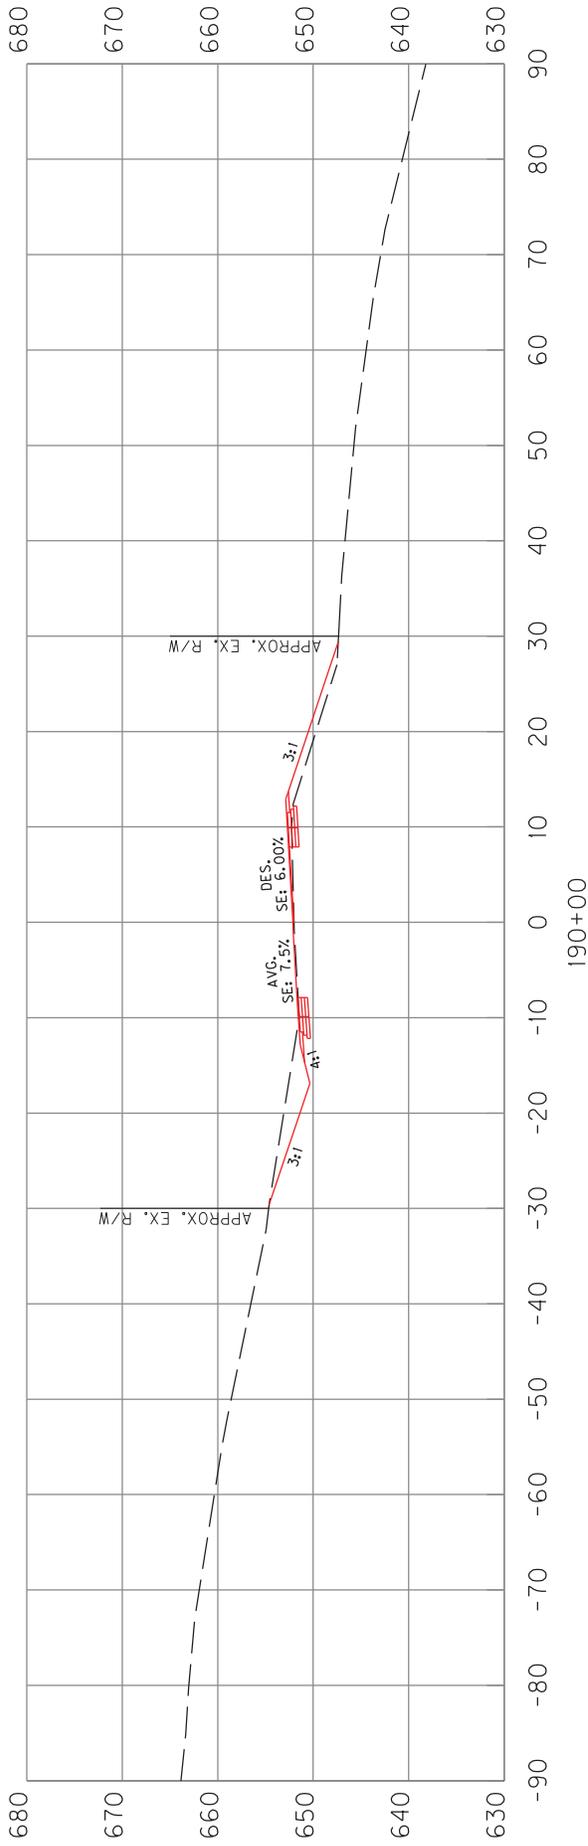



KY 100
CURVE 14
CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

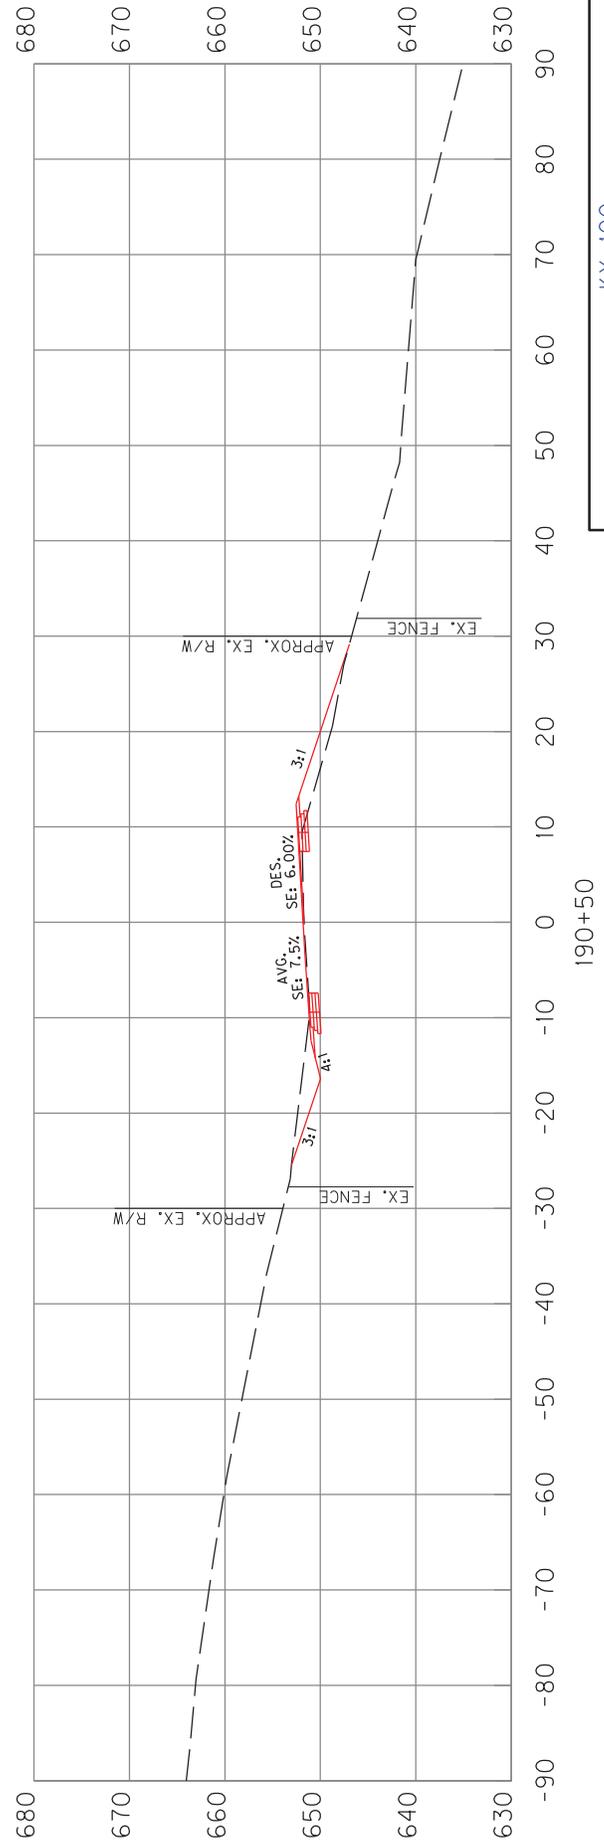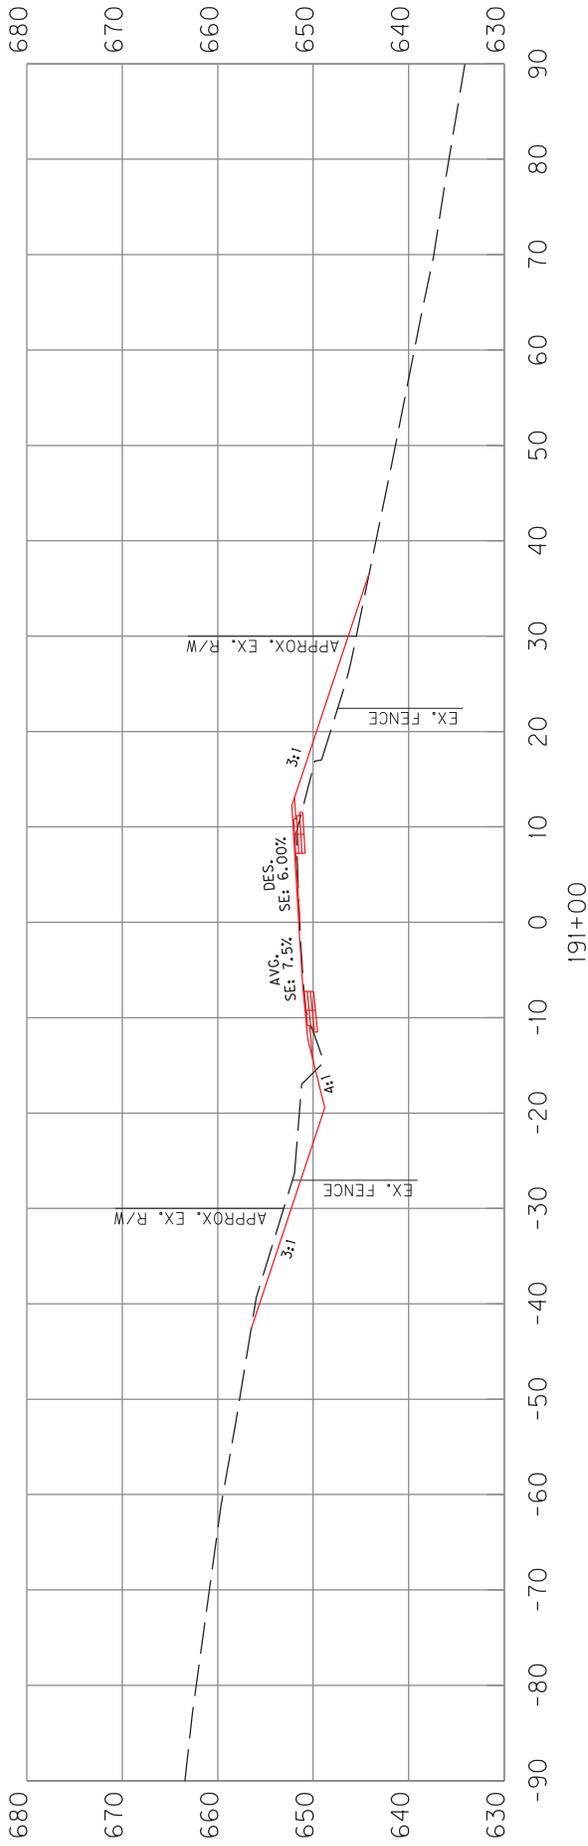



KY 100
 CURVE 14
 CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

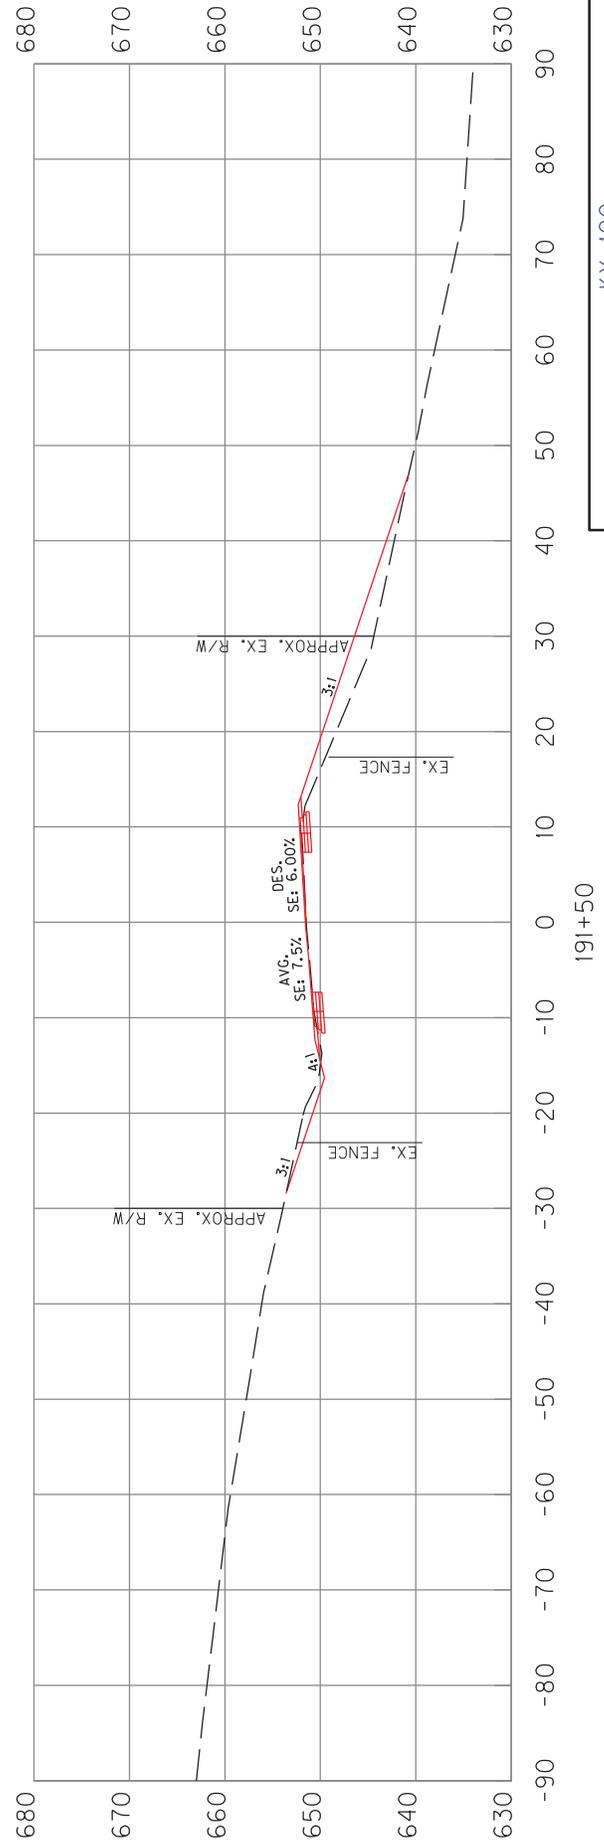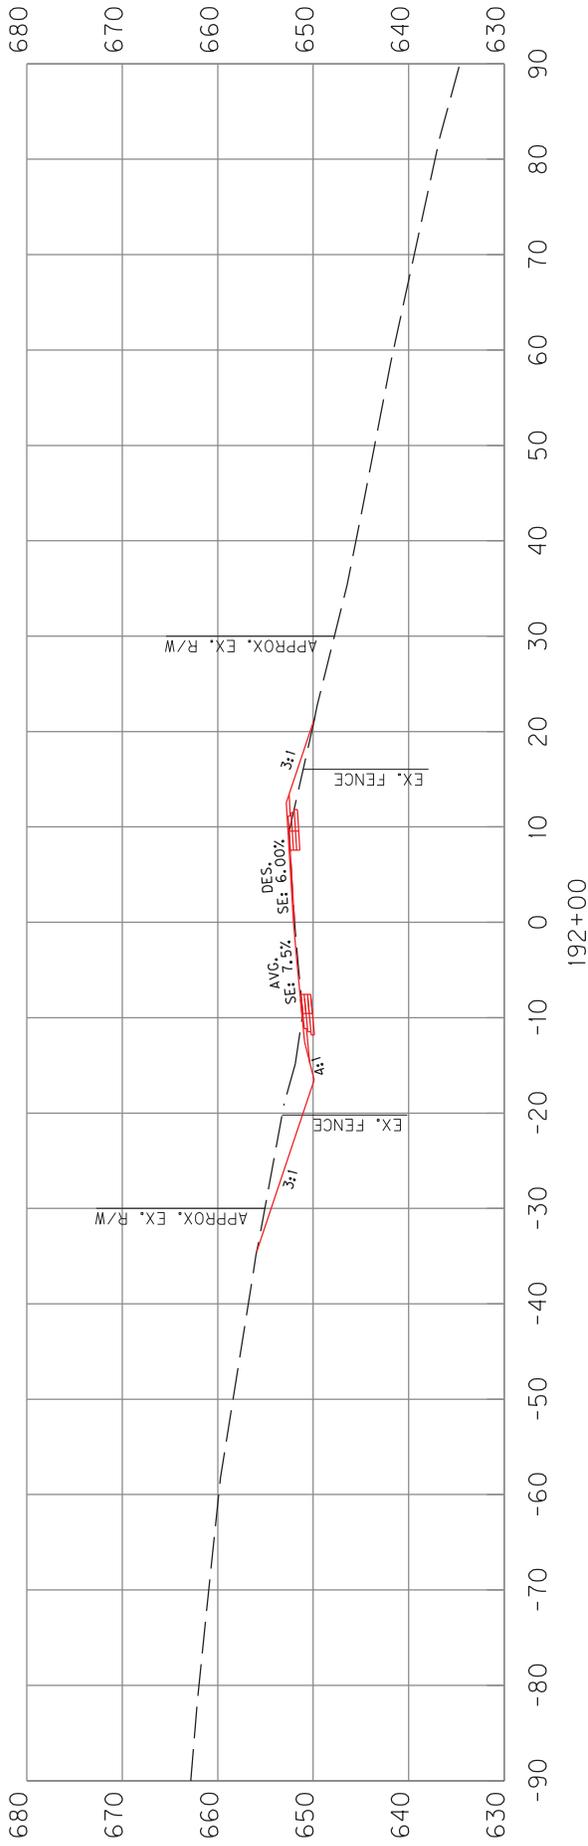



KY 100
 CURVE 14
 CROSS SECTIONS

COUNTY OF	ALLEN
ITEM NO.	3-9014

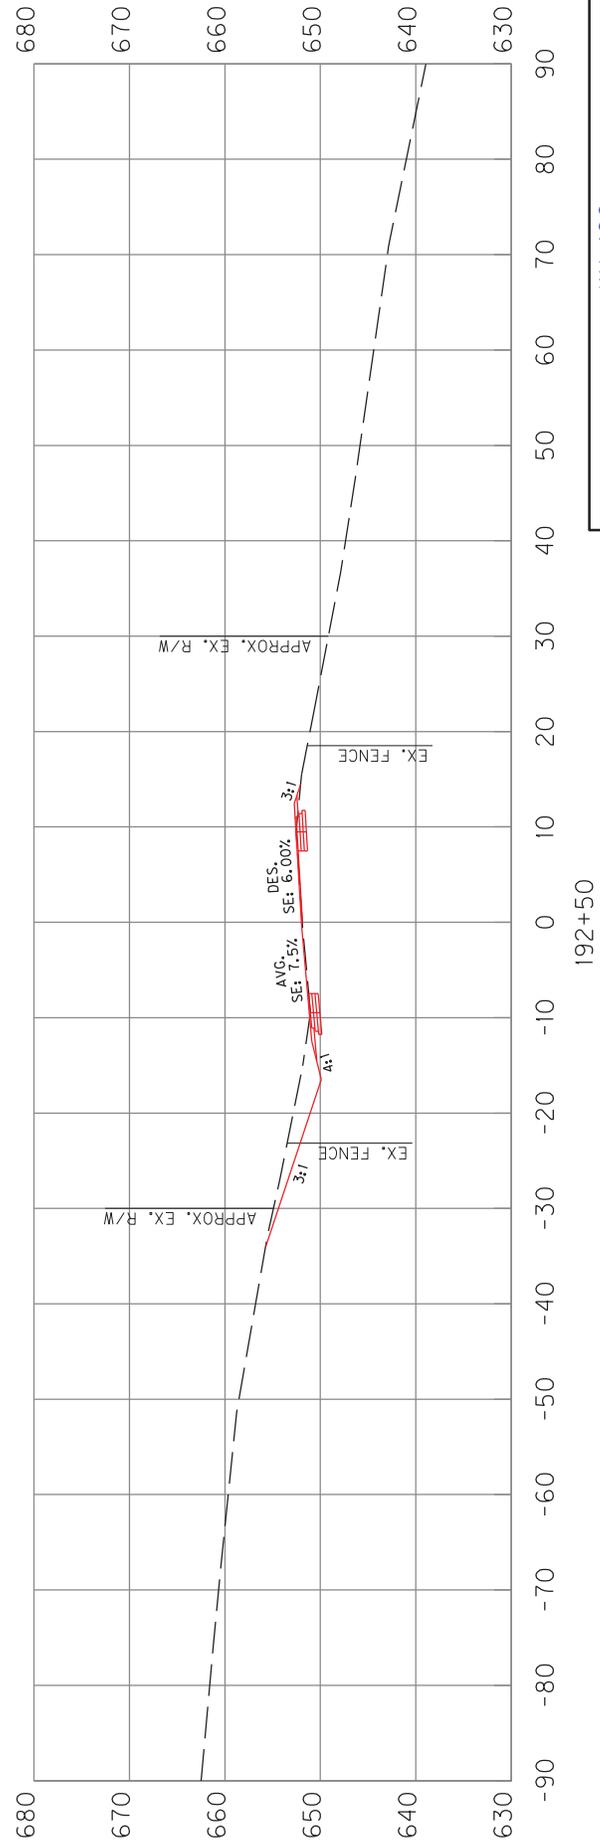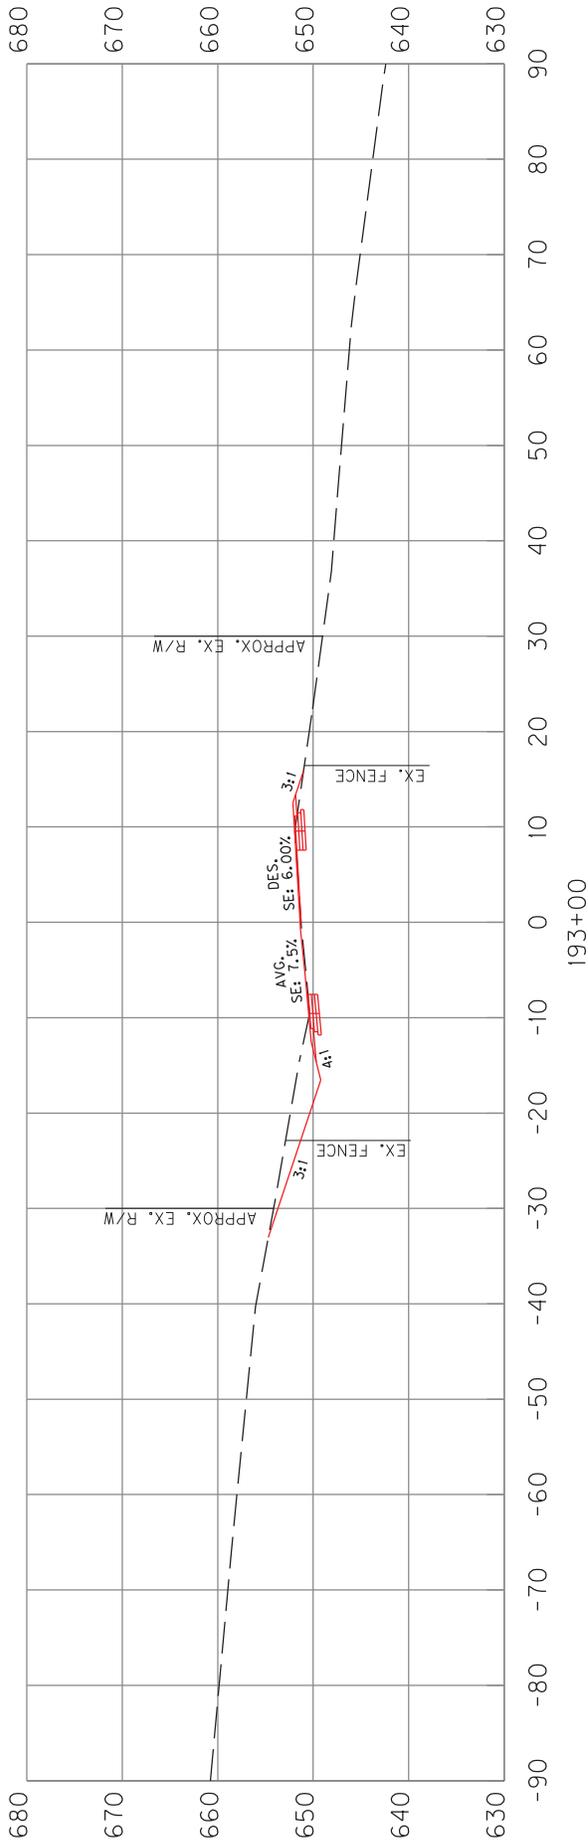



KY 100
 CURVE 14
 CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

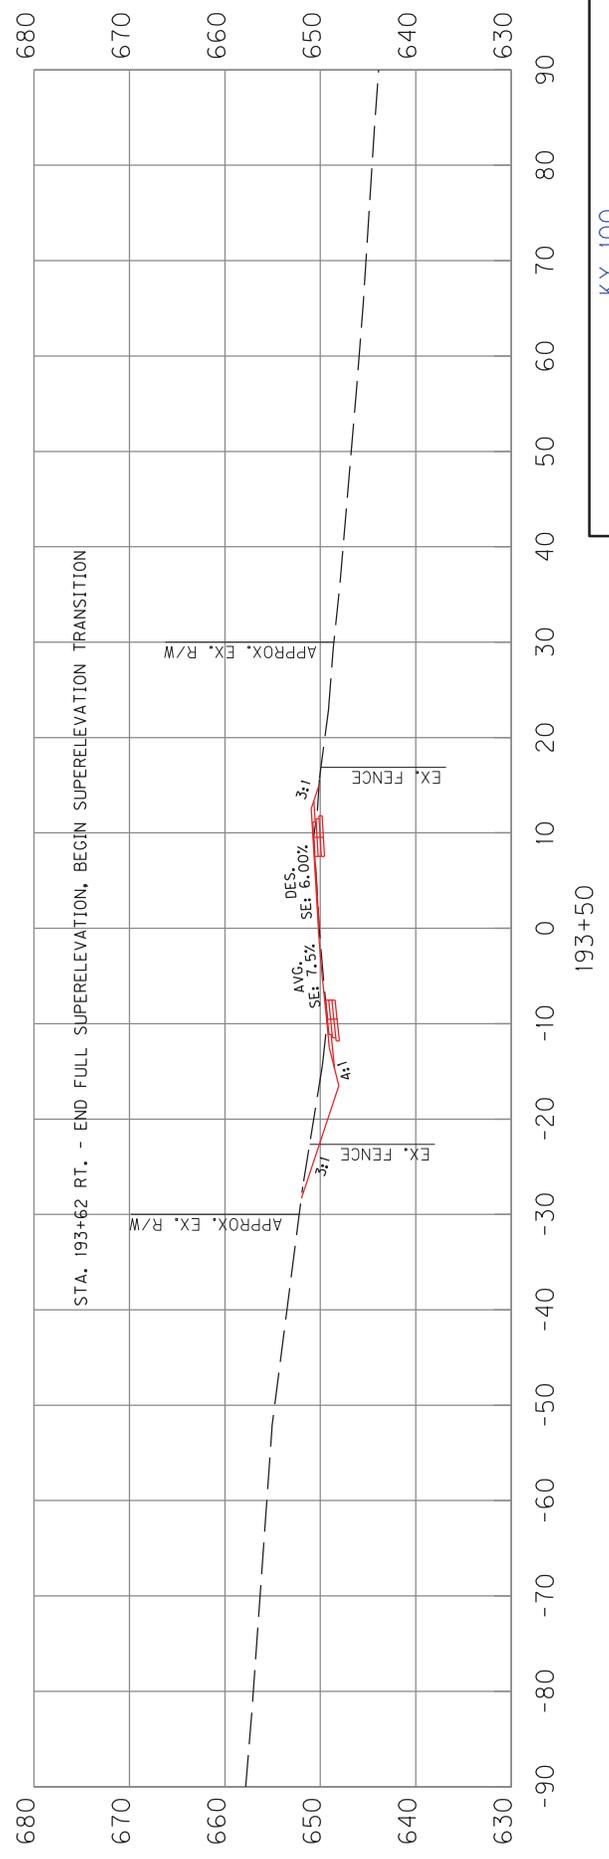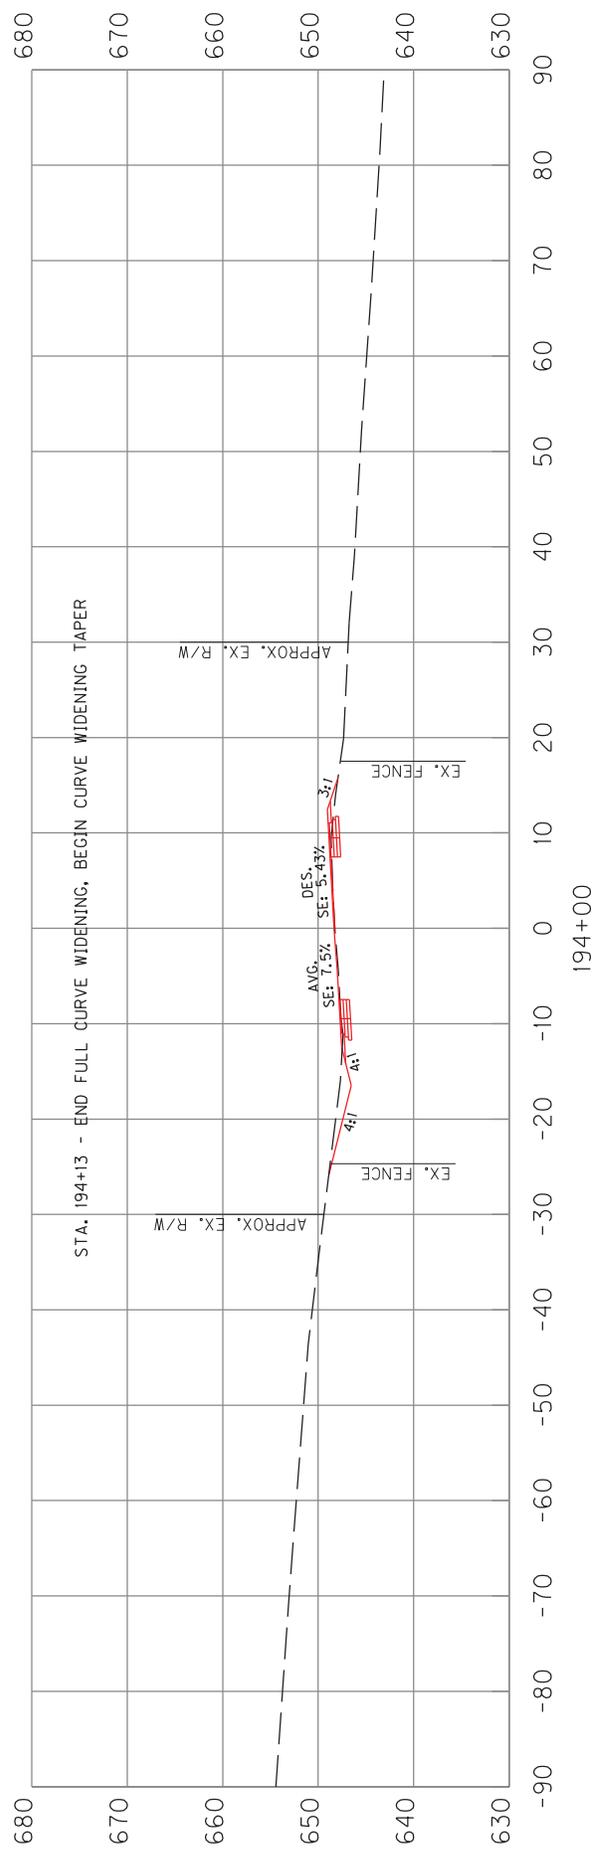



KY 100
CURVE 14
CROSS SECTIONS

COUNTY OF	ITEM NO.
ALLEN	3-9014

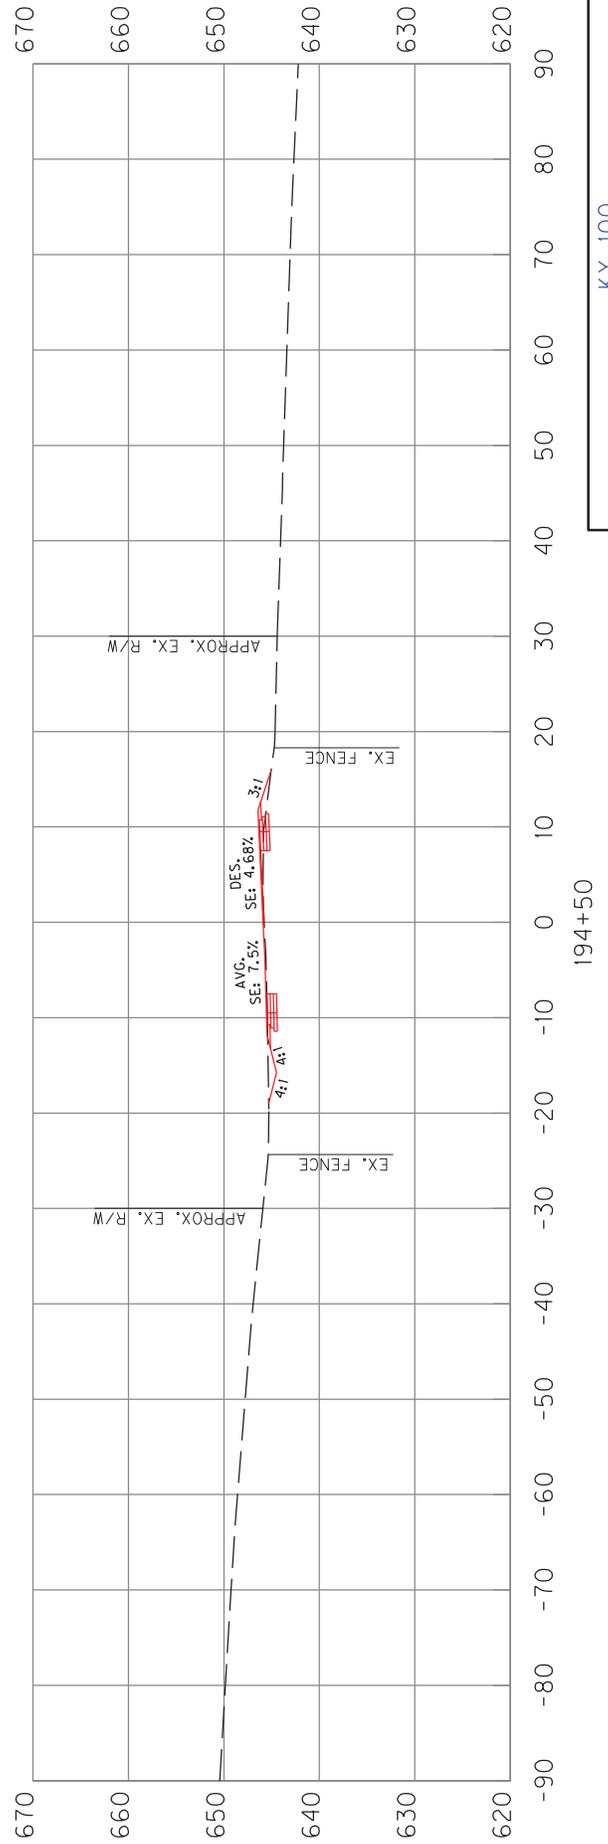
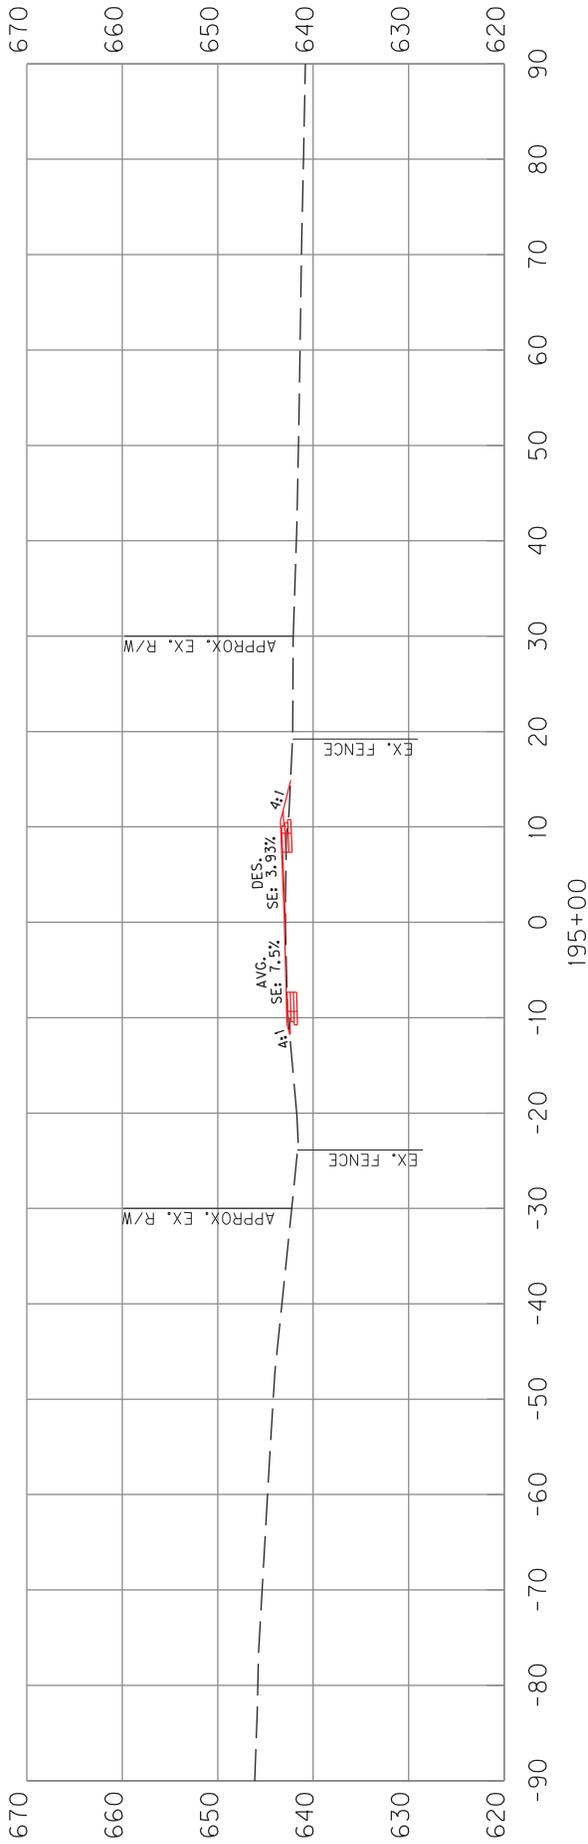


KY 100
 CURVE 14
 CROSS SECTIONS


COUNTY OF	ITEM NO.
ALLEN	3-9014

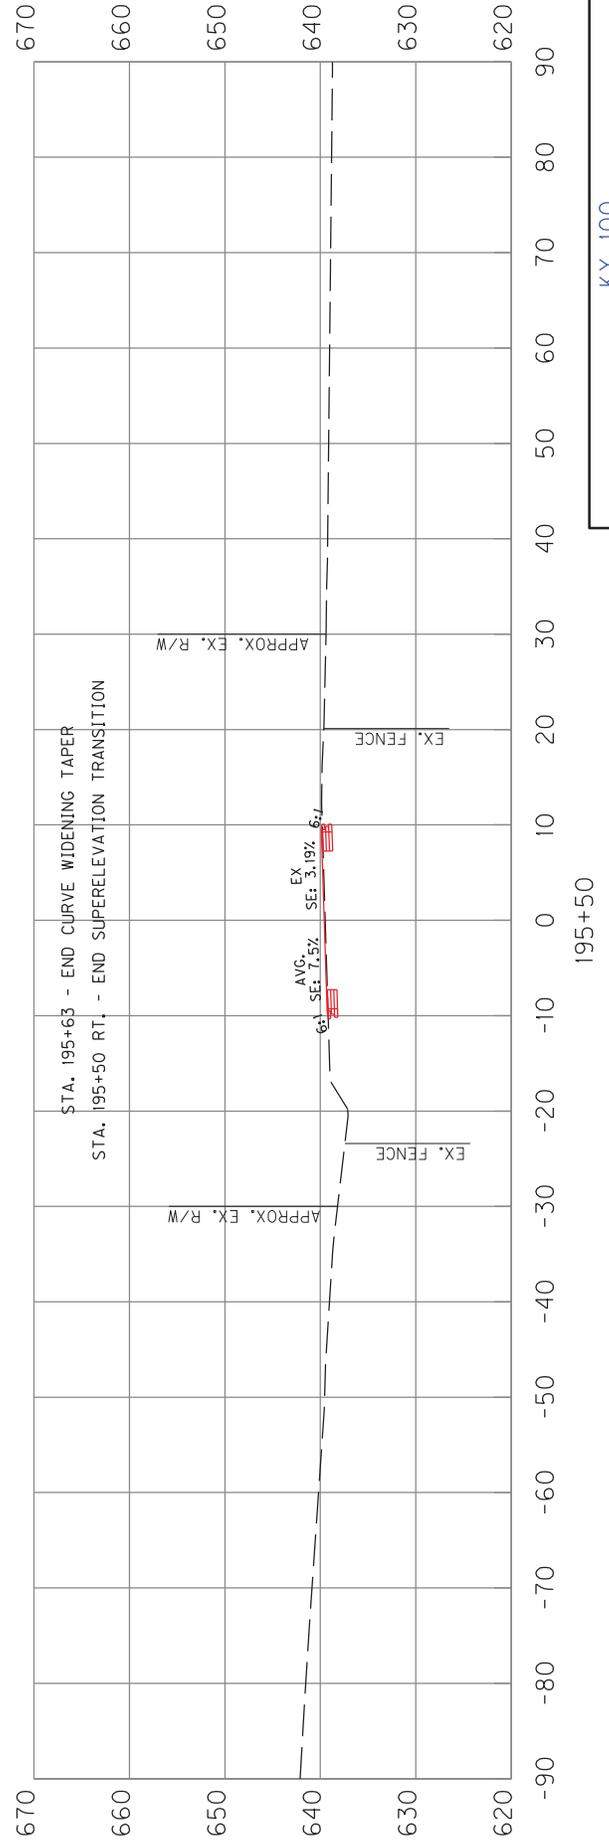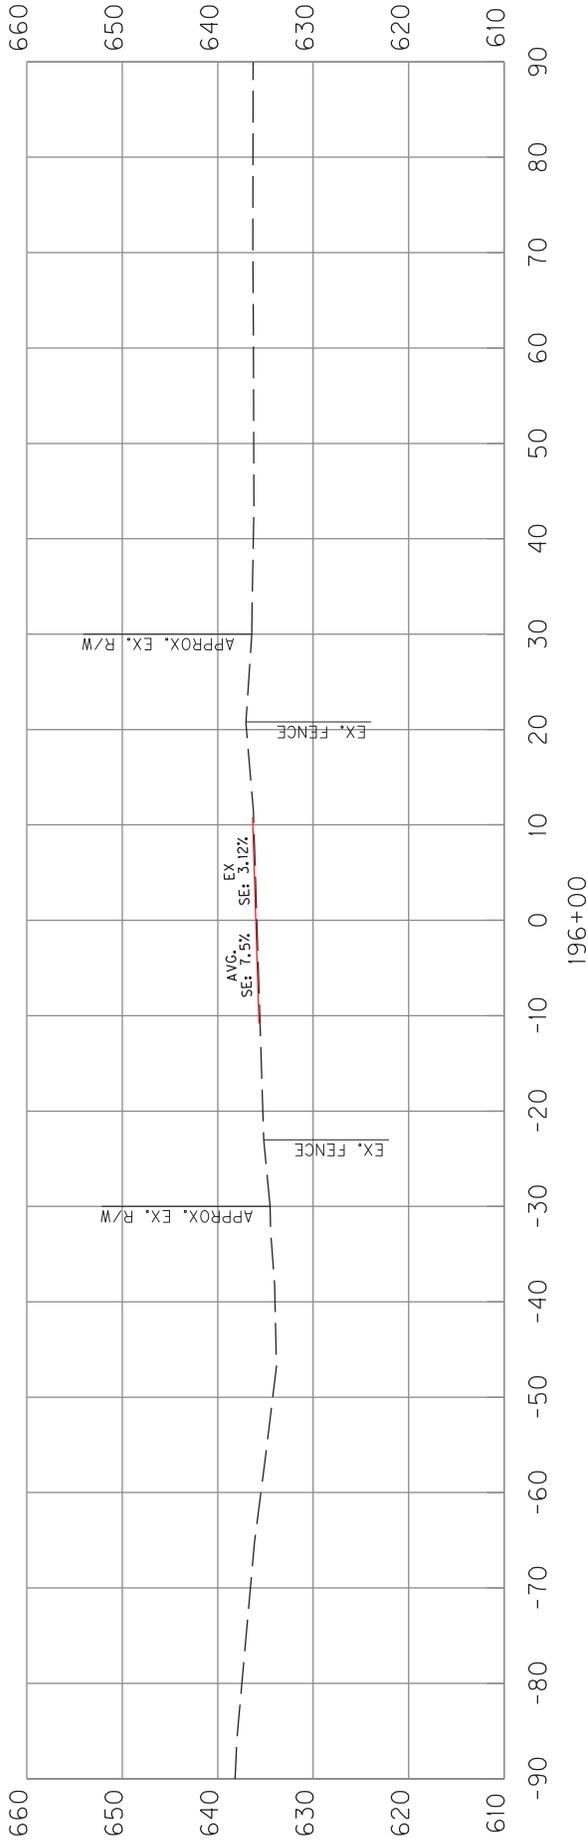

KY 100
 CURVE 14
 CROSS SECTIONS

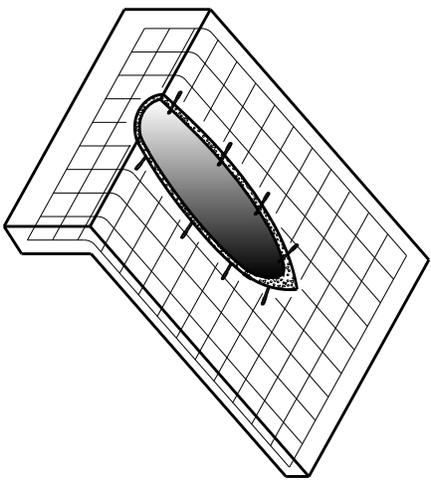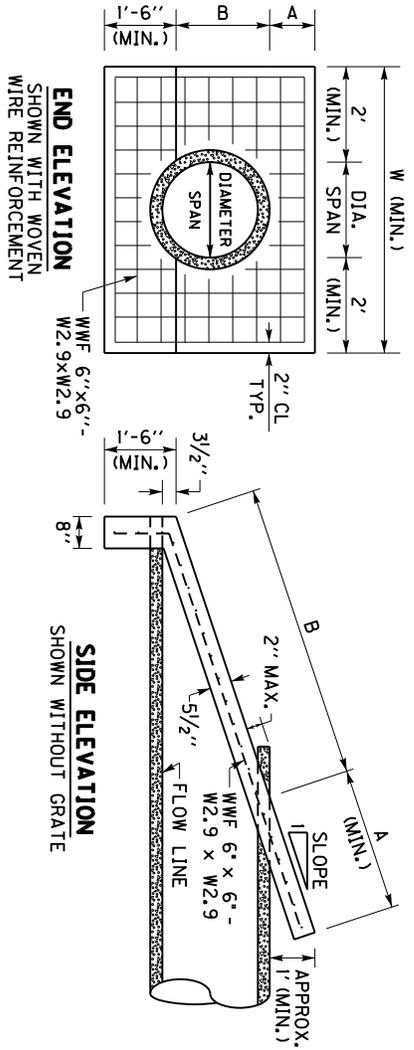

ISOMETRIC VIEW
SHOWN WITH WOVEN
WIRE REINFORCEMENT
AND WEDGE ANCHORS

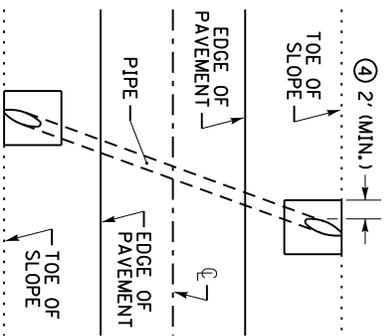

PLAN VIEW
SHOWN WHEN THE
PIPE IS ON A SKEW

DIMENSIONS AND CONCRETE QUANTITIES (FOR PIPE WITH SKEW = 0°) ④

PIPE SIZE	3:1 SLOPE			4:1 SLOPE			6:1 SLOPE		
	A	B	W	A	B	W	A	B	W
15"	3'-7 1/2"	5'-3"	0.74	4'-8 3/4"	5'-3"	0.93	6'-11 3/4"	5'-3"	1.29
18"	4'-5 3/4"	5'-6"	0.85	5'-10"	5'-6"	1.05	8'-7 1/4"	5'-6"	1.48
24"	6'-2 1/2"	6'-0"	1.05	8'-1"	6'-0"	1.32	11'-11"	6'-0"	1.87
30"	7'-10 3/4"	6'-6"	1.43	10'-3 3/4"	6'-6"	1.80	15'-2 1/2"	6'-6"	2.28

••DIMENSIONS AND CONCRETE QUANTITIES ARE APPROXIMATE AND LISTED FOR INFORMATIONAL PURPOSES ONLY••

BID ITEM AND UNIT TO BID: 24575ES610 HEADWALL (SLOPED & MITERED CONCRETE-FOR 1/2 INCH PIPE) - EACH

COUNTY OF	TOWN NO.	SHEET NO.
-----------	----------	-----------





NOTES

- FOR PIPES THAT RECEIVE THE SLOPED & MITERED CONCRETE HEADWALL, THE PIPE LENGTH SHALL BE MEASURED TO THE FURTHEST POINT ALONG THE MITERED END OF THE PIPE.
- THE EMBANKMENT FILL MATERIAL IS TO BE PLACED, COMPACTED, AND GRADDED AROUND THE PIPE BEFORE THE CONCRETE SLOPE PAVING IS PLACED. THE INTENT IS FOR THE SLOPED & MITERED HEADWALL TO MATCH THE FINAL EMBANKMENT SLOPE.
- THE PIPE SHALL BE MITERED AFTER THE CONCRETE SLOPE PAVING HAS BEEN PLACED AND SUFFICIENTLY CURED. THE PIPE SHOULD BE MITERED AS CLOSE TO FLUSH WITH THE SLOPE PAVING AS POSSIBLE, AND NO HIGHER THAN 2" ABOVE THE SLOPE PAVING. HAND FINISHING AND/OR CUTTING MAY BE NECESSARY.
- WHEN THE PIPE IS ON A SKEW, INSTALL THE HEADWALL AND MITER THE PIPE SO THAT THE CONCRETE SLOPE PAVING IS PERPENDICULAR TO THE ROADWAY. FOR HEADWALLS ON SKEWED PIPES, THE HEADWALL WIDTH, 'W', SHALL BE WIDENED, AS NEEDED, SO THAT THE OUTSIDE EDGE OF THE CONCRETE SLOPE PAVING IS A MINIMUM OF 2" FROM THE OUTER MOST EDGE OF THE PIPE.
- THE DIMENSION 'A' IS BASED ON THE FINAL GRADED SLOPE. THE DIMENSION 'B' IS BASED ON CIRCULAR REINFORCED CONCRETE PIPE AT 0° SKEW FOR THE LISTED SLOPE. THE DIMENSION 'W' IS BASED ON THE DIAMETER, OR SPAN, OF THE PIPE. THE FINAL HEADWALL DIMENSIONS AND CONCRETE QUANTITIES MAY VARY BASED ON THE FINAL GRADED SLOPE, PIPE SKEW, AND/OR TYPE OF PIPE.
- WOVEN WIRE REINFORCEMENT (WWF 6"x6" - W2.9xW2.9) IS REQUIRED FOR THE SLOPE PAVING AND TOE WALL. UTILIZE 2" CLEARANCE FROM ALL EDGES.
- DIMENSIONS AND CONCRETE QUANTITIES SHOWN ARE FOR ONE (1) HEADWALL, INSTALLED ON A PIPE WITH SKEW = 0°.
- AFTER THE PIPE HAS BEEN MITERED, ANCHOR THE PIPE TO THE CONCRETE SLOPE PAVING BY CORE DRILLING AND INSTALLING 1/2" DIAMETER x 7" LENGTH STEEL WEDGE ANCHORS (3" MINIMUM EMBEDMENT) ON 18" CENTERS ALONG THE SIDES OF THE PIPE. HOLE SIZE & DEPTH, TORQUE, & INSTALLATION PROCEDURES PER RECOMMENDATION OF ANCHOR MANUFACTURER. NOTE: STEEL WEDGE ANCHORS ARE NOT REQUIRED FOR REINFORCED CONCRETE PIPE.
- THE FOLLOWING SITUATIONS REQUIRE A HEADWALL WITH A GRATE:
 - 24" DIAMETER PIPE ON GREATER THAN 30° SKEW
 - 30" DIAMETER PIPE ON GREATER THAN 15° SKEW
 - PIPE WITH GREATER THAN 30" DIAMETER.
 - ELLIPTICAL PIPE GREATER THAN 24" EQUIVALENT DIAMETER
 SEE SHEET 2 FOR GRATE DETAILS
- ALL BOLTS AND HARDWARE SHALL BE RUST RESISTANT: ZINC PLATED, STAINLESS STEEL, OR STEEL THAT HAS BEEN GALVANIZED IN ACCORDANCE WITH AASHTO M 232.

NOT TO SCALE

DEPARTMENT OF HIGHWAYS
KENTUCKY
SLOPED & MITERED CONCRETE HEADWALL (SHEET 1 OF 2)

SEE SHEET 2 FOR
DIMENSIONS OF
HEADWALLS FOR PIPE
OVER 30" DIAMETER

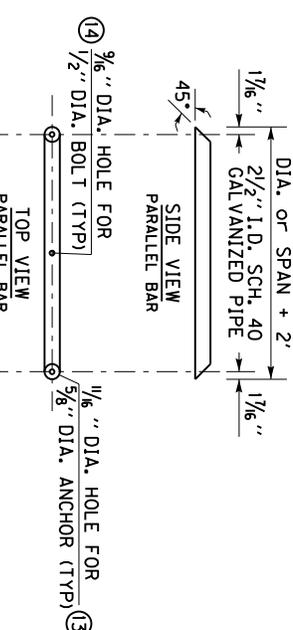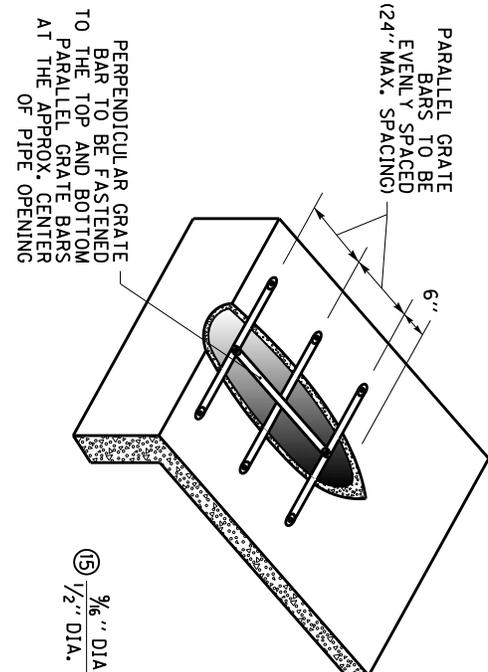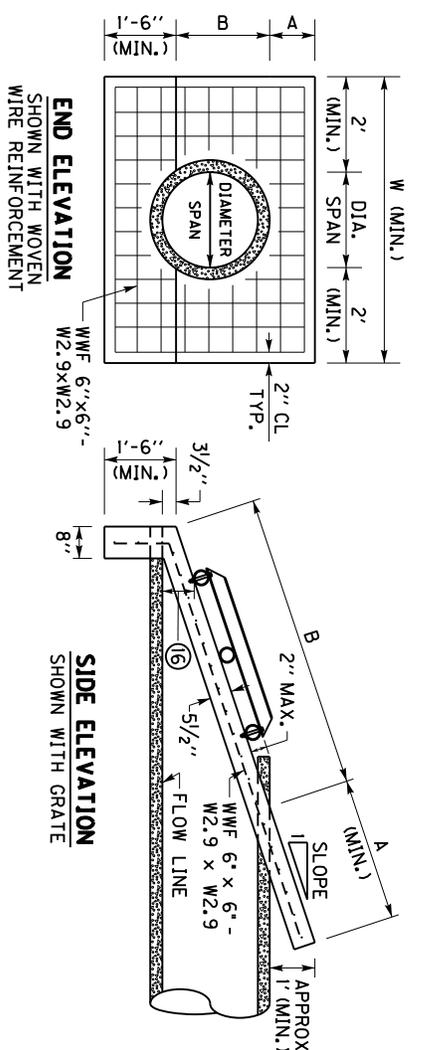

- ~ NOTES ~
- SEE SHEET 1 FOR NOTES 1 THRU 8
 - THE FOLLOWING SITUATIONS REQUIRE A HEADWALL WITH A GRATE:
 - 24" DIAMETER PIPE ON GREATER THAN 30° SKEW
 - 30" DIAMETER PIPE ON GREATER THAN 15° SKEW
 - PIPE WITH GREATER THAN 30" DIAMETER, ELLIPTICAL PIPE GREATER THAN 24" EQUIVALENT DIAMETER
 - ALL BOLTS AND HARDWARE SHALL BE RUST RESISTANT; ZINC PLATED, STAINLESS STEEL, OR STEEL THAT HAS BEEN GALVANIZED IN ACCORDANCE WITH AASHTO M 232.
 - THE PIPE USED TO CONSTRUCT THE GRATE SHALL BE STEEL, SCHEDULE 40, CONFORMING TO ASTM A53, AND GALVANIZED IN ACCORDANCE WITH AASHTO M 111 AFTER FABRICATION.
 - ANY RAW METAL EXPOSED BY FIELD CUTTING AND/OR DRILLING SHALL BE TREATED WITH A COLD GALVANIZING COMPOUND.
 - FASTEN PARALLEL BARS TO HEADWALL WITH 5/8" DIA. x 4 1/2" LENGTH STEEL WEDGE ANCHORS, MINIMUM EMBEDMENT = 2 1/4" HOLE SIZE AND DEPTH, TORQUE, & INSTALLATION PROCEDURES PER RECOMMENDATION OF ANCHOR MANUFACTURE.
 - CENTER BOLT HOLE SHALL ONLY BE DRILLED IN THE TOP AND BOTTOM PARALLEL BARS.
 - FASTEN THE PERPENDICULAR BAR TO THE TOP AND BOTTOM PARALLEL BARS WITH 1/2" DIA. x 4" LENGTH HEX HEAD BOLTS, HEX HEAD NUTS, & FLAT WASHERS.
 - THE BOTTOM PARALLEL BAR IS TO BE PLACED SO THAT IT IS APPROX. 6" ABOVE THE FLOWLINE OF THE PIPE.

DIMENSIONS AND CONCRETE QUANTITIES (FOR PIPE WITH SKEW = 0°) ④

PIPE SIZE	3:1 SLOPE		4:1 SLOPE		6:1 SLOPE		GRATE REQUIRED						
	A	B	W	CU. YDS. CONCRETE	A	B		W	CU. YDS. CONCRETE				
36"	3'	9'-7 1/2"	7'-0"	1.51	4'	12'-6 1/2"	7'-0"	1.91	6'	18'-6"	7'-0"	2.42	YES
42"	3'	11'-4"	7'-6"	1.76	4'	14'-9 1/4"	7'-6"	2.23	6'	21'-9 1/2"	7'-6"	3.19	YES

PIPE FOR GRATE DETAILS
SEE NOTE 9 TO DETERMINE
IF GRATE IS REQUIRED

NOT TO SCALE

DEPARTMENT OF HIGHWAYS KENTUCKY
SLOPED & MITERED CONCRETE HEADWALL (SHEET 2 OF 2)

SEE SHEET 1 FOR
DIMENSIONS OF
HEADWALLS FOR PIPE
30" DIAMETER & LESS

BID ITEM AND UNIT TO BID: 24575ES610 HEADWALL (SLOPED & MITERED CONCRETE-FOR - INCH PIPE) - EACH

COUNTY OF	TOWN NO.	SHEET NO.
-----------	----------	-----------

FIGURE 1

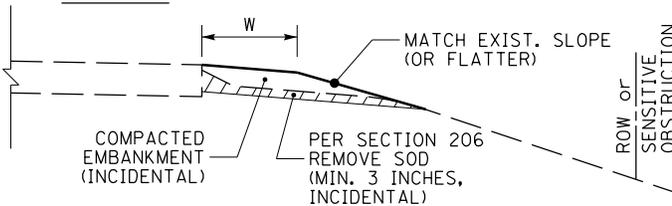


FIGURE 2

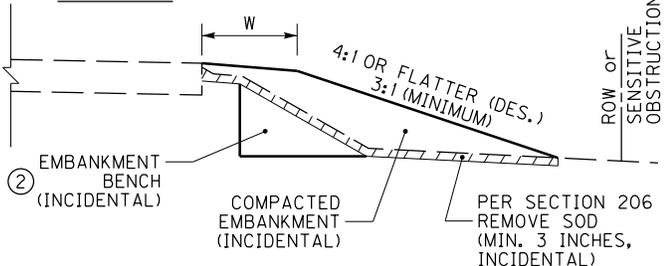


FIGURE 3

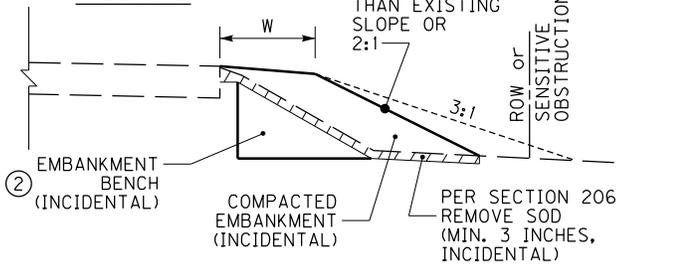


FIGURE 4

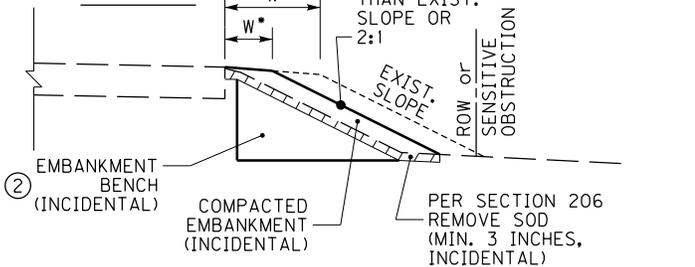


FIGURE 5


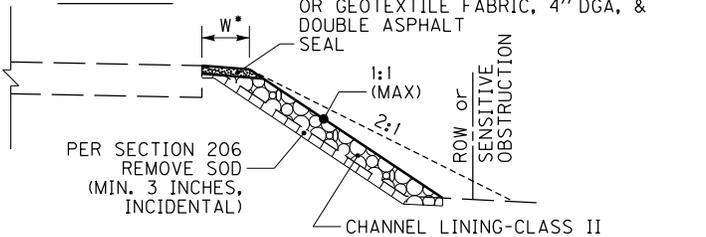


FIGURE 6

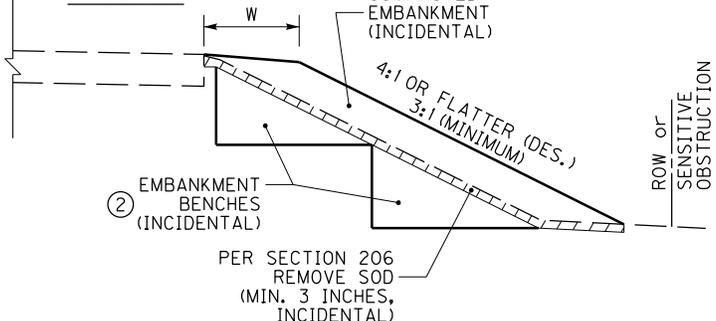

~ NOTES ~

BID ITEM AND UNIT TO BID:
2575 - DITCHING & SHOULDERING - LF

1. THE BID ITEM 'DITCHING & SHOULDERING' SHALL CONSIST OF ANY AND ALL NECESSARY CLEARING & GRUBBING, GRADING, AND/OR RESHAPING OF THE EXISTING SHOULDER, DITCH, AND/OR ROADSIDE TO ACHIEVE THE PROPOSED SHOULDER, DITCH, AND/OR ROADSIDE DIMENSIONS, AS DETAILED ON THE TYPICAL SECTIONS. FINAL PAYMENT WILL BE BASED ON THE ACTUAL LINEAR FEET OF DITCHING AND SHOULDERING PERFORMED, AND WILL INCLUDE ALL WORK AND INCIDENTALS NECESSARY TO PERFORM THE DITCHING AND SHOULDERING ACCORDING TO THESE DETAILS, NOTES, AND ANY OTHER INFORMATION FOUND ELSEWHERE IN THE PROPOSAL OR STANDARD SPECIFICATIONS. IN THE CASE OF A DISCREPANCY, REFER TO SECTION 105.05 OF THE STANDARD SPECIFICATIONS. DEPENDING ON THE EXISTING CONDITIONS ENCOUNTERED, DITCHING AND SHOULDERING MAY ALSO INCLUDE, BUT IS NOT LIMITED TO:

- PROVIDING ADDITIONAL EARTH MATERIAL AND GRADING, SHAPING, AND COMPACTING THE EARTH MATERIAL TO ACHIEVE THE DIMENSIONS SHOWN ON THE TYPICAL SECTIONS. COMPACT MATERIAL ACCORDING TO SECTION 206 OF THE STANDARD SPECIFICATIONS.
- NOTE: ADDITIONAL EARTH MATERIAL PROVIDED SHALL BE SUITABLE FOR VEGETATION GROWTH.
- EXCAVATING AND REMOVING EXCESS MATERIAL TO ACHIEVE THE DIMENSIONS SHOWN ON THE TYPICAL SECTIONS
- EMBANKMENT BENCHING

② EMBANKMENT BENCHING WILL BE REQUIRED WHEN THE EXISTING GROUNDLINE HAS AN INCLINE GREATER THAN 15% (APPROX. 6:1). ANY AND ALL REQUIRED EMBANKMENT BENCHING SHALL BE INCIDENTAL TO THE BID ITEM 'DITCHING AND SHOULDERING'. THE FOLLOWING ARE GUIDELINES FOR EMBANKMENT BENCHING USED IN CONJUNCTION WITH THE BID ITEM 'DITCHING AND SHOULDERING':

- THE TYPICAL HEIGHT (OR RISE) IS 1' TO 6'
- THE TYPICAL WIDTH (OR RUN) WILL VARY BASED ON THE HEIGHT OF THE BENCH
- MULTIPLE SMALL BENCHES MAY BE USED, AND MAY BE MORE ADVANTAGEOUS AS THIS WILL REQUIRE PROCESSING LESS EARTHWORK.

3. AS SHOWN IN FIGURE 1, IN SOME SITUATIONS, MINOR SHOULDERING, WITH MINIMAL ADDITIONAL EARTH MATERIAL, MAY BE ALL THAT IS REQUIRED TO RESHAPE THE EARTH SHOULDER TO THE PROPOSED WIDTH AND BRING IT FLUSH WITH THE EDGE OF PAVEMENT.

4. AS SHOWN IN FIGURE 2, MOST SITUATIONS WILL REQUIRE ADDITIONAL EARTH MATERIAL TO ACHIEVE THE PROPOSED EARTH SHOULDER WIDTH. IT IS DESIRED THAT THE RESULTING FILL SLOPE BE INSTALLED AS FLAT AS POSSIBLE AND REMAIN WITHIN THE RIGHT-OF-WAY AND/OR AVOID SENSITIVE OBSTRUCTIONS.

5. AS SHOWN IN FIGURE 3, IF A 3:1 FILL SLOPE WILL RESULT IN THE TOE OF SLOPE EXTENDING BEYOND THE RIGHT-OF-WAY OR IMPACT A SENSITIVE OBSTRUCTION, THEN THE FILL SLOPE MAY BE INSTALLED STEEPER THAN 3:1, BUT NO STEEPER THAN THE EXISTING FILL SLOPE, OR A 2:1, WHICHEVER IS FLATTER.

6. AS SHOWN IN FIGURE 4, IF MATCHING THE EXISTING FILL SLOPE OR INSTALLING A 2:1 FILL SLOPE (WHICHEVER IS FLATTER) STILL RESULTS IN THE TOE OF SLOPE EXTENDING BEYOND THE RIGHT-OF-WAY OR STILL IMPACTS A SENSITIVE OBSTRUCTION, THEN THE PROPOSED EARTH SHOULDER WIDTH MAY BE REDUCED SO THAT THE RESULTING TOE OF SLOPE WILL REMAIN WITHIN THE RIGHT-OF-WAY AND/OR NOT IMPACT THE SENSITIVE OBSTRUCTION.

7. AS SHOWN IN FIGURE 5, IF THE EXISTING FILL SLOPE IS STEEPER THAN 2:1 AND THERE IS NOT ENOUGH SPACE TO INSTALL A 2:1 FILL SLOPE WITHOUT EXTENDING BEYOND THE RIGHT-OF-WAY AND/OR IMPACTING A SENSITIVE OBSTRUCTION, THEN CLASS II CHANNEL LINING MAY BE INSTALLED ALONG THE STEEP EXISTING SLOPE IN ORDER TO ESTABLISH A WIDTH OF AGGREGATE SHOULDER. THESE LOCATIONS WILL BE NOTED ELSEWHERE IN THE PROPOSAL AS SLOPE PROTECTION. THE CHANNEL LINING IS TO BE CAPPED WITH GEOTEXTILE FABRIC TYPE IV AND 4" OF CRUSHED STONE BASE, OR 4" OF DGA WITH DOUBLE ASPHALT SEAL COAT.

8. AS SHOWN IN FIGURE 6, AS THE HEIGHT OF THE FILL INCREASES, MULTIPLE EMBANKMENT BENCHES MAY BE REQUIRED.

SEE SHEET 2 FOR
NOTES 9 THRU 13

**KENTUCKY
DEPARTMENT OF HIGHWAYS**

DITCHING & SHOULDERING
AND EMBANKMENT
BENCHING DETAILS
(SHEET 1 OF 2)

NOT TO SCALE

FIGURE 7

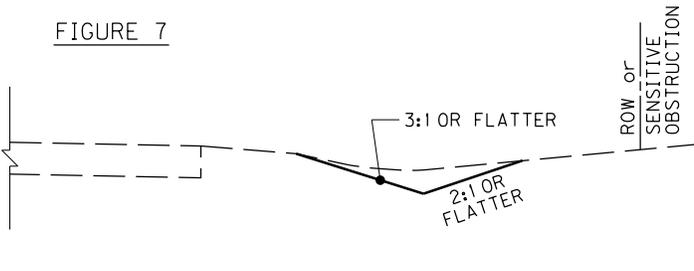


FIGURE 8

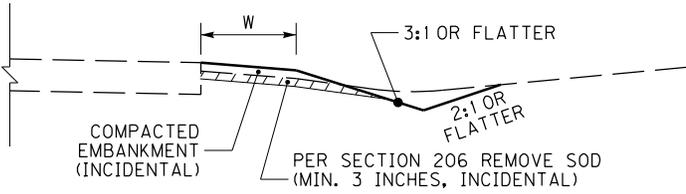


FIGURE 9

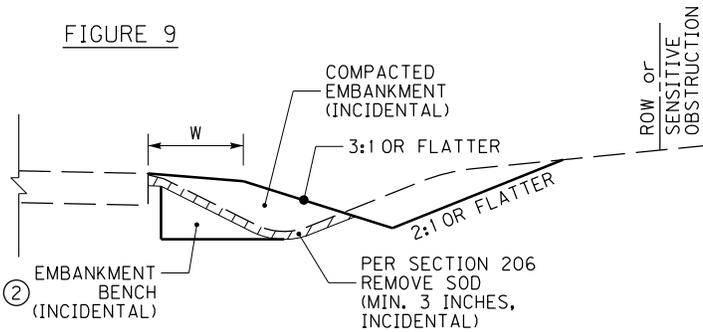


FIGURE 10


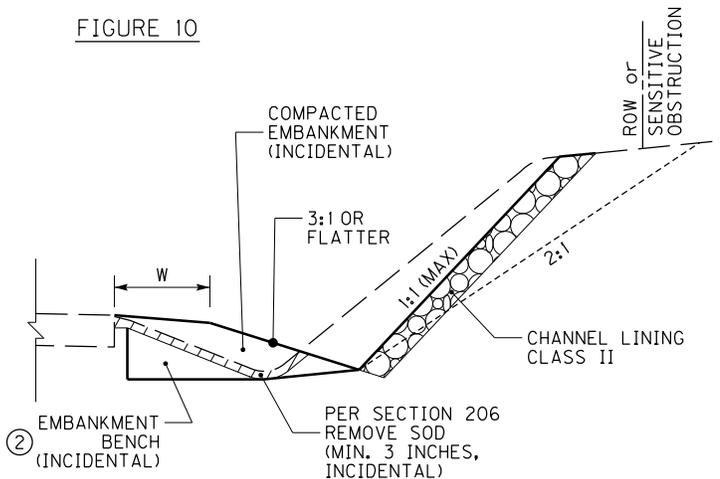


FIGURE 11

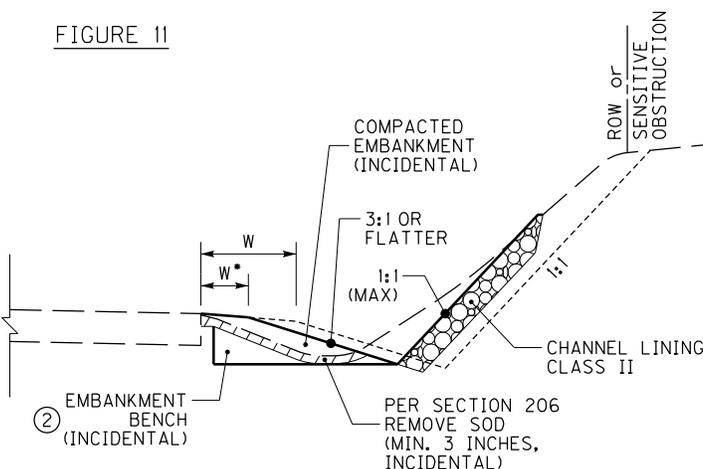

~ NOTES ~

BID ITEM AND UNIT TO BID:
2575 - DITCHING & SHOULDERING - LF

1. THE BID ITEM 'DITCHING & SHOULDERING' SHALL CONSIST OF ANY AND ALL NECESSARY CLEARING & GRUBBING, GRADING, AND/OR RESHAPING OF THE EXISTING SHOULDER, DITCH, AND/OR ROADSIDE TO ACHIEVE THE PROPOSED SHOULDER, DITCH, AND/OR ROADSIDE DIMENSIONS, AS DETAILED ON THE TYPICAL SECTIONS. FINAL PAYMENT WILL BE BASED ON THE ACTUAL LINEAR FEET OF DITCHING AND SHOULDERING PERFORMED, AND WILL INCLUDE ALL WORK AND INCIDENTALS NECESSARY TO PERFORM THE DITCHING AND SHOULDERING ACCORDING TO THESE DETAILS, NOTES, AND ANY OTHER INFORMATION FOUND ELSEWHERE IN THE PROPOSAL OR STANDARD SPECIFICATIONS. IN THE CASE OF A DISCREPANCY, REFER TO SECTION 105.05 OF THE STANDARD SPECIFICATIONS. DEPENDING ON THE EXISTING CONDITIONS ENCOUNTERED, DITCHING AND SHOULDERING MAY ALSO INCLUDE, BUT IS NOT LIMITED TO:

- PROVIDING ADDITIONAL EARTH MATERIAL AND GRADING, SHAPING, AND COMPACTING THE EARTH MATERIAL TO ACHIEVE THE DIMENSIONS SHOWN ON THE TYPICAL SECTIONS. COMPACT MATERIAL ACCORDING TO SECTION 206 OF THE STANDARD SPECIFICATIONS.
- NOTE: ADDITIONAL EARTH MATERIAL PROVIDED SHALL BE SUITABLE FOR VEGETATION GROWTH.
- EXCAVATING AND REMOVING EXCESS MATERIAL TO ACHIEVE THE DIMENSIONS SHOWN ON THE TYPICAL SECTIONS
- EMBANKMENT BENCHING

② EMBANKMENT BENCHING WILL BE REQUIRED WHEN THE EXISTING GROUNDLINE HAS AN INCLINE GREATER THAN 15% (APPROX. 6:1). ANY AND ALL REQUIRED EMBANKMENT BENCHING SHALL BE INCIDENTAL TO THE BID ITEM 'DITCHING AND SHOULDERING'. THE FOLLOWING ARE GUIDELINES FOR EMBANKMENT BENCHING USED IN CONJUNCTION WITH THE BID ITEM 'DITCHING AND SHOULDERING':

- THE TYPICAL HEIGHT (OR RISE) IS 1' TO 6'
- THE TYPICAL WIDTH (OR RUN) WILL VARY BASED ON THE HEIGHT OF THE BENCH
- MULTIPLE SMALL BENCHES MAY BE USED, AND MAY BE MORE ADVANTAGEOUS AS THIS WILL REQUIRE PROCESSING LESS EARTHWORK.


SEE SHEET 1 FOR NOTES 3. THRU 8.

9. AS SHOWN IN FIGURE 7, IN SOME SITUATIONS, ALL THAT MAY BE REQUIRED IS TO CLEAN OUT THE EXISTING DITCH AND RESHAPE IT TO THE PROPOSED DIMENSIONS. THE MATERIAL EXCAVATED FROM THE DITCH MAY BE RE-USED ELSEWHERE ON THE PROJECT, PROVIDED THE ENGINEER DETERMINES THE MATERIAL REMOVED FROM THE DITCH IS SUITABLE FOR THE INTENDED RE-USE.
10. AS SHOWN IN FIGURE 8, IN SOME SITUATIONS, THE DITCH AND SHOULDER MAY ONLY NEED MINOR REGRADING AND/OR RESHAPING. THE MATERIAL EXCAVATED FROM THE DITCH MAY BE USED TO RESHAPE THE EARTH SHOULDER, PROVIDED THE ENGINEER DETERMINES THE MATERIAL REMOVED FROM THE DITCH IS SUITABLE FOR SHOULDERING. IF THE MATERIAL IS NOT SUITABLE, ADDITIONAL EARTH MATERIAL MAY BE REQUIRED.
11. AS SHOWN IN FIGURE 9, IN MOST SITUATIONS, REGRADING AND RESHAPING THE ROADSIDE TO ACHIEVE THE PROPOSED SHOULDER, DITCH, AND/OR ROADSIDE DIMENSIONS WILL RESULT IN MOVING THE DITCH FURTHER AWAY FROM THE ROADWAY. IT IS DESIRED THAT DITCH FORESLOPES BE 3:1 OR FLATTER AND DITCH BACKSLOPES BE 2:1 OR FLATTER.
12. AS SHOWN IN FIGURE 10, IF INSTALLING A 2:1 DITCH BACKSLOPE WILL RESULT IN THE TOP OF CUT EXTENDING BEYOND THE RIGHT-OF-WAY OR IMPACTING A SENSITIVE OBSTRUCTION, THEN THE DITCH BACK SLOPE MAY BE INSTALLED STEEPER THAN 2:1, UP TO 1:1 MAXIMUM. IN THIS SITUATION, THE DITCH BACKSLOPE SHALL HAVE CLASS II CHANNEL LINING INSTALLED FOR SLOPE PROTECTION.
13. AS SHOWN IN FIGURE 11, IF USING A 1:1 DITCH BACKSLOPE STILL RESULTS IN THE TOP OF CUT EXTENDING BEYOND THE RIGHT-OF-WAY OR STILL IMPACTS A SENSITIVE OBSTRUCTION, THEN THE PROPOSED EARTH SHOULDER WIDTH MAY BE REDUCED SO THAT THE STEEP DITCH BACKSLOPE CAN BE INSTALLED WITHIN THE RIGHT-OF-WAY AND/OR TO AVOID A SENSITIVE OBSTRUCTION.

**KENTUCKY
DEPARTMENT OF HIGHWAYS**

DITCHING & SHOULDERING
AND EMBANKMENT
BENCHING DETAILS
(SHEET 2 OF 2)


NOT TO SCALE

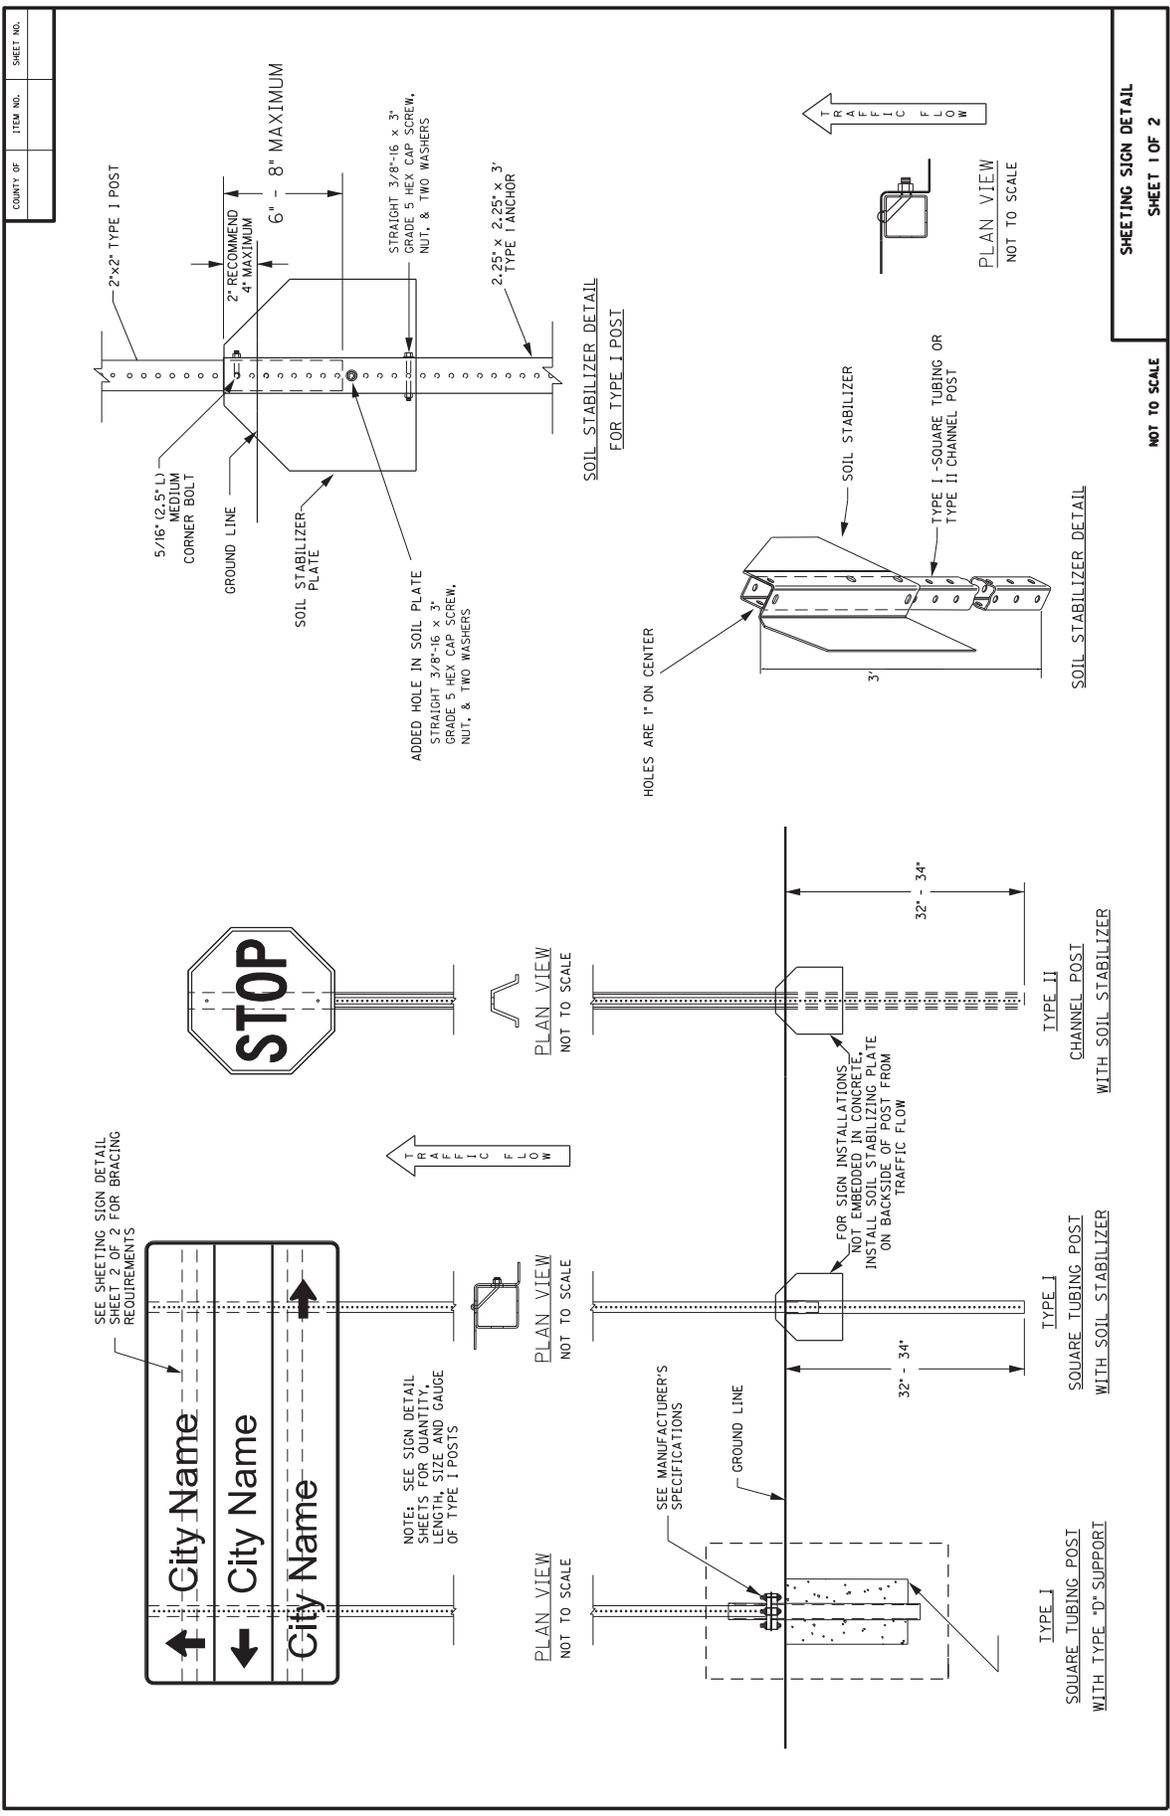

SHEETING SIGN DETAIL
SHEET 1 OF 2

NOT TO SCALE

SOIL STABILIZER DETAIL

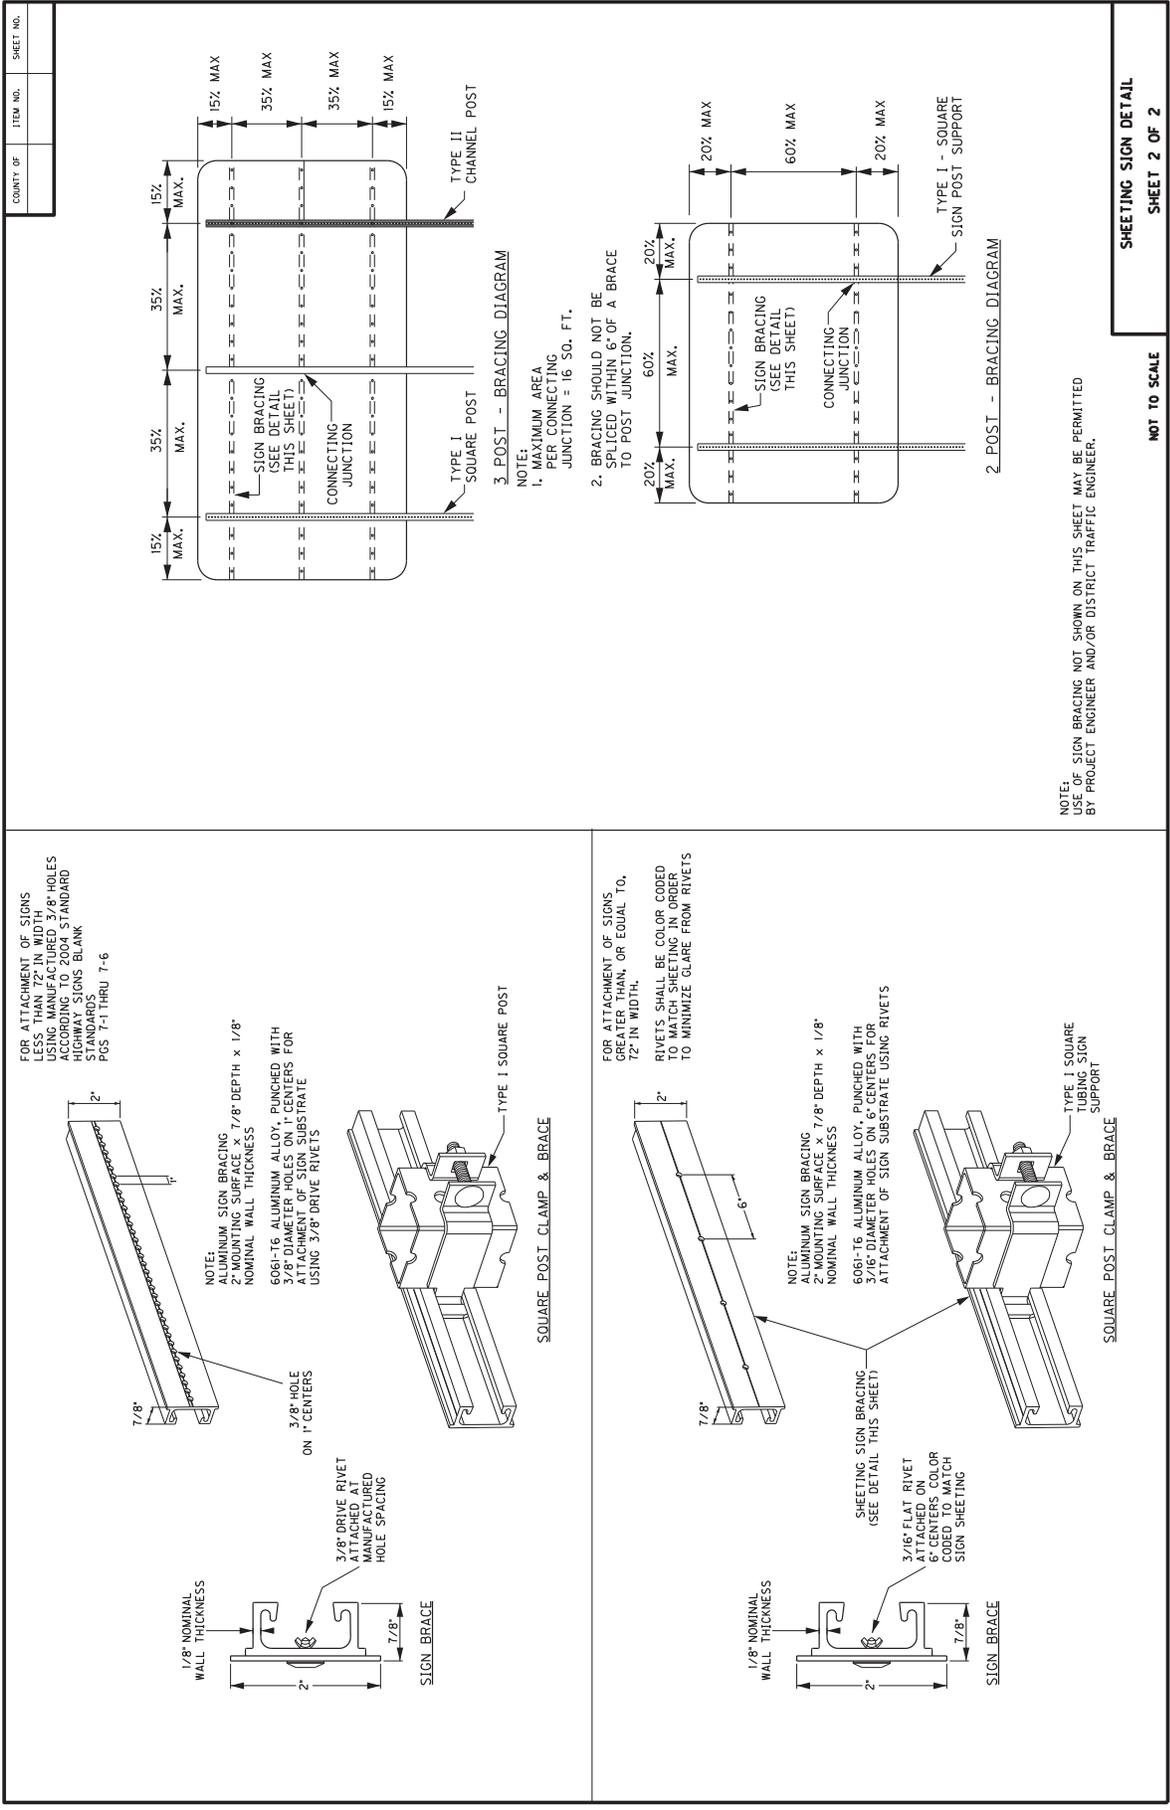

GUARDRAIL DELIVERY VERIFICATION SHEET

Contract Id: _____

Contractor: _____

Section Engineer: _____

District & County: _____

<u>DESCRIPTION</u>	<u>UNIT</u>	<u>QTY LEAVING PROJECT</u>	<u>QTY RECEIVED@BB YARD</u>
GUARDRAIL (Includes End treatments & crash cushions)	LF	_____	_____
STEEL POSTS	EACH	_____	_____
STEEL BLOCKS	EACH	_____	_____
WOOD OFFSET BLOCKS	EACH	_____	_____
BACK UP PLATES	EACH	_____	_____
CRASH CUSHION	EACH	_____	_____
NUTS, BOLTS, WASHERS	BAG/BCKT	_____	_____
DAMAGED RAIL TO MAINT. FACILITY	LF	_____	_____
DAMAGED POSTS TO MAINT. FACILITY	EACH	_____	_____

***Required Signatures before Leaving Project Site**

Printed Section Engineer's Representative _____ & Date _____

Signature Section Engineer's Representative _____ & Date _____

Printed Contractor's Representative _____ & Date _____

Signature Contractor's Representative _____ & Date _____

***Required Signatures after Arrival at Bailey Bridge Yard (All material on truck must be counted & the quantity received column completed before signatures)**

Printed Bailey Bridge Yard Representative _____ & Date _____

Signature Bailey Bridge Yard Representative _____ & Date _____


Printed Contractor's Representative _____ & Date _____

Signature Contractor's Representative _____ & Date _____

**Payment for the bid item remove guardrail will be based upon the quantities shown in the Bailey Bridge Yard received column. Payment will not be made for guardrail removal until the guardrail verification sheets are electronically submitted to the Section Engineer by the Bailey Bridge Yard Representative.

Completed Form Submitted to Section Engineer Date: _____ By: _____

GUARDRAIL ON BRIDGE, CASE I-A CURB HEIGHT GREATER THAN 2 INCHES

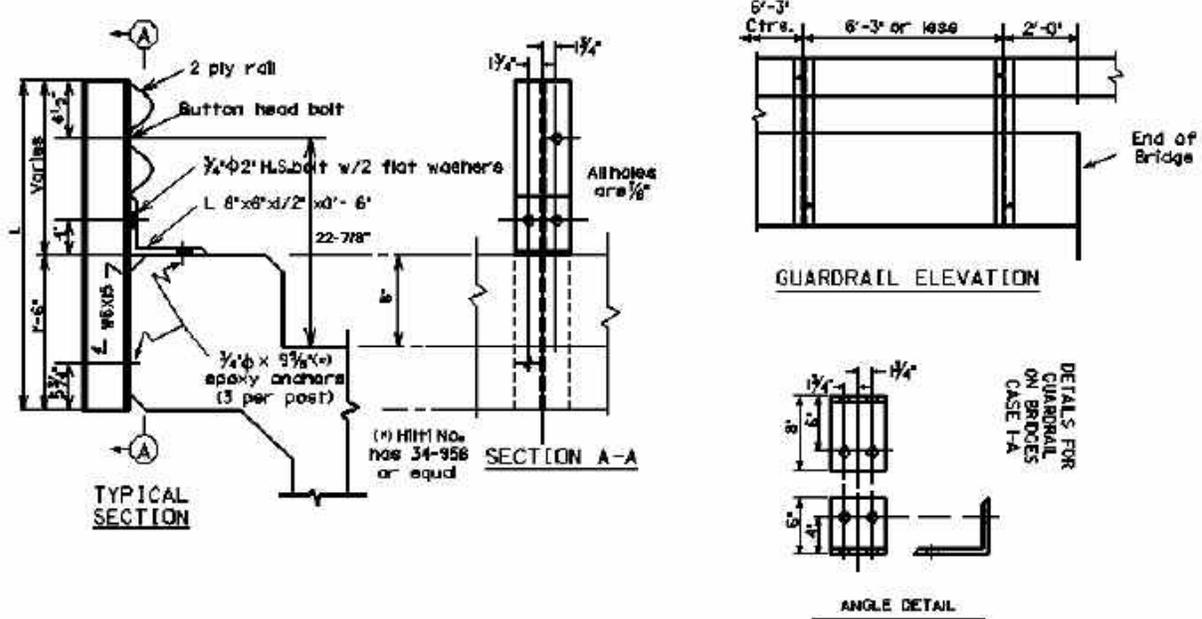



Bridge MP	L=	D=	No. Posts	On the Bridge LF of 2 PLY Rail
3.99	36"	7"	36	430
4.15	36"	7"	6	70

L = Length of Guardrail Post D = Curb Height W = Width of Bridge Curb


WARRANTS: When the dimension from the top of the existing riding surface to the top of the curb is greater than 2 inches and where the clear distance between the faces of the guardrail is less than 20 feet or the curb width is less than 18 inches, remove existing concrete and/or guardrail bridge rail and use Case I-A Bridge Guardrail.

- NOTES:**
1. When using Case I-A Bridge Guardrail, do not pave the bridge surface flush to the top of the curb.
 2. When Case I-A Bridge Guardrail is used, use a Precast Concrete Bridge Block at the ends of the bridge which face opposing traffic. See detail drawing for Precast Concrete Bridge Block.

PRECAST CONCRETE BRIDGE RAIL BLOCK

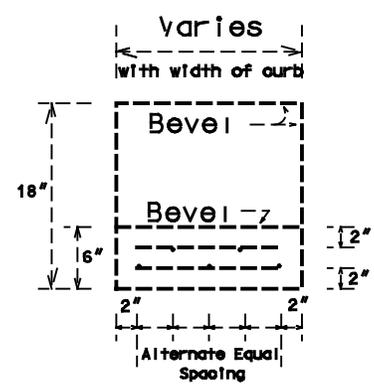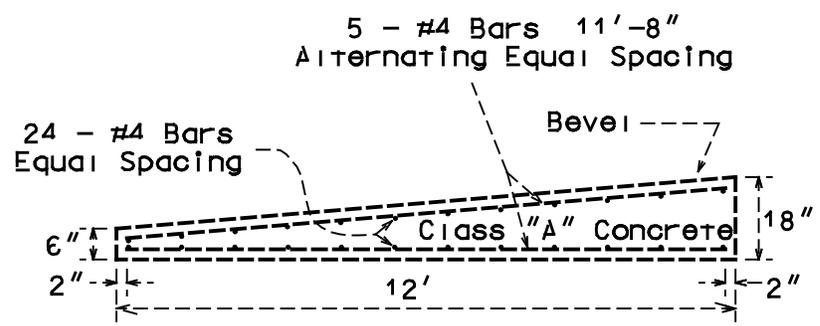

Note: Excavate as needed
to set block in place.

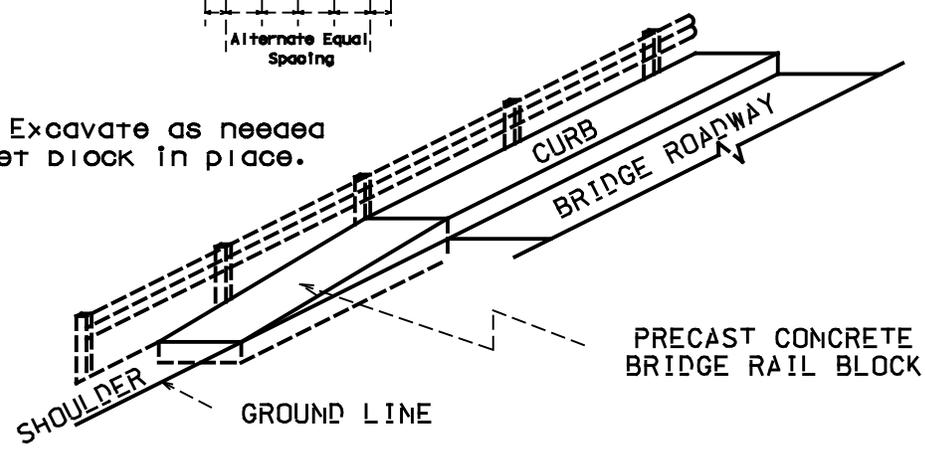









NOTE: ALL EXPOSED EDGES
SHALL BE BEVELED $\frac{3}{4}$ "

COUNTY OF	ITEM NO.	SHEET

NOTES

- ITEM CODE BID ITEM UNIT
- 1726 SAFETY BOX INLET-18 INCH SDB-1 EACH
- 1727 SAFETY BOX INLET-24 INCH SDB-1 EACH
- THE UNIT BID FOR EACH STRUCTURE SHALL INCLUDE ALL CONCRETE, STRUCTURAL STEEL GRATING, EXCAVATION, LABOR AND INCIDENTALS NECESSARY FOR ITS CONSTRUCTION AS DETAILED ON THIS SHEET.
- ① TOE OF BOX SHALL BE RAISED OR LOWERED TO FIT EXISTING FIELD CONDITIONS.
- ② SKEW OF BOX SHALL VARY TO FIT EXISTING FIELD CONDITIONS.

APPROXIMATE QUANTITIES			
CLASS "A"	GRATE	LBS. STRUCTURAL STEEL	TOTAL POUNDS
CUBIC YARDS	NUMBER	EACH GRATE	
1.44	1	145	298
	2	153	

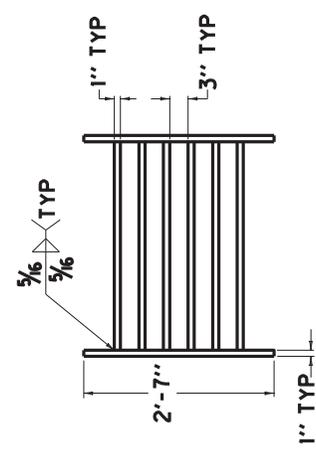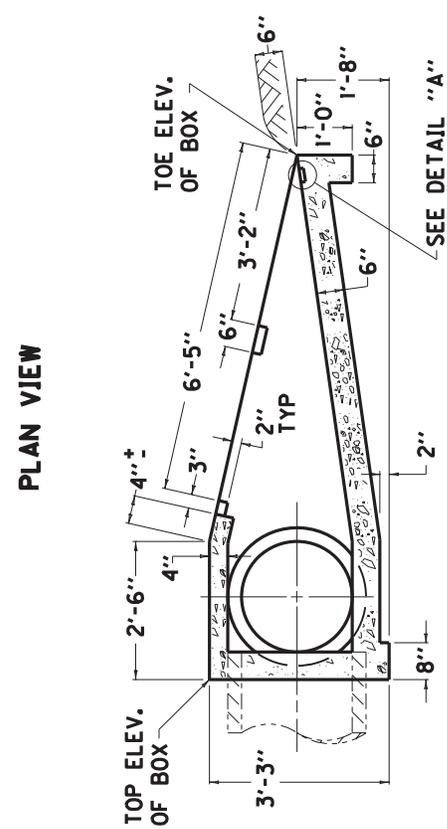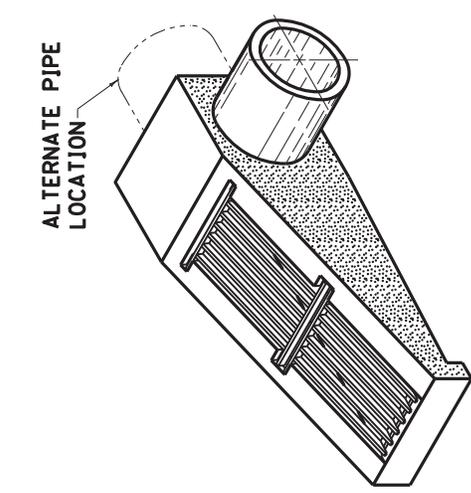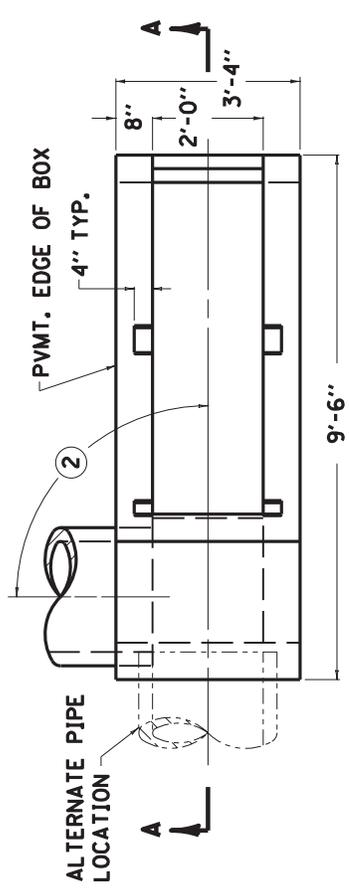

KENTUCKY
 DEPARTMENT OF HIGHWAYS

SAFETY TYPE
 BOX INLET
 (18" OR 24")

APPROVED _____
 PROJECT ENGINEER

Contract No. 204206
 Page 6 of 267



06-04-2009
 DATE

COUNTY OF	ITEM NO.	SHEET NO.


NOTES

1. NUMBER OF BARS IN ONE HEADWALL.
2. DIMENSIONS ARE O. TO O. OF BARS.
3. ALL BARS ARE STRAIGHT EXCEPT THOSE SHOWN BELOW.


BENT BAR SHAPES



MARK	S	NO	LGTH	K	
				①	②
				FT	IN
36"					
Q	4	5	19	6	1 8
b	4	16	3	6	
c1	4	2	5	0	3 6
c2	4	2	5	10	3 6
c3	4	2	6	10	3 6
c4	4	2	7	10	3 6
c5	4	2	8	10	3 6
c6	4	2	9	10	3 6
c7	4	1	11	0	3 6
c8	4	5	11	6	3 6
d	4	6	13	4	

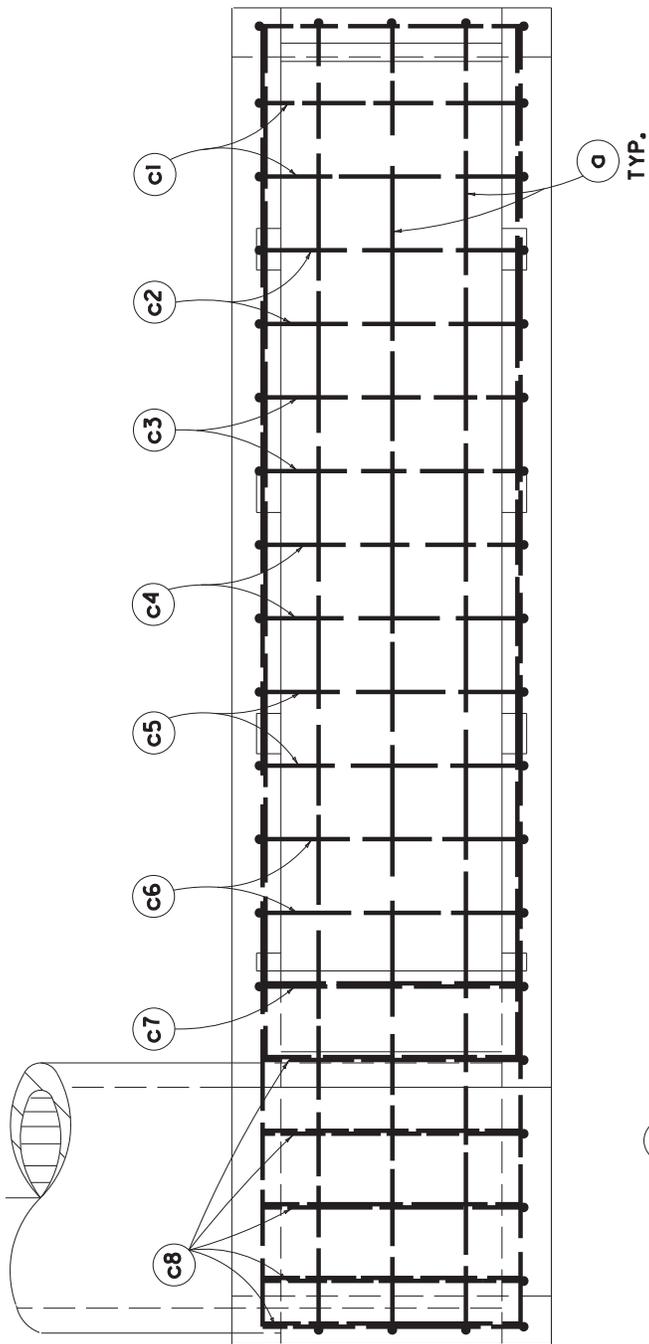

PLAN VIEW

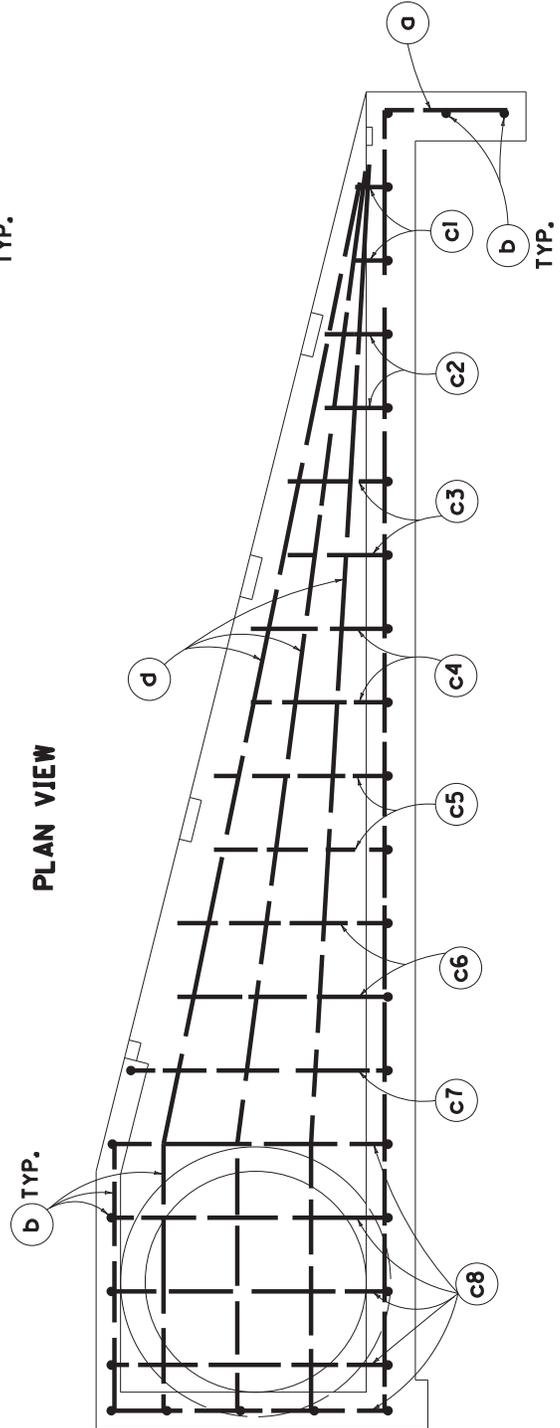

ELEVATION VIEW

SHEET 2 OF 2

KENTUCKY
 DEPARTMENT OF HIGHWAYS

**BILL OF REINFORCEMENT
 SAFETY TYPE BOX INLET
 (36")**

Contract No. 204206
 Page 8 of 267

APPROVED:  ENGINEER
 06-04-2008


COUNTY OF	ITEM NO.	SHEET
		019

NOTES


ITEM CODE BID ITEM UNIT
 1728 SAFETY BOX INLET-18 IN DBL SOB-5 EACH
 1729 SAFETY BOX INLET-24 IN DBL SOB-5 EACH

THE UNIT BID FOR EACH STRUCTURE SHALL INCLUDE ALL CONCRETE, STRUCTURAL STEEL GRATING, EXCAVATION, LABOR AND INCIDENTALS NECESSARY FOR ITS CONSTRUCTION AS DETAILED ON THIS SHEET.


① TOE OF BOX SHALL BE RAISED OR LOWERED TO FIT EXISTING FIELD CONDITIONS.
 ② ANGLE BETWEEN BOX WALLS MAY VARY TO FIT EXISTING FIELD CONDITIONS.

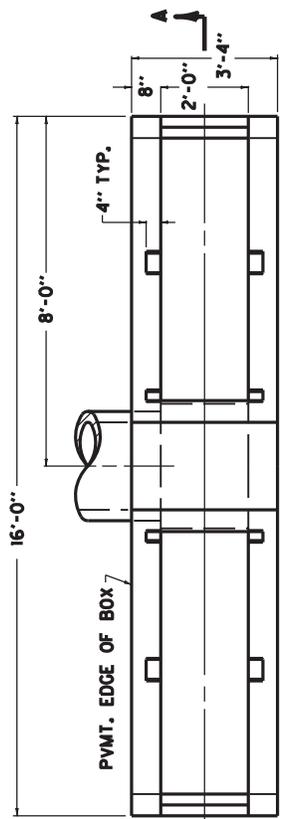


PLAN VIEW

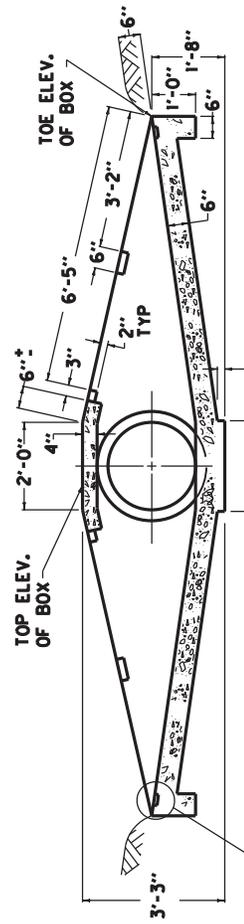

SECTION A-A



DETAIL "A"

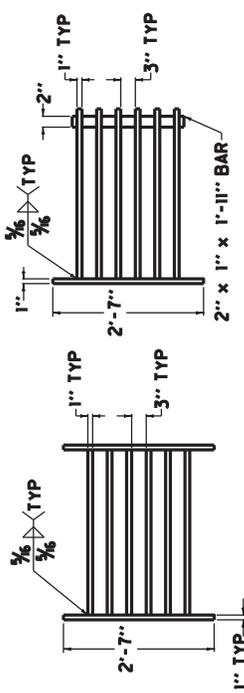


**GRATE NO. 1
PLAN VIEW**


**GRATE NO. 2
PLAN VIEW**




**GRATE NO. 1
SIDE ELEVATION**



**GRATE NO. 2
SIDE ELEVATION**



SECTIONAL VIEW

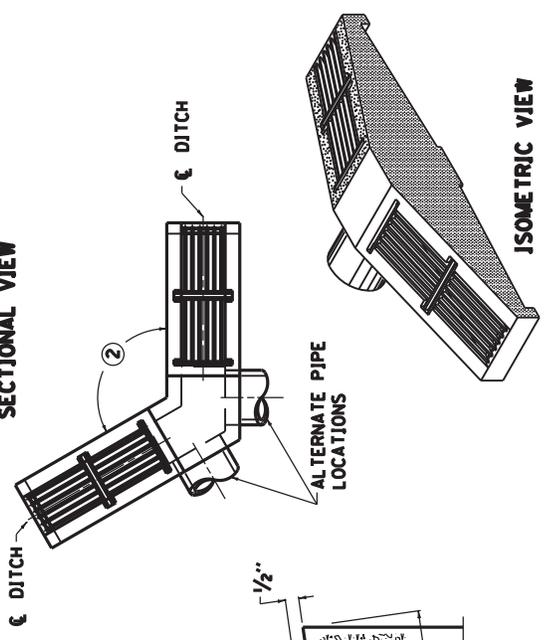

ISOMETRIC VIEW

APPROXIMATE QUANTITIES			
CLASS	GRATE	LBS. STRUCTURAL STEEL	
"A"	NUMBER	EACH GRATE	TOTAL POUNDS
2.07	1	145	596
	2	153	

N/A

DBL SAFETY BOX INLET DETAIL SHEET

PART II
SPECIFICATIONS AND STANDARD DRAWINGS

SPECIFICATIONS REFERENCE

Any reference in the plans or proposal to previous editions of the *Standard Specifications for Road and Bridge Construction* and *Standard Drawings* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2019* and *Standard Drawings, Edition of 2020*.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting.
The Supplemental Specifications can be found at the following link:

<http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx>

SPECIAL NOTE FOR BARCODE LABEL ON PERMANENT SIGNS

1.0 DESCRIPTION. Install barcode label on sheeting signs. Section references herein are to the Department’s Standard Specifications for Road and Bridge Construction, current edition.

2.0 MATERIALS. The Department will provide the Contractor with a 2 inch x 1 inch foil barcode label for each permanent sheeting sign. A unique number will be assigned to each barcode label.

The Contractor shall contact the Operations and Pavement Management Branch in the Division of Maintenance at (502) 564-4556 to obtain the barcode labels.

3.0 CONSTRUCTION. Apply foil barcode label in the lower right quadrant of the sign back. Signs where the bottom edge is not parallel to the ground, the lowest corner of the sign shall serve as the location to place the barcode label. The barcode label shall be placed no less than one-inch and no more than three inches from any edge of the sign. The barcode must be placed so that the sign post does not cover the barcode label.

Barcodes shall be applied in an indoor setting with a minimum air temperature of 50°F or higher. Prior to application of the barcode label, the back of the sign must be clean and free of dust, oil, etc. If the sign is not clean, an alcohol swab shall be used to clean the area. The area must be allowed to dry prior to placement of the barcode label.

Data for each sign shall include the barcode number, MUTCD reference number, sheeting manufacturer, sheeting type, manufacture date, color of primary reflective surface, installation date, latitude and longitude using the North American Datum of 1983 (NAD83) or the State Plane Coordinates using an x and y ordinate of the installed location.

Data should be provided electronically on the TC 71-229 Sign Details Information and TC 71-230 Sign Assembly Information forms. The Contractor may choose to present the data in a different format provided that the information submitted to the Department is equivalent to the information required on the Department TC forms. The forms must be submitted in electronic format regardless of which type of form is used. The Department will not accept PDF or handwritten forms. These completed forms must be submitted to the Department prior to final inspection of the signs. The Department will not issue formal acceptance for the project until the TC 71-229 and TC-230 electronic forms are completed for all signs and sign assemblies on the project.

4.0 MEASUREMENT. The Department will measure all work required for the installation of the barcode label and all work associated with completion and submission of the sign inventory data (TC 71-229 and TC 71-230).

The installation of the permanent sign will be measured in accordance to Section 715.

5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:



<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
24631EC	Barcode Sign Inventory	Each

The Department will not make payment for this item until all barcodes are installed and sign inventory is complete on every permanent sign installed on the project. The Department will make payment for installation of the permanent sign in accordance to Section 715. The Department will consider payment as full compensation for all work required under this special note.





One Sign Post





↑
2" Wide Post

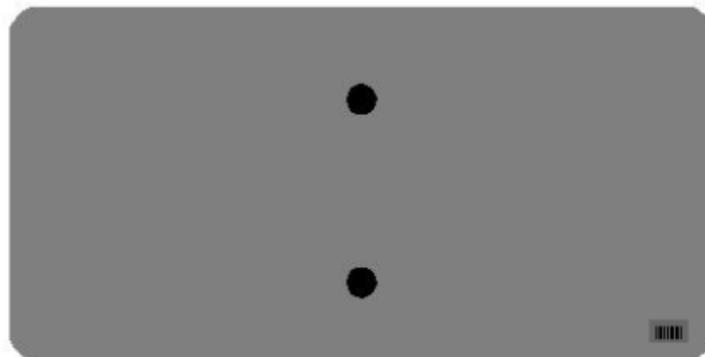


One Sign Post

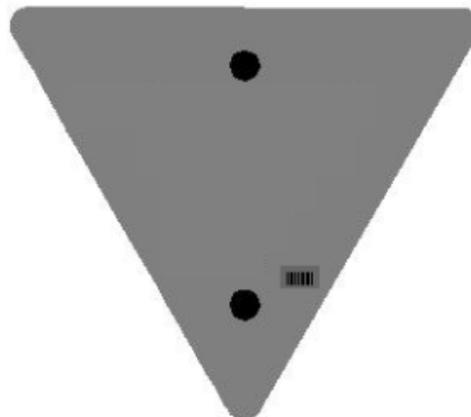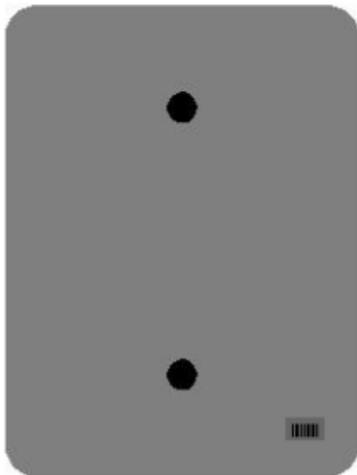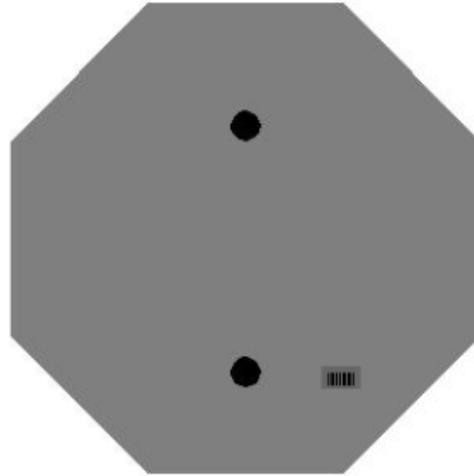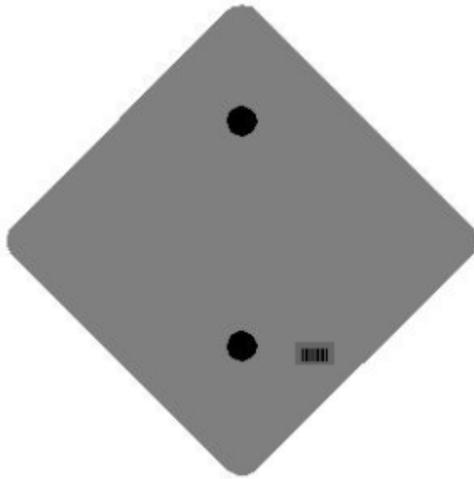


One Sign Post

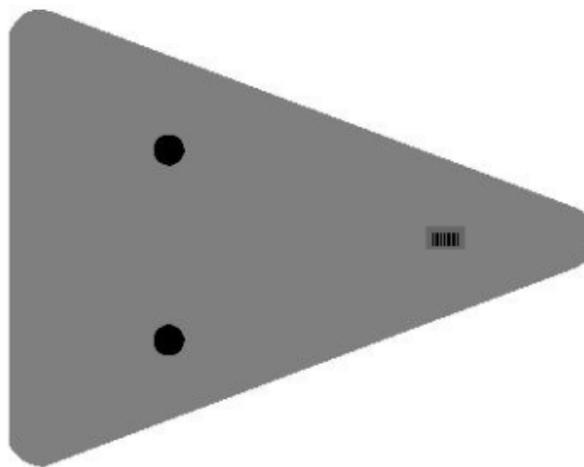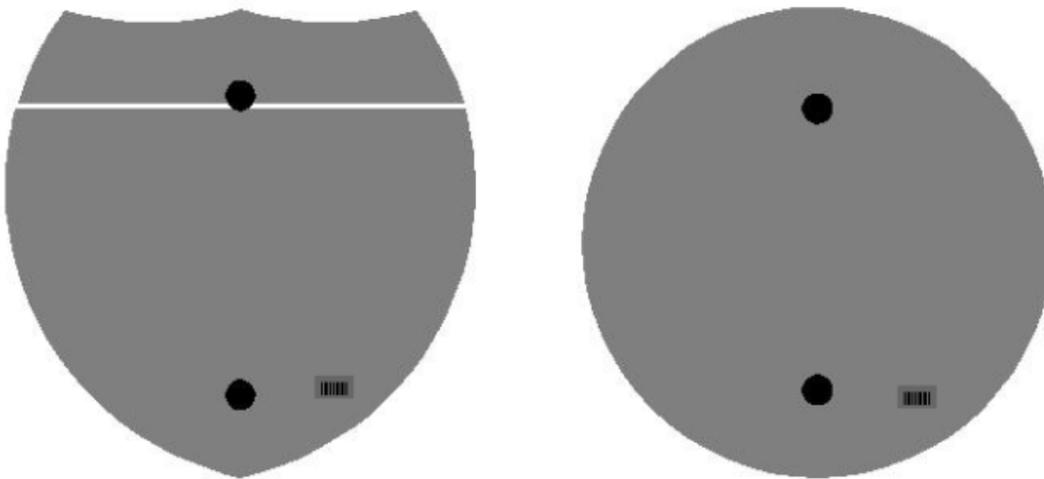

Double Sign Post

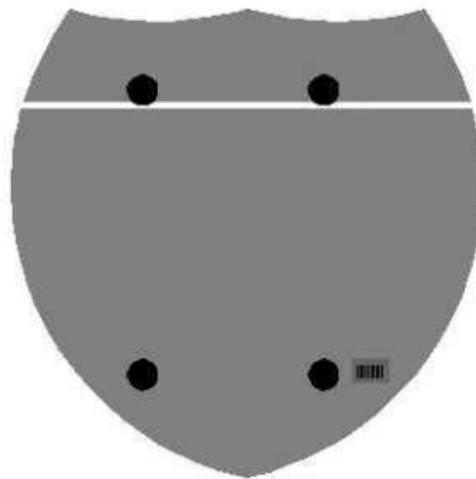

Interstate
Shield

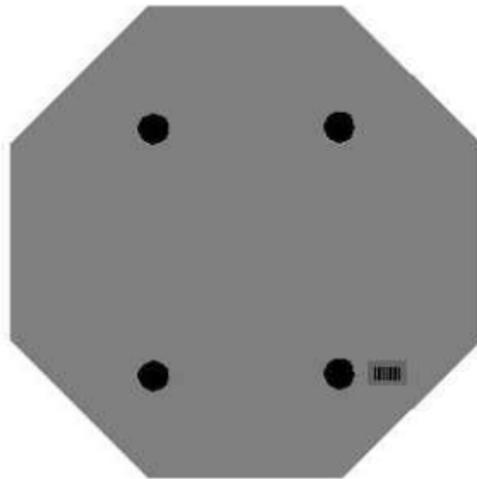


48" Stop

2 Post Signs



↑
2" Wide Post

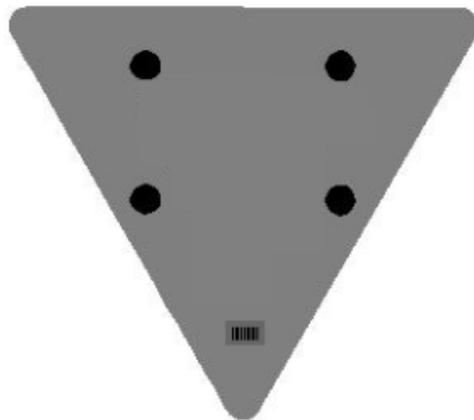

2020 STANDARD DRAWINGS THAT APPLY

**ROADWAY
~ BARRIERS ~**

GUARDRAIL CONNECTORS TO BRIDGE ENDS

GUARDRAIL CONNECTOR TO BRIDGE END TYPE A COMPONENTS.....	RBC-002-04
GUARDRAIL CONNECTOR TO BRIDGE END TYPE A AND A-1 COMPONENTS.....	RBC-003-09
GUARDRAIL CONNECTOR TO BRIDGE END TYPE A.....	RBC-005-01
GUARDRAIL CONNECTOR TO BRIDGE END TYPE A NOTES.....	RBC-005N

TYPICAL BARRIER INSTALLATIONS

TYPICAL GUARDRAIL INSTALLATIONS.....	RBI-001-12
TYPICAL GUARDRAIL INSTALLATIONS.....	RBI-002-07
INSTALLATION OF GUARDRAIL END TREATMENT TYPE 1.....	RBI-004-06

GUARDRAIL HARDWARE

STEEL BEAM GUARDRAIL (W-BEAM).....	RBR-001-13
GUARDRAIL COMPONENTS.....	RBR-005-11
GUARDRAIL TERMINAL SECTIONS.....	RBR-010-06
STEEL GUARDRAIL POSTS.....	RBR-015-06
GUARDRAIL END TREATMENT TYPE 1.....	RBR-020-07
GUARDRAIL END TREATMENT TYPE 7.....	RBR-050-08
GUARDRAIL END TREATMENT TYPE 7 ALTERNATE ANCHOR.....	RBR-051-01
DELINEATORS FOR GUARDRAIL.....	RBR-005-01

~ DRAINAGE ~

PAVED DITCHES, FLUME INLETS AND CHANNEL LININGS

CHANNEL LINING CLASS II AND III.....	RDD-040-05
--------------------------------------	------------

PIPE AND BOX CULVERT HEADWALLS

12" - 27" - SINGLE LINE PIPE

CONCRETE HEADWALLS FOR 12" - 27" CIRCULAR PIPE CULVERTS.....	RDH-005-02
--	------------

TYPICAL DRAINAGE INSTALLATIONS

CULVERT, ENTRANCE & STORM SEWER PIPE TYPES & COVER HEIGHTS (12" - 24" PIPE).....	RDI-001-10
PIPE BEDDING FOR CULVERTS, ENTRANCE, AND STORM SEWER PIPE.....	RDI-020-10
PIPE BEDDING FOR CULVERTS, ENTRANCE, AND STORM SEWER, REINFORCED CONC. PIPE.....	RDI-021-01
PIPE BEDDING, TRENCH CONDITION.....	RDI-025-06
PIPE BEDDING, TRENCH CONDITION, REINFORCED CONC. PIPE.....	RDI-026-01
EROSION CONTROL BLANKET SLOPE INSTALLATION.....	RDI-040-01
EROSION CONTROL BLANKET CHANNEL INSTALLATION.....	RDI-041-01

MISCELLANEOUS DRAINAGE

TEMPORARY SILT FENCE.....	RDX-210-03
TEMPORARY SILT FENCE WITH WOVEN WIRE FENCE FABRIC.....	RDX-215-01
SILT TRAP - TYPE A.....	RDX-220-05
SILT TRAP - TYPE B.....	RDX-225-01
SILT TRAP - TYPE C.....	RDX-230-01

Standard Drawings That Apply
Page 2 of 2

~ GENERAL ~

CURVE WIDENING AND SUPERELEVATION

CURVE WIDENING AND SUPERELEVATION TRANSITIONSRGS-001-07

~ PAVEMENT ~

MEDIANS, CURBS, APPROACHES, ENTRANCES, ETC.

APPROACHES, ENTRANCES, AND MAIL BOX TURNOUTRPM-110-07

TRAFFIC

~ PERMANENT ~

RUMBLE STRIPS

SHOULDER & EDGELINE RUMBLE STRIPS PLACEMENT DETAILS TPR-115

EDGELINE RUMBLE STRIP DETAILS TWO LANE ROADWAYS TPR-120

~ TEMPORARY ~

TRAFFIC CONTROL

LANE CLOSURE TWO-LANE HIGHWAY TTC-100-05

SHOULDER CLOSURE..... TTC-135-03

DEVICES

DOUBLE FINES ZONE SIGNS TTD-120-03

PAVEMENT CONDITION WARNING SIGNS TTD-125-03

STRIPING OPERATIONS

MOBILE OPERATION FOR PAINT STRIPING CASE I..... TTS-100-02

MOBILE OPERATION FOR PAINT STRIPING CASE II TTS-105-02

MOBILE OPERATION FOR DURABLE STRIPING CASE III..... TTS-130-02

MOBILE OPERATION FOR DURABLE STRIPING CASE IV..... TTS-135-02

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

FHWA-1273 -- Revised May 1, 2012

**REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS**

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on [Form FHWA-1391](#). The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions

of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

- (i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
- (ii) The classification is utilized in the area by the construction industry; and
- (iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program. Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly

rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is

evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS
PREFERENCE FOR APPALACHIAN DEVELOPMENT
HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS
ROAD CONTRACTS**

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

**KENTUCKY TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS**

**EMPLOYMENT REQUIREMENTS
RELATING TO
NONDISCRIMINATION OF EMPLOYEES
(APPLICABLE TO FEDERAL-AID SYSTEM CONTRACTS)**

**AN ACT OF THE KENTUCKY GENERAL ASSEMBLY
TO PREVENT DISCRIMINATION IN EMPLOYMENT**

**KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972**

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

Standard Title VI/Non-Discrimination Assurances

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. **Compliance with Regulations:** The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, **Federal Highway Administration**, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.
2. **Non-discrimination:** The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.
3. **Solicitations for Subcontracts, Including Procurements of Materials and Equipment:** In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.
4. **Information and Reports:** The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the **Federal Highway Administration** to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the **Federal Highway Administration**, as appropriate, and will set forth what efforts it has made to obtain the information.
5. **Sanctions for Noncompliance:** In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the **Federal Highway Administration** may determine to be appropriate, including, but not limited to:
 - a. withholding payments to the contractor under the contract until the contractor complies; and/or
 - b. cancelling, terminating, or suspending a contract, in whole or in part.
6. **Incorporation of Provisions:** The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the **Federal Highway Administration** may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

Standard Title VI/Non-Discrimination Statutes and Authorities

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the “contractor”) agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21;
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms “programs or activities” to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131 -- 12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration’s Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 *et seq.*)

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

No present or former public servant shall, within six (6) months following termination of his office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 3 Fountain Place, Frankfort, Kentucky 40601; telephone (502) 564-7954.

"General Decision Number: KY20200040 08/28/2020

Superseded General Decision Number: KY20190040

State: Kentucky

Construction Type: Highway

Counties: Allen, Ballard, Butler, Caldwell, Calloway, Carlisle, Christian, Crittenden, Daviess, Edmonson, Fulton, Graves, Hancock, Henderson, Hickman, Hopkins, Livingston, Logan, Lyon, Marshall, McCracken, McLean, Muhlenberg, Ohio, Simpson, Todd, Trigg, Union, Warren and Webster Counties in Kentucky.

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels, building structures in rest area projects & railroad construction; bascule, suspension & spandrel arch bridges designed for commercial navigation, bridges involving marine construction; and other major bridges).

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.80 for calendar year 2020 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.80 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2020. If this contract is covered by the EO and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must pay workers in that classification at least the wage rate determined through the conformance process set forth in 29 CFR 5.5(a)(1)(ii) (or the EO minimum wage rate, if it is higher than the conformed wage rate). The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60). Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number	Publication Date
0	01/03/2020
1	01/10/2020
2	01/31/2020
3	08/14/2020
4	08/28/2020

BRIN0004-002 06/01/2017

BALLARD, BUTLER, CALDWELL, CARLISLE, CRITTENDEN, DAVIESS, EDMONSON, FULTON, GRAVES, HANCOCK, HENDERSON, HICKMAN, HOPKINS, LIVINGSTON, LYON, MARSHALL, MCCRACKEN, MCLEAN, MUHLENBERG, OHIO, UNION, and WEBSTER COUNTIES

Rates

Fringes

BRICKLAYER

Ballard, Caldwell, Carlisle, Crittenden, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, and McCracken Counties.....	\$ 30.50	15.16
Butler, Edmonson, Hopkins, Muhlenberg, and Ohio Counties.....	\$ 26.80	12.38
Daviess, Hancock, Henderson, McLean, Union, and Webster Counties.....	\$ 30.00	15.16

BRTN0004-005 06/01/2017

ALLEN, CALLOWAY, CHRISTIAN, LOGAN, SIMPSON, TODD, TRIGG, and
WARREN COUNTIES

	Rates	Fringes
BRICKLAYER.....	\$ 26.80	12.38

CARP0357-002 04/01/2019

	Rates	Fringes
CARPENTER.....	\$ 29.25	19.23
Diver.....	\$ 44.25	19.23
PILEDRIVERMAN.....	\$ 29.50	19.23

ELEC0369-006 05/28/2019

BUTLER, EDMONSON, LOGAN, TODD & WARREN COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 32.44	17.22

ELEC0429-001 01/01/2020

ALLEN & SIMPSON COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 27.72	13.48

ELEC0816-002 01/01/2020

BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN,
FULTON (Except a 5 mile radius of City Hall in Fulton), GRAVES,
HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCRACKEN & TRIGG COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 33.58	25.5%+7.25

Cable spicers receive \$.25 per hour additional.

ELEC1701-003 06/01/2018

DAVISS, HANCOCK, HENDERSON, HOPKINS, MCLEAN, MUHLENBERG, OHIO,
 UNION & WEBSTER COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 31.04	15.74

Cable spicers receive \$.25 per hour additional.

 ELEC1925-002 01/01/2019

FULTON COUNTY (Up to a 5 mile radius of City Hall in Fulton):

	Rates	Fringes
CABLE SPLICER.....	\$ 25.80	12.16
ELECTRICIAN.....	\$ 25.20	13.74

 * ENGI0181-017 07/01/2020

	Rates	Fringes
POWER EQUIPMENT OPERATOR		
GROUP 1.....	\$ 33.95	17.25
GROUP 2.....	\$ 31.09	17.25
GROUP 3.....	\$ 31.54	17.25
GROUP 4.....	\$ 30.77	17.25

OPERATING ENGINEER CLASSIFICATIONS

GROUP 1 - A-Frame Winch Truck; Auto Patrol; Backfiller;
 Batcher Plant; Bituminous Paver; Bituminous Transfer
 Machine; Boom Cat; Bulldozer; Mechanic; Cableway; Carry-All
 Scoop; Carry Deck Crane; Central Compressor Plant; Cherry
 Picker; Clamshell; Concrete Mixer (21 cu. ft. or Over);
 Concrete Paver; Truck-Mounted Concrete Pump; Core Drill;
 Crane; Crusher Plant; Derrick; Derrick Boat; Ditching &
 Trenching Machine; Dragline; Dredge Operator; Dredge
 Engineer; Elevating Grader & Loaders; Grade-All; Gurries;
 Heavy Equipment Robotics Operator/Mechanic; High Lift;
 Hoe-Type Machine; Hoist (Two or More Drums); Hoisting
 Engine (Two or More Drums); Horizontal Directional Drill
 Operator; Hydrocrane; Hyster; KeCal Loader; LeTourneau;
 Locomotive; Mechanic; Mechanically Operated Laser Screed;
 Mechanic Welder; Mucking Machine; Motor Scraper; Orangepeel
 Bucket; Overhead Crane; Piledriver; Power Blade; Pumpcrete;
 Push Dozer; Rock Spreader, attached to equipment; Rotary
 Drill; Roller (Bituminous); Rough Terrain Crane; Scarifier;
 Scoopmobile; Shovel; Side Boom; Subgrader; Tailboom;
 Telescoping Type Forklift; Tow or Push Boat; Tower Crane
 (French, German & other types); Tractor Shovel; Truck
 Crane; Tunnel Mining Machines, including Moles, Shields or
 similar types of Tunnel Mining Equipment

GROUP 2 - Air Compressor (Over 900 cu. ft. per min.);
 Bituminous Mixer; Boom Type Tamping Machine; Bull Float;
 Concrete Mixer (Under 21 cu. ft.); Dredge Engineer;
 Electric Vibrator; Compactor/Self-Propelled Compactor;
 Elevator (One Drum or Buck Hoist); Elevator (When used to
 Hoist Building Material); Finish Machine; Firemen & Hoist
 (One Drum); Flexplane; Forklift (Regardless of Lift
 Height); Form Grader; Joint Sealing Machine; Outboard Motor
 Boat; Power Sweeper (Riding Type); Roller (Rock); Ross

Carrier; Skid Mounted or Trailer Mounted Concrete Pump; Skid Steer Machine with all Attachments; Switchman or Brakeman; Throttle Valve Person; Tractair & Road Widening Trencher; Tractor (50 H.P. or Over); Truck Crane Oiler; Tugger; Welding Machine; Well Points;& Whirley Oiler

GROUP 3 -All Off Road Material Handling Equipment, including Articulating Dump Trucks; Greaser on Grease Facilities servicing Heavy Equipment

GROUP 4 - Bituminous Distributor; Burlap & Curing Machine; Cement Gun; Concrete Saw; Conveyor; Deckhand Oiler; Grout Pump; Hydraulic Post Driver; Hydro Seeder; Mud Jack; Oiler; Paving Joint Machine; Power Form Handling Equipment; Pump; Roller (Earth); Steerman; Tamping Machine; Tractor (Under 50 H.P.); & Vibrator

CRANES - with booms 150 ft. & Over (Including JIB), and where the length of the boom in combination with the length of the piling equals or exceeds 150 ft. - \$1.00 above Group 1 rate

EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE TO BE PAID 10% ABOVE BASIC WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK.

IRON0070-005 06/01/2020

BUTLER COUNTY (Eastern eighth, including the Townships of Decker, Lee & Tilford);
EDMONSON COUNTY (Northern three-fourths, including the Townships of Asphalt, Bee Spring, Brownsville, Grassland, Huff, Kyrock, Lindseyville, Mammoth Cave, Ollie, Prosperity, Rhoda, Sunfish & Sweden)

Rates Fringes

IRONWORKER

 Structural; Ornamental;
 Reinforcing; Precast
 Concrete Erectors.....\$ 30.42 23.15

IRON0103-004 08/01/2018

DAVISS, HANCOCK, HENDERSON, HOPKINS, MCLEAN, OHIO, UNION & WEBSTER COUNTIES
BUTLER COUNTY (Townships of Aberdeen, Bancock, Casey, Dexterville, Dunbar, Elfie, Gilstrap, Huntsville, Logansport, Monford, Morgantown, Provo, Rochester, South Hill & Welchs Creek);
CALDWELL COUNTY (Northeastern third, including the Township of Creswell);
CHRISTIAN COUNTY (Northern third, including the Townships of Apex, Crofton, Kelly, Mannington & Wynns);
CRITTENDEN COUNTY (Northeastern half, including the Townships of Grove, Mattoon, Repton, Shady Grove & Tribune);
MUHLENBERG COUNTY (Townships of Bavier, Beech Creek Junction, Benton, Brennen, Browder, Central City, Cleaton, Depoy, Drakesboro, Eunis, Graham, Hillside, Luzerne, Lynn City, Martwick, McNary, Millport, Moorman, Nelson, Paradise, Powderly, South Carrollton, Tarina & Weir)

	Rates	Fringes
Ironworkers:.....	\$ 28.66	22.435

 IRON0492-003 05/01/2018

ALLEN, LOGAN, SIMPSON, TODD & WARREN COUNTIES
 BUTLER COUNTY (Southern third, including the Townships of
 Boston, Berrys Lick, Dimple, Jetson, Quality, Sharer, Sugar
 Grove & Woodbury);
 CHRISTIAN COUNTY (Eastern two-thirds, including the Townships
 of Bennettstown, Casky, Herndon, Hopkinsville, Howell,
 Masonville, Pembroke & Thompsonville);
 EDMONSON COUNTY (Southern fourth, including the Townships of
 Chalybeate & Rocky Hill);
 MUHLENBERG COUNTY (Southern eighth, including the Townships of
 Dunnior, Penrod & Rosewood)

	Rates	Fringes
Ironworkers:.....	\$ 26.11	14.02

 IRON0782-006 05/01/2018

BALLARD, CALLOWAY, CARLISLE, FULTON, GRAVES, HICKMAN,
 LIVINGSTON, LYON, MARSHALL, MCCRACKEN & TRIGG COUNTIES
 CALDWELL COUNTY (Southwestern two-thirds, including the
 Townships of Cedar Bluff, Cider, Claxton, Cobb, Crowtown,
 Dulaney, Farmersville, Fredonia, McGowan, Otter Pond &
 Princeton);
 CHRISTIAN COUNTY (Western third, Excluding the Townships of
 Apex, Crofton, Kelly, Mannington, Wynns, Bennettstown, Casky,
 Herndon, Hopkinsville, Howell, Masonville, Pembroke &
 Thompsonville);
 CRITTENDEN COUNTY (Southwestern half, including the Townships
 of Crayne, Dycusburg, Frances, Marion, Mexico, Midway,
 Sheridan & Told)

	Rates	Fringes
Ironworkers:		
Projects with a total contract cost of \$20,000,000.00 or above.....	\$ 28.79	24.17
All Other Work.....	\$ 27.20	22.75

 LABO0189-005 07/01/2018

BALLARD, CALLOWAY, CARLISLE, FULTON, GRAVES, HICKMAN,
 LIVINGSTON, LYON, MARSHALL & MCCRACKEN COUNTIES

	Rates	Fringes
Laborers:		
GROUP 1.....	\$ 23.07	14.21
GROUP 2.....	\$ 23.32	14.21
GROUP 3.....	\$ 23.37	14.21
GROUP 4.....	\$ 23.97	14.21

LABORER CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushhammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter; Green Concrete Cutting; Hand Operated Grouter & Grinder Machine Operator; Jackhammer; Pavement Breaker; Paving Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven Georgia Buggy & Wheel Barrow; Power Post Hole Digger; Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Blaster; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

 LAB00189-006 07/01/2018

ALLEN, BUTLER, CALDWELL, CHRISTIAN, DAVIESS, EDMONSON, HANCOCK, HOPKINS, LOGAN, MCLEAN, MUHLENBERG, OHIO, SIMPSON, TODD, TRIGG & WARREN COUNTIES

	Rates	Fringes
Laborers:		
GROUP 1.....	\$ 23.07	14.21
GROUP 2.....	\$ 23.32	14.21
GROUP 3.....	\$ 23.37	14.21
GROUP 4.....	\$ 23.97	14.21

LABORER CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler;

Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushhammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter; Green Concrete Cutting; Hand Operated Grouter & Grinder Machine Operator; Jackhammer; Pavement Breaker; Paving Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven Georgia Buggy & Wheel Barrow; Power Post Hole Digger; Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Blaster; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LABO0561-001 07/01/2018

CRITTENDEN, HENDERSON, UNION & WEBSTER COUNTIES

	Rates	Fringes
Laborers:		
GROUP 1.....	\$ 22.71	15.00
GROUP 2.....	\$ 22.96	15.00
GROUP 3.....	\$ 23.01	15.00
GROUP 4.....	\$ 23.61	15.00

LABORER CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushhammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter;

Green Concrete Cutting; Hand Operated Grouter & Grinder
Machine Operator; Jackhammer; Pavement Breaker; Paving
Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven
Georgia Buggy & Wheel Barrow; Power Post Hole Digger;
Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind
Trencher; Sand Blaster; Concrete Chipper; Surface
Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite
Operator & Mixer; Grout Pump Operator; Blaster; Side Rail
Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free
Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher;
Environmental - Nuclear, Radiation, Toxic & Hazardous Waste
- Levels A & B; Miner & Driller (Free Air); Tunnel Blaster;
& Tunnel Mucker (Free Air); Directional & Horizontal
Boring; Air Track Drillers (All Types); Powdermen &
Blasters; Troxler & Concrete Tester if Laborer is Utilized

PAIN0032-002 09/01/2018

BALLARD COUNTY

	Rates	Fringes
Painters:		
Bridges.....	\$ 33.56	16.13
All Other Work.....	\$ 31.86	16.13
Spray, Blast, Steam, High & Hazardous (Including Lead Abatement) and All Epoxy - \$1.00 Premium		

PAIN0118-003 06/01/2014

EDMONSON COUNTY:

	Rates	Fringes
Painters:		
Brush & Roller.....	\$ 18.50	11.97
Spray, Sandblast, Power Tools, Waterblast & Steam Cleaning.....	\$ 19.50	11.97

PAIN0156-006 04/01/2015

DAVISS, HANCOCK, HENDERSON, MCLEAN, OHIO, UNION & WEBSTER
COUNTIES

	Rates	Fringes
Painters:		
BRIDGES		
GROUP 1.....	\$ 27.60	12.85
GROUP 2.....	\$ 27.85	12.85
GROUP 3.....	\$ 28.60	12.85
GROUP 4.....	\$ 29.60	12.85
ALL OTHER WORK:		
GROUP 1.....	\$ 26.45	12.85
GROUP 2.....	\$ 26.70	12.85

GROUP 3.....	\$ 27.45	12.85
GROUP 4.....	\$ 28.45	12.85

PAINTER CLASSIFICATIONS

GROUP 1 - Brush & Roller

GROUP 2 - Plasterers

GROUP 3 - Spray; Sandblast; Power Tools; Waterblast;
Steamcleaning; Brush & Roller of Mastics, Creosotes, Kwinch
Koate & Coal Tar Epoxy

GROUP 4 - Spray of Mastics, Creosotes, Kwinch Koate & Coal
Tar Epoxy

PAIN0500-002 06/01/2018

CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON,
GRAVES, HICKMAN, HOPKINS, LIVINGSTON, LYON, MARSHALL, MCCRACKEN
& TRIGG COUNTIES:

	Rates	Fringes
Painters:		
Bridges.....	\$ 27.75	13.60
All Other Work.....	\$ 21.50	13.60

Waterblasting units with 3500 PSI and above - \$.50 premium
Spraypainting and all abrasive blasting - \$1.00 premium
Work 40 ft. and above ground level - \$1.00 premium

PLUM0184-002 07/01/2018

BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN,
FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCRACKEN
and TRIGG COUNTIES

	Rates	Fringes
Plumber; Steamfitter.....	\$ 35.06	18.18

PLUM0502-004 08/01/2020

ALLEN, BUTLER, EDMONSON, SIMPSON & WARREN

	Rates	Fringes
Plumber; Steamfitter.....	\$ 36.92	20.78

PLUM0633-002 07/01/2017

DAVISS, HANCOCK, HENDERSON, HOPKINS, LOGAN, MCLEAN,
MUHLENBERG, OHIO, TODD, UNION & WEBSTER COUNTIES:

	Rates	Fringes
PLUMBER/PIPEFITTER.....	\$ 31.47	16.80

TEAM0089-003 04/01/2019

ALLEN, BUTLER, EDMONSON, LOGAN, SIMPSON & WARREN COUNTIES

	Rates	Fringes
Truck drivers:		
Zone 1:		
Group 1.....	\$ 20.82	21.96
Group 2.....	\$ 21.00	21.96
Group 3.....	\$ 21.08	21.96
Group 4.....	\$ 21.10	21.96

GROUP 1 - Greaser; Tire Changer

GROUP 2 - Truck Mechanic; Single Axle Dump; Flat Bed; All Terrain Vehicles when used to haul materials; Semi Trailer or Pole Trailer when used to pull building materials and equipment; Tandem Axle Dump; Driver of Distributors

GROUP 3 - Mixer All Types

GROUP 4 - Winch and A-Frame when used in transporting materials; Ross Carrier; Fork Lift when used to transport building materials; Driver on Pavement Breaker; Euclid and Other Heavy Earth Moving Equipment; Low Boy; Articulator Cat; Five Axle Vehicle

TEAM0215-003 04/01/2019

DAVISS, HANCOCK, HENDERSON, HOPKINS, MCLEAN, MUHLENBERG, OHIO & WEBSTER COUNTIES

	Rates	Fringes
TRUCK DRIVER		
Group 1.....	\$ 22.45	21.96
Group 2.....	\$ 22.68	21.96
Group 3.....	\$ 22.75	21.96
Group 4.....	\$ 22.76	21.96

GROUP 1: Greaser, Tire Changer

GROUP 2: Truck Mechanic

GROUP 3: Single Axle Dump; Flat Bed; All Terrain Vehicle when used to haul materials; Semi Trailer or Pole Trailer when used to pull building materials and equipment; Tandem Axle Dump; Driver of Distributors; Mixer All Types

GROUP 4: Euclid and other heavy earth moving equipment; Low Boy; Articulator Cat; 5 Axle Vehicle; Winch and A- Frame when used in transporting materials; Ross Carrier; Fork Lift when used to transport building materials; Driver on Pavement Breaker

TEAM0236-001 04/01/2019

BALLARD, CALDWELL, CALLOWAY, CARLISLE, CHRISTIAN, CRITTENDEN, FULTON, GRAVES, HICKMAN, LIVINGSTON, LYON, MARSHALL, MCCRACKEN, TODD & TRIGG COUNTIES

	Rates	Fringes
TRUCK DRIVER		
Group 1.....	\$ 20.82	21.96
Group 2.....	\$ 21.00	21.96
Group 3.....	\$ 21.00	21.96
Group 4.....	\$ 20.10	21.96
Group 5.....	\$ 21.08	21.96

GROUP 1: Greaser, Tire Changer

GROUP 2: Truck Mechanic

GROUP 3: Single Axle Dump; Flat Bed; All Terrain Vehicle when used to haul materials; Semi Trailer or Pole Trailer when used to pull building materials and equipment; Tandem Axle Dump; Drivers of Distributors

GROUP 4: Euclid and other heavy earth moving equipment; Low Boy; Articulator Cat; Five Axle Vehicle; Winch and A-Frame when used in transporting materials; Ross Carrier

GROUP 5: Mixer All Types

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====
Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical

order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than ""SU"" or ""UAVG"" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

=====
END OF GENERAL DECISION"

Fringe benefit amounts are applicable for all hours worked except when otherwise noted.

No laborer, workman or mechanic shall be paid at a rate less than that of a Journeyman except those classified as bona fide apprentices.

Apprentices or trainees shall be permitted to work as such subject to Administrative Regulations adopted by the Commissioner of Workplace Standards. Copies of these regulations will be furnished upon request from any interested person.

Before using apprentices on the job the contractor shall present to the Contracting Officer written evidence of registration of such employees in a program of a State apprenticeship and training agency approved and recognized by the U. S. Bureau of Apprenticeship and Training. In the absence of such a State agency, the contractor shall submit evidence of approval and registration by the U. S. Bureau of Apprenticeship and Training.

The contractor shall submit to the Contracting Officer, written evidence of the established apprenticeship-journeyman ratios and wage rates in the project area, which will be the basis for establishing such ratios and rates for the project under the applicable contract provisions.

TO: EMPLOYERS/EMPLOYEES

PREVAILING WAGE SCHEDULE:

The wages indicated on this wage schedule are the least permitted to be paid for the occupations indicated. When an employee works in more than one classification, the employer must record the number of hours worked in each classification at the prescribed hourly base rate.

OVERTIME:

Overtime is to be paid to an employee at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty (40) hours in such workweek. Wage violations or questions should be directed to the designated Engineer or the undersigned.

Director
Division of Construction Procurement
Frankfort, Kentucky 40622
502-564-3500

**NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION
TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY
(Executive Order 11246)**

1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:

GOALS FOR MINORITY PARTICIPATION IN EACH TRADE	GOALS FOR FEMALE PARTICIPATION IN EACH TRADE
12.0%	6.9%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally-assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and non-federally involved construction.

The Contractor's compliance with the Executive Order and the regulations in CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4, 3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten (10) working days of award of any construction subcontract in excess of \$10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed. The notification shall be mailed to:

**Evelyn Teague, Regional Director
Office of Federal Contract Compliance Programs
61 Forsyth Street, SW, Suite 7B75
Atlanta, Georgia 30303-8609**

4. As used in this Notice, and in the contract resulting from this solicitation, the "**covered area**" is Allen County.

PART IV
INSURANCE

Refer to
Kentucky Standard Specifications for Road and Bridge Construction,
current edition

PART V
BID ITEMS

PROPOSAL BID ITEMS

204206

Page 1 of 3

Report Date 8/31/20

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	2,467.00	TON		\$	
0020	00080		CRUSHED AGGREGATE SIZE NO 23	19.00	TON		\$	
0030	00100		ASPHALT SEAL AGGREGATE	745.00	TON		\$	
0040	00103		ASPHALT SEAL COAT	90.00	TON		\$	
0050	00190		LEVELING & WEDGING PG64-22	685.00	TON		\$	
0060	00212		CL2 ASPH BASE 1.00D PG64-22	740.00	TON		\$	
0070	00301		CL2 ASPH SURF 0.38D PG64-22	7,821.00	TON		\$	
0080	00356		ASPHALT MATERIAL FOR TACK	49.00	TON		\$	
0090	02676		MOBILIZATION FOR MILL & TEXT (ALLEN CO KY 100)	1.00	LS		\$	
0100	02677		ASPHALT PAVE MILLING & TEXTURING	64.00	TON		\$	
0110	21289ED		LONGITUDINAL EDGE KEY	5,983.00	LF		\$	

Section: 0002 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0120	02159		TEMP DITCH	23,312.00	LF		\$	
0130	02160		CLEAN TEMP DITCH	11,656.00	LF		\$	
0140	02259		FENCE-TEMP	5,065.00	LF		\$	
0150	02268		REMOVE & REPLACE FENCE (FIVE STRAND BARBED WIRE WITH T- POSTS & WOOD POSTS)	405.00	LF		\$	
0160	02268		REMOVE & REPLACE FENCE (FIVE STRAND BARBED WIRE WITH WOOD & METAL POSTS)	1,405.00	LF		\$	
0170	02268		REMOVE & REPLACE FENCE (THREE PLANK WOOD FENCE)	75.00	LF		\$	
0180	02268		REMOVE & REPLACE FENCE (TWO STRAND BARBED WIRE WITH T- POSTS)	450.00	LF		\$	
0190	02268		REMOVE & REPLACE FENCE (TWO STRAND BARBED WIRE-1 ELECTRIFIED-WITH METAL T-POSTS)	200.00	LF		\$	
0200	02268		REMOVE & REPLACE FENCE (WOVEN WIRE WITH WOOD POSTS & TWO BARBED WIRE STRANDS-1 ELECTRIFIED)	120.00	LF		\$	
0210	02268		REMOVE & REPLACE FENCE (WOVEN WIRE/BARBED WIRE)	1,785.00	LF		\$	
0220	02268		REMOVE & REPLACE FENCE (WOVEN WIRE WITH SINGLE STRAND BARBED WIRE)	625.00	LF		\$	
0230	02483		CHANNEL LINING CLASS II	575.00	TON		\$	
0240	02575		DITCHING AND SHOULDERING	23,830.00	LF		\$	
0250	02603		FABRIC-GEOTEXTILE CLASS 2	126.00	SQYD		\$	
0260	02650		MAINTAIN & CONTROL TRAFFIC (ALLEN CO KY 100)	1.00	LS		\$	
0270	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0280	02697		EDGELINE RUMBLE STRIPS	92,759.00	LF		\$	
0290	02701		TEMP SILT FENCE	23,310.00	LF		\$	
0300	02703		SILT TRAP TYPE A	35.00	EACH		\$	

PROPOSAL BID ITEMS

204206

Page 2 of 3

Report Date 8/31/20

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0310	02704		SILT TRAP TYPE B	35.00	EACH		\$	
0320	02705		SILT TRAP TYPE C	35.00	EACH		\$	
0330	02706		CLEAN SILT TRAP TYPE A	35.00	EACH		\$	
0340	02707		CLEAN SILT TRAP TYPE B	35.00	EACH		\$	
0350	02708		CLEAN SILT TRAP TYPE C	35.00	EACH		\$	
0360	02726		STAKING (ALLEN CO KY 100)	1.00	LS		\$	
0370	05950		EROSION CONTROL BLANKET	27,500.00	SQYD		\$	
0380	05952		TEMP MULCH	112,933.00	SQYD		\$	
0390	05953		TEMP SEEDING AND PROTECTION	84,700.00	SQYD		\$	
0400	05963		INITIAL FERTILIZER	3.00	TON		\$	
0410	05964		MAINTENANCE FERTILIZER	3.00	TON		\$	
0420	05985		SEEDING AND PROTECTION	27,933.00	SQYD		\$	
0430	05992		AGRICULTURAL LIMESTONE	36.00	TON		\$	
0440	06510		PAVE STRIPING-TEMP PAINT-4 IN	92,759.00	LF		\$	
0450	06556		PAVE STRIPING-DUR TY 1-6 IN W	491.00	LF		\$	
0460	06557		PAVE STRIPING-DUR TY 1-6 IN Y	493.00	LF		\$	
0470	06568		PAVE MARKING-THERMO STOP BAR-24IN	48.00	LF		\$	
0480	06572		PAVE MARKING-DOTTED LANE EXTEN	115.00	LF		\$	
0490	10020NS		FUEL ADJUSTMENT	15,768.00	DOLL	\$1.00	\$	\$15,768.00
0500	10030NS		ASPHALT ADJUSTMENT	39,604.00	DOLL	\$1.00	\$	\$39,604.00
0510	20748ED		SHOULDER MILLING/TRENCHING	444.00	SQYD		\$	
0520	24995EC		PAVE STRIPING-SPRAY THERMO-6 IN W	92,759.00	LF		\$	
0530	24996EC		PAVE STRIPING-SPRAY THERMO-6 IN Y	92,759.00	LF		\$	

Section: 0003 - DRAINAGE

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0540	00441		ENTRANCE PIPE-18 IN	40.00	LF		\$	
0550	00450		ENTRANCE PIPE-15 IN EQUIV	301.00	LF		\$	
0560	00462		CULVERT PIPE-18 IN	307.00	LF		\$	
0570	00464		CULVERT PIPE-24 IN	34.00	LF		\$	
0580	01310		REMOVE PIPE	475.00	LF		\$	
0590	01726		SAFETY BOX INLET-18 IN SDB-1	8.00	EACH		\$	
0600	01727		SAFETY BOX INLET-24 IN SDB-1	1.00	EACH		\$	
0610	01728		SAFETY BOX INLET-18 IN DBL SDB-5	1.00	EACH		\$	
0620	02625		REMOVE HEADWALL	30.00	EACH		\$	
0630	24575ES610		HEADWALL (SLOPED & MITERED CONCRETE-FOR 18 IN PIPE)	19.00	EACH		\$	
0640	24575ES610		HEADWALL (SLOPED & MITERED CONCRETE-FOR 24 IN PIPE)	3.00	EACH		\$	

Section: 0004 - SIGNING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0650	06406		SBM ALUM SHEET SIGNS .080 IN	203.00	SQFT		\$	

PROPOSAL BID ITEMS

204206

Page 3 of 3

Report Date 8/31/20

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0660	06407		SBM ALUM SHEET SIGNS .125 IN	6.00	SQFT		\$	
0670	06410		STEEL POST TYPE 1	355.00	LF		\$	
0680	08100		CONCRETE-CLASS A (FOR INTERMEDIATE PIPE ANCHORS)	33.00	CUYD		\$	
0690	21134ND		REMOVE-STORE AND REINSTALL SIGN	15.00	EACH		\$	
0700	21373ND		REMOVE SIGN	10.00	EACH		\$	
0710	24631EC		BARCODE SIGN INVENTORY	83.00	EACH		\$	

Section: 0005 - GUARDRAIL

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0720	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	31.00	EACH		\$	
0730	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE (LUCIOL SYSTEMS BI-DIRECTIONAL LINEAR DELINEATION)	40.00	EACH		\$	
0740	02355		GUARDRAIL-STEEL W BEAM-S FACE A	200.00	LF		\$	
0750	02360		GUARDRAIL TERMINAL SECTION NO 1	5.00	EACH		\$	
0760	02363		GUARDRAIL CONNECTOR TO BRIDGE END TY A	2.00	EACH		\$	
0770	02367		GUARDRAIL END TREATMENT TYPE 1	9.00	EACH		\$	
0780	02371		GUARDRAIL END TREATMENT TYPE 7	2.00	EACH		\$	
0790	02381		REMOVE GUARDRAIL	1,788.00	LF		\$	
0800	08806		GUARDRAIL-BRIDGE CASE I-A	525.00	LF		\$	
0810	08810		PRECAST CONC BRIDGE RAIL BLOCK	8.00	EACH		\$	
0820	20191ED		OBJECT MARKER TY 3	9.00	EACH		\$	
0830	21802EN		G/R STEEL W BEAM-S FACE (7 FT POST)	1,255.00	LF		\$	

Section: 0006 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0840	02568		MOBILIZATION	1.00	LS		\$	
0850	02569		DEMOBILIZATION	1.00	LS		\$	