



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Jim Gray
SECRETARY

July 21, 2025

CALL NO. 344
CONTRACT ID NO. 253081
ADDENDUM # 1

Subject: Larue County, CB06 062 0470 000-006
Letting July 24, 2025

- (1) Revised - Special Note - Page 13 of 46
- (2) Added - Special Note - Page 17A of 46
- (3) Revised - Typical Section - Page 36 of 46

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

SPECIAL NOTE FOR SHOULDER PREPARATION
CB06 062 0470 000-006

Ensure existing shoulders are free of dirt, loose material, and all vegetation prior to placing asphalt surface and pavement wedge. Remove any protruding vegetation flush with or below existing pavement by any means necessary, including but not limited to spraying, grading, mowing, and string trimming. The Department will not measure shoulder preparation for separate payment. This work shall be incidental to the asphalt mix for pavement wedge and/or surface placed on the shoulder.

SPECIAL NOTE FOR PAVEMENT WEDGE AND SHOULDER MONOLITHIC OPERATION


1.0 MATERIALS. Provide an Asphalt Surface Mixture conforming to Section 403 of the Standard Specifications, as applicable to the project, for the pavement wedge.

2.0 CONSTRUCTION. Place the specified Asphalt Surface Mixture on shoulders monolithically with the driving lane. Prime the existing shoulder with tack material as the Engineer directs before placing the wedge. Construct according to Section 403.03 of the Standard Specifications.

Equip the paver with a modified screed that extends the full width of the wedge being placed and is tapered to produce a wedge. Obtain the Engineer's approval of the modified screed before placing shoulder wedge monolithically with the driving lane.

The wedge may vary in thickness at the edge of the milled area in the shoulder. If the area to receive the shoulder wedge is milled prior to placement, during rolling operations pinch the outside edge of the new inlay wedge to match the existing shoulder elevation not being resurfaced. Unless required otherwise by the Contract, construct rolled or sawed rumble strips according to Section 403.03.08, as applicable.


The following sketch is primarily for the computation of quantities; however, the wedge will result in a similar cross-section where sufficient width exists. Do not construct a shoulder for placing the wedge unless specified elsewhere in the Contract.

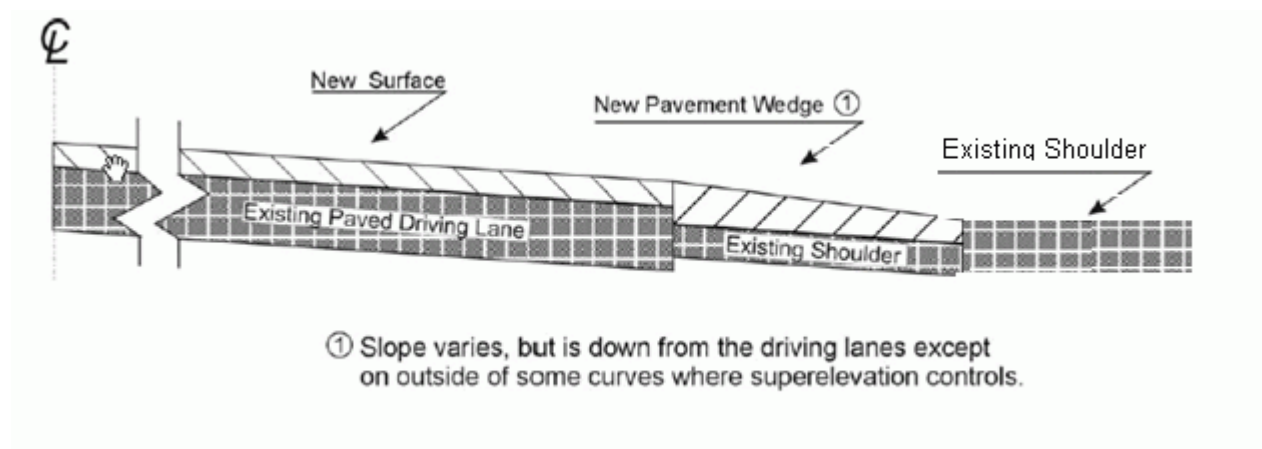

3.0 MEASUREMENT. The Department will measure Asphalt Surface Mixture placed as the pavement wedge according to Section 403.

4.0 PAYMENT. The Department will make payment for the completed and accepted quantities of Asphalt Surface Mixtures on pavement wedges according to Section 403.

TYPICAL SECTION
LARUE COUNTY
CB06 062 0470 000-006

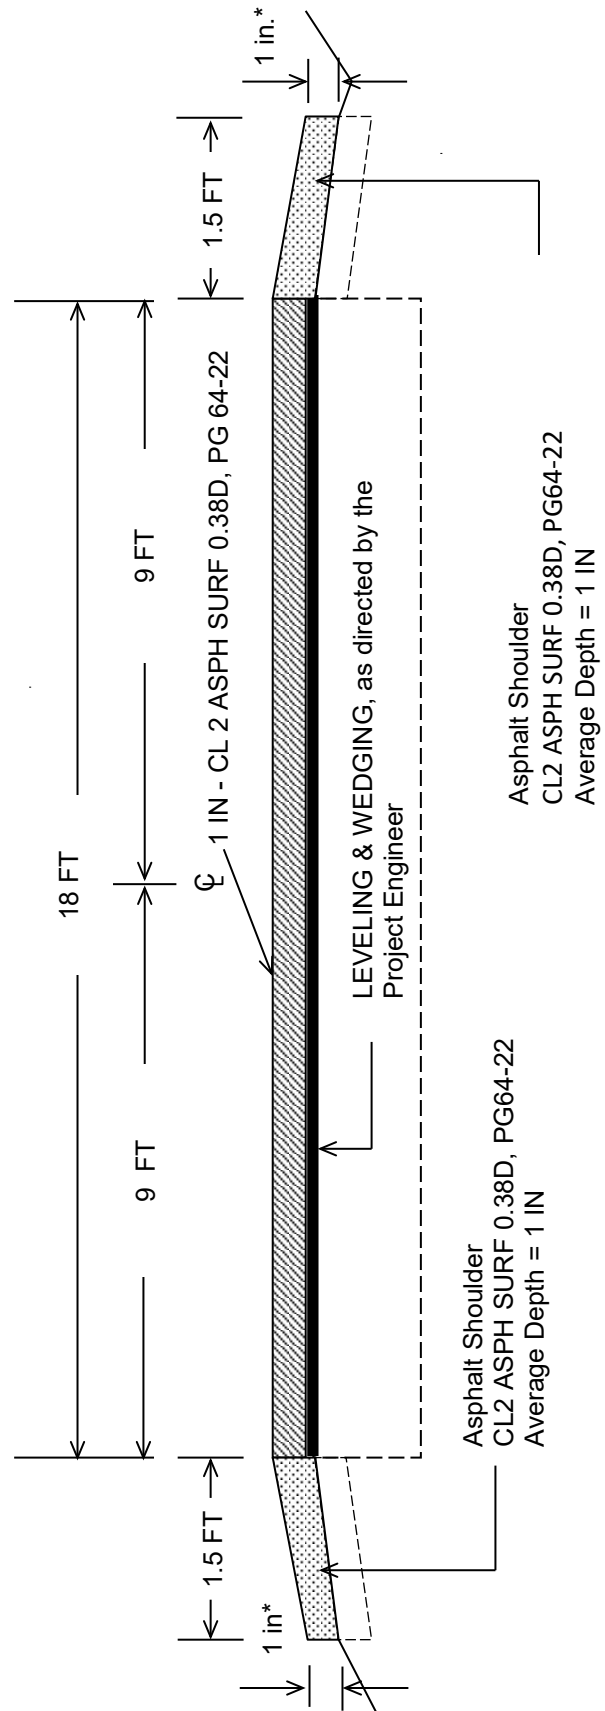

- Notes:
- *1). ONE INCH MAXIMUM WHERE SITE CONDITIONS PERMIT
 - 2). MP 0.000 - 0.616, 5.086 - 5.180:
 - MILL FULL WIDTH MAINLINE, SHOULDERS AND PARKING AREAS AS DIRECTED BY THE ENGINEER
 - SECTION INCLUDES SPLIT COLLECTOR LANES
 - WIDTH VARIES AT NUMEROUS STATIONS: 12 - 35 FT