



CALL NO. 345

CONTRACT ID. 172189

CUMBERLAND COUNTY

FED/STATE PROJECT NUMBER FE01 029 0061 013-014

DESCRIPTION BURKESVILLE-COLUMBIA ROAD (KY 61)

WORK TYPE JPC PAVEMENT

PRIMARY COMPLETION DATE 8/9/2017

LETTING DATE: April 28,2017

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN DAYLIGHT TIME April 28,2017. Bids will be publicly announced at 10:00 AM EASTERN DAYLIGHT TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I	SCOPE OF WORK • PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES • CONTRACT NOTES • STATE CONTRACT NOTES • SIGNIFICANT PROJECT -PROJECT TRAFFIC COORDINATOR • SURFACING AREAS • ASPHALT MIXTURE • DGA BASE • INCIDENTAL SURFACING • JPC RIDE QUALITY • FUEL AND ASPHALT PAY ADJUSTMENT • COMPACTION OPTION B • SPECIAL NOTE(S) APPLICABLE TO PROJECT • LIQUIDATED DAMAGES • WASTE AND BORROW SITES • ASPHALT MILLING AND TEXTURING • TYPICAL SECTION DIMENSIONS • SIDEWALK RAMPS & DETECTABLE WARNINGS • TRAFFIC CONTROL PLAN • TRAFFIC SIGNAL LOOP DETECTORS • EROSION CONTROL PLAN FOR MAINTENANCE PROJECTS • SKETCH MAP(S) • SUMMARY SHEET(S) • TYPICAL SECTION(S) • DETAIL SHEET(S)
PART II	SPECIFICATIONS AND STANDARD DRAWINGS • SPECIFICATIONS REFERENCE • SUPPLEMENTAL SPECIFICATION • [SN-11] PORTABLE CHANGEABLE SIGNS • 2016 STANDARD DRAWINGS THAT APPLY
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS • LABOR AND WAGE REQUIREMENTS • EXECUTIVE BRANCH CODE OF ETHICS • KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY / STATE • PROJECT WAGE RATES / STATE
PART IV	INSURANCE
PART V	BID ITEMS

PART I
SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 08

CONTRACT ID - 172189

FE01 029 0061 013-014

COUNTY - CUMBERLAND

PCN - MP02900611701

FE01 029 0061 013-014

BURKESVILLE-COLUMBIA ROAD (KY 61) (MP 13.630) FROM 375 FEET SOUTH OF KY 90 EXTENDING NORTH TO 300 FEET NORTH OF KY 90 (MP 13.757), A DISTANCE OF 0.13 MILES.JPC PAVEMENT
GEOGRAPHIC COORDINATES LATITUDE 36:47:34.00 LONGITUDE 85:22:05.00

COMPLETION DATE(S):

COMPLETED BY 08/09/2017 APPLIES TO ENTIRE CONTRACT

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's Expedite Bidding Program available on the Internet web site of the Department of Highways, Division of Construction Procurement. (www.transportation.ky.gov/construction-procurement)

The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

SPECIAL NOTE FOR COMPOSITE OFFSET BLOCKS

Contrary to the Standard Drawings (2016 edition) the Cabinet will allow 6" composite offset blocks in lieu of wooden offset blocks, except as specified on proprietary end treatments and crash cushions. The composite blocks shall be selected from the Cabinet's List of Approved Materials.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by [KRS 14A.9-010](#) to obtain a certificate of authority to transact business in the Commonwealth (“certificate”) from the Secretary of State under [KRS 14A.9-030](#) unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in [KRS 14A.9-010](#), the foreign entity should identify the applicable exception. Foreign entity is defined within [KRS 14A.1-070](#).

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity’s solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at <https://secure.kentucky.gov/sos/ftbr/welcome.aspx>.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading “Questions & Answers” on the Construction Procurement website (www.transportation.ky.gov/contract). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004.

06/01/16

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

Reciprocal preference to be given by public agencies to resident bidders

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the Expedite Bidding Program. Submittal of the Affidavit should be done along with the bid in Bid Express.

03/01/2011

PROJECT TRAFFIC COORDINATOR (PTC)

Be advised this project is a significant project pursuant to section 112.03.12.

SURFACING AREAS

The Department estimates the mainline surfacing width to be surfaced with JPC-11 IN/24 to be 36 feet.

The Department estimates the total area to be surfaced with JPC-11 IN/24 Pavement to be 4,788 SY.

The Department estimates the asphalt surfacing width to be 36 feet on each side.

The Department estimates the total area to be surfaced with asphalt to be 1,450 square yards.

ASPHALT MIXTURE

Unless otherwise noted, the Department estimates the rate of application for all asphalt mixtures to be 110 lbs/sy per inch of depth.

DGA BASE

Unless otherwise noted, the Department estimates the rate of application for DGA Base to be 115 lbs/sy per inch of depth.

INCIDENTAL SURFACING

The Department has included in the quantities of asphalt mixtures established in the proposal estimated quantities required for resurfacing or surfacing mailbox turnouts, farm field entrances, residential and commercial entrances, curve widening, ramp gores and tapers, and road and street approaches, as applicable. Pave these areas to the limits as shown on Standard Drawing RPM-110-06 or as directed by the Engineer. In the event signal detectors are present in the intersecting streets or roads, pave the crossroads to the right of way limit or back of the signal detector, whichever is the farthest back of the mainline. Surface or resurface these areas as directed by the Engineer. The Department will not measure placing and compacting for separate payment but shall be incidental to the Contract unit price for the asphalt mixtures.

JPC RIDE QUALITY

The Department will apply JPC Ride Quality requirements on this project in accordance with the Category B Requirements of Section 501.03.19(B). Any corrective work, including diamond grinding, will not be paid for, but shall be considered incidental to JPC Pavement-11 IN/24.

FUEL AND ASPHALT PAY ADJUSTMENT

The Department has included the Contract items Asphalt Adjustment and Fuel Adjustment for possible future payments at an established Contract unit price of \$1.00. The Department will calculate actual adjustment quantities after work is completed. If existing Contract amount is insufficient to pay all items on the contract with the adjustments, the Department will establish additional monies with a change order.

OPTION B

Be advised that the Department will control and accept compaction of asphalt mixtures furnished on this project under OPTION B in accordance with Sections 402 and 403.

SPECIAL NOTE FOR ROADBED STABILIZATION

I. DESCRIPTION.

Except as provided herein, perform roadbed stabilization in accordance with the Department's Standard and Supplemental Specifications, Special Provisions and Special Notes, and Standard and Sepia Drawings, current editions, and as directed by the Engineer. Section references are to the Standard Specifications. This work shall consist of furnishing all materials, equipment, labor, and incidentals for:

- (1) Maintain and Control Traffic; (2) Site Preparation and Erosion Control;
- (3) Undercut the existing roadbed and backfill; (4) Perforated Pipe Drainage System; and (5) All other work specified in the Contract.

II. MATERIALS.

Provide for sampling and testing all materials in accordance with the Department's Sampling Manual. Make the materials available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing unless otherwise specified in these Notes.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Erosion Control. See Special Note for Erosion Control.

B. Geotextile Fabric. Furnish Geotextile Fabric, Type IV.

C. Trench Backfill. Furnish Crushed Stone. Use a composition of Crushed Limestone coarse aggregate only, sizes No. 23, and 57.

D. Top Course Backfill. Furnish Dense Graded Aggregate, no alternates. Do not furnish Crushed Stone Base (CSB) or Stabilized Aggregate Base (SAB) in lieu of DGA.

E. Perforated Pipe Drainage System. Furnish 4 inch Perforated and Non-Perforated Pipe to be connected to existing drainage boxes after core drilling.

III. CONSTRUCTION.

A. Maintain and Control Traffic. See Traffic Control Plan.

Roadbed Stabilization
Page 2 of 5

B. Site Preparation. Perform site preparation, including but not limited to saw cutting pavement and base; clearing and grubbing and tree and stump removal; embankment, borrow, and embankment in place; removal of existing obstructions or any other items; temporary erosion and pollution control; disposal of materials, waste, and debris; restoration, clean up, and final dressing; seeding and protection, and any other incidentals.

C. Erosion Control. See Special Note for Erosion Control.

D. Staking. See Special Note for Staking.

E. Pavement Removal. Consider pavement removal limits shown on the drawings to be approximate only. The Engineer will determine actual pavement removal limits at the time of construction. Prior to removing pavement, saw cut the existing asphalt surface and underlying PCC pavement (if present) and DGA or other stone base. Remove the existing pavement and base under the traffic lanes and shoulders as the Engineer directs.

F. Undercut and Backfill. After removing the pavement and base, undercut the subgrade as required. The Engineer may increase the undercut depth to accommodate proposed finished grade elevations and/or where unstable materials remain. Place geotextile fabric in the bottom and against the sides and ends of the undercut trench. Provide transverse and longitudinal laps between adjacent sheets of geotextile fabric so that backfill remains completely confined within the geotextile fabric during and upon completion of construction. Backfill the undercut with a layered composition of Crushed Limestone sizes No. 23 and 57 with larger sizes on the bottom.

Place geotextile fabric over the Crushed Limestone and compact the trench backfill material by “walking down” with equipment, or other methods the Engineer approves. After compacting the trench backfill, place DGA top course. Use DGA in the top 4 inches, and only in the top 4 inches, of the backfill.

See attached drawing for details of backfill placement.

G. Perforated Pipe Drainage System. Construct perforated pipe drainage system as shown on the drawing. Wherever possible, slope all pipe to drain to the outside. Construct outlet pipe with a 1:24 ($\frac{1}{2}$ "/foot) or greater slope. Whenever possible, outlet the perforated pipe system to existing drainage boxes with Cored Hole Drainage Box Connectors. If not outlet to an existing drainage box, outlet to a Perforated Pipe Headwall as shown on Standard Drawing RDP-010-09.

Roadbed Stabilization
Page 3 of 5

H. Property Damage. Be responsible for all damage to public and/or private property resulting from the work. Repair or replace all damaged roadway features in like kind materials and design at no additional cost to the Department. Repair or replace damaged private property in like kind materials and design to the satisfaction of the owner.

I. Coordination with Utility Companies. The Department **has not** located utilities. Locate all underground, above ground and overhead utilities prior to beginning construction. Be responsible for contacting and maintaining liaison with all utility companies that have utilities located within the project limits. Do not disturb existing overhead or underground utilities. It is not anticipated that any utility facilities will need to be relocated and/or adjusted; however, in the event that it is discovered that the work does require that utilities be relocated and/or adjusted, the utility companies will work concurrently with the Contractor while relocating their facilities. Be responsible for repairing all utility damage that occurs as a result of the work.

J. On-Site Inspection. Make a thorough inspection of the site prior to submitting bid and be thoroughly familiar with existing conditions so that the work can be expeditiously performed after a Contract is awarded. The Department will consider submission of a bid as evidence of this inspection having been made. The Department will not consider any claims resulting from site conditions, including utilities.

K. Right of Way Limits. The Department has not established exact limits of the Right-of-Way. Limit Contract activities to obvious Right-of-Way, permanent or temporary easements, and work areas secured by the Department through consent and release of the adjacent property owners. Be responsible for all encroachments onto private lands.

L. Disposal of Waste, Final Dressing, and Clean-Up. Dispose of all removed pavement, base, concrete, debris, and other waste at sites off the right of way obtained by the Contractor at no additional cost to the Department (see Special Note for waste and Borrow). Backfill all excavated areas and compact as directed by the Engineer. Perform Class A Final Dressing on all disturbed areas, both on and off the right of way. Sow all disturbed earthen areas according to the Special Notes for Erosion Control.

M. Control. Perform all work under the absolute control of the Department of Highways. Obtain the Engineer's approval of all design modifications proposed by the Contractor prior to incorporation into the work. The Department reserves the right to have other work performed by other Contractors and its own forces and to permit public utility companies and others to do work during the construction of and within the limits of, or adjacent to, the project. Conduct work activities and operations in cooperation with such other parties so that interference with such other work will be reduced to a minimum. The Department will consider submission of a bid as Contractor's agreement to not make any claims for additional compensation due to delays or other conditions created by the operations of such other parties. Should a difference of opinion arise as to the rights of the Contractor and others working within the limits of, or adjacent to, the project, the Engineer will decide as to the respective rights of the various parties

Roadbed Stabilization
Page 4 of 5

involved in order to assure the completion of the Department's, Contractor's, and Other's work in general harmony and in a satisfactory manner, and his decision shall be final and binding upon the Contractor.

O. Caution. Without regard to the materials encountered, consider all pavement removal and roadway, drainage, solid rock, and special excavation to be unclassified. Distinctly understand that any reference to asphalt, base, concrete, rock, earth, or any other material in these notes or on the drawings, whether in numbers, words, letters, or lines, is solely for the Department's information and is not to be taken as an indication of classified pavement removal, excavation, or any other material involved. The bidder must draw his own conclusions as to the conditions to be encountered. The Department does not give any guarantee as to the accuracy of the data and no claim will be considered for additional compensation or extension of Contract time if the materials encountered are not in accord with the classification shown.

IV. MEASUREMENT.

The Department will measure only the bid items listed. All other items required to complete the construction shall be incidental to the listed bid items.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Site Preparation. The Department will not measure site preparation for separate payment, but shall be incidental to Pavement Removal, Backfilling Undercut, and Perforated Pipe System bid items, as applicable.

C. Erosion Control. See Special Note for Erosion Control.

D. Removing Pavement. The Department will measure pavement removed within the limits specified by the Engineer as cubic yards of roadway excavation. The Department will consider removing the pavement to include existing asphalt pavement, existing asphalt patching, underlying PCC pavement (if present), and existing DGA or other stone base.

E. Undercut. The Department will field measure undercut below existing DGA or other stone base as unclassified Roadway Excavation in cubic yards.

F. Backfilling Undercut. The Department will measure Geotextile Fabric, Type IV in square yards; however, the Department will not measure laps, cutoffs, excess, and waste. The Department will measure the trench backfill material as Crushed Stone and DGA in Tons.

Roadbed Stabilization
Page 5 of 5

G. Perforated Pipe Drainage System. The Department will measure the quantity of Perforated and Non-Perforated pipe of each type in linear feet. The department will measure Cored Hole Drainage Box Connector and Perforated Pipe Headwalls of each type in individual units, Each.

V. PAYMENT.

The Department will make payment only for the bid items listed. All other items required to complete the construction shall be incidental to the bid items listed.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Erosion Control. See special Note for Erosion Control.

C. Removing Pavement. Accept payment at the Contract unit price per cubic yard of roadway excavation as full compensation for all materials, equipment, labor and incidentals necessary to complete the work as specified in these notes and the Standard Specifications for saw cutting and removing the existing asphalt surface, underlying PCC pavement (if present), and DGA or other stone base under the traffic lanes and shoulders as the Engineer directs.

D. Backfilling Undercut. Accept payment at the Contract unit price per cubic yard for Roadway Excavation, per square yard for Geotextile Fabric, and per ton for Crushed Stone and DGA as full compensation for all materials, equipment, labor and incidentals necessary to complete the work as specified in these notes and the Standard Specifications for undercutting pavement, backfilling with coarse aggregate wrapped in geotextile fabric, and constructing DGA top coarse

E. Perforated Pipe Drainage System. Accept payment at the Contract unit price per linear foot for Perforated and Non-Perforated pipe and for individual units, Each for Cored Hole Drainage Box Connector and Perforated Pipe Headwall as full compensation for all materials, equipment, labor and incidentals necessary to complete the work as specified in these notes and the Standard Specifications for constructing perforated pipe drainage system.

SPECIAL NOTE FOR JPC INTERSECTION PAVEMENT

I. DESCRIPTION

Except as specified herein, construct Jointed Plain Concrete (JPC) Pavement in accordance with the Department's Standard and Supplemental Specifications, Special Provisions and Special Notes, and Standard and Sepia Drawings, current editions, and as directed by the Engineer. Section references are to the Standard Specifications. Furnish all materials, labor, equipment, and incidentals for the following work:

(1) Remove existing pavement and replace with JPC Pavement; (2) Maintain and control traffic; and (3) All other work specified as part of this contract.

II. MATERIALS

The Department will sample and test all materials according to the Department's Sampling Manual. Make the materials available for sampling a sufficient time in advance of use, to allow for the necessary time for testing, unless otherwise specified in these notes.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Dense Graded Aggregate. Do furnish Crushed Stone Base in lieu of DGA.

C. Jointed Plain Cement Concrete Pavement. Use JPC Pavement/24. At Contractor's request, and at no additional cost to the Department, the Engineer may approve other high early strength rapid setting concrete. The Department will allow either central mixing or truck mixing.

D. Joint Sealant. Use Hot-Poured Elastic, no alternates.

E. Traffic Signal Loops. See Special Notes for Installation of Traffic Loops.

III. CONSTRUCTION METHODS

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Shoulder Preparation and Restoration. Prior to placing any lane closures that require shifting traffic onto existing shoulders/adjacent lanes, patch the shoulders/adjacent lanes as directed by the Engineer. Remove failed materials and perform additional patching as directed by the Engineer during the time the shoulder/adjacent lane is used as a travel lane.

JPC Intersection
Page 2 of 5

C. Site Preparation. Be responsible for all site preparation, including but not limited to, incidental excavation and backfilling; removal of all obstructions or any other items; disposal of materials; sweeping and removal of debris; shoulder preparation and restoration; temporary and permanent erosion and pollution control; final dressing, clean up, and seeding; and all incidentals. Perform all Site Preparation only as approved or directed by the Engineer.

D. Pavement Removal. Consider pavement removal locations and dimensions shown on the drawings to be approximate only; the Engineer will determine exact locations and dimensions at the time of construction. Prior to removal, saw-cut existing asphalt pavement at locations directed by the Engineer to provide a neat edge where new concrete will adjoin existing asphalt. Remove underlying DGA/stone or other materials to depths as outlined on the attached drawings to provide for the specified thickness of stone/JPC pavement outlined in this proposal.

E. Concrete Pavement Replacement. Prior to placing JPC Pavement, obtain the Engineer's approval of proposed method of construction for ensuring and establishing a smooth profile. Immediately after removing asphalt pavement, stabilize the base as outlined in the attached notes or as by the Engineer and place the replacement JPC in a continuous operation in accordance with the Traffic Control Plan and as directed by the Engineer. Construct the replacement JPC Pavement with a minimum depth of 11 inches; however, transition the finished grade to match adjacent pavement that is to remain in place; therefore, the actual thickness of the pavement may be greater than 11 inches in some areas. Consolidate the concrete, strike off, machine finish with a vibrating or roller screed, and straightedge the plastic concrete with a straightedge conforming to Section 501.02.18. The profile of the finished pavement shall conform to the Category B Requirements of Section 501.03.19(B).

F. Joint Sealing. Saw, clean, and seal transverse and longitudinal joints as shown on the standard drawings and as directed the Engineer.

G. Traffic Signal Loops. See Special Notes for Installation of Traffic Loops. Protect lead wires from each loop to the junction box during each phase of the construction sequence at no additional cost to the Department.

H. Disposal of Waste. Dispose of all waste and debris off the right-of-way at sites obtained by the Contractor at no additional cost to the Department. See Special Note for Waste and Borrow.

I. Pavement Markings. See Traffic Control Plan.

JPC Intersection
Page 3 of 5

J. On-Site Inspection. Prior to submitting a bid, make a thorough inspection of the site and become thoroughly familiar with the existing conditions so that the work can be expeditiously performed after a contract is awarded. The Department will consider submission of a bid as evidence of this inspection having been made. The Department will not honor any claims resulting from site conditions.

K. Property Damage and Restoration. Be responsible for all damage to public and/or private property resulting from the work. Repair or replace all damaged roadway features in like kind materials and design at no additional cost to the Department. Repair or replace damaged private property in like kind materials and design to the satisfaction of the owner.

L. Caution. Consider information shown on the drawings and in this proposal and the types and quantities of work listed are approximate only, and not as an accurate or complete evaluation of the material and conditions to be encountered during construction. The bidder must draw his own conclusion as to the conditions encountered. The Department does not give any guarantee as to the accuracy of the data and no claim will be considered for additional compensation if the conditions encountered are not in accordance with the information shown.

M. Utility Clearance. Determine the location of all underground and overhead utilities prior to construction. It is not anticipated that utility facilities will need to be relocated and/or adjusted; however, in the event that work does require relocation and/or adjustment, the utility companies will work concurrently with the Contractor while relocating their facilities.

N. Final Dressing, Clean Up, and Seeding and Protection. After all work is completed, remove all waste and debris from the construction sites. Remove all temporary shoulder widening and restore disturbed shoulders. Perform Class A final dressing on all disturbed areas. Sow disturbed earthen areas with Seed Mixture No. 1.

O. Coordination of Work. Be advised that other projects may be in progress within or in the near vicinity of this project. Take into consideration that the traffic control of those projects may affect this project and the traffic control of this project may affect those projects. Coordinate the work on this project with the work of the other contractors. In case of a conflict, the Engineer will determine the relative priority to give to work phasing on the various projects.

JPC Intersection
Page 4 of 5

IV. METHOD OF MEASUREMENT

The Department will measure only the bid items listed. All other items required to complete the construction shall be incidental to the listed bid items.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Site Preparation. Other than the bid items listed, The Department will not measure Site Preparation for payment, but will be incidental to the other items of the work.

C. Shoulder Preparation and Restoration. The Department will measure DGA in Tons. The Department will not measure other items for shoulder preparation and restoration but shall be incidental to the other items of work.

D. Remove Pavement. The Department will measure pavement removed within the limits specified by the Engineer as cubic yards of roadway excavation. The Department will consider removing the pavement to include existing asphalt pavement, existing asphalt patching, underlying PCC pavement (if present), and existing DGA or other stone base.

E. JPC Pavement-11 IN/24. See Section 502.04.01 and Section 501.04.01.

F. Joint Sealing. The Department will not measure Joint Sealing for payment, but will be incidental to JPC Pavement/24.

H. Smooth Dowels, Deformed Tie Bars, and Hook Bolts. The Department will not measure smooth dowels, deformed tie bars and hook bolts, but will be incidental to JPC Pavement-11 IN/24.

G. Signal Loops. See Special Notes for Installation of Traffic Loops.

IV. BASIS OF PAYMENT

The Department will make payment only for the bid items listed. All other items required to complete the construction shall be incidental to the bid items listed.

A. Maintain and Control Traffic. See Traffic Control Plan.

B. Remove Pavement. The Department will measure pavement removed within the limits specified by the Engineer as cubic yards of roadway excavation. The Department will consider removing the pavement to include existing asphalt pavement, existing asphalt patching, underlying PCC pavement (if present), and existing DGA or other stone base.

JPC Intersection
Page 5 of 5

C. JPC Pavement-11 IN/24. See Section 502.05.

D. Signal Loops. See Special Notes for Installation of Traffic Loops.

SPECIAL NOTE FOR STAKING

In addition to the requirements of Section 201, perform the following:

1. Contrary to Section 201.03.01, perform items 1-3 usually performed by the Engineer; and
2. Field survey the existing pavement in order to establish the existing cross slopes, transitions and profile. Irregularities in the existing pavement are to be eliminated with the construction of a smooth line and grade of the new JPC pavement to ensure the best rideability possible.
3. Verify intersection and lane profile and alignment and prepare a Drainage Development Worksheet to provide for positive drainage upon completion of construction; and
4. Prior to incorporating into the work, obtain the Engineers approval of all designs and revisions to be provided by the Contractor; and
5. Produce and furnish to the Engineer "As Built" plans; and
6. Perform any and all other staking operations required to control and construct the work.

SPECIAL NOTES FOR COMPLETION DATE & LIQUIDATED DAMAGES

Select a date to begin work subject to the following conditions:

Once work begins, complete all work within 40 calendar Days;
Phase 1 shall be completed within 168 hours of closure of the roadway for Phase 1; and
Regardless of the date work begins, complete all work no later than August 9, 2017.

In addition to the requirements of Section 108.09, the Department will assess Liquidated Damages in the amount of \$5,000 per hour for each hour or part of an hour the Phase 1 closure and/or a lane closure remains in place during days and hours prohibited by the Traffic Control Plan or the Engineer. If work is delayed by inclement weather, the minimum work required to place traffic on this pavement shall be resumed immediately as soon as weather permits.

The Department will assess Liquidated Damages in the amount specified in Section 108.09 whenever work remains uncompleted beyond the Calendar Days allowed or the applicable Specified Completions Date, whichever occurs first.

Contrary to section 108.09, the Department will assess Liquidated Damages for the months of December through March.

Contrary to Section 108.09, the Department will assess Liquidated Damages regardless of whether seasonal limitations prohibit the Contractor from performing work on the controlling operation.

All liquidated damages will be applied accumulatively.

All other applicable portions of Section 108 apply.

SPECIAL PROVISION FOR WASTE AND BORROW SITES

Obtain U.S. Army Corps of Engineer's approval before utilizing a waste or borrow site that involves "Waters of the United States". The Corps of Engineers defines "Waters of the United States" as perennial or intermittent streams, ponds or wetlands. The Corps of Engineers also considers ephemeral streams, typically dry except during rainfall but having a defined drainage channel, to be jurisdictional waters. Direct questions concerning any potential impacts to "Waters of the United States" to the attention of the appropriate District Office for the Corps of Engineers for a determination prior to disturbance. Be responsible for any fees associated with obtaining approval for waste and borrow sites from the U.S. Army Corps of Engineer or other appropriate regulatory agencies.

1-296 Waste & Borrow Sites
01/02/2012

SPECIAL NOTE FOR ASPHALT MILLING AND TEXTURING

Begin paving operations within **48 hours** of commencement of the milling operation. Continue paving operations continuously until completed. If paving operations are not begun within this time period, the Department will assess liquidated damages at the rate prescribed by Section 108.09 until such time as paving operations are begun.

Take possession of the millings and recycle the millings or dispose of the millings off the Right-of-Way at sites obtained by the Contractor at no additional cost to the Department.

1-3520 48 hours Contractor keeps millings
01/2/2012

SPECIAL NOTE FOR TYPICAL SECTION DIMENSIONS

Consider the dimensions shown on the typical sections for pavement and shoulder widths and thickness' to be nominal or typical dimensions. The Engineer may direct or approve varying the actual dimensions to be constructed to fit existing conditions. Do not widen existing pavement or shoulders unless specified elsewhere in this proposal or directed by the engineer.

1-3725 Typical Section Dimensions
01/02/2012

SPECIAL NOTE FOR SIDEWALK RAMPS & DETECTABLE WARNINGS

GENERAL

Unless otherwise stated in the contract, or as directed by or with prior approval from the Engineer, construct Sidewalk Ramps and Detectable Warnings in accordance with Sections 505 and 720; Supplemental Specifications; Standard Drawings RGX-040-03, RPM-150-08, RPM-152-08, RPM-170-09, and RPM-172-07; current editions, as applicable. In lieu of the Detectable Warnings shown on Standard Drawing RGX-040-03, the Department will also allow the use of any Detectable Warnings listed as Phase XI on the [Kentucky Product Evaluation List](http://www.ktc.uky.edu/kytc/kypel/allevvaluations.php) (<http://www.ktc.uky.edu/kytc/kypel/allevvaluations.php>). For Detectable Warnings as shown on Standard Drawing RGX-040-03, saw cut existing sidewalks, curb and gutter, and pavement, if present, as shown on the detail and reconstruct sidewalk ramps with detectable warnings as directed or approved by the Engineer. For Detectable Warnings from the Kentucky Product Evaluation List, install according to the manufacturer's recommendations. Unless specified otherwise in the Contract, construct sidewalk with 4" nominal minimum required thickness; however, if the existing sidewalk thickness is found to be greater or less than the thickness specified, transition the thickness as directed by the Engineer.

Except as required by the work, do not disturb drainage pipe, catch basins, and other roadway features, appurtenances and installations. Restore any roadway features, appurtenances, and installations damaged by the work in like kind materials and design at no additional cost to the Department. Dispose of all waste off the right of way at sites obtained by the Contractor at no additional cost to the Department (see Special Note for Waste and Borrow).

MEASUREMENT & PAYMENT

SIDEWALK RAMPS – The Department will measure Sidewalk Ramps in accordance with Section 505.04.01 and Standard Drawing RPM-170-09, current editions; however, contrary to Sections 505.04.05 and 505.04.06, the Department will not measure Roadway Excavation or Embankment in Place, but shall be incidental to the Sidewalk. Accept payment at the Contract unit price per square yard as full compensation for all labor, materials, equipment, and incidentals required for removal and disposal of existing sidewalk and curb and gutter, excavation and embankment, construction of the sidewalk ramps, reconstruction of the adjacent curb and/or sidewalk as necessary to install the sidewalk ramps, and restoration of disturbed features in accordance with these notes or as directed by the Engineer.

DETECTABLE WARNINGS – The Department will measure Detectable Warnings in accordance with Section 505.04.04 and Standard Drawings RGX-040-03 and RPM-170-09, current editions. The Department will make payment according to Section 505.05.

HANDRAIL – The Department will measure and make payment for Handrail in accordance with Section 720.05 and Standard Drawing RPM-172-07, current editions.

TRAFFIC CONTROL PLAN (FE01 029 0061 013-014)

TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the Kentucky Standard Specifications and the Standard Drawings, current editions. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic". All lane closures used on the project will be in compliance with the appropriate Standard Drawings. (NOTE: Any lane closures used on the project shall be done utilizing traffic drums with a maximum spacing of 25 ft.) Do NOT use cones for lane closures or shoulder closures.

Contrary to Section 106.01, traffic control devices used on this project may be new, or used in like new condition, at the beginning of the work and maintained in like new condition until completion of the work. Traffic control devices used on this project and the Temporary Traffic Control Plan shall conform to the current edition of the *Manual on Uniform Traffic Control Devices*.

District Traffic Personnel will be responsible for the movement of traffic signals to accommodate the changing traffic control scheme for the duration of the project. Contractor shall notify the Project Engineer and District Traffic Engineer of plans to switch the traffic control phasing 48 hours prior to the operation.

PROJECT PHASING & CONSTRUCTION PROCEDURES

This project shall be completed within 40 calendar days of beginning work. Regardless of the date work begins on the project, the project shall be completed no later than August 9, 2017. Maintain a minimum of one traffic lane (mainline) in each direction at all times during construction with the exception of the 168 hour shutdown required to complete PHASE 1. The clear lane width shall be 10 Feet. Maintain one lane of traffic during construction in accordance with Standard Drawing No. TTC-115-02, and the attached detail drawing.

CONSTRUCTION PHASING

Closure date of KY 61/KY must be approved by Engineer. See note below.

**PHASE 1 – EXISTING ASPHALT PAVEMENT REMOVAL AND
CONSTRUCTION OF NEW JPC PAVEMENT ON KY 90 APPROACHES, KY 61
APPROACHES, AND MIDDLE OF KY 90 KY 61 INTERSECTION.**

Phase 1:

Phase 1 shall be completed by closing the KY 61/KY 90 intersection. This intersection closure will only be permitted during times when school is not in session. **Phase 1 must be completed utilizing only 1 intersection closure (intersection may not be closed**

multiple times) with a maximum closure time of 168 hours. Any closures exceeding this limitation will be subject to liquidated damages (see special note for liquidated damages). Phase 1 closure will not be permitted during any major holidays. Phase 1 shall also utilize a temporary detour (See detour map. Contractor to provide detour signs per contract unit bid price for Temporary Signs). Coordinate all dates and scheduling with the Engineer. Provide adequate notice to KYTC/Engineer prior to beginning of Phase 1 in order to allow enough time to notify all appropriate parties. Receive approval from the Engineer prior to the beginning of Phase 1. Verify location of all detour signs with Engineer. Excavate and remove existing asphalt pavement and other unclassified material to sufficient depth for placement of sub base material. Place edge drain system and outlet to drain to existing curb box inlet. Place sub base material and construct JPC pavement.

PHASE 2 – EXISTING ASPHALT PAVEMENT REMOVAL AND CONSTRUCTION OF NEW JPC PAVEMENT ON NORTHBOUND KY 61 THROUGH LANE.

Phase 2:

Channelize traffic on KY 61 in the Northbound direction using drums to one lane. This will move KY 61 Northbound through traffic and KY 61 Northbound left turns into the center lane. Channelize traffic on KY 61 in the Southbound direction using drums to one lane. This will move KY 61 Southbound through traffic and KY 61 Southbound right turns to the westernmost lane. Remove the existing asphalt in the original KY 61 Northbound through lane on both sides of the Intersection Approach as shown on the traffic control plan (Phase 2) drawing. Businesses located in this section of roadway will have access from City and County Roads approaching them from the Rear. Excavate and remove existing asphalt pavement and other unclassified material to sufficient depth for placement of sub base material. Place edge drain system and outlet to drain to connect to existing curb box inlet. Inspect and certify edge drain system. Place sub base material and construct JPC pavement.

PHASE 3 – EXISTING ASPHALT PAVEMENT REMOVAL AND CONSTRUCTION OF NEW JPC PAVEMENT ON NORTHBOUND KY 61 LEFT TURN LANE AND SOUTHBOUND KY 61 THROUGH LANE NORTH OF THE INTERSECTION.

Phase 3:

Channelize traffic on KY 61 in the Northbound direction using drums to one lane. This will move KY 61 Northbound through and KY 61 Northbound left turns in the Completed Easternmost lane. Channelize traffic on KY 61 in the Southbound direction using drums to one lane. This will move KY 61 Southbound through traffic and KY 61 Southbound Right turns to the Westernmost lane. Remove the existing asphalt in the original KY 61 Northbound left turn lane and original KY 61 Southbound Through lane (north of the intersection) as denoted on the traffic control plan (Phase 3) drawing. This will allow access to remain open to the businesses located in this section of roadway.

Excavate and remove existing asphalt pavement and other unclassified material to sufficient depth for placement of sub base material. Place edge drain system and outlet to drain to connect to existing curb box inlet. Inspect and certify edge drain system. Place sub base material and construct JPC pavement.

PHASE 4 – EXISTING ASPHALT PAVEMENT REMOVAL AND CONSTRUCTION OF NEW JPC PAVEMENT ON SOUTHBOUND KY 61 RIGHT TURN LANE AND SOUTHBOUND KY 61 THROUGH LANE SOUTH OF THE INTERSECTION.

Phase 4:

Channelize traffic on KY 61 in the Southbound direction using drums to one lane. This will move KY 61 Southbound right turns and KY 61 Southbound through (south of the intersection) into the middle lane (original KY 61 Southbound through and KY 61 Northbound left turn). Channelize traffic on KY 61 in the Northbound direction using drums to one lane. This will move KY 61 Northbound through traffic and KY 61 Northbound left turns to the easternmost lane. A TEMPORARY stop bar will be added in this lane at the engineer's discretion to allow more room for trucks turning from KY 90 onto KY 61 Southbound. Location of the temporary stop bar shall also be at the engineer's discretion. Remove the existing asphalt in the original KY 61 right turn and KY 61 through lane (south of intersection) at the location denoted on the traffic control plan (Phase 4) drawing. Businesses in this area will still have access via County/City Roadways. Excavate and remove existing asphalt pavement and other unclassified material to sufficient depth for placement of sub base material. Place sub base material and construct JPC pavement.

PHASE 5 – PERMANENT STRIPING AND PAVEMENT MARKINGS

After all JPC pavement work has been completed place permanent pavement striping; In addition to permanent striping, place all pavement markings within the project limits.

Night work will be allowed on this project. The method of lighting for night work will require written approval from the Engineer prior to its use.

Locations listed in the proposal or shown on sketch map are approximate only; the Engineer will determine exact locations at time of construction.

LANE CLOSURES

Limit the lengths of lane closures to only that needed for actual operations in accordance with the phasing specified herein, or as directed by the Engineer. Lane closures must be monitored 24 hours a day by the contractor in order to provide safe travel for the general public and to ensure protection

of the work zone.

SIGNS

Contrary to Section 112.04.02 and 112.04.03, Low Shoulder Signs will not be measured for payment, but shall be incidental to Maintain and Control Traffic.

Sign posts and splices shall be compliant with NCHRP 350 or MASH. Manufacturer's documentation validating this compliance shall be provided to the Engineer prior to installation. Signs, including any splices, shall be installed according to manufacturer's specifications and installation recommendations. Contrary to section 112.04.02, only long-term signs (signs intended to be continuously in place for more than 3 days) will be measured for payment. Short-term signs (signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic.

Individual construction signs will be measured only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. Replacements for damaged signs or signs directed to be replaced by the Engineer due to poor legibility or reflectivity will not be measured for payment.

Relocate and reset or cover existing permanent signs as required by the work. Obtain the Engineer's approval before removing or covering an existing sign. The Department will not measure relocating and resetting or covering existing permanent signs, but shall be incidental to Maintain and Control Traffic.

BARRICADES

Barricades used in lieu of barrels and cones for channelization or delineation will be incidental to Maintain and Control Traffic according to Section 112.04.01. Barricades used to protect pavement removal areas will be bid as each according to Section 112.04.04.

Individual barricades will be measured only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. Replacements for damaged barricades or barricades directed to be replaced by the Engineer due to poor legibility or reflectivity will not be measured for payment.

CHANGEABLE MESSAGE SIGNS

Provide changeable message signs in advance of and within the project at locations to be determined by the Engineer. If work is in progress concurrently in both directions or if more than one lane closure is in place in the same direction of travel, provide additional changeable message signs as directed by the Engineer. Place changeable message signs one mile in advance of the anticipated queue at each lane closure. As the actual queue lengthens and/or shortens relocate or

provide additional changeable message signs so that traffic has warning of slowed or stopped traffic at least one mile but not more than two miles before reaching the end of the actual queue. The locations designated may vary as the work progresses. The messages required to be provided shall be designated by the Engineer. In the event of damage or mechanical/electrical failure, the Contractor shall repair or replace the Changeable Message Sign within 24 hours. The Department will measure for payment the maximum number of changeable message signs in concurrent use at the same time on a single day on all sections of the contract. Individual changeable message signs will be measured only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. Replacements for damaged changeable message signs directed by the Engineer to be replaced due to poor condition or readability will not be measured for payment.

ARROW PANEL

Use arrow panels as shown on the Standard Drawings or as directed by the Engineer. The Department will measure for payment the maximum number of arrow panels in concurrent use at the same time on a single day on all sections of the contract. The Department will measure for payment the maximum number of Changeable Message Signs in concurrent use at the same time on a single day on all sections of the contract. The Department will measure individual Arrow Panels only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. The Department will not measure replacements for damaged Arrow Panels or for panels signs the Engineer directs be replaced due to poor condition or readability for payment. Retain possession of the Arrow Panels upon completion of the work.

TRAFFIC COORDINATOR

Designate an employee to be traffic coordinator conforming to the requirements of Section 112.03.12. Designate an employee to serve as Traffic Coordinator. The Traffic Coordinator will inspect the project maintenance of traffic once every two hours during the Contractor's operations and at any time a lane closure is in place. The Traffic Coordinator will report all incidents throughout the work zone to the Engineer on the project. The Contractor will furnish the name and telephone number where the Traffic Coordinator can be contacted at all times. During any period when a lane closure is in place, the Traffic Coordinator will arrange for personnel to be present on the project at all times to inspect the traffic control, maintain the signing and devices, and relocate variable message boards as queue lengths change. The personnel will have access on the project to a radio or telephone to be used in case of emergencies or accidents.

TEMPORARY ENTRANCES

The Contractor will not be required to provide continuous access to farms, single family, duplex, or triplex residential properties during working hours; however, provide reasonable egress and ingress to each such property when actual operations are not in progress at that location. The time during

which a farm or residential entrance is blocked shall be the minimum length of time required for actual operations, shall not be extended for the Contractor's convenience, and in no case shall exceed six (6) hours. Notify all residents twenty-four hours in advance of any driveway or entrance closings and make any accommodations necessary to meet the access needs of disabled residents.

Except as allowed by the Phasing as specified above, maintain direct access to all side streets and roads, schools, churches, commercial properties and apartments or apartment complexes of four or more units at all times.

Payment will be allowed at the unit price bid for all asphalt materials required to construct and maintain any temporary entrances which may be necessary to provide temporary access; however, no direct payment will be allowed for aggregates, excavation and/or embankment needed. The Engineer will determine the type of surfacing material, asphalt or aggregate, to be used at each entrance.

TRAFFIC LOOP INSTALLATION

All items required for lane closures related to this item of work shall be considered incidental to bid item "Maintain and Control Traffic". Install Traffic signal loops as per special notes. The Contractor shall coordinate the placement of the traffic loops with the District Traffic Engineer.

THERMOPLASTIC INTERSECTION

Consider the locations listed on the summary as approximate only. Prior to milling and/or resurfacing, locate and document the locations of the existing markings. After resurfacing, replace the markings at their approximate existing locations or as directed by Engineer. Place markings not existing prior to resurfacing as directed by the Engineer.

BARRICADES

The Department will not measure barricades used in lieu of barrels and cones for channelization or delineation, but shall be incidental to Maintain and Control Traffic according to Section 112.04.01.

The Department will measure barricades used to protect pavement removal areas in individual units. Each. The Department will measure for payment the maximum number of barricades in concurrent use at the same time on a single day on all sections of the contract. The Department will measure individual barricades only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. The Department will not measure replacements for damaged barricades the Engineer directs to be replaced due to poor condition or reflectivity. Retain possession of the Barricades upon completion of the work.

PAVEMENT MARKINGS

Contrary to Section 112.03.10, remove or cover the lenses of raised pavement markers that do not conform to the traffic control scheme in use during night time hours, or as directed by the Engineer. Replace or uncover lenses before a closed lane is reopened to traffic. No direct payment will be made for removing and replacing or covering and uncovering the lenses, but shall be incidental to “Maintain and Control Traffic”.

Place temporary and permanent striping according to Sections 112 and 748, except that:

Temporary or Permanent striping or tape shall be in place before a lane is opened to traffic.

Any pavement striping that conflicts with the traffic control phasing must be removed and is incidental to Maintain and Control Traffic.

If the Contractor’s operations or phasing requires temporary markings that must be subsequently removed from the final surface course, Temporary Removable Tape shall be used. This removable tape will be measured separately.

PAVEMENT EDGE DROP-OFFS

A pavement edge between opposing directions of traffic or lanes that traffic is expected to cross in a lane change situation shall not have an elevation difference greater than 1½”. Warning signs (MUTCD W8-9 or W8-9A, or W8-11) shall be placed in advance of and at 1500’ intervals throughout the drop-off area. Dual posting on both sides of the traveled way shall be required. All transverse transitions between newly surfaced pavement and the existing pavement areas that traffic may cross shall be wedged with asphalt mixture for leveling and wedging. Remove wedges prior to placement of the final surface course.

Pavement edges that traffic is not expected to cross, except accidentally, shall be treated as follows:

Less than 2” – No protection required.

2” to 4” – Place plastic drums, vertical panels, or barricades every 50 feet. Cones may be used in place of plastic drums, panels, and barricades during daylight working hours. Wedge with DGA or asphalt mixtures with a 1:1 or flatter slope in daylight hours, or 3:1 or flatter slope during nighttime hours, when work is not active in the drop-off area.

4 inches and greater –Protect with a lane or shoulder closure using drums or barricades; cones will not be allowed for lane or shoulder closures for drop-offs 4 inches or greater. Place drums or barricades with spacing **not to exceed 25 feet**. Place Type III Barricades facing oncoming traffic at each drop off. If for any reason traffic must be maintained less than 5 feet from the drop off, wedge with crushed

stone with 3:1 or flatter slope when work is not actively in progress in the drop-off area. Once excavation begins, work continuously to construct crushed stone backfill and DGA base to eliminate the drop-off. Drop-offs greater than 4 inches within 5 feet of traffic will not be allowed during non-working hours.

USE AND PLACEMENT OF CHANGEABLE MESSAGE SIGNS

The following policy is based upon current Changeable Message Signs (CMS) standards and practice from many sources, including the Federal Highway Administration (FHWA), other State Departments of Transportation, and Traffic Safety Associations. It is understood that each CMS installation or use requires individual consideration due to the specific location or purpose. However, there will be elements that are constant in nearly all applications. Accordingly these recommended guidelines bring a level of uniformity, while still being open to regional experience and engineering judgment.

Application

The primary purpose of CMS is to advise the driver of unexpected traffic and routing situations. Examples of applications where CMS can be effective include:

- Closures (road, lane, bridge, ramp, shoulder, interstate)
- Changes in alignment or surface conditions
- Significant delays, congestion
- Construction/maintenance activities (delays, future activities)
- Detours/alternative routes
- Special events with traffic and safety implications
- Crash/incidents
- Vehicle restrictions (width, height, weight, flammable)
- Advance notice of new traffic control devices
- Real-time traffic conditions (must be kept up to date)
- Weather /driving conditions, environmental conditions, Roadway Weather Information Systems
- Emergency Situations
- Referral to Highway Advisory Radio (if available)
- Messages as approved by the County Engineer's Office

CMS should not be used for:

- Replacement of static signs (e.g. road work ahead), regulatory signage (e.g. speed limits), pavement markings, standard traffic control devices, conventional warning or guide signs.
- Replacement of lighted arrow board
- Advertising (Don't advertise the event unless clarifying "action" to be taken by driver – e.g. Speedway traffic next exit)
- Generic messages
- Test messages (portable signs only)
- Describe recurrent congestion (e.g. rush hour)
- Public service announcements (not traffic related)

Messages

Basic principles that are important to providing proper messages and insuring the proper operation of a CMS are:

- Visible for at least ½ mile under ideal daytime and nighttime conditions
- Legible from all lanes a minimum of 650 feet
- Entire message readable twice while traveling at the posted speed
- Nor more than two message panels should be used (three panels may be used on roadways where vehicles are traveling less than 45 mph). A panel is the message that fits on the face of the sign without flipping or scrolling.
- Each panel should convey a single thought; short and concise
- Do not use two unrelated panels on a sign
- Do not use the sign for two unrelated messages
- Should not scroll text horizontally or vertically
- Should not contain both the words left and right
- Use standardized abbreviations and messages
- Should be accurate and timely
- Avoid filler/unnecessary words and periods (hazardous, a, an, the)
- Avoid use of speed limits
- Use words (not numbers) for dates

Placement

Placement of the CMS is important to insure that the signs is visible to the driver and provides ample time to take any necessary action. Some of the following principles may only be applicable to controlled access roadways. The basic principles of placement for a CMS are:

- When 2 signs are needed, place on same side of roadway and at least 1,000 feet apart
- Place behind semi-rigid/rigid protection (guardrail, barrier) or outside of the clear zone
- Place 1,000 feet in advance of work zone; at least one mile ahead of decision point
- Normally place on right side of roadway; but should be placed closest to the affected lane so that either side is acceptable
- Signs should not be dual mounted (one on each side of roadway facing same direction)
- Point trailer hitch downstream
- Secure to immovable object to prevent thief (if necessary)
- Do not place in sags or just beyond crest
- Check for reflection of sun to prevent the blinding of motorist
- Should be turned ~3 degrees outward from perpendicular to the edge of pavement
- Bottom of sign should be 7 feet above the elevation of edge of roadway
- Should be removed when not in use
-

Standard Abbreviations

The following is a list of standard abbreviations to be used on CMS.

<u>Word</u>	<u>Abbrev.</u>	<u>Example</u>
Access	ACCS	ACCIDENT AHEAD/USE ACCS RD NEXT RIGHT
Alternate	ALT	ACCIDENT AHEAD/USE ALT RTE NEXT RIGHT
Avenue	AVE	FIFTH AVE CLOSED/DETOUR NEXT LEFT
Blocked	BLKD	FIFTH AVE BLKD/MERGE LEFT
Boulevard	BLVD	MAIN BLVD CLOSED/USE ALT RTE
Bridge	BRDG	SMITH BRDG CLOSED/USE ALT RTE
Cardinal Directions	N, S, E, W	N I75 CLOSED/ DETOUR EXIT 30
Center	CNTR	CNTR LANE CLOSED/MERGE LEFT
Commercial	COMM	OVRSZ COMM VEH/USE I275
Condition	COND	ICY COND POSSIBLE
Congested	CONG	HVY CONG NEXT 3 MI
Construction	CONST	CONST WORK AHEAD/EXPECT DELAYS
Downtown	DWNTN	DWNTN TRAF USE EX 40
Eastbound	E-BND	E-BND I64 CLOSED/DETOUR EXIT 20
Emergency	EMER	EMER VEH AHEAD/PREPARE TO STOP
Entrance, Enter	EX, EXT	DWNTN TRAF USE EX 40
Expressway	EXPWY	WTRSN EXPWY CLOSED/DETOUR EXIT 10
Freeway	FRWY, FWY	GN SYNDR FWY CLOSED/DETOUR EXIT 15
Hazardous Materials	HAZMAT	HAZMAT IN ROADWAY/ALL TRAF EXIT 25
Highway	HWY	ACCIDENT ON AA HWY/EXPECT DELAYS
Hour	HR	ACCIDENT ON AA HWY/2 HR DELAY
Information	INFO	TRAF INFO TUNE TO 1240 AM
Interstate	I	E-BND I64 CLOSED/DETOUR EXIT 20
Lane	LN	LN CLOSED/MERGE LEFT
Left	LFT	LANE CLOSED/MERGE LFT
Local	LOC	LOC TRAF USE ALT RTE
Maintenance	MAINT	MAINT WRK ON BRDG/SLOW
Major	MAJ	MAJ DELWAYS I75/USE ALT RTE
Mile	MI	ACCIDENT 3 MI AHEAD/ USE ALT RTE
Minor	MNR	ACCIDENT 3 MI MNR DELAY

Minutes Northbound	MIN N-BND	ACCIDENT 3 MI/30 MIN DELAY N-BND I75 CLOSED/ DETOUR EXIT 50
Oversized	OVRSZ	OVRSZ COMM VEH/USE I275 NEXT RIGHT
Parking Parkway	PKING PKWY	EVENT PKING NEXT RGT CUM PKWAY TRAF/DETOUR EXIT 60
Prepare Right Road Roadwork	PREP RGT RD RDWK	ACCIDENT 3 MIL/PREP TO STOP EVENT PKING NEXT RGT HAZMAT IN RD/ALL TRAF EXIT 25 RDWK NEXT 4 MI/POSSIBLE DELAYS
Route Shoulder Slippery Southbound	RTE SHLDR SLIP S-BND	MAJ DELAYS I75/USE ALT RTE SHLDR CLOSED NEXT 5 MI SLIP COND POSSIBLE/ SLOW SPD S-BND I75 CLOSED/DETOUR EXIT 50
Speed Street Traffic	SPD ST TRAF	SLIP COND POSSIBLE/ SLOW SPD MAIN ST CLOSED/USE ALT RTE CUM PKWAY TRAF/DETOUR EXIT 60
Vehicle	VEH	OVRSZ COMM VEH/USE I275 NEXT RIGHT
Westbound	W-BND	W-BND I64 CLOSED/DETOUR EXIT 50
Work	WRK	CONST WRK 2MI/POSSIBLE DELAYS

Certain abbreviations are prone to inviting confusion because another word is abbreviated or could be abbreviated in the same way. DO NO USE THESE ABBREVIATIONS.

<u>Abbrev.</u>	<u>Intended Word</u>	<u>Word Erroneously Given</u>
ACC	Accident	Access (Road)
CLRS	Clears	Colors
DLY	Delay	Daily
FDR	Feeder	Federal
L	Left	Lane (merge)
LOC	Local	Location
LT	Light (traffic)	Left
PARK	Parking	Park
POLL	Pollution (index)	Poll
RED	Reduce	Red
STAD	Stadium	Standard
TEMP	Temporary	Temperature
WRNG	Warning	Wrong

TYPICAL MESSAGES

The following is a list of typical messages used on CMS. The list consists of the reason or problem that you want the driver to be aware of and the action that you want the driver to take.

<u>Reason/Problem</u>	Action
ACCIDENT	ALL TRAFFIC EXIT RT
ACCIDENT/XX MILES	AVOID DELAY USE XX
XX ROAD CLOSED	CONSIDER ALT ROUTE
XX EXIT CLOSED	DETOUR
BRIDGE CLOSED	DETOUR XX MILES
BRIDGE/(SLIPPERY, ICE, ETC.)	DO NOT PASS
CENTER/LANE/CLOSED	EXPECT DELAYS
DELAY(S), MAJOR/DELAYS	FOLLOW ALT ROUTE
DEBRIS AHEAD	KEEP LEFT
DENSE FOG	KEEP RIGHT
DISABLED/VEHICLE	MERGE XX MILES
EMER/VEHICLES/ONLY	MERGE LEFT
EVENT PARKING	MERGE RIGHT
EXIT XX CLOSED	ONE-WAY TRAFFIC
FLAGGER XX MILES	PASS TO LEFT
FOG XX MILES	PASS TO RIGHT
FREEWAY CLOSED	PREPARE TO STOP
FRESH OIL	REDUCE SPEED
HAZMAT SPILL	SLOW
ICE	SLOW DOWN
INCIDENT AHEAD	STAY IN LANE
LANES (NARROW, SHIFT, MERGE, ETC.)	STOP AHEAD
LEFT LANE CLOSED	STOP XX MILES
LEFT LANE NARROWS	TUNE RADIO 1610 AM
LEFT 2 LANES CLOSED	USE NN ROAD
LEFT SHOULDER CLOSED	USE CENTER LANE
LOOSE GRAVEL	USE DETOUR ROUTE
MEDIAN WORK XX MILES	USE LEFT TURN LANE
MOVING WORK ZONE, WORKERS IN ROADWAY	USE NEXT EXIT
NEXT EXIT CLOSED	USE RIGHT LANE
NO OVERSIZED LOADS	WATCH FOR FLAGGER
NO PASSING	
NO SHOULDER	
ONE LANE BRIDGE	
PEOPLE CROSSING	
RAMP CLOSED	
RAMP (SLIPPERY, ICE, ETC.)	
RIGHT LANE CLOSED	
RIGHT LANE NARROWS	
RIGHT SHOULDER CLOSED	
ROAD CLOSED	
ROAD CLOSED XX MILES	
ROAD (SLIPPERY, ICE, ETC.)	
ROAD WORK	
ROAD WORK (OR CONSTRUCTION) (TONIGHT, TODAY, TOMORROW, DATE)	

ROAD WORK XX MILES
SHOULDER (SLIPPERY, ICE, SOFT, BLOCKED, ETC.)
NEW SIGNAL XX MILES
SLOW 1 (OR 2) - WAY TRAFFIC
SOFT SHOULDER
STALLED VEHICLES AHEAD
TRAFFIC BACKUP
TRAFFIC SLOWS
TRUCK CROSSING
TRUCKS ENTERING
TOW TRUCK AHEAD
UNEVEN LANES
WATER ON ROAD
WET PAINT
WORK ZONE XX MILES
WORKERS AHEAD

SPECIAL NOTES FOR TRAFFIC SIGNAL PREFORMED LOOP REPLACEMENT

I. DESCRIPTION. Loop replacement shall be performed in accordance with the Department's Standard Specifications (current edition), applicable Standard Drawings, and applicable Special Provisions except as hereafter specified. Article references are to the Standard Specifications.

The Contractor shall furnish all materials, labor, and equipment for the replacement of traffic signal loop(s), and junction boxes (if the contract specifies quantities for this bid item elsewhere), and maintaining and controlling traffic, and all other work specified as part of this contract.

II. MATERIALS. See section 835 of the Standard Specifications.

All preformed loop wire shall be 16-gauge THWN stranded copper, single conductor in a 2-4-2 configuration for Quadrapole and 3 turns for a standard as shown on the Quadrapole and Standard Loop detail. The loop and home run shall be housed in a class A oil resistant heavy-duty reinforced rubber hose with a 250-PSI internal pressure rating. Hose for the loop and home run assembly shall be one continuous piece. The 3/8" I.D. (5/8" O.D.) hose shall be factory assembled. Preformed loops and home runs shall be pre-wired. The loop configurations and homerun lengths shall be assembled for the specific application.

Hose tee connections shall be high temperature synthetic rubber. The tee shall be of proper size to attach directly to the hose, minimizing the glue joints. The tee shall have the same flexible properties as the hose to insure that the whole assembly can conform to pavement movement and shifting without cracking or breaking.

III. CONSTRUCTION. See section 723 of the Standard Specifications.

The electrical contractor shall coordinate with the general contractor and inspector to ensure the loops are installed prior to any milling work being performed. The contractor shall be responsible for the removal of existing lead-in cable.

Preformed Quadrapole Loops, Preformed Loops and Preformed Loop Lead-In locations shall be coordinated with the Contractor and the Engineer prior to any work being performed. The Contractor shall be careful to avoid pavement sections where potholes, cracks, or any other roadway flaws exist.

Hose for the preformed loops and home run assembly shall be one continuous piece and shall be extended splice-free to the controller or junction box. Preformed loop cables shown as extended to junction boxes by means of preformed home run cables shall be spliced into loop lead-in cable at the boxes. Loop lead-in cable shall be extended splice-free from the junction box to controller.

The preformed loop dimension shall be 6' x 30' Quadrapole or 6' x 6', as specified. Center and mark each loop in the lane such that its sides are parallel and perpendicular to the direction of traffic.

Each Contractor submitting a bid for this work shall make a thorough inspection of the site prior to submitting his bid and shall thoroughly familiarize himself with existing conditions so that the work can be expeditiously performed after a Contract is awarded. Submission of a bid will be considered evidence of this inspection having been made. Any claims resulting from site conditions will not be honored by the Department.

Information provided in this proposal and the types and quantities of work listed are not to be taken as an accurate or complete evaluation of the material and conditions to be encountered during construction. The bidder must draw his own conclusion as to the conditions encountered. The Department does not give any guarantee as to the accuracy of the data and no claim will be considered for additional compensation if the conditions encountered are not in accordance with the information shown.

It is not anticipated that utility facilities will need to be relocated and/or adjusted; however, in the event that it is discovered that the work does require that utilities be relocated and/or adjusted, the utility companies will work concurrently with the Contractor while relocating their facilities.

Sow all disturbed earthen areas with Seed Mixture No. 1.

Asphalt or Concrete(4 inches or less) Installation

Starting at the tee joint, saw-cut a $\frac{3}{4}$ " wide slot to a depth of 6" below the final surface of pavement for three sides of the loop leaving the center leg and the shortest and farthest leg from the home run tee joint for the last saw-cuts. After the three sides have been saw-cut, lay loop in slot to mark the center leg and the fourth side. Pull the loop out of the slot to saw-cut the center leg and the fourth side. Saw-cut a $\frac{3}{4}$ " wide slot for the center leg and the fourth side. Clean any debris, water and loose particles from the slot with compressed air.

Make the saw-cut for the home run slot from each loop to the transition conduit $\frac{3}{4}$ " wide and 6" deep. Clean any debris, water, and loose particles from the slot with compressed air.

Insert the preformed loop wire and home run lead-in into the bottom of the loop slot. Extend the preformed home run lead-in cable splice-free to the junction box or cabinet. No exceptions to this shall be considered.

There shall be a minimum of 6' between loops in adjacent lanes for 12' wide lanes. Once the preformed loop is installed in the roadway, hand place 1" backer rod in the saw slot to ensure preformed loop will not rise out of slot. Contractor shall then fill the saw slot with non-shrink grout until level with road surface. The non-shrink grout shall be incidental to the Loop Saw, Slot and Fill bid item. See Asphalt saw slot detail.

Concrete(with more than 4 inches) Installation

Lay the preformed loop wire and home run lead-in on the compacted aggregate prior to pouring the new concrete. There shall be a minimum of six feet between loops in adjacent lanes for 12 foot wide lanes.

IV. MEASUREMENT. See Section 723.04 in the Standard Specifications.




Bid notes not included in Section 723 in the Standard Specifications or that are contrary


Loop saw slot and fill shall include sawing, cleaning saw slot as well as furnishing and installing loop sealant, backer rod and non-shrink grout as shown on the details. The contractor shall saw according to the dimensions shown on the detail sheets and not cut out any sections of pavement by over-sawing any slot. The ¾” conduit referenced in the Loop Wire Transition details is incidental to this project and not a separate pay item.

Preformed Quadrapole Loops, Preformed Loops and Preformed Loop Lead-In shall include furnishing and installing preformed quadrapole loops, preformed loops and preformed loop lead-in. Items installed in saw slots shall be installed as shown on the Saw Slot detail. All connections and fittings required for a full and complete installation of the loops are incidental to this item.


V. PAYMENT. The Department will make payment for completed and accepted quantities under the following:

Code	Pay Item	Pay Unit
4792	Conduit 1”	Linear Foot
4793	Conduit 1 ¼”	Linear Foot
4795	Conduit 2”	Linear Foot
4811	Junction Box Type B	Each
4820	Trenching and Backfilling	Linear Foot
4850	Cable-No. 14/1 Pair	Linear Foot
4895	Loop Saw Slot and Fill	Linear Foot
4894	Preformed Loop Lead-In	Linear Foot
20453NS835	Preformed Quadrapole Loops	Linear Foot
20452NS835	Preformed Loops	Linear Foot

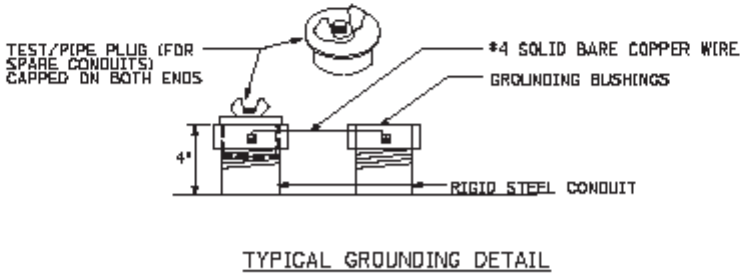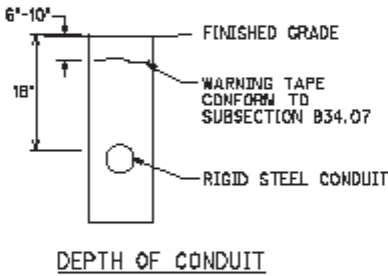
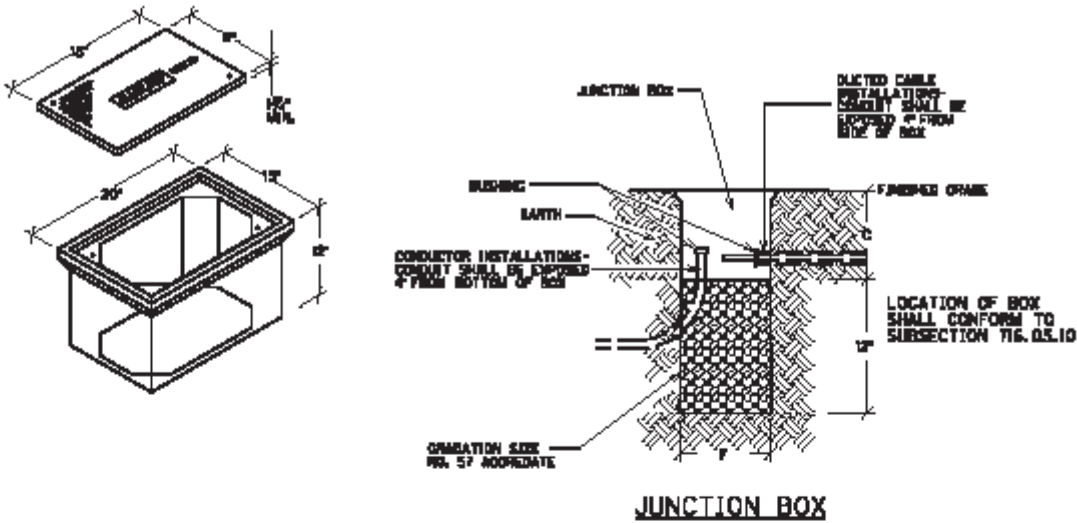


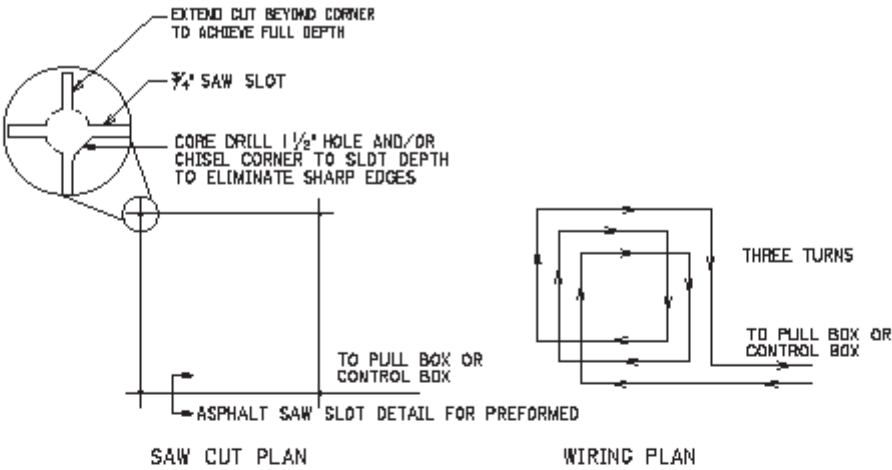


6'X6' LOOP

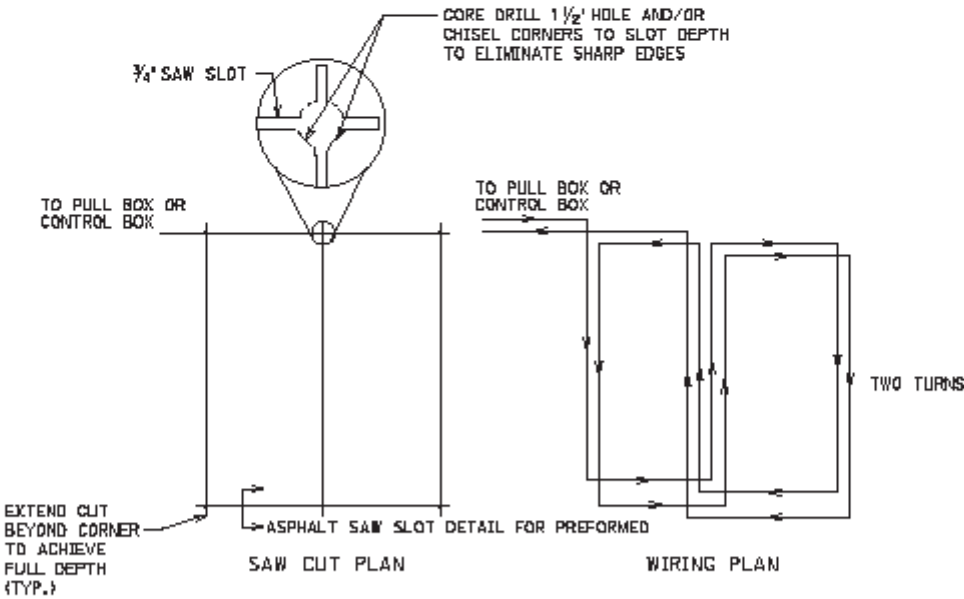

6'X30' QUADRAPOLE LOOP

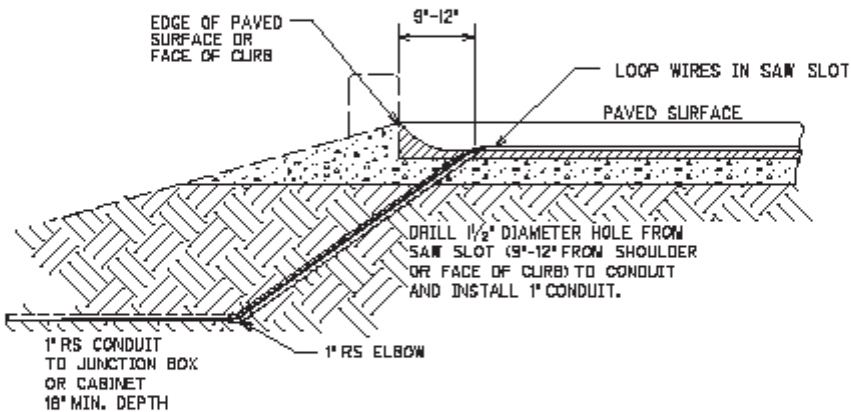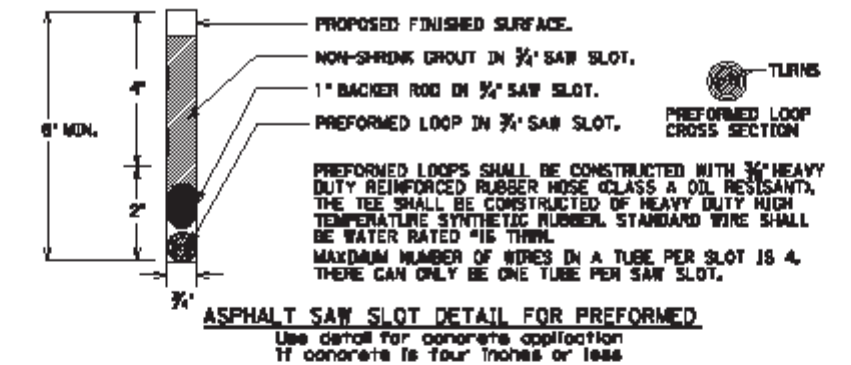


SAW SLOT EDGE OF PAVEMENT TRANSITION

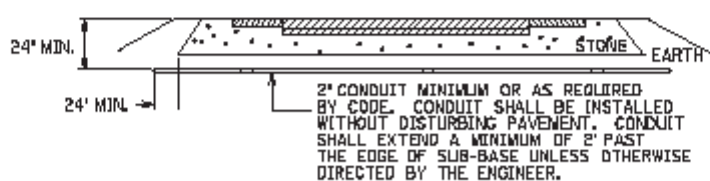


CONDUIT UNDER EXISTING PAVEMENT DETAIL

PREFORMED LOOP LEAD-IN SHALL BE TWISTED WITH THREE TO FIVE TURNS PER FOOT UNTIL TERMINATED AT FIELD CONNECTIONS IN THE CABINET OR CONNECTED TO SHIELDED CABLE.

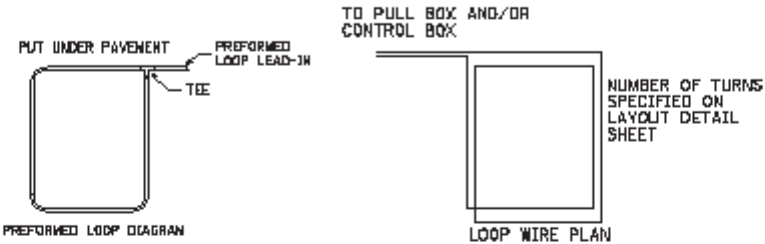

STANDARD PREFORMED LOOP
*ALL LOOPS THAT ARE NOT QUADRAPOLES SHALL BE STANDARD AND HAVE 3 TURNS

PREFORMED LOOP LEAD-IN SHALL BE TWISTED WITH THREE TO FIVE TURNS PER FOOT UNTIL TERMINATED AT FIELD CONNECTIONS IN THE CABINET OR CONNECTED TO SHIELDED CABLE.

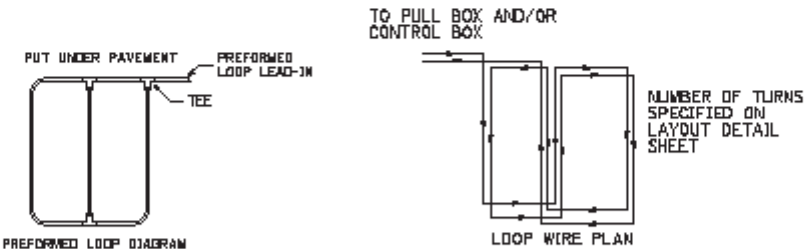

QUADRAPOLE PREFORMED LOOP
*ALL 6'x30' LOOPS SHALL BE QUADRAPOLE AND SHALL HAVE A 2-4-2 CONFIGURATION

SPECIAL NOTE FOR EROSION CONTROL

I. DESCRIPTION

Except as provided herein, perform all erosion and water pollution control work in accordance with the Department's Standard and Supplemental Specifications, and Standard and Sepia Drawings, current editions, and as directed by the Engineer. Section references are to the Standard Specifications. This work shall consist of:

(1) Developing and preparing a Best Management Practices Plan (BMP) tailored to suit the specific construction phasing for each site within the project; (2) Preparing the project site(s) for construction, including locating, furnishing, installing, and maintaining temporary and/or permanent erosion and water pollution control measures as required by the BMP prior to beginning any earth disturbing activity on the project site; (3) Clearing and grubbing and removal of all obstructions as required for construction; (4) Removing all erosion control devices when no longer needed; (5) Restoring all disturbed areas as nearly as possible to their original condition; (6) Preparing seedbeds and permanently seeding all disturbed areas; (7) Providing a Kentucky Erosion Prevention and Sediment Control Program (KEPSC) qualified inspector; and (8) Performing any other work to prevent erosion and/or water pollution as specified by this contract, required by the BMP, or as directed by the Engineer.

II. MATERIALS

Except as provided herein, furnish all materials for erosion and water pollution control work in accordance with the Department's Standard and Supplemental Specifications, and Standard and Sepia Drawings, current editions, and as directed by the Engineer.

Provide for all materials to be sampled and tested in accordance with the Department's Sampling Manual. Unless directed otherwise by the Engineer, make the materials available for sampling a sufficient time in advance of the use of the materials to allow for the necessary time for testing.

III. CONSTRUCTION

Except as provided herein, construct all erosion and water pollution control work in accordance with the Department's Standard and Supplemental Specifications, and Standard and Sepia Drawings, current editions, and as directed by the Engineer.

Erosion Control

Page 2 of 3

Be advised, these Erosion Control Plan Notes do not constitute a BMP plan for the project. Jointly with the Engineer, prepare a site specific BMP plan for each drainage area within the project in accordance with Section 213 and the supplemental specifications. Provide a unique BMP at each project site using good engineering practices taking into account existing site conditions, the type of work to be performed, and the construction phasing, methods and techniques to be utilized to complete the work. Be responsible for all erosion prevention, sediment control, and water pollution prevention measures required by the BMP for each site. Represent and warrant compliance with the Clean Water Act (33 USC Section 1251 et seq.), the 404 Permit, the 401 Water Quality Certification, and applicable state and local government agency laws, regulations, rules, specifications, and permits. Contrary to Section 105.05, in case of discrepancy between these notes, the Standard Specifications, interim Supplemental Specifications, Special and Special Notes, Standard and Sepia Drawings, and such state and local government agency requirements, adhere to the most restrictive requirement.

Conduct operations in such a manner as to minimize the amount of disturbed ground during each phase of the construction and limit the haul roads to the minimum required to perform the work. Preserve existing vegetation not required to be removed by the work or the contract. Seed and/or mulch disturbed areas at the earliest opportunity. Use silt fence, silt traps, temporary ditches, brush barriers, erosion control blankets, sodding, channel lining, and other erosion control measures in a timely manner as required by the BMP and as directed or approved by the Engineer. Prevent sediment laden water from leaving the project, entering an existing drainage structure, or entering a stream.

Provide for erosion control measures to be in place and functioning prior to any earth disturbance within a drainage area. Compute the volume and size of silt control devices necessary to control sediment during each phase of construction. Remove sediment from silt traps before they become a maximum of ½ full. Maintain silt fence by removing accumulated trappings and/or replacing the geotextile fabric when it becomes clogged, damaged, or deteriorated, or when directed by the Engineer. Properly dispose of all materials trapped by erosion control devices at approved sites off the right of way obtained by the Contractor at no additional cost to the Department (See Special Note for Waste and Borrow).

As work progresses, add or remove erosion control measures as required by the BMP applicable to the Contractor's project phasing and construction methods and techniques. Update the volume calculations and modify the BMP as necessary throughout the duration of the project. Ensure that an updated BMP is kept on site and available for public inspection throughout the life of the project.


After all construction is complete, restore all disturbed areas in accordance with Section 212. Completely remove all temporary erosion control devices not required as part of the permanent erosion control from the construction site. Prior to removal, obtain the Engineer's concurrence of items to be removed. Grade the remaining exposed earth (both on and off the Right of-Way) as nearly as possible to its original condition, or as directed by the Engineer. Prepare the seed bed areas and sow all exposed earthen areas with the applicable seed mixture(s) according to Section 212.03.03.

Erosion Control
Page 3 of 3

IV. MEASUREMENT

Contrary to Section 212.04 and 213.04, the Department will not measure Erosion Control items for separate payment, but shall be incidental to Pavement Removal, DGA, Leveling and Wedging, and JPC Pavement as applicable

FE01 029 0061 013-014

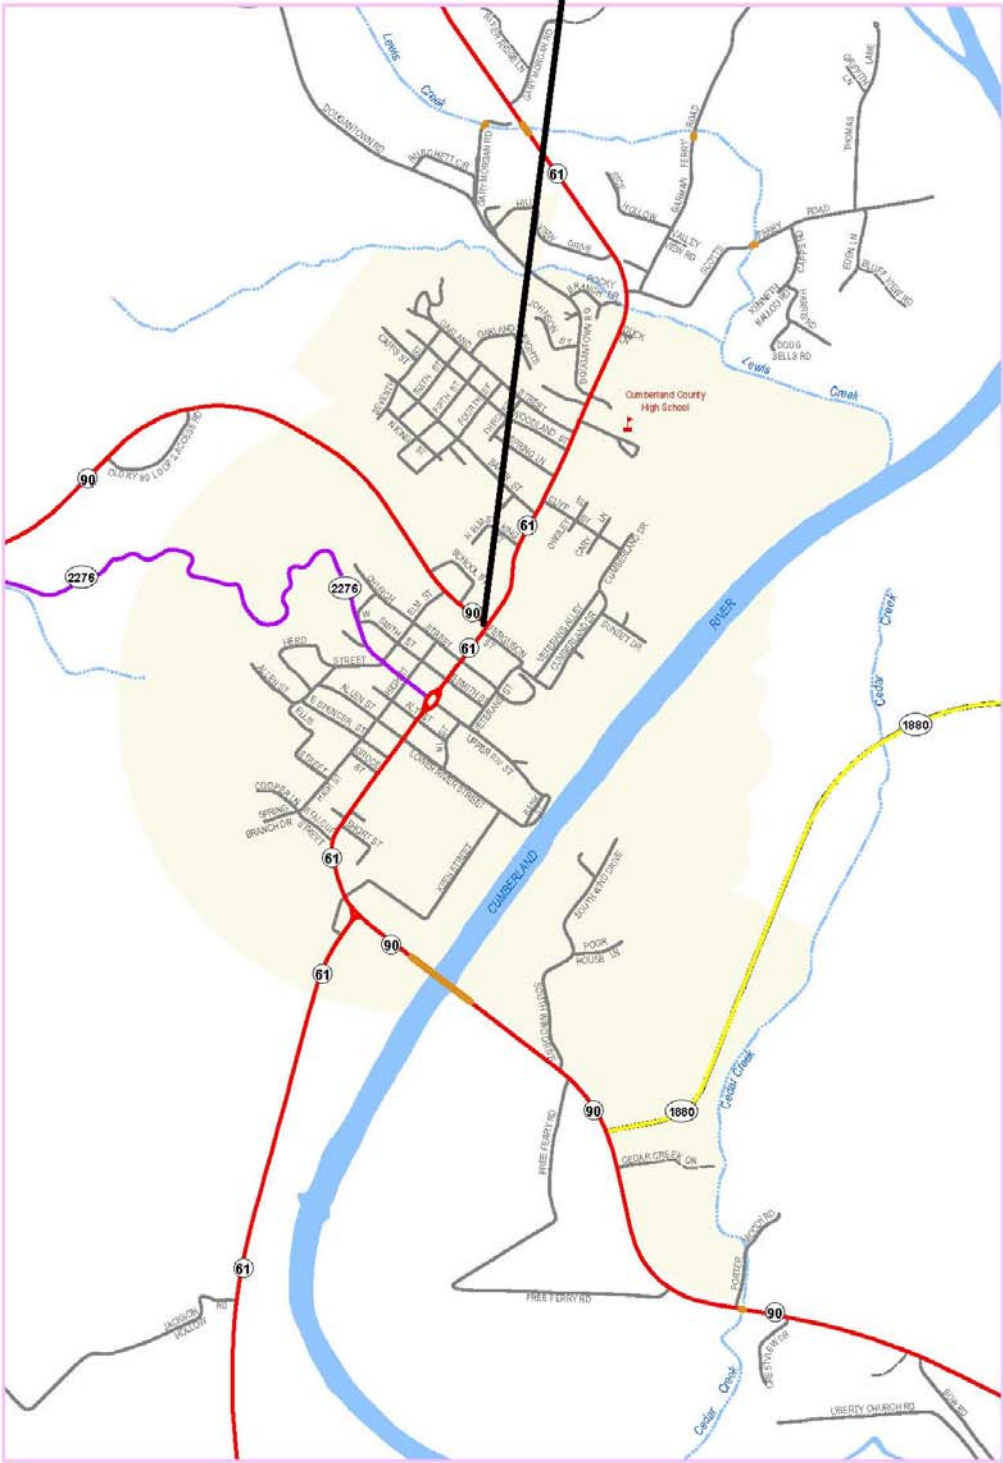

BURKESVILLE



NOTE: *Final Pavement Marking locations may vary from existing locations. Verify new locations with Engineer prior to placement.
 *15 LF of Type 1 Tape Stop Bar-24 Inch to be used during Phase 4 construction, then removed. Removal to be considered incidental to Type 1 Tape Stop Bar-24 Inch.

MPT.	INTERSECTION	X-WALKS 12 INCH		STP BARS 24 INCH		CURVE		ARROWS		COMB		"ONLY Y"		CATRAXX 6 INCH		RAILROAD "R" 6 FOOT		NOTES
		LF		LF		EA		EA	STR	EA	EA	EA	EA	EA	EA	EA	EA	
13.701	KY 90	200		107		8		4										
TOTAL		200		107		8		4							270			

NOTE: Detectable Warnings (New and Retrofit) shall be placed so that they are aligned with the pedestrian direction of travel, as directed by the Engineer.

TOTAL

NOTE: Detectable Warnings (New and Retrofit) shall be placed so that they are aligned with the pedestrian direction of travel, as directed by the Engineer.

Cumberland County


NOTES

1. Quantities are for estimating purposes only. For items that need to be precut, the Contractor shall field measure items to verify quantities.

2. Due to phasing of construction, additional quantity of 1 1/4 in. conduit has been accounted for preformed loop installation under partial width JPC Construction. Verify need based upon project scheduling.
3. All Loops referenced shall be 6 ft X 30 ft.

COUNTY OF	ITEM NO.	SHEET
CUMBERLAND		14

TYPICAL SECTION KY 61 - KY 90
NOT TO SCALE

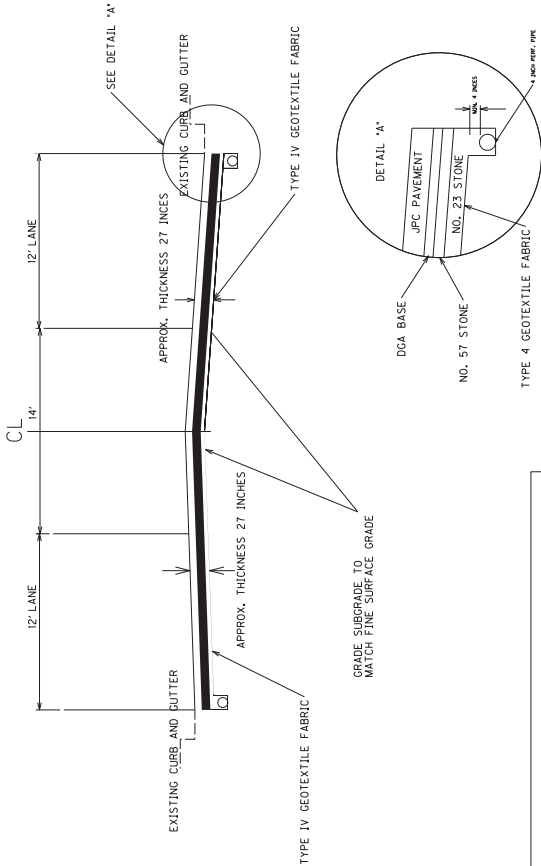

PAVEMENT SCHEDULE

ROADBED PREPARATION	
CRUSHED AGGREGATE SIZE NO. 23	8 INCHES
CRUSHED AGGREGATE SIZE NO. 57	4 INCHES
TYPE IV GEOTEXTILE FABRIC (WRAPPED)/ SQ YD	
TRAFFIC LANES	
DGA BASE	4" DEPTH
JPC PAVEMENT	11 INCHES

- NOTES:
1. FINAL GRADE SHALL MATCH EXISTING
 2. WRAP SUBGRADE AREA WITH
 3. TYPE IV GEOTEXTILE FABRIC
 4. PAVE TO FULL WIDTH OF EXISTING PAVEMENT
 5. TRANSVERSE AND LONGITUDINAL SAWCUT SHALL BE INCIDENTAL TO CONSTRUCTION OF THE CONCRETE PAVEMENT.
 6. GRADE OF CORED HOLE DRAINAGE BOX CONNECTION AND LOCATION WILL BE DETERMINED BY THE ENGINEER.

TYPICAL SECTION KY 90 - KY 61
SCALE: 1"=

FILE NAME: C:\USERS\HENRY\CARDWELL\DESKTOP\K61-KY90 DON FILES\JPC TYPICAL SECTION.DGN

DATE PLOTTED: June 24, 2014



USER: Henry,Cardwell

E-SHEET NAME:

MicroStation v8.11.9.292

COUNTY OF	ITEM NO.	SHEET
CUMBERLAND		

WORK ON CENTER LANE

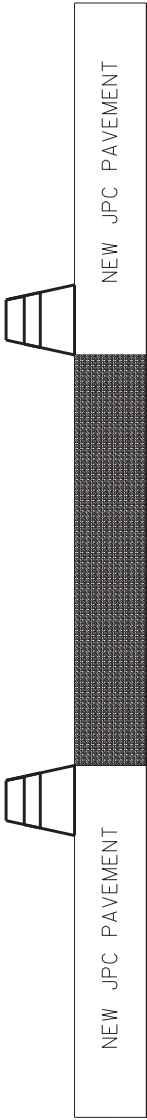

WORK ON CENTER LANE

SCALE: 1"=

PHASE – 1



PHASE – 2




PHASE – 3





PHASE – 4



- LEGEND:**
- Phase 1-RED
 - Phase 2-YELLOW
 - Phase 3-GREEN
 - Phase 4-BLUE

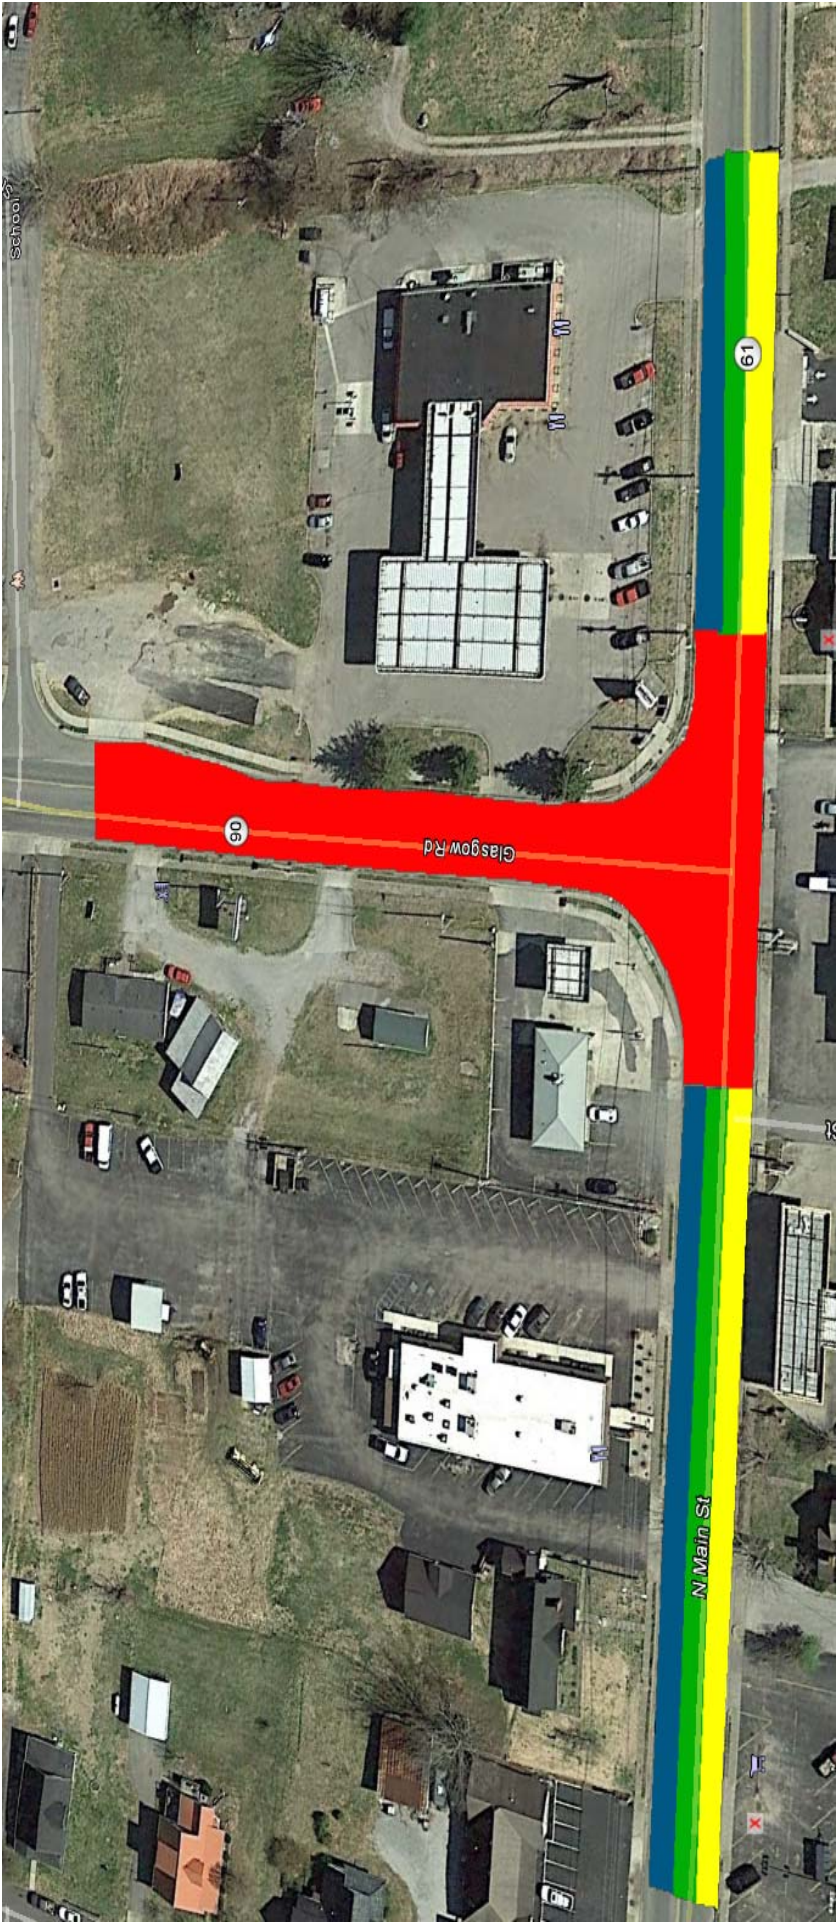

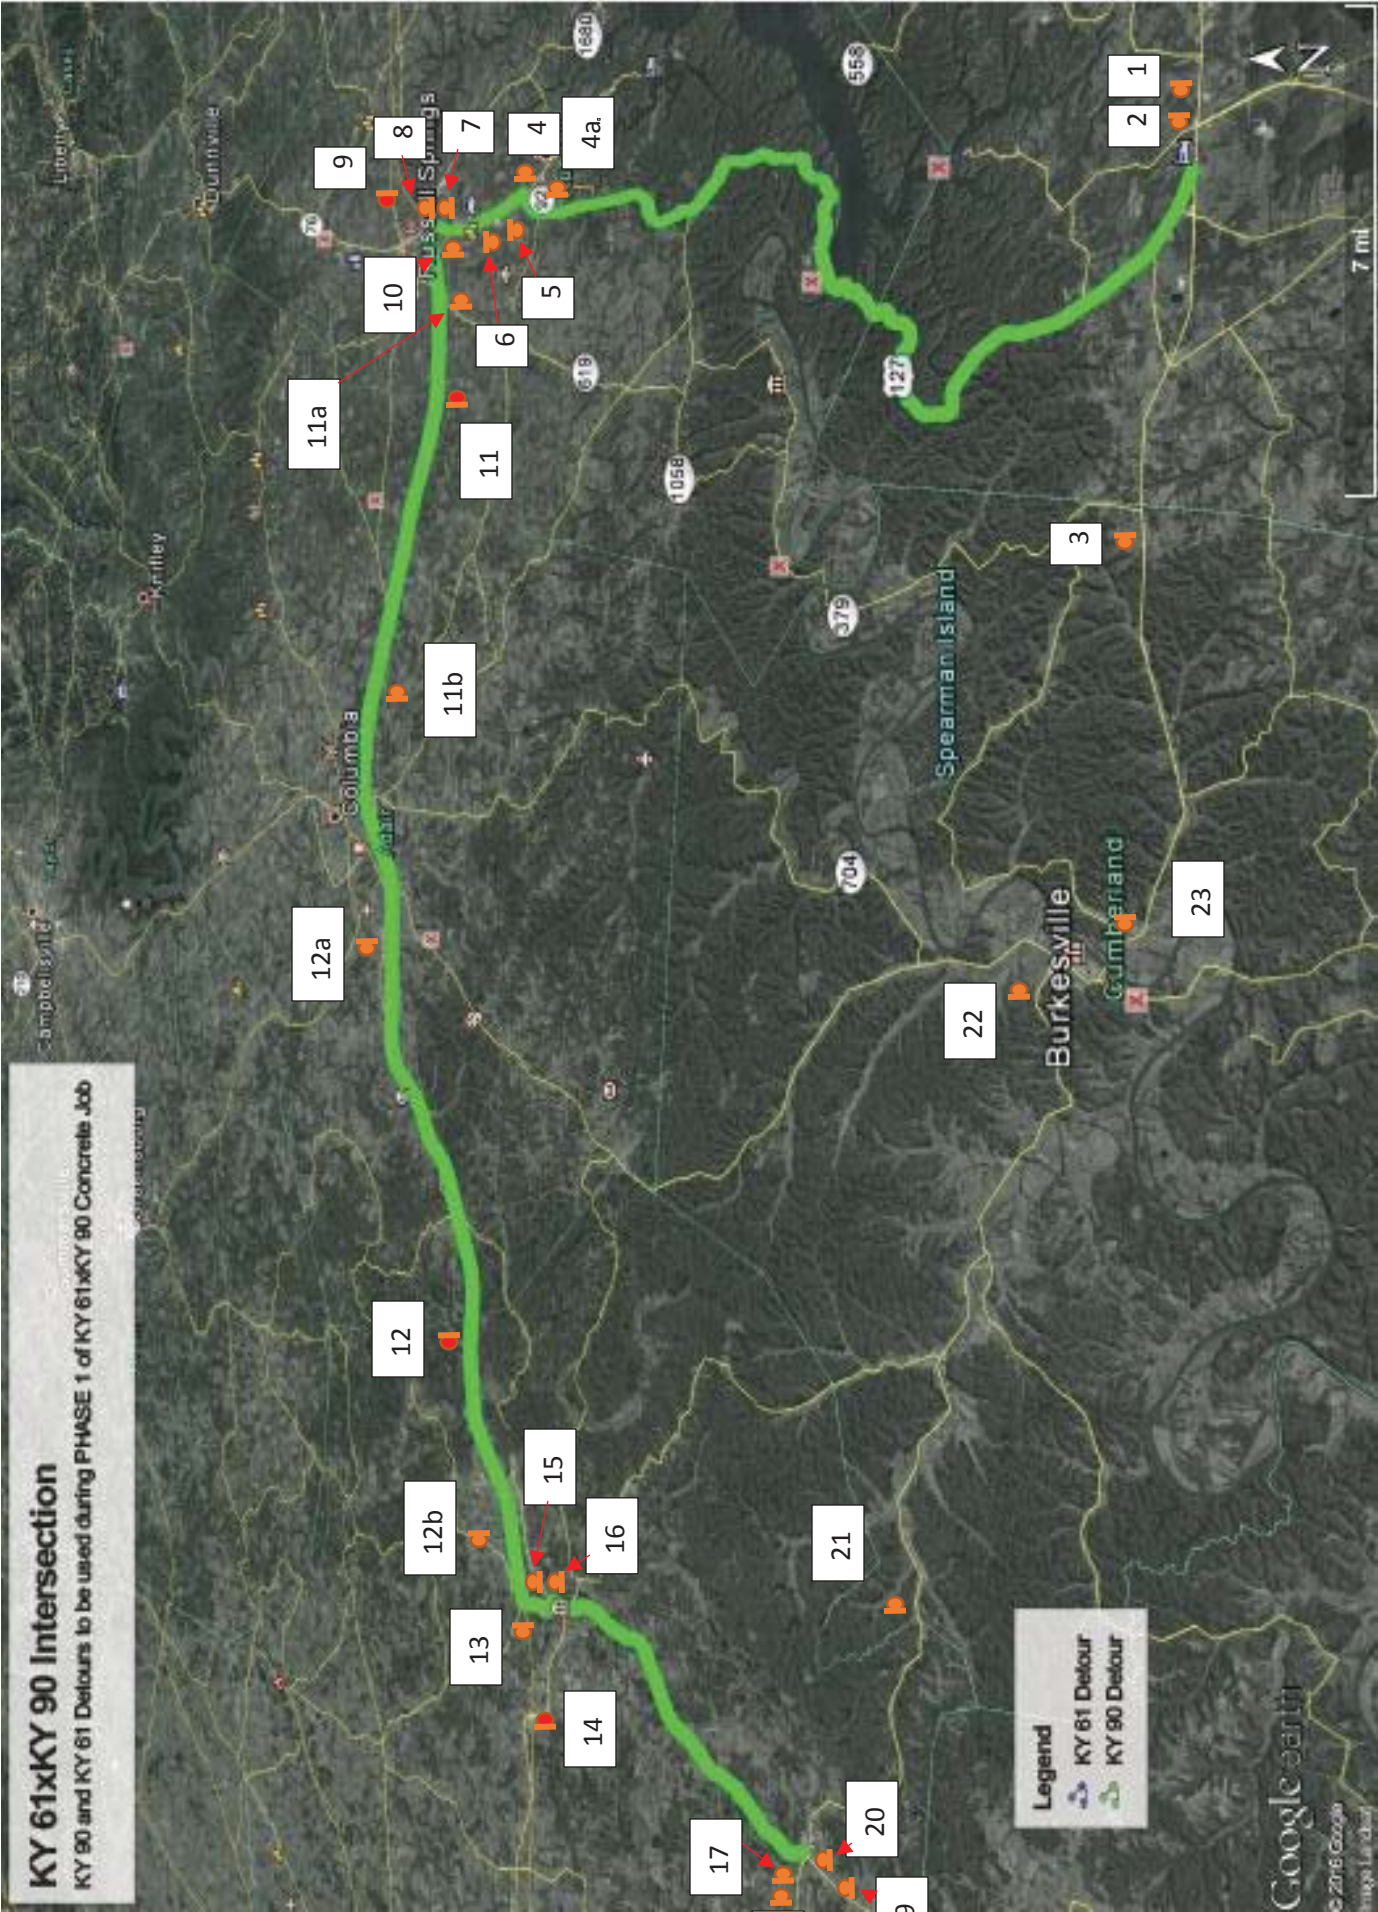

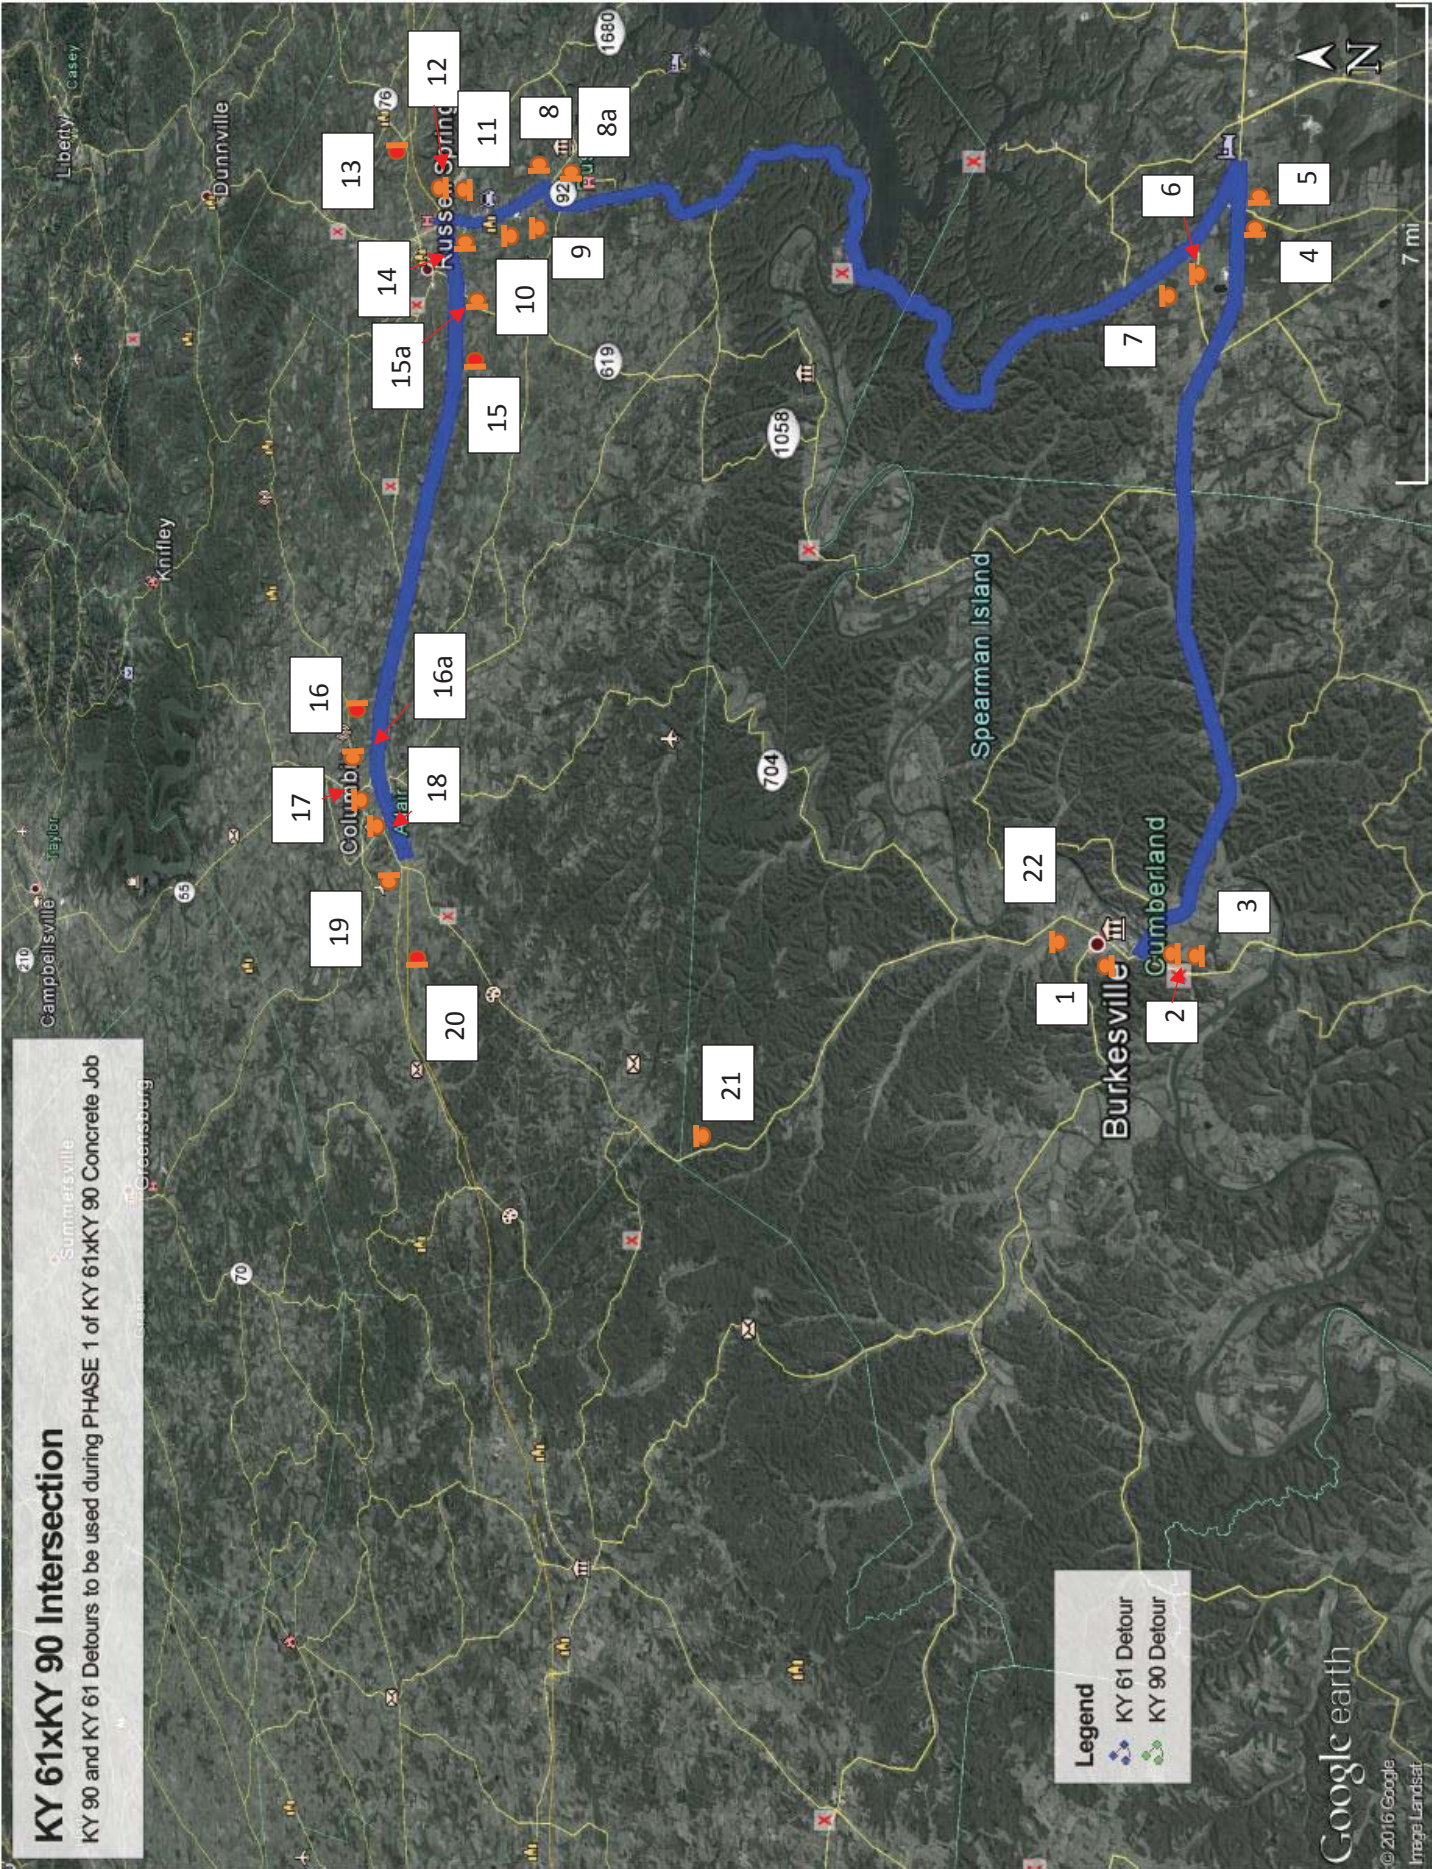

DETOUR SIGNS

LEGEND

Sign #	MUTCD CODE	DESCRIPTION	Quantity
1	M1-5	State Route (KY90) (24x24)	16
1a	M1-5	State Route (KY61) (24x24)	16
2	M3-1	NORTH (24x12)	9
3	M3-2	EAST (24x12)	9
4	M3-3	SOUTH (24x12)	7
5	M3-4	WEST (24x12)	7
6	M5-1a	Far Left Turn Arrow (21x15)	7
7	M5-1b	Far Right Turn Arrow (21x15)	6
8	M6-1a	Left Arrow (21x15)	8
9	M6-1b	Right Arrow (21x15)	9
10	M6-3	Straight Arrow (21x15)	2
11	M4-8	DETOUR (24x12)	32
12	G20-2a	Begin Work (36x18)	3
13	G20-2b	End Work (36x18)	3
14	R11-2	Road Closed (48x30)	9
15	R11-3a	Road Closed XX Miles Ahead (60x30)	7
16	W20-1a	Road Work 1.0 Mile (36x36)	3
17	W20-1b	Road Work 1500 Feet (36x36)	3
18	W20-1c	Road Work 1000 Feet (36x36)	3
19	W20-1d	Road Work 500 Feet (36x36)	3
20	W20-3a	Road Closed 1000 Feet (36x36)	3
21	W20-3b	Road Closed 500 Feet (36x36)	0
22	TYPE III Barricade		15
23	Message Board		9
24	M1-5	State Route (KY90) (36x36)	4
24a	M1-5	State Route (KY61) (36x36)	2
25	M3-1	North (36x18)	1
26	M3-2	EAST (36x18)	2
27	M3-3	SOUTH (36x18)	1
28	M3-4	WEST (36x18)	2
29	M4-8	DETOUR (30x15)	6
30	M6-3	STRAIGHT ARROW (30x21)	2
31	M6-2	RAMP ARROW (30x21)	4

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

SPECIFICATIONS REFERENCE

Any reference in the plans or proposal to previous editions of the *Standard Specifications for Road and Bridge Construction* and *Standard Drawings* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2012* and *Standard Drawings, Edition of 2016*.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting.
The Supplemental Specifications can be found at the following link:

<http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx>

SPECIAL NOTE FOR PORTABLE CHANGEABLE MESSAGE SIGNS

This Special Note will apply when indicated on the plans or in the proposal.

1.0 DESCRIPTION. Furnish, install, operate, and maintain variable message signs at the locations shown on the plans or designated by the Engineer. Remove and retain possession of variable message signs when they are no longer needed on the project.

2.0 MATERIALS.

2.1 General. Use LED Variable Message Signs Class I, II, or III, as appropriate, from the Department's List of Approved Materials.

Unclassified signs may be submitted for approval by the Engineer. The Engineer may require a daytime and nighttime demonstration. The Engineer will make a final decision within 30 days after all required information is received.

2.2 Sign and Controls. All signs must:

- 1) Provide 3-line messages with each line being 8 characters long and at least 18 inches tall. Each character comprises 35 pixels.
- 2) Provide at least 40 preprogrammed messages available for use at any time. Provide for quick and easy change of the displayed message; editing of the message; and additions of new messages.
- 3) Provide a controller consisting of:
 - a) Keyboard or keypad.
 - b) Readout that mimics the actual sign display. (When LCD or LCD type readout is used, include backlighting and heating or otherwise arrange for viewing in cold temperatures.)
 - c) Non-volatile memory or suitable memory with battery backup for storing pre-programmed messages.
 - d) Logic circuitry to control the sequence of messages and flash rate.
- 4) Provide a serial interface that is capable of supporting complete remote control ability through land line and cellular telephone operation. Include communication software capable of immediately updating the message, providing complete sign status, and allowing message library queries and updates.
- 5) Allow a single person easily to raise the sign to a satisfactory height above the pavement during use, and lower the sign during travel.
- 6) Be Highway Orange on all exterior surfaces of the trailer, supports, and controller cabinet.
- 7) Provide operation in ambient temperatures from -30 to + 120 degrees Fahrenheit during snow, rain and other inclement weather.
- 8) Provide the driver board as part of a module. All modules are interchangeable, and have plug and socket arrangements for disconnection and reconnection. Printed circuit boards associated with driver boards have a conformable coating to protect against moisture.
- 9) Provide a sign case sealed against rain, snow, dust, insects, etc. The lens is UV stabilized clear plastic (polycarbonate, acrylic, or other approved material) angled to prevent glare.
- 10) Provide a flat black UV protected coating on the sign hardware, character PCB, and appropriate lens areas.
- 11) Provide a photocell control to provide automatic dimming.

11

- 12) Allow an on-off flashing sequence at an adjustable rate.
- 13) Provide a sight to aim the message.
- 14) Provide a LED display color of approximately 590 nm amber.
- 15) Provide a controller that is password protected.
- 16) Provide a security device that prevents unauthorized individuals from accessing the controller.
- 17) Provide the following 3-line messages preprogrammed and available for use when the sign unit begins operation:

/KEEP/RIGHT/⇒⇒⇒/	/MIN/SPEED/**MPH/
/KEEP/LEFT/⇐⇐⇐/	/ICY/BRIDGE/AHEAD/ /ONE
/LOOSE/GRAVEL/AHEAD/	LANE/BRIDGE/AHEAD/
/RD WORK/NEXT/**MILES/	/ROUGH/ROAD/AHEAD/
/TWO WAY/TRAFFIC/AHEAD/	/MERGING/TRAFFIC/AHEAD/
/PAINT/CREW/AHEAD/	/NEXT/***/MILES/
/REDUCE/SPEED/**MPH/	/HEAVY/TRAFFIC/AHEAD/
/BRIDGE/WORK/**0 FT/	/SPEED/LIMIT/**MPH/
/MAX/SPEED/**MPH/	/BUMP/AHEAD/
/SURVEY/PARTY/AHEAD/	/TWO/WAY/TRAFFIC/

*Insert numerals as directed by the Engineer.

Add other messages during the project when required by the Engineer.

2.3 Power.

- 1) Design solar panels to yield 10 percent or greater additional charge than sign consumption. Provide direct wiring for operation of the sign or arrow board from an external power source to provide energy backup for 21 days without sunlight and an on-board system charger with the ability to recharge completely discharged batteries in 24 hours.

3.0 CONSTRUCTION. Furnish and operate the variable message signs as designated on the plans or by the Engineer. Ensure the bottom of the message panel is a minimum of 7 feet above the roadway in urban areas and 5 feet above in rural areas when operating. Use Class I, II, or III signs on roads with a speed limit less than 55 mph. Use Class I or II signs on roads with speed limits 55 mph or greater.

Maintain the sign in proper working order, including repair of any damage done by others, until completion of the project. When the sign becomes inoperative, immediately repair or replace the sign. Repetitive problems with the same unit will be cause for rejection and replacement.

Use only project related messages and messages directed by the Engineer, unnecessary messages lessen the impact of the sign. Ensure the message is displayed in either one or 2 phases with each phase having no more than 3 lines of text. When no message is needed, but it is necessary to know if the sign is operable, flash only a pixel.

When the sign is not needed, move it outside the clear zone or where the Engineer directs. Variable Message Signs are the property of the Contractor and shall be removed from the project when no longer needed. The Department will not assume ownership of these signs.

4.0 MEASUREMENT. The final quantity of Variable Message Sign will be

11
the actual number of individual signs acceptably furnished and operated during the project. The Department will not measure signs replaced due to damage or rejection.

5.0 PAYMENT. The Department will pay for the Variable Message Signs at the unit price each. The Department will not pay for signs replaced due to damage or rejection. Payment is full compensation for furnishing all materials, labor, equipment, and service necessary to, operate, move, repair, and maintain or replace the variable message signs. The Department will make payment for the completed and accepted quantities under the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
02671	Portable Changeable Message Sign	Each

Effective June 15, 2012

2016 KENTUCKY STANDARD DRAWINGS

SUPPLEMENTS TO STANDARD SPECIFICATIONS

TABLE OF CONTENTS

PERFORATED PIPE TYPES AND COVER HEIGHTS	RDP-001-06
PERFORATED PIPE FOR SUBGRADE DRAINAGE ON TWO-LANE (CLASS 2) AND MULTI-LANE ROADS	RDP-005-05
PERFORATED PIPE UNDERDRAINS (LONGITUDINAL AND TRANSVERSE)	RDP-006-04
PERFORATED PIPE DETAILS (SOLID ROCK)	RDP-007-04
PERFORATED PIPE HEADWALLS	RDP-010-09
TEMPORARY SILT FENCE	RDX-210-03
TEMPORARY SILT FENCE WITH WOVEN WIRE FENCE FABRIC	RDX-215-01
SILT TRAP - TYPE A	RDX-220-05
SILT TRAP - TYPE B	RDX-225-01
SILT TRAP - TYPE C	RDX-230-01
CURVE WIDENING AND SUPERELEVATION TRANSITIONS	RGS-001-07
SUPERELEVATION FOR MULTILANE PAVEMENT	RGS-002-06
MISCELLANEOUS STANDARDS	RGX-001-06
DETECTABLE WARNINGS	RGX-040-03
CURB AND GUTTER, CURBS AND VALLEY GUTTER	RPM-100-10
APPROACHES, ENTRANCES, AND MAIL BOX TURNOUT	RPM-110-07
CONCRETE ENTRANCE PAVEMENT AND SIDEWALK	RPM-150-08
CONCRETE ENTRANCE PAVEMENT AND SIDEWALK	RPM-152-08
SIDEWALK RAMPS	RPM-170-09
JOINTED PLAIN CONCRETE PAVEMENT FOR SHOULDERS AND MEDIANS	RPN-001-07
JOINTED PLAIN CONCRETE PAVEMENT	RPN-015-05
CONCRETE PAVEMENT JOINTS - TYPES AND SPACING	RPN-020-04
STATION MARKINGS - CONCRETE PAVEMENT	RPX-001-04
HOT - POURED ELASTIC JOINT SEALS FOR CONCRETE PAVEMENT	RPX-015-04
LANE CLOSURE TWO-LANE HIGHWAY	TTC-100-04
SHOULDER CLOSURE	TTC-135-02
PAVEMENT CONDITION WARNING SIGNS	TTD-125-02
MOBILE OPERATION FOR PAINT STRIPING CASE I	TTS-100-02
MOBILE OPERATION FOR PAINT STRIPING CASE II	TTS-105-02

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

**TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS**

**LABOR AND WAGE REQUIREMENTS
APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS**

- I. Application
- II. Nondiscrimination of Employees (KRS 344)

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

II. NONDISCRIMINATION OF EMPLOYEES

**AN ACT OF THE KENTUCKY
GENERAL ASSEMBLY TO PREVENT
DISCRIMINATION IN EMPLOYMENT
KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972**

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

No present or former public servant shall, within six (6) months following termination of his office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 3 Fountain Place, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: January 27, 2017

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address:
<https://www.eProcurement.ky.gov>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

EMPLOYEE RIGHTS

UNDER THE FAIR LABOR STANDARDS ACT

THE UNITED STATES DEPARTMENT OF LABOR WAGE AND HOUR DIVISION

FEDERAL MINIMUM WAGE

\$7.25 PER HOUR

BEGINNING JULY 24, 2009

OVERTIME PAY

At least 1½ times your regular rate of pay for all hours worked over 40 in a workweek.

CHILD LABOR

An employee must be at least **16** years old to work in most non-farm jobs and at least **18** to work in non-farm jobs declared hazardous by the Secretary of Labor.

Youths **14** and **15** years old may work outside school hours in various non-manufacturing, non-mining, non-hazardous jobs under the following conditions:

No more than

- **3** hours on a school day or **18** hours in a school week;
- **8** hours on a non-school day or **40** hours in a non-school week.

Also, work may not begin before **7 a.m.** or end after **7 p.m.**, except from June 1 through Labor Day, when evening hours are extended to **9 p.m.** Different rules apply in agricultural employment.

Contract ID: 172189
Page 74 of 78

TIP CREDIT

Employers of “tipped employees” must pay a cash wage of at least \$2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee's tips combined with the employer's cash wage of at least \$2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.

ENFORCEMENT

The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.

Employers may be assessed civil money penalties of up to \$1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to \$11,000 for each employee who is the subject of a violation of the Act's child labor provisions. In addition, a civil money penalty of up to \$50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to \$100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.

ADDITIONAL INFORMATION

- Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions.
- Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands.
- Some state laws provide greater employee protections; employers must comply with both.
- The law requires employers to display this poster where employees can readily see it.
- Employees under 20 years of age may be paid \$4.25 per hour during their first 90 consecutive calendar days of employment with an employer.
- Certain full-time students, student learners, apprentices, and workers with disabilities may be paid less than the minimum wage under special certificates issued by the Department of Labor.

For additional information:



1-866-4-USWAGE

(1-866-487-9243)

TTY: 1-877-889-5627



WWW.WAGEHOUR.DOL.GOV

PART IV

INSURANCE

INSURANCE

The Contractor shall procure and maintain the following insurance in addition to the insurance required by law:

- 1) Commercial General Liability-Occurrence form – not less than \$2,000,000 General aggregate, \$2,000,000 Products & Completed Aggregate, \$1,000,000 Personal & Advertising, \$1,000,000 each occurrence.
- 2) Automobile Liability- \$1,000,000 per accident
- 3) Employers Liability:
 - a) \$100,000 Each Accident Bodily Injury
 - b) \$500,000 Policy limit Bodily Injury by Disease
 - c) \$100,000 Each Employee Bodily Injury by Disease
- 4) The insurance required above must be evidenced by a Certificate of Insurance and this Certificate of Insurance must contain one of the following statements:
 - a) "policy contains no deductible clauses."
 - b) "policy contains _____ (amount) deductible property damage clause but company will pay claim and collect the deductible from the insured."
- 5) KENTUCKY WORKMEN'S COMPENSATION INSURANCE. The contractor shall furnish evidence of coverage of all his employees or give evidence of self-insurance by submitting a copy of a certificate issued by the Workmen's Compensation Board.

The cost of insurance is incidental to all contract items. All subcontractors must meet the same minimum insurance requirements.

PART V

BID ITEMS

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	1,650.00	TON		\$	
0020	00071		CRUSHED AGGREGATE SIZE NO 57	1,100.00	TON		\$	
0030	00078		CRUSHED AGGREGATE SIZE NO 2	1,600.00	TON		\$	
0040	00388		CL3 ASPH SURF 0.38B PG64-22	100.00	TON		\$	
0050	01000		PERFORATED PIPE-4 IN	1,950.00	LF		\$	
0060	01010		NON-PERFORATED PIPE-4 IN	80.00	LF		\$	
0070	01740		CORED HOLE DRAINAGE BOX CON-4 IN	3.00	EACH		\$	
0080	01810		STANDARD CURB AND GUTTER	200.00	LF		\$	
0090	02014		BARRICADE-TYPE III	15.00	EACH		\$	
0100	02025		JPC PAVEMENT-11 IN/24	4,788.00	SQYD		\$	
0110	02200		ROADWAY EXCAVATION	3,591.00	CUYD		\$	
0120	02562		TEMPORARY SIGNS	800.00	SQFT		\$	
0130	02599		FABRIC-GEOTEXTILE TYPE IV	11,815.00	SQYD		\$	
0140	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0150	02653		LANE CLOSURE	6.00	EACH		\$	
0160	02671		PORTABLE CHANGEABLE MESSAGE SIGN	9.00	EACH		\$	
0170	02676		MOBILIZATION FOR MILL & TEXT	1.00	LS		\$	
0180	02677		ASPHALT PAVE MILLING & TEXTURING	100.00	TON		\$	
0190	02720		SIDEWALK-4 IN CONCRETE	95.00	SQYD		\$	
0200	02726		STAKING	1.00	LS		\$	
0210	02775		ARROW PANEL	2.00	EACH		\$	
0220	04793		CONDUIT-1 1/4 IN	290.00	LF		\$	
0230	04795		CONDUIT-2 IN	200.00	LF		\$	
0240	04811		ELECTRICAL JUNCTION BOX TYPE B	6.00	EACH		\$	
0250	04820		TRENCHING AND BACKFILLING	250.00	LF		\$	
0260	04844		CABLE-NO. 14/5C	250.00	LF		\$	
0270	04850		CABLE-NO. 14/1 PAIR	300.00	LF		\$	
0280	04894		PREFORMED LOOP/LEAD-IN	210.00	LF		\$	
0290	06514		PAVE STRIPING-PERM PAINT-4 IN	25,000.00	LF		\$	
0300	06551		PAVE STRIPING-TEMP REM TAPE-Y	1,300.00	LF		\$	
0310	06600		REMOVE PAVEMENT MARKER TYPE V	15.00	EACH		\$	
0320	10020NS		FUEL ADJUSTMENT	1,391.00	DOLL	\$1.00	\$	\$1,391.00
0330	20453ES835		PREFORMED QUADRAPOLE LOOPS	306.00	LF		\$	
0340	23158ES505		DETECTABLE WARNINGS (NEW)	20.00	SQFT		\$	
0350	23158ES505		DETECTABLE WARNINGS (RETROFIT)	40.00	SQFT		\$	
0360	23254ES717		PAVE MARK TY 1 TAPE DOTTED LANE EXT	270.00	LF		\$	
0370	23255ES717		PAVE MARK TY 1 TAPE-STRAIGHT ARROW	4.00	EACH		\$	
0380	23264ES717		PAVE MARK TY 1 TAPE X-WALK-12 IN	200.00	LF		\$	
0390	23265ES717		PAVE MARK TY 1 TAPE STOP BAR-24 IN	107.00	LF		\$	
0400	23270ES717		PAVE MARK TY 1 TAPE-CURV ARROW	8.00	EACH		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0410	02569		DEMOBILIZATION	1.00	LS		\$	