



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

April 26, 2011

CALL NO. 112
CONTRACT ID NO. 111315
ADDENDUM # 1

Subject: Martin County, STPR 0401 (073)
Letting April 29, 2011

(1) Revised - Plan Sheets - R16 & R51

Proposal revisions are available at <http://transportation.ky.gov/contract/>.
Plan revisions are available at <http://www.lynnimaging.com/kytransportation/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Ryan Griffith".

Ryan Griffith
Director
Division of Construction Procurement


RG:ks
Enclosures



An Equal Opportunity Employer M/F/D

| COUNTY OF | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|-----------|-------------|-----------|--------------|
| MARTIN | | R16 | |

ITEM NO. 12-154.04

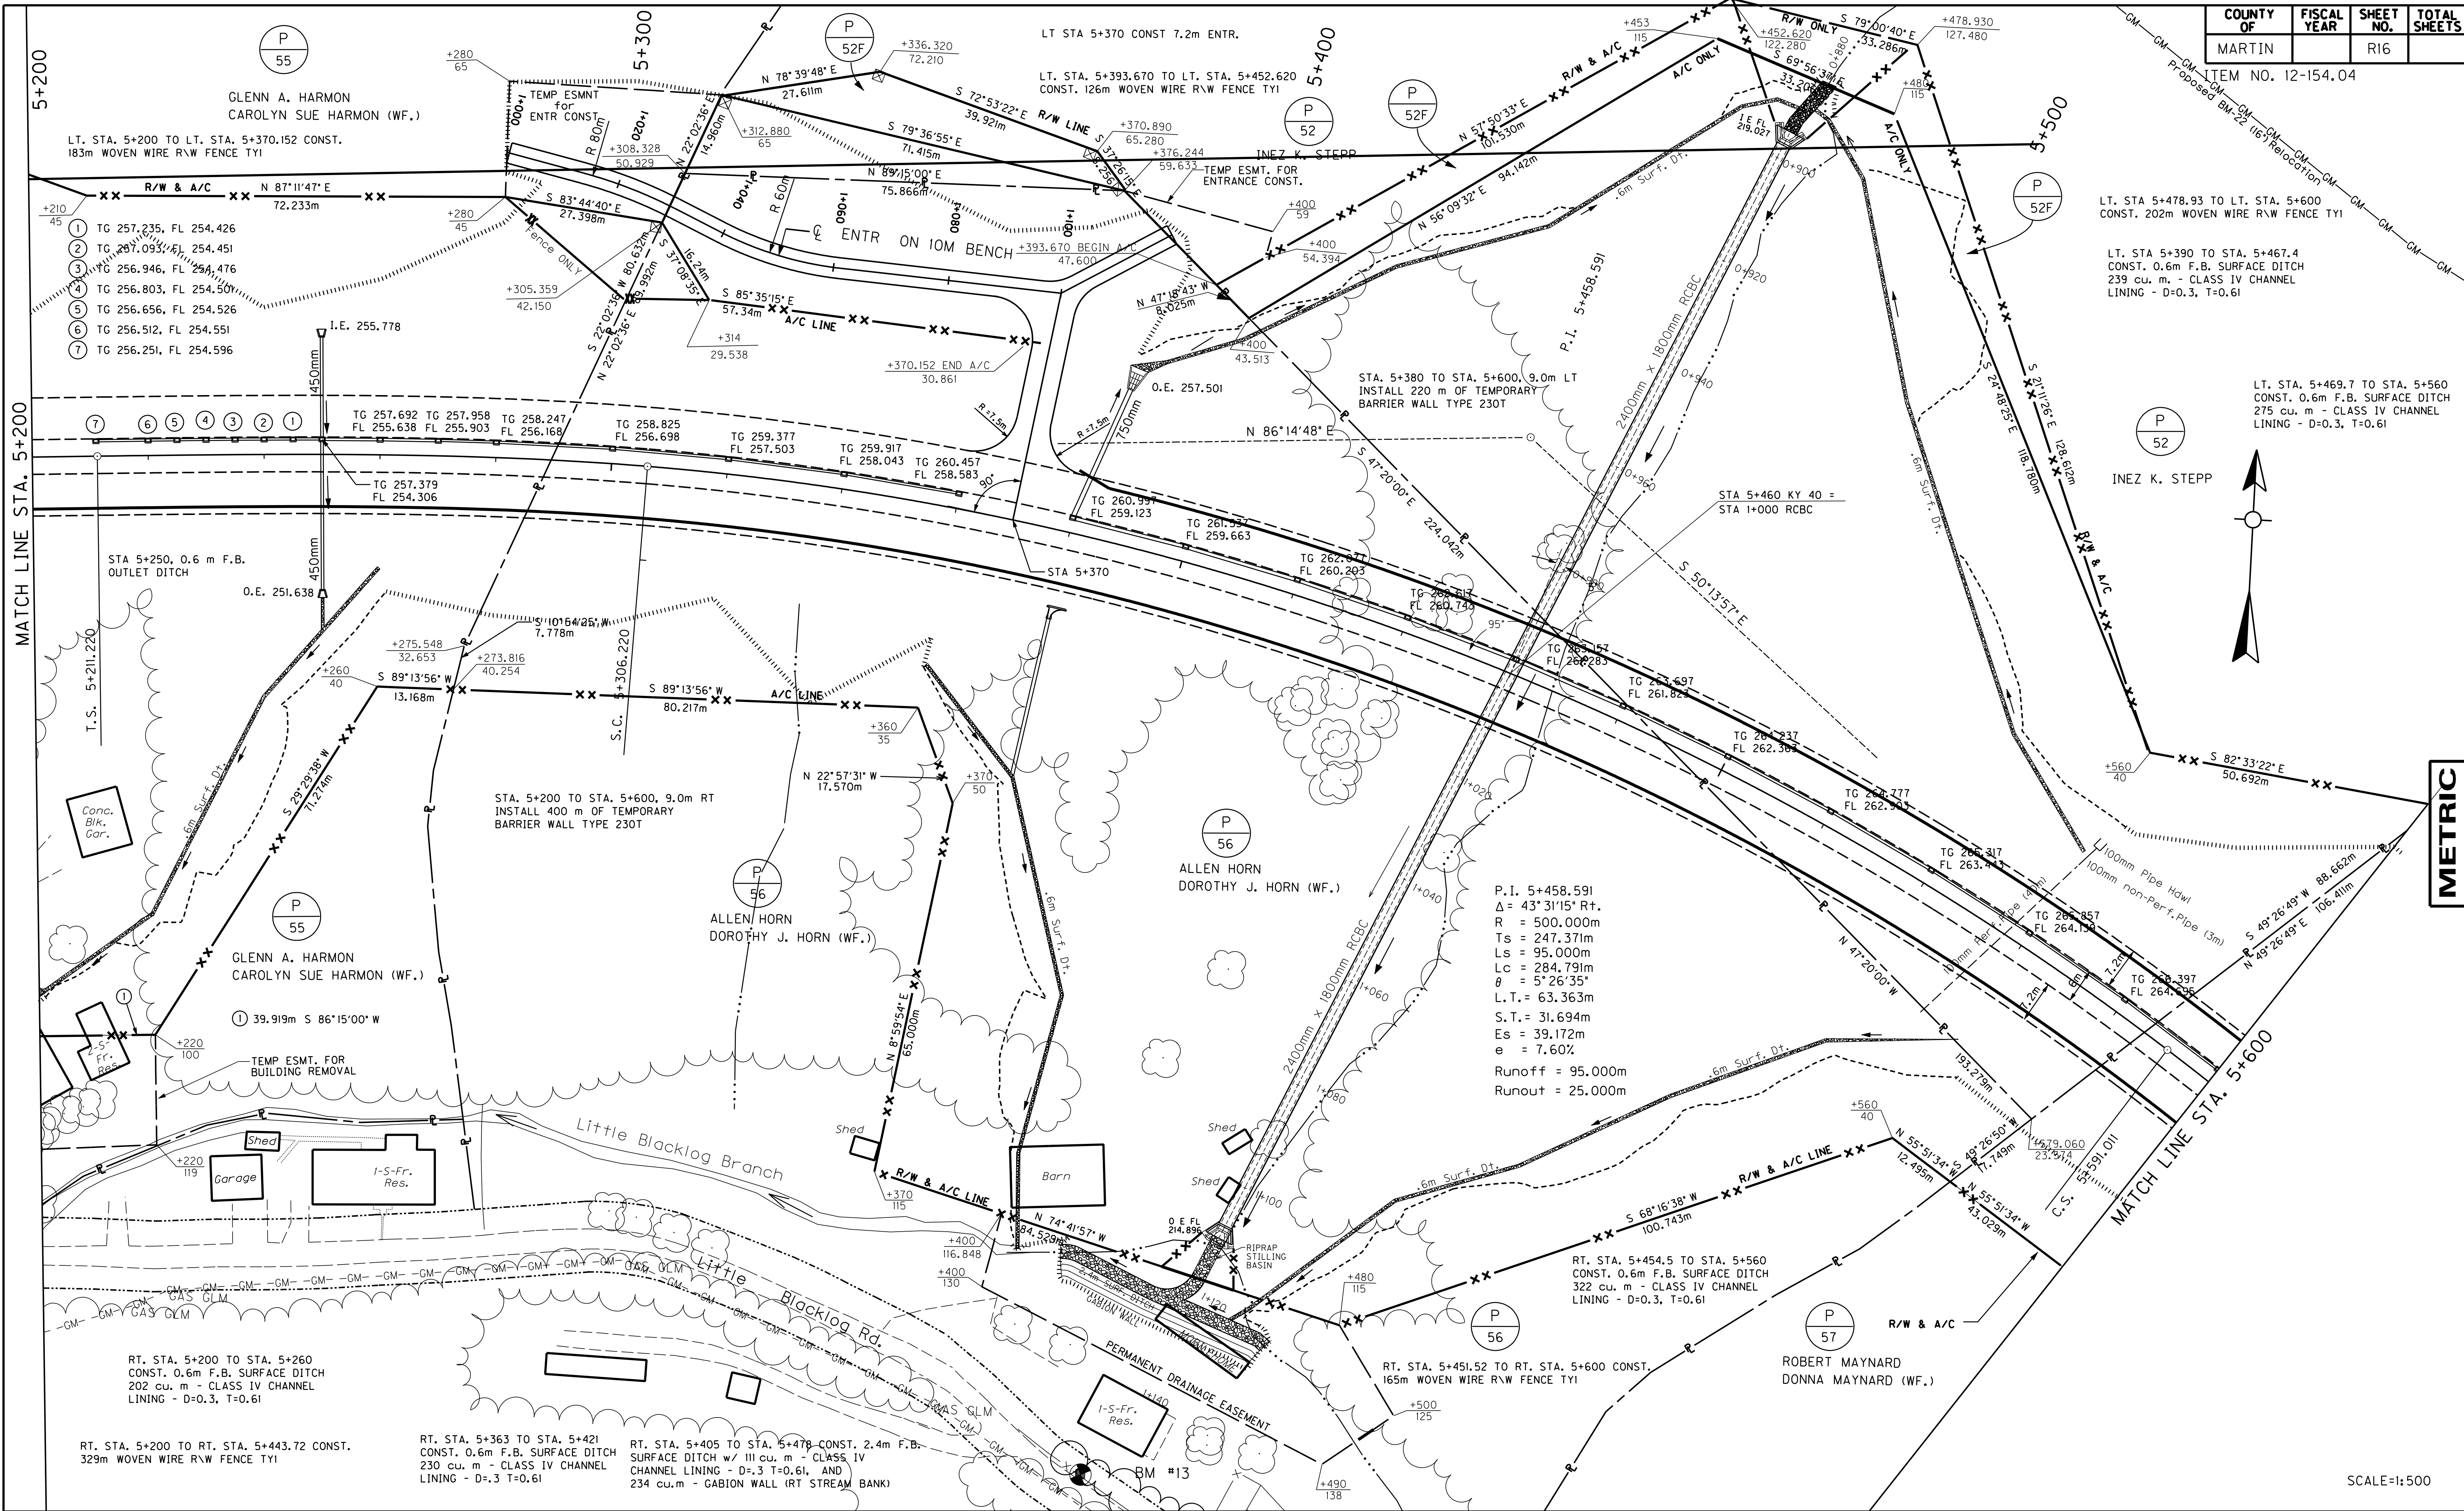

PREPARED BY _____ DATE _____
 CHECKED BY _____ DATE _____
 APPROVED BY _____ DATE _____

Cell Library: mrcodway.cel
 Cell Name: sp
 20-APR-2011 16:11
 6-93 FORM NO. 2m

P.I. 5+458.591
 $\Delta = 43^{\circ}31'15''$ Rt.
 $R = 500.000m$
 $T_s = 247.371m$
 $L_s = 95.000m$
 $L_c = 284.791m$
 $\theta = 5^{\circ}26'35''$
 $L.T. = 63.363m$
 $S.T. = 31.694m$
 $E_s = 39.172m$
 $e = 7.60\%$
 Runoff = 95.000m
 Runout = 25.000m

- 1 TG 257.235, FL 254.426
- 2 TG 257.093, FL 254.451
- 3 TG 256.946, FL 254.476
- 4 TG 256.803, FL 254.501
- 5 TG 256.656, FL 254.526
- 6 TG 256.512, FL 254.551
- 7 TG 256.251, FL 254.596

LT. STA 5+478.93 TO LT. STA. 5+600
 CONST. 202m WOVEN WIRE R/W FENCE TYI

LT. STA 5+390 TO STA. 5+467.4
 CONST. 0.6m F.B. SURFACE DITCH
 239 cu. m. - CLASS IV CHANNEL
 LINING - D=0.3, T=0.61

LT. STA. 5+469.7 TO STA. 5+560
 CONST. 0.6m F.B. SURFACE DITCH
 275 cu. m. - CLASS IV CHANNEL
 LINING - D=0.3, T=0.61

RT. STA. 5+200 TO STA. 5+260
 CONST. 0.6m F.B. SURFACE DITCH
 202 cu. m - CLASS IV CHANNEL
 LINING - D=0.3, T=0.61

RT. STA. 5+200 TO RT. STA. 5+443.72 CONST.
 329m WOVEN WIRE R/W FENCE TYI

RT. STA. 5+363 TO STA. 5+421
 CONST. 0.6m F.B. SURFACE DITCH
 230 cu. m - CLASS IV CHANNEL
 LINING - D=0.3 T=0.61

RT. STA. 5+405 TO STA. 5+478 CONST. 2.4m F.B.
 SURFACE DITCH w/ III cu. m - CLASS IV
 CHANNEL LINING - D=0.3 T=0.61, AND
 234 cu.m - GABION WALL (RT STREAM BANK)

RT. STA. 5+454.5 TO STA. 5+560
 CONST. 0.6m F.B. SURFACE DITCH
 322 cu. m - CLASS IV CHANNEL
 LINING - D=0.3, T=0.61



RT. STA. 5+451.52 TO RT. STA. 5+600 CONST.
 165m WOVEN WIRE R/W FENCE TYI

ROBERT MAYNARD
 DONNA MAYNARD (WF.)

SCALE=1:500

| COUNTY OF | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|-----------|-------------|-----------|--------------|
| MARTIN | | R51 | |

ITEM NO. 12-154.04

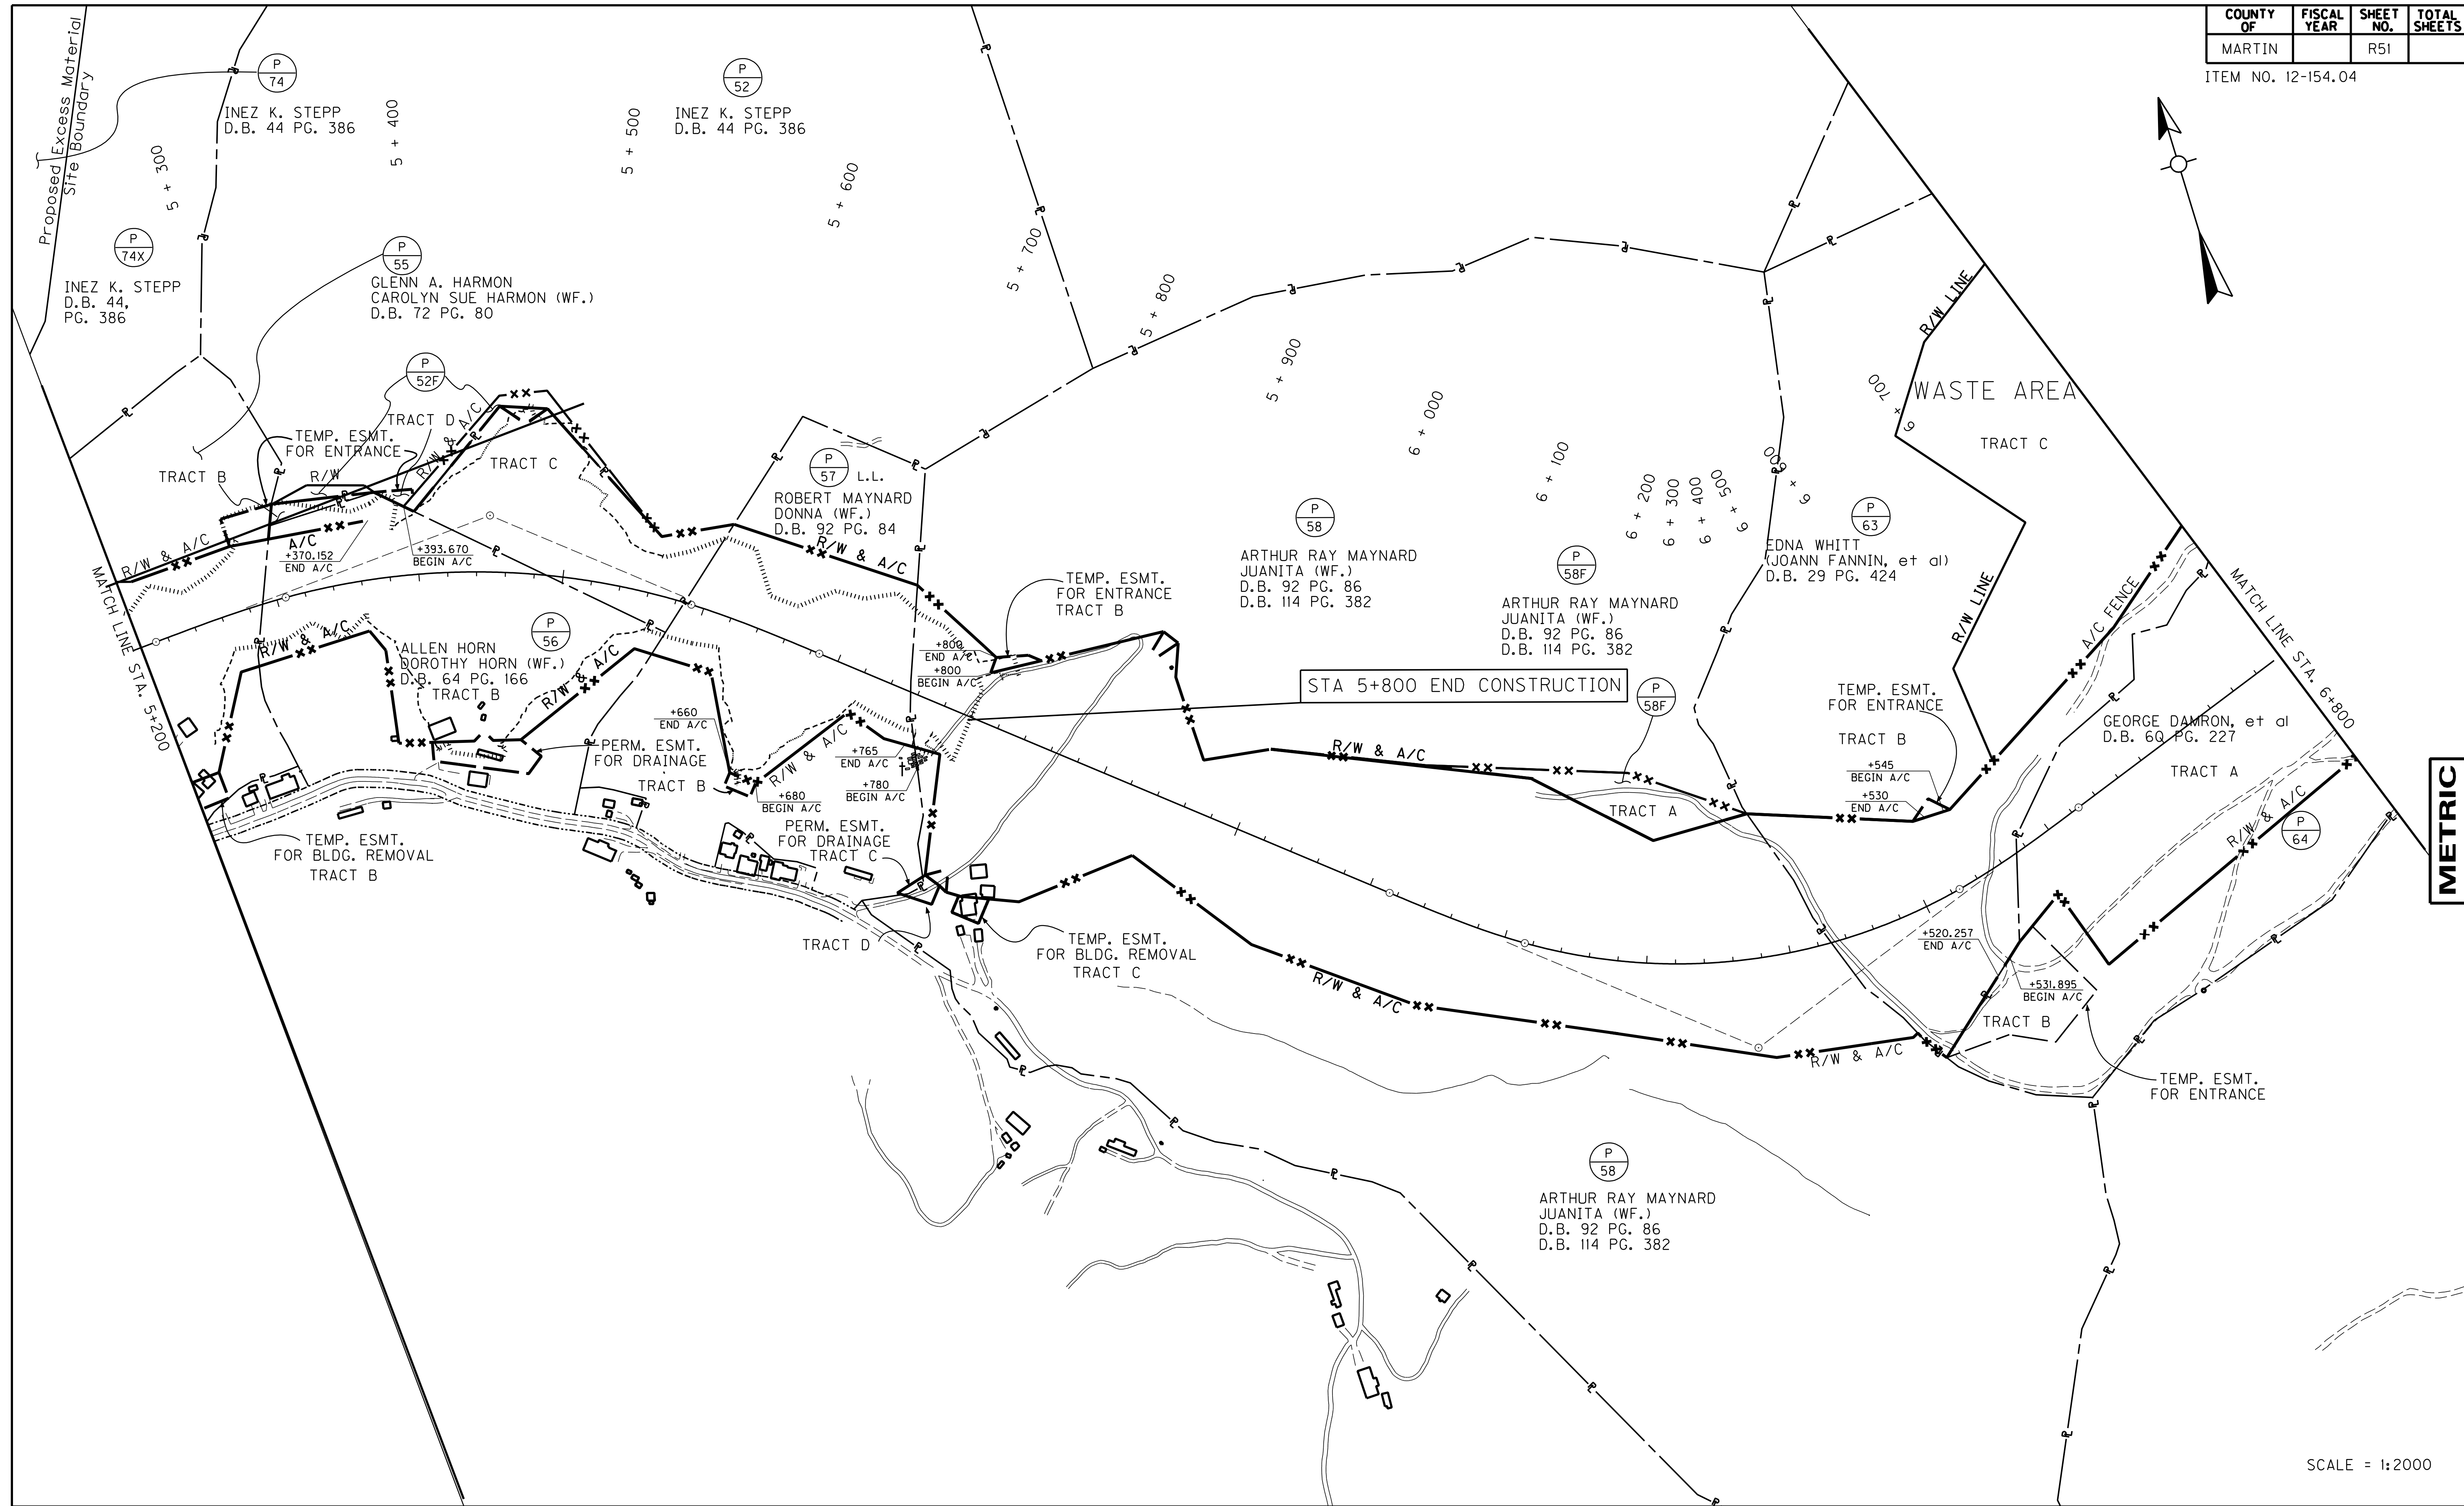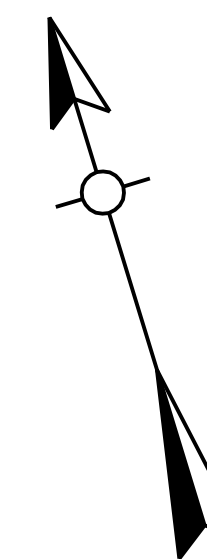

| | |
|-------------|------|
| PREPARED BY | DATE |
| CHECKED BY | DATE |
| APPROVED BY | DATE |

Cell Library: mroadway.cel
 Cell Name: sp
 20-APR-2011 16:13

6-93
 FORM NO. 2m

METRIC

SCALE = 1:2000

