



**COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET**
Frankfort, Kentucky 40622
www.transportation.ky.gov/

Matthew G. Bevin
Governor

Greg Thomas
Secretary

May 18, 2017

CALL NO. 117
CONTRACT ID NO. 174121
ADDENDUM # 1

Subject: HSIP 5316 (022)
Letting May 26, 2017

- (1) Revised - Note - Page 70 of 111
- (2) Revised - Bid Items - Pages 110-111 of 111

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in cursive script that reads "Rachel Mills".


Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:ks
Enclosures




An Equal Opportunity Employer M/F/D

CULVERT PIPE REPLACEMENT DETAIL

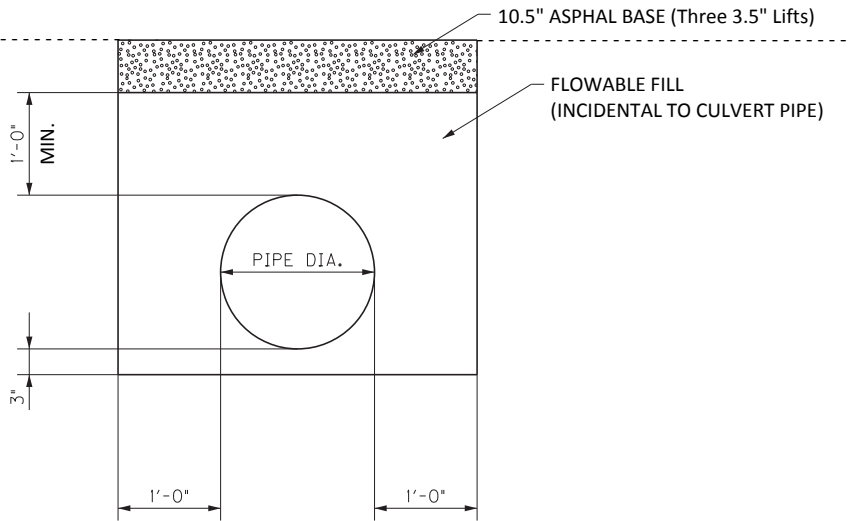

CULVERT PIPE REPLACEMENTS - INITIAL BACKFILL

Culvert Pipe Replacements shall be constructed according to the Initial Backfill Detail shown above, or as directed by the Engineer. Allow the asphalt base to be exposed to traffic a minimum of 14 days to allow for settlement. After the 14 day waiting period, mill and inlay 1.25 inches of asphalt surface according to the detail below.

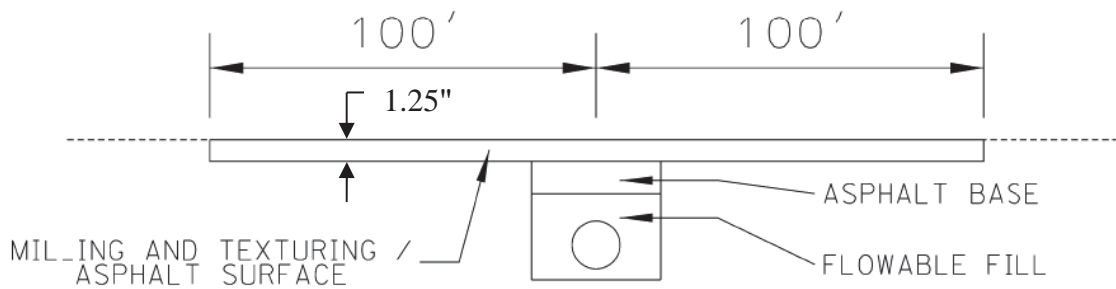

PROPOSAL BID ITEMS

REVISED ADDENDUM #1: 5-18-17

174121

Page 1 of 2

Report Date 5/18/17

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	50.00	TON		\$	
0020	00221		CL2 ASPH BASE 0.75D PG64-22	125.00	TON		\$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22	225.00	TON		\$	
0040	00462		CULVERT PIPE-18 IN	700.00	LF		\$	
0050	00464		CULVERT PIPE-24 IN	280.00	LF		\$	
0060	00468		CULVERT PIPE-36 IN	8.00	LF		\$	
0070	00496		CULVERT PIPE-36 IN EQUIV	40.00	LF		\$	
0080	00498		CULVERT PIPE-42 IN EQUIV	40.00	LF		\$	
0090	00501		CULVERT PIPE-60 IN EQUIV	40.00	LF		\$	
0100	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	70.00	EACH		\$	
0110	02187		SITE PREPARATION M.P 8.653	1.00	EACH		\$	
0120	02187		SITE PREPARATION M.P 8.864	1.00	EACH		\$	
0130	02187		SITE PREPARATION M.P. 9.357	1.00	EACH		\$	
0140	02351		GUARDRAIL-STEEL W BEAM-S FACE	3,425.00	LF		\$	
0150	02360		GUARDRAIL TERMINAL SECTION NO 1	11.00	EACH		\$	
0160	02367		GUARDRAIL END TREATMENT TYPE 1	2.00	EACH		\$	
0170	02381		REMOVE GUARDRAIL	2,688.00	LF		\$	
0180	02391		GUARDRAIL END TREATMENT TYPE 4A	2.00	EACH		\$	
0190	02399		EXTRA LENGTH GUARDRAIL POST 7 FT	274.00	EACH		\$	
0200	02484		CHANNEL LINING CLASS III	100.00	TON		\$	
0210	02562		TEMPORARY SIGNS	300.00	SQFT		\$	
0220	02575		DITCHING AND SHOULDERING	20,313.00	LF		\$	
0240	02650		MAINTAIN & CONTROL TRAFFIC KY 36	1.00	LS		\$	
0242	02676		MOBILIZATION FOR MILL & TEXT (ADDED: 5-18-17)	1.00	LS		\$	
0243	02677		ASPHALT PAVE MILLING & TEXTURING (ADDED: 5-18-17)	950.00	TON		\$	
0250	02703		SILT TRAP TYPE A	29.00	EACH		\$	
0260	02731		REMOVE STRUCTURE M.P. 10.740	1.00	LS		\$	
0270	02731		REMOVE STRUCTURE M.P. 8.653	1.00	LS		\$	
0280	02731		REMOVE STRUCTURE M.P. 8.864	1.00	LS		\$	
0290	02731		REMOVE STRUCTURE M.P. 9.357	1.00	LS		\$	
0300	02731		REMOVE STRUCTURE M.P. 9.521	1.00	LS		\$	
0310	02731		REMOVE STRUCTURE M.P. 9.865	1.00	LS		\$	
0320	05950		EROSION CONTROL BLANKET	4,000.00	SQYD		\$	
0330	06514		PAVE STRIPING-PERM PAINT-4 IN	3,100.00	LF		\$	
0340	22533EN		ALUMINUM ALLOY STRUCT PLATE PIPE ARCH M.P. 8.653 - 10' X 3'	40.00	LF		\$	

174121

PROPOSAL BID ITEMS

Page 2 of 2

Report Date 5/18/17

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0350	22533EN		ALUMINUM ALLOY STRUCT PLATE PIPE ARCH M.P. 8.864 - 10' X 4'	40.00	LF		\$	
0360	22533EN		ALUMINUM ALLOY STRUCT PLATE PIPE ARCH M.P. 9.357 - 12' X 4'	40.00	LF		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0370	02569		DEMOBILIZATION	1.00	LS		\$	