



COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET

www.transportation.ky.gov/

Andy Beshear
GOVERNOR

Jim Gray
SECRETARY

November 30, 2020

CALL NO. 203
CONTRACT ID NO. 202255
ADDENDUM # 1

Subject: FLOYD COUNTY, 036GR20P051-ER
Letting December 11, 2020

- (1) Revised - Material Summary - Pages 47-48 of 99
- (2) Revised - Site Summary - Page 51 of 99
- (3) Revised - Guardrail Summary - Page 52 of 99
- (4) Revised - Typical Section - Page 56 of 99
- (5) Revised - Proposal Bid Items - Page 99 of 99

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

MATERIAL SUMMARY

CONTRACT ID: 202255

036GR20P051-ER

MP03603022001

WATERGAP - AUXIER ROAD (KY 302) FROM 0.311 MILES EAST OF JENNY WILEY STATE PARK ROAD EXTENDING EAST TO 0.32 MILES WEST OF KY 3051 SLIDE REPAIR, A DISTANCE OF .35 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE - (REVISED: 11-30-20)	27.00	TON
0010	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 11-30-20)	8.00	EACH
0015	02383	REMOVE & RESET GUARDRAIL - (REVISED: 11-30-20)	287.50	LF
0020	02562	TEMPORARY SIGNS	170.00	SQFT
0025	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 11-30-20)	513.00	SQYD
0030	02650	MAINTAIN & CONTROL TRAFFIC - KY 302	1.00	LS
0035	03234	RAILROAD RAILS-DRILLED - (REVISED: 11-30-20)	2,379.00	LF
0040	03235	EXCAVATION AND BACKFILL - (REVISED: 11-30-20)	399.00	CUYD
0045	03236	CRIBBING - (REVISED: 11-30-20)	2,124.00	SQFT
0050	20257NC	SITE PREPARATION - KY 302 SITE 1	1.00	LS
0055	20257NC	SITE PREPARATION - KY 302 SITE 2	1.00	LS
0060	21415ND	EROSION CONTROL - KY 302 SITE 1	1.00	LS
0065	21415ND	EROSION CONTROL - KY 302 SITE 2	1.00	LS
0070	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 202255

036GR20P051-ER

MP03604042001

PRESTONSBURG - DAVID ROAD (KY 404) FROM 0.140 MILES EAST OF MAGOFFIN COUNTY LINE EXTENDING EAST TO 0.430 MILES WEST OF DAVID SCHOOL ROAD SLIDE REPAIR, A DISTANCE OF .65 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0075	00001	DGA BASE - (REVISED: 11-30-20)	35.00	TON
0080	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 11-30-20)	12.00	EACH
0085	02383	REMOVE & RESET GUARDRAIL - (REVISED: 11-30-20)	462.50	LF
0090	02562	TEMPORARY SIGNS	150.00	SQFT
0095	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 11-30-20)	928.00	SQYD
0100	02650	MAINTAIN & CONTROL TRAFFIC - KY 404	1.00	LS
0105	03234	RAILROAD RAILS-DRILLED - (REVISED: 11-30-20)	4,602.00	LF
0110	03235	EXCAVATION AND BACKFILL - (REVISED: 11-30-20)	516.00	CUYD
0115	03236	CRIBBING - (REVISED: 11-30-20)	4,176.00	SQFT
0120	20257NC	SITE PREPARATION - KY 404 SITE 2	1.00	LS
0125	20257NC	SITE PREPARATION - KY 404 SITE 3	1.00	LS
0130	21415ND	EROSION CONTROL - KY 404 SITE 2	1.00	LS
0135	21415ND	EROSION CONTROL - KY 404 SITE 3	1.00	LS
0140	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 202255

036GR20P051-ER

MP03614282001

MARTIN - ALLEN ROAD (KY 1428) FROM 0.112 MILES NORTH OF FINANCE HOLLOW EXTENDING NORTH TO 0.084 MILES SOUTH OF BETSY CLARK ROAD SLIDE REPAIR, A DISTANCE OF .31 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0145	00001	DGA BASE - (REVISED: 11-30-20)	11.00	TON
0150	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 11-30-20)	7.00	EACH
0155	02383	REMOVE & RESET GUARDRAIL - (REVISED: 11-30-20)	212.50	LF
0160	02562	TEMPORARY SIGNS	150.00	SQFT
0165	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 11-30-20)	294.00	SQYD
0170	02650	MAINTAIN & CONTROL TRAFFIC - KY 1428	1.00	LS
0175	03234	RAILROAD RAILS-DRILLED - (REVISED: 11-30-20)	1,287.00	LF
0180	03235	EXCAVATION AND BACKFILL - (REVISED: 11-30-20)	186.00	CUYD
0185	03236	CRIBBING - (REVISED: 11-30-20)	1,302.00	SQFT
0190	20257NC	SITE PREPARATION - KY 1428 SITE 1	1.00	LS
0195	20257NC	SITE PREPARATION - KY 1428 SITE 2	1.00	LS
0200	21415ND	EROSION CONTROL - KY 1428 SITE 1	1.00	LS
0205	21415ND	EROSION CONTROL - KY 1428 SITE 2	1.00	LS
0210	02569	DEMOBILIZATION	1.00	LS

SITE SUMMARY - KY 404

Site	Begin	End	Length	Cribbing Depth (FT)	Excavation Width (FT)	Depth to Rock (FT)	Number of Rows	RR Rail Spacing (FT)	Cribbing Amount (SQ FT)	Drilled RR Rail (FT)	Excav. & Backfill (CU YD)	Class 2 Geotextile Fabric (SQ YD)	DGA (TONS)			
1	0.145	0.168														
NOT PART OF THIS CONTRACT																
2	0.457	0.482	132	10	4	26	1	3	1,584	1,755	196	352	13			
3	0.738	0.779	216	10	4	26	1	3	2,592	2,847	320	576	22			
TOTALS												4,176	4,602	516	928	47


GUARDRAIL SUMMARY - KY 404

NEW GUARDRAIL						REMOVE & RESET GUARDRAIL					
LANE	END TREAT.	BEGIN MILEPOINT	END MILEPOINT	END TREAT.	LIN FEET	REMARKS	LANE	BEGIN MILEPOINT	END MILEPOINT	LIN FEET	REMARKS
							LEFT	0.453	0.487	187.5	
							LEFT	0.733	0.784	275.0	

TOTAL = 0.0

TOTAL = 462.5

**TYPICAL SECTION
FLOYD COUNTY
KY 404
SITES 2 & 3**

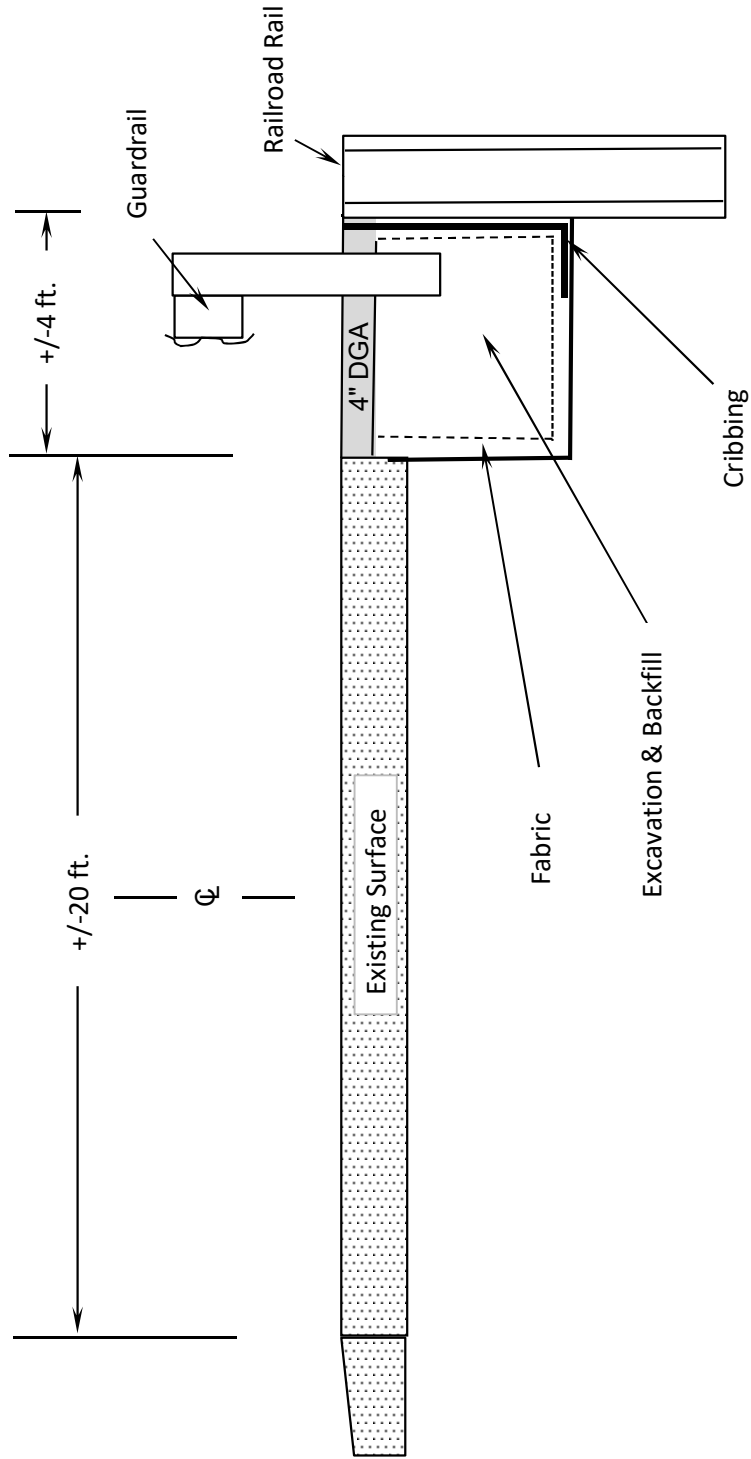

*Guardrail as directed by Engineer

PROPOSAL BID ITEMS

202255

Page 1 of 1

Report Date 11/30/20

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE (REVISED: 11-30-20)	73.00	TON		\$	
0020	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE (REVISED: 11-30-20)	27.00	EACH		\$	
0030	02383		REMOVE & RESET GUARDRAIL (REVISED: 11-30-20)	962.50	LF		\$	
0040	02562		TEMPORARY SIGNS	470.00	SQFT		\$	
0050	02603		FABRIC-GEOTEXTILE CLASS 2 (REVISED: 11-30-20)	1,735.00	SQYD		\$	
0060	02650		MAINTAIN & CONTROL TRAFFIC KY 1428	1.00	LS		\$	
0070	02650		MAINTAIN & CONTROL TRAFFIC KY 302	1.00	LS		\$	
0080	02650		MAINTAIN & CONTROL TRAFFIC KY 404	1.00	LS		\$	
0090	03234		RAILROAD RAILS-DRILLED (REVISED: 11-30-20)	8,268.00	LF		\$	
0100	03235		EXCAVATION AND BACKFILL (REVISED: 11-30-20)	1,101.00	CUYD		\$	
0110	03236		CRIBBING (REVISED: 11-30-20)	7,602.00	SQFT		\$	
0120	20257NC		SITE PREPARATION KY 1428 SITE 1	1.00	LS		\$	
0130	20257NC		SITE PREPARATION KY 1428 SITE 2	1.00	LS		\$	
0140	20257NC		SITE PREPARATION KY 302 SITE 1	1.00	LS		\$	
0150	20257NC		SITE PREPARATION KY 302 SITE 2	1.00	LS		\$	
0160	20257NC		SITE PREPARATION KY 404 SITE 2	1.00	LS		\$	
0170	20257NC		SITE PREPARATION KY 404 SITE 3	1.00	LS		\$	
0180	21415ND		EROSION CONTROL KY 1428 SITE 1	1.00	LS		\$	
0190	21415ND		EROSION CONTROL KY 1428 SITE 2	1.00	LS		\$	
0200	21415ND		EROSION CONTROL KY 302 SITE 1	1.00	LS		\$	
0210	21415ND		EROSION CONTROL KY 302 SITE 2	1.00	LS		\$	
0220	21415ND		EROSION CONTROL KY 404 SITE 2	1.00	LS		\$	
0230	21415ND		EROSION CONTROL KY 404 SITE 3	1.00	LS		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0240	02569		DEMOBILIZATION	1.00	LS		\$	