



COMMONWEALTH OF KENTUCKY  
TRANSPORTATION CABINET

[www.transportation.ky.gov/](http://www.transportation.ky.gov/)

Andy Beshear  
GOVERNOR

Jim Gray  
SECRETARY

December 2, 2020

CALL NO. 204  
CONTRACT ID NO. 202270  
ADDENDUM # 1

Subject: FLOYD COUNTY, 036GR20P052-ER  
Letting December 11, 2020

- (1) Revised - Material Summary - Pages 55-58 of 117
- (2) Revised - Site Summary - Page 63 of 117
- (3) Revised - Guardrail Summary - Page 64 of 117
- (4) Revised - Typical Section - Page 72 of 117
- (5) Revised - Proposal Bid Items - Pages 116-117 of 117

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:mr  
Enclosures

# MATERIAL SUMMARY

**CONTRACT ID: 202270**

**036GR20P052-ER**

**MP03600072001**

MOUSIE - SALTICK ROAD (KY 7) FROM 0.212 MILES NORTH OF KNOTT COUNTY LINE EXTENDING NORTH TO 0.31 MILES NORTH OF BILL TUSSY ROAD SLIDE REPAIR, A DISTANCE OF 12.04 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE - (REVISED: 12-2-20)	13.00	TON
0010	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 12-2-20)	12.00	EACH
0015	02383	REMOVE & RESET GUARDRAIL - (REVISED: 12-2-20)	412.50	LF
0020	02562	TEMPORARY SIGNS	450.00	SQFT
0025	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 12-2-20)	568.00	SQYD
0030	02650	MAINTAIN & CONTROL TRAFFIC - (KY 7)	1.00	LS
0035	03234	RAILROAD RAILS-DRILLED - (REVISED: 12-2-20)	2,535.00	LF
0040	03235	EXCAVATION AND BACKFILL - (REVISED: 12-2-20)	256.00	CUYD
0045	03236	CRIBBING - (REVISED: 12-2-20)	2,642.00	SQFT
0050	20257NC	SITE PREPARATION - KY 7 SITE 3	1.00	LS
0055	20257NC	SITE PREPARATION - KY 7 SITE 4	1.00	LS
0060	20257NC	SITE PREPARATION - KY 7 SITES 1 & 2	1.00	LS
0065	21415ND	EROSION CONTROL - KY 7 SITE 3	1.00	LS
0070	21415ND	EROSION CONTROL - KY 7 SITE 4	1.00	LS
0075	21415ND	EROSION CONTROL - KY 7 SITES 1 & 2	1.00	LS
0080	02569	DEMOBILIZATION	1.00	LS

# MATERIAL SUMMARY

**CONTRACT ID: 202270**

**036GR20P052-ER**

**MP03601222001**

MARTIN- MELVIN ROAD (KY 122) FROM 0.075 MILES EAST OF HITE ROAD EXTENDING EAST TO 0.072 MILES WEST OF LEFT FORK ABNER ROAD SLIDE REPAIR, A DISTANCE OF 22.62 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0085	00001	DGA BASE - (REVISED: 12-2-20)	53.00	TON
0090	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 12-2-20)	25.00	EACH
0095	02351	GUARDRAIL-STEEL W BEAM-S FACE	75.00	LF
0100	02360	GUARDRAIL TERMINAL SECTION NO 1	1.00	EACH
0105	02371	GUARDRAIL END TREATMENT TYPE 7	1.00	EACH
0110	02383	REMOVE & RESET GUARDRAIL - (REVISED: 12-2-20)	850.00	LF
0115	02562	TEMPORARY SIGNS	450.00	SQFT
0120	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 12-2-20)	1,129.00	SQYD
0125	02650	MAINTAIN & CONTROL TRAFFIC - (KY 122)	1.00	LS
0130	03234	RAILROAD RAILS-DRILLED - (REVISED: 12-2-20)	6,162.00	LF
0135	03235	EXCAVATION AND BACKFILL - (REVISED: 12-2-20)	610.00	CUYD
0140	03236	CRIBBING - (REVISED: 12-2-20)	5,138.00	SQFT
0145	08019	CYCLOPEAN STONE RIP RAP	125.00	TON
0150	20257NC	SITE PREPARATION - KY 122 SITE 1	1.00	LS
0155	20257NC	SITE PREPARATION - KY 122 SITE 2	1.00	LS
0160	20257NC	SITE PREPARATION - KY 122 SITE 3	1.00	LS
0165	20257NC	SITE PREPARATION - KY 122 SITE 4	1.00	LS
0170	20257NC	SITE PREPARATION - KY 122 SITE 5	1.00	LS
0175	20257NC	SITE PREPARATION - KY 122 SITE 6	1.00	LS
0180	20257NC	SITE PREPARATION - KY 122 SITES 7 & 8	1.00	LS
0185	21415ND	EROSION CONTROL - KY 122 SITE 1	1.00	LS
0190	21415ND	EROSION CONTROL - KY 122 SITE 2	1.00	LS
0195	21415ND	EROSION CONTROL - KY 122 SITE 3	1.00	LS
0200	21415ND	EROSION CONTROL - KY 122 SITE 4	1.00	LS
0205	21415ND	EROSION CONTROL - KY 122 SITE 5	1.00	LS
0210	21415ND	EROSION CONTROL - KY 122 SITE 6	1.00	LS
0215	21415ND	EROSION CONTROL - KY 122 SITES 7 & 8	1.00	LS
0220	02569	DEMOBILIZATION	1.00	LS

# MATERIAL SUMMARY

**CONTRACT ID: 202270**

**036GR20P052-ER**

**MP03605502001**

HUEYSVILLE - MIDAS ROAD (KY 550) FROM 0.31 MILES EAST OF GAYHEART CEMETARY ROAD EXTENDING EAST TO 0.258 MILES EAST OF COOLEY BRANCH SLIDE REPAIR, A DISTANCE OF 2.16 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0225	00001	DGA BASE - (REVISED: 12-2-20)	33.00	TON
0230	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 12-2-20)	32.00	EACH
0235	02351	GUARDRAIL-STEEL W BEAM-S FACE	800.00	LF
0240	02367	GUARDRAIL END TREATMENT TYPE 1	2.00	EACH
0245	02383	REMOVE & RESET GUARDRAIL - (REVISED: 12-2-20)	487.50	LF
0250	02562	TEMPORARY SIGNS	170.00	SQFT
0255	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 12-2-20)	1,188.00	SQYD
0260	02650	MAINTAIN & CONTROL TRAFFIC - (KY 550)	1.00	LS
0265	03234	RAILROAD RAILS-DRILLED - (REVISED: 12-2-20)	5,070.00	LF
0270	03235	EXCAVATION AND BACKFILL - (REVISED: 12-2-20)	613.00	CUYD
0275	03236	CRIBBING - (REVISED: 12-2-20)	5,434.00	SQFT
0280	20257NC	SITE PREPARATION - KY 550 SITE 5	1.00	LS
0285	20257NC	SITE PREPARATION - KY 550 SITE 6	1.00	LS
0290	20257NC	SITE PREPARATION - KY 550 SITES 1, 2, & 3 (REVISED: 12-2-20)	1.00	LS
0295	21415ND	EROSION CONTROL - KY 550 SITE 5	1.00	LS
0300	21415ND	EROSION CONTROL - KY 550 SITE 6	1.00	LS
0305	21415ND	EROSION CONTROL - KY 550 SITES 1, 2, & 3 (REVISED: 12-2-20)	1.00	LS
0310	02569	DEMOBILIZATION	1.00	LS

# MATERIAL SUMMARY

**CONTRACT ID: 202270**

**036GR20P052-ER**

**MP03606802001**

JOHN HALL BRANCH ROAD (KY 680) FROM 0.406 MILES EAST OF ROUGH BRANCH OF HALL FORK ROAD EXTENDING EAST TO 0.471 MILES WEST OF EVANS LANE SLIDE REPAIR, A DISTANCE OF .14 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0315	00001	DGA BASE - (REVISED: 12-2-20)	5.00	TON
0320	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 12-2-20)	18.00	EACH
0325	02351	GUARDRAIL-STEEL W BEAM-S FACE	675.00	LF
0330	02367	GUARDRAIL END TREATMENT TYPE 1	1.00	EACH
0335	02383	REMOVE & RESET GUARDRAIL - (REVISED: 12-2-20)	100.00	LF
0340	02562	TEMPORARY SIGNS	150.00	SQFT
0345	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 12-2-20)	144.00	SQYD
0350	02650	MAINTAIN & CONTROL TRAFFIC - (KY 680)	1.00	LS
0355	03234	RAILROAD RAILS-DRILLED - (REVISED: 12-2-20)	1,014.00	LF
0360	03235	EXCAVATION AND BACKFILL - (REVISED: 12-2-20)	62.00	CUYD
0365	03236	CRIBBING - (REVISED: 12-2-20)	680.00	SQFT
0370	20257NC	SITE PREPARATION - KY 680 SITES 1, 2, & 3	1.00	LS
0375	21415ND	EROSION CONTROL - KY 680 SITES 1, 2, & 3	1.00	LS
0380	02569	DEMOBILIZATION	1.00	LS

**CONTRACT ID: 202270**

**036GR20P052-ER**

**MP03609792001**

HI HAT - HAROLD ROAD (KY 979) FROM 0.409 MILES SOUTH OF ELMWOOD COURT EXTENDING NORTH TO 0.1 MILES SOUTH OF EMITT TACKETT SLIDE REPAIR, A DISTANCE OF 11.51 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0385	00001	DGA BASE - (REVISED: 12-2-20)	7.00	TON
0390	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 12-2-20)	5.00	EACH
0395	02383	REMOVE & RESET GUARDRAIL - (REVISED: 12-2-20)	212.50	LF
0400	02562	TEMPORARY SIGNS	300.00	SQFT
0405	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 12-2-20)	178.00	SQYD
0410	02650	MAINTAIN & CONTROL TRAFFIC - (KY 979)	1.00	LS
0415	03234	RAILROAD RAILS-DRILLED - (REVISED: 12-2-20)	1,287.00	LF
0420	03235	EXCAVATION AND BACKFILL - (REVISED: 12-2-20)	74.00	CUYD
0425	03236	CRIBBING - (REVISED: 12-2-20)	846.00	SQFT
0430	20257NC	SITE PREPARATION - KY 979 SITE 1	1.00	LS
0435	20257NC	SITE PREPARATION - KY 979 SITE 2	1.00	LS
0440	21415ND	EROSION CONTROL - KY 979 SITE 1	1.00	LS
0445	21415ND	EROSION CONTROL - KY 979 SITE 2	1.00	LS
0450	02569	DEMOBILIZATION	1.00	LS

## SITE SUMMARY - KY 550

Site	Begin	End	Length	Cribbing Depth	Excavation Width	Depth to Rock	Number of Rows	Rail Spacing (FT)	Cribbing Amount (SQ FT)	Steel (FT)	Excav. & Backfill (CU YD)	Class 2 Geotextile Fabric (SQ YD)	DGA (TONS)
1	1.147	1.155	44	12	3	26	1	3	616	624	59	132	3
2	1.162	1.173	58	12	3	26	1	3	812	819	78	174	4
3	1.212	1.233	110	10	4	26	1	3	1,320	1,482	163	293	11
4						<b>NOT PART OF THIS CONTRACT</b>							
5	1.929	1.95	114	15	3	26	1	3	1,938	1,521	190	418	9
6	3.287	3.295	44	15	5	26	1	3	748	624	123	171	6
<b>TOTALS</b>									<b>5,434</b>	<b>5,070</b>	<b>613</b>	<b>1,188</b>	<b>36</b>


## GUARDRAIL SUMMARY - KY 550

NEW GUARDRAIL						REMOVE & RESET GUARDRAIL					
LANE	END TREAT.	BEGIN MILEPOINT	END MILEPOINT	END TREAT.	LIN FEET	REMARKS	LANE	BEGIN MILEPOINT	END MILEPOINT	LIN FEET	REMARKS
							LEFT	1.142	1.160	100.0	
							LEFT	1.157	1.178	112.5	
							LEFT	1.207	1.238	175.0	
LEFT	TYPE 1	1.890	2.042	TYPE 1	800.0						
							RIGHT	3.282	3.300	100.0	

TOTAL = 800.0

TOTAL = 487.5

**TYPICAL SECTION  
FLOYD COUNTY  
KY 550  
SITES 1-3 & 5-6**

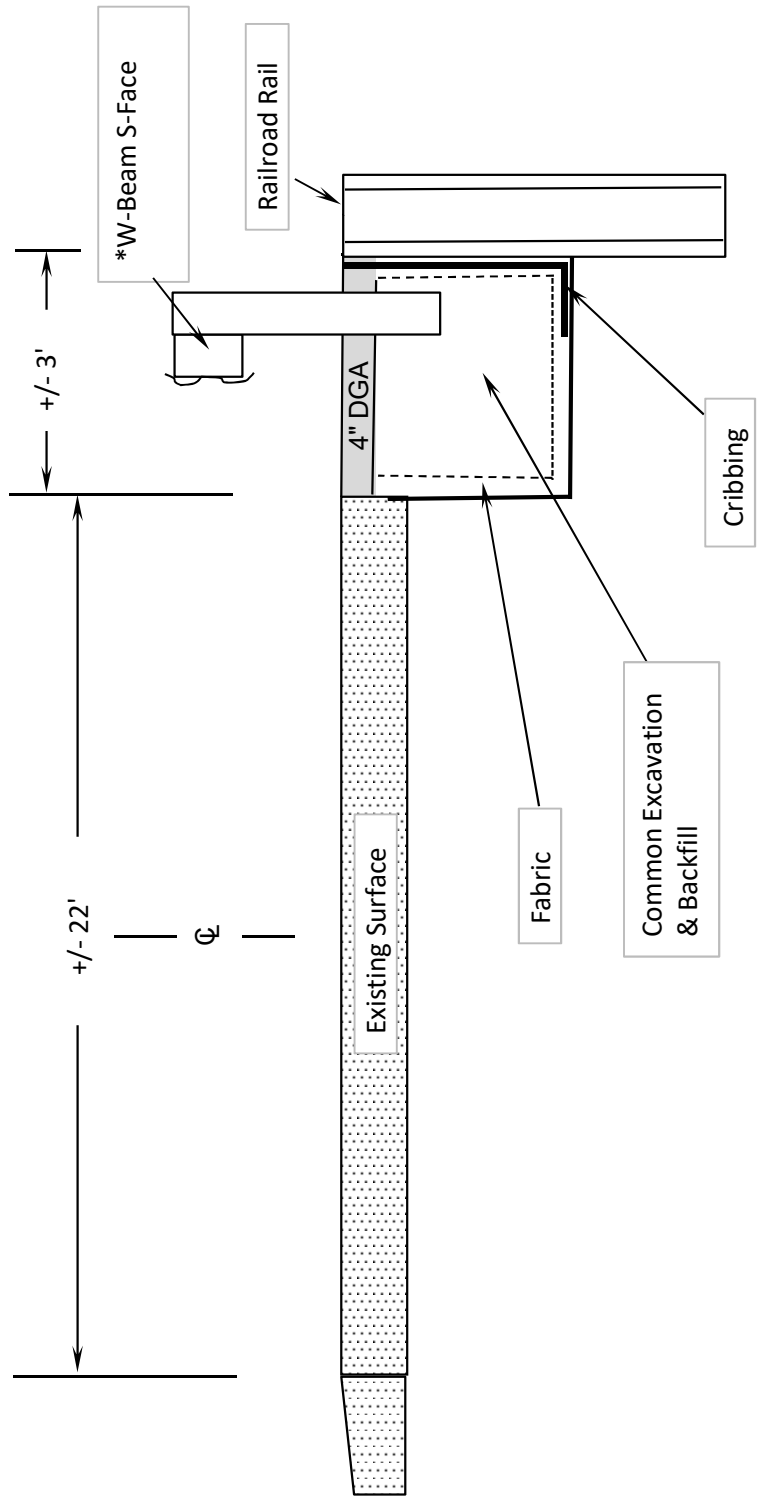

\*Guardrail as directed by Engineer



**PROPOSAL BID ITEMS**

202270

Page 1 of 2

Report Date 12/2/20

**Section: 0001 - ROADWAY**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE (REVISED: 12-2-20)	111.00	TON		\$	
0020	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE (REVISED: 12-2-20)	92.00	EACH		\$	
0030	02351		GUARDRAIL-STEEL W BEAM-S FACE	1,550.00	LF		\$	
0040	02360		GUARDRAIL TERMINAL SECTION NO 1	1.00	EACH		\$	
0050	02367		GUARDRAIL END TREATMENT TYPE 1	3.00	EACH		\$	
0060	02371		GUARDRAIL END TREATMENT TYPE 7	1.00	EACH		\$	
0070	02383		REMOVE & RESET GUARDRAIL (REVISED: 12-2-20)	2,062.50	LF		\$	
0080	02562		TEMPORARY SIGNS	1,520.00	SQFT		\$	
0090	02603		FABRIC-GEOTEXTILE CLASS 2 (REVISED: 12-2-20)	3,207.00	SQYD		\$	
0100	02650		MAINTAIN & CONTROL TRAFFIC (KY 122)	1.00	LS		\$	
0110	02650		MAINTAIN & CONTROL TRAFFIC (KY 550)	1.00	LS		\$	
0120	02650		MAINTAIN & CONTROL TRAFFIC (KY 680)	1.00	LS		\$	
0130	02650		MAINTAIN & CONTROL TRAFFIC (KY 7)	1.00	LS		\$	
0140	02650		MAINTAIN & CONTROL TRAFFIC (KY 979)	1.00	LS		\$	
0150	03234		RAILROAD RAILS-DRILLED (REVISED: 12-2-20)	16,068.00	LF		\$	
0160	03235		EXCAVATION AND BACKFILL (REVISED: 12-2-20)	1,615.00	CUYD		\$	
0170	03236		CRIBBING (REVISED: 12-2-20)	14,740.00	SQFT		\$	
0180	08019		CYCLOPEAN STONE RIP RAP	125.00	TON		\$	
0190	20257NC		SITE PREPARATION KY 122 SITE 1	1.00	LS		\$	
0200	20257NC		SITE PREPARATION KY 122 SITE 2	1.00	LS		\$	
0210	20257NC		SITE PREPARATION KY 122 SITE 3	1.00	LS		\$	
0220	20257NC		SITE PREPARATION KY 122 SITE 4	1.00	LS		\$	
0230	20257NC		SITE PREPARATION KY 122 SITE 5	1.00	LS		\$	
0240	20257NC		SITE PREPARATION KY 122 SITE 6	1.00	LS		\$	
0250	20257NC		SITE PREPARATION KY 122 SITES 7 & 8	1.00	LS		\$	
0260	20257NC		SITE PREPARATION KY 550 SITE 5	1.00	LS		\$	
0270	20257NC		SITE PREPARATION KY 550 SITE 6	1.00	LS		\$	
0280	20257NC		SITE PREPARATION KY 550 SITES 1, 2, & 3 (REVISED: 12-2-20)	1.00	LS		\$	

**PROPOSAL BID ITEMS**

202270

Page 2 of 2

Report Date 12/2/20

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0290	20257NC		SITE PREPARATION KY 680 SITES 1, 2, & 3	1.00	LS		\$	
0300	20257NC		SITE PREPARATION KY 7 SITE 3	1.00	LS		\$	
0310	20257NC		SITE PREPARATION KY 7 SITE 4	1.00	LS		\$	
0320	20257NC		SITE PREPARATION KY 7 SITES 1 & 2	1.00	LS		\$	
0330	20257NC		SITE PREPARATION KY 979 SITE 1	1.00	LS		\$	
0340	20257NC		SITE PREPARATION KY 979 SITE 2	1.00	LS		\$	
0350	21415ND		EROSION CONTROL KY 122 SITE 1	1.00	LS		\$	
0360	21415ND		EROSION CONTROL KY 122 SITE 2	1.00	LS		\$	
0370	21415ND		EROSION CONTROL KY 122 SITE 3	1.00	LS		\$	
0380	21415ND		EROSION CONTROL KY 122 SITE 4	1.00	LS		\$	
0390	21415ND		EROSION CONTROL KY 122 SITE 5	1.00	LS		\$	
0400	21415ND		EROSION CONTROL KY 122 SITE 6	1.00	LS		\$	
0410	21415ND		EROSION CONTROL KY 122 SITES 7 & 8	1.00	LS		\$	
0420	21415ND		EROSION CONTROL KY 550 SITE 5	1.00	LS		\$	
0430	21415ND		EROSION CONTROL KY 550 SITE 6	1.00	LS		\$	
0440	21415ND		EROSION CONTROL KY 550 SITES 1, 2, & 3 (REVISED: 12-2-20)	1.00	LS		\$	
0450	21415ND		EROSION CONTROL KY 680 SITES 1, 2, & 3	1.00	LS		\$	
0460	21415ND		EROSION CONTROL KY 7 SITE 3	1.00	LS		\$	
0470	21415ND		EROSION CONTROL KY 7 SITE 4	1.00	LS		\$	
0480	21415ND		EROSION CONTROL KY 7 SITES 1 & 2	1.00	LS		\$	
0490	21415ND		EROSION CONTROL KY 979 SITE 1	1.00	LS		\$	
0500	21415ND		EROSION CONTROL KY 979 SITE 2	1.00	LS		\$	

**Section: 0002 - DEMOBILIZATION**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0510	02569		DEMOBILIZATION	1.00	LS		\$	