



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Jim Gray
SECRETARY

March 10, 2025

CALL NO. 204
CONTRACT ID NO. 254400
ADDENDUM # 1

Subject: Franklin-Trimble-Shelby Counties, 121GR25T001-HSIP
Letting March 20, 2025

- (1) Revised - Completion Date - Cover Page and Page 4 of 233
- (2) Revised - Notes - Page 31 of 233
- (3) Revised - Material Summary - Pages 45-46 of 233
- (4) Revised - Summary Sheets - Pages 48-50, 53, 127, 130, & 131 of 233
- (5) Revised - Plan Sheets - Pages 59, 68, 87, 144 & 162 of 233
- (6) Revised - Wage Rates - Pages 215-227 of 233
- (7) Revised - Proposal Bid Items - Page 233 of 233

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures



CALL NO. 204

CONTRACT ID. 254400

FRANKLIN - TRIMBLE - SHELBY COUNTIES

FED/STATE PROJECT NUMBER 121GR25T001-HSIP

DESCRIPTION VARIOUS ROUTES IN DISTRICT 5

WORK TYPE SIGNS

PRIMARY COMPLETION DATE 3/30/2026

LETTING DATE: March 20,2025

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN DAYLIGHT TIME March 20,2025. Bids will be publicly announced at 10:00 AM EASTERN DAYLIGHT TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

DBE CERTIFICATION REQUIRED - 0%

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

ADMINISTRATIVE DISTRICT - 05

CONTRACT ID - 254400
121GR25T001-HSIP
COUNTY - FRANKLIN
PCN - 0503704212501
HSIP 4201(089)

BALD KNOB ROAD (US 421) (MP 11.100) FROM 0.032 MILE SOUTH OF KY 12 EXTENDING NORTHWEST TO THE FRANKILIN/HENRY COUNTY LINE (MP 17.886), A DISTANCE OF 06.79 MILES.SIGNS SYP NO. 05-09052.00.
GEOGRAPHIC COORDINATES LATITUDE 38:18:51.82 LONGITUDE 84:56:51.20
ADT 787

COUNTY - SHELBY
PCN - 0510617792501
HSIP 9010(628)

BENSON PIKE (KY 1779) (MP 1.100) FROM 1.096 MILES EAST OF KY 1871 EXTENDING EAST TO KY 1005 (MP 10.018), A DISTANCE OF 08.92 MILES.SIGNS SYP NO. 05-09053.00.
GEOGRAPHIC COORDINATES LATITUDE 38:13:27.23 LONGITUDE 85:04:30.81
ADT 508

COUNTY - TRIMBLE
PCN - 0511206252501
HSIP 9010(626)

PECK PIKE ROAD (KY 625) (MP 0.000) FROM THE US 421 INTERSECTION EXTENDING NORTHWEST TO THE KY 1256 INTERSECTION (MP 12.000), A DISTANCE OF 012.00 MILES.SIGNS SYP NO. 05-09054.00.
GEOGRAPHIC COORDINATES LATITUDE 38:38:18.94 LONGITUDE 85:24:19.28
ADT 642

COMPLETION DATE(S):
COMPLETED BY 03/30/2026 APPLIES TO ENTIRE PROJECT

Special Note for Completion Date & Liquidated Damages

I. COMPLETION DATE

The ultimate fixed completion date for this project will be March 30, 2026. Liquidated Damages for failure to complete the project on time will be assessed following Section 108.09.

II. LIQUIDATED DAMAGES

In addition to the requirements of Section 108.09, the Department will assess Liquidated Damages in the amount of **\$1,000** per hour for each hour, or fraction of an hour, for any and all lane closures that are in place beyond the time frame(s) noted in the Traffic Control Plan and approved by the Engineer.

Contrary to Section 108.09, Liquidated Damages will be assessed regardless of whether seasonal limitations prohibit the Contractor from performing work on the controlling operation.

Contrary to Section 108.09, Liquidated Damages will be assessed for the months of December through March.

All liquidated damages will be applied accumulatively.

All other applicable portions of Section 108 apply.

MATERIAL SUMMARY

CONTRACT ID: 254400

121GR25T001-HSIP

0503704212501

BALD KNOB ROAD (US 421) FROM 0.032 MILE SOUTH OF KY 12 EXTENDING NORTHWEST TO THE FRANKILIN/HENRY COUNTY LINE SIGNS, A DISTANCE OF 6.79 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	02650	MAINTAIN & CONTROL TRAFFIC - (FRANKLIN US 421 HSIP)	1.00	LS
0010	02671	PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH
0015	02726	STAKING - (FRANKLIN US 421 HSIP)	1.00	LS
0020	06406	SBM ALUM SHEET SIGNS .080 IN (REVISED 3-10-25)	1,037.00	SQFT
0025	06407	SBM ALUM SHEET SIGNS .125 IN	108.00	SQFT
0030	06410	STEEL POST TYPE 1 (REVISED 3-10-25)	1,391.00	LF
0035	21373ND	REMOVE SIGN	43.00	EACH
0040	24631EC	BARCODE SIGN INVENTORY (REVISED 3-10-25)	331.00	EACH
0045	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 254400

121GR25T001-HSIP

0510617792501

BENSON PIKE (KY 1779) FROM 1.096 MILES EAST OF KY 1871 EXTENDING EAST TO KY 1005 SIGNS, A DISTANCE OF 8.92 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0050	02650	MAINTAIN & CONTROL TRAFFIC - (SHELBY KY 1779 HSIP)	1.00	LS
0055	02671	PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH
0060	02726	STAKING - (SHELBY KY 1779 HSIP)	1.00	LS
0065	06406	SBM ALUM SHEET SIGNS .080 IN	484.00	SQFT
0070	06407	SBM ALUM SHEET SIGNS .125 IN	240.00	SQFT
0075	06410	STEEL POST TYPE 1	998.00	LF
0080	21373ND	REMOVE SIGN	21.00	EACH
0085	24631EC	BARCODE SIGN INVENTORY	193.00	EACH
0090	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 254400

121GR25T001-HSIP

0511206252501

PECK PIKE ROAD (KY 625) FROM THE US 421 INTERSECTION EXTENDING NORTHWEST TO THE KY 1256 INTERSECTION SIGNS, A DISTANCE OF 12 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0095	02650	MAINTAIN & CONTROL TRAFFIC - (TRIMBLE KY 625 HSIP)	1.00	LS
0100	02671	PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH
0105	02726	STAKING - (TRIMBLE KY 625 HSIP)	1.00	LS
0110	06406	SBM ALUM SHEET SIGNS .080 IN	871.00	SQFT
0115	06407	SBM ALUM SHEET SIGNS .125 IN	506.00	SQFT
0120	06410	STEEL POST TYPE 1	1,958.00	LF
0125	21373ND	REMOVE SIGN	57.00	EACH
0130	24631EC	BARCODE SIGN INVENTORY	321.00	EACH
0135	02569	DEMOBILIZATION	1.00	LS

FRANKLIN COUNTY US 421 ITEM NO. 05-9052.00 GENERAL SUMMARY			
ITEM	DESCRIPTION	UNIT	QUANTITY
2569	DEMOBILIZATION	LS	1
2650	MAINTAIN & CONTROL TRAFFIC (KY 625)	LS	1
2671	PORTABLE CHANGEABLE MESSAGE SIGNS	EACH	2
2726	STAKING	LS	1
6406	SBM ALUM SHEET SIGNS .080 IN	SQFT	1037
6407	SBM ALUM SHEET SIGNS .125 IN	SQFT	108
6410	STEEL POST TYPE 1	LF	1391
21373ND	REMOVE SIGN	EACH	43
24631EC	BARCODE SIGN INVENTORY	EACH	331

- 1 Carried over from Sign Summary
- 2 Carried over from Remove Signs Summary

FRANKLIN COUNTY US 421
ITEM NO. 05-9052.00

SIGN LOCATION					Facing Traffic	MUTCD Code	Sign Description	Sign Text / Remarks	Sign Dimensions (in x in)	SHEETING			SBM Alum		SBM Alum Sheet Signs 0.125 IN (SQ.FT)	Installation Type	Bracing Req'd	# of Sign Posts	Estimated Length of 2" Post (ft)	Estimated Length of 2-1/2" Post (ft)	2-1/4" Stiffener Req'd (includ to post)	TOTAL Estimated Sign Post Length (LF)	Barcode Sign Inv. (EACH)
Assembly ID	Side of Road	Approx Offset (ft)	Approx Station	Approx. Mile Point						Text/ Symbol Color	Background Color	Sheeting Type	Sheet Signs 0.080 IN (SQ.FT)										
1	RT	19	585+99	11.100	NB	W1-1R W13-1P	Right Turn XX MPH (Advisory Speed)	30 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	12			12	1	
2	LT	17	589+55	11.166	NB	W1-6R	Right One-Direction Lrg Arrow		48 x 24	Black	FL Yellow	XL		8.00	Stnd w/ Soil Plate		2	8			16	1	
3	LT	17	591+15	11.196	SB	W1-6L	Left One-Direction Lrg Arrow		48 x 24	Black	FL Yellow	XL		8.00	Stnd w/ Soil Plate		2	8			16	1	
4	LT	15	593+74	11.245	SB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)	35 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	12			12	1	
5	LT	16	594+74	11.264	SB	M2-1 M1-5	Junction State Route Sign (1 or 2 digit)	12	21 x 15 24 x 24	Black Black	White White	XL XL	2.19 4.00		Stnd w/ Soil Plate		1	11			11	1	
6	RT	16	603+70	11.434	NB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)	35 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	12			12	1	
7	RT	16	604+76	11.454	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	9			9	1	
8	RT	16	605+94	11.476	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	9			9	1	
9	RT	16	607+12	11.498	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	9			9	1	
10	RT	16	608+30	11.521	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	9			9	1	
11	LT	16	609+25	11.539	SB	W1-2R W13-1P	Right Curve XX MPH (Advisory Speed)	45 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	11			11	1	
12	RT	16	610+32	11.559	NB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)	40 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	11			11	1	
13	RT	16	610+95	11.571	NB	W2-1	Cross Road	Modified - see detail below	36 x 36	Black	Yellow	XL	9.00		Stnd w/ Soil Plate		1	12			12	1	
14	RT	16	611+57	11.583	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	8			8	1	
15	RT	16	612+64	11.603	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	8			8	1	
16	RT	16	613+71	11.623	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	8			8	1	
17	RT	16	614+78	11.644	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XL	3.00		Stnd w/ Soil Plate		1	8			8	1	
18	LT	16	616+51	11.676	SB	W1-8R W13-1P	Right Chevron XX MPH (Advisory Speed)	35 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	11			11	1	
19	RT	16	619+35	11.730	NB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)	45 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	11			11	1	
20	LT	16	628+60	11.905	SB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)	45 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	12			12	1	
21	RT	17	634+03	12.008	NB	W1-2R W13-1P	Right Curve XX MPH (Advisory Speed)	40 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	11			11	1	
22	LT	17	635+50	12.036	NB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
23	LT	17	636+67	12.058	SB	W1-8R W1-8L	Reflective Panels Right Chevron		2 x 60 18 x 24	-- Black	FL Yellow FL Yellow	XL XL	1.67 3.00		Stnd w/ Soil Plate		1	8			8	1	
24	LT	17	637+83	12.080	SB	W1-8R W1-8L	Reflective Panels Right Chevron		2 x 60 18 x 24	-- Black	FL Yellow FL Yellow	XL XL	1.67 3.00		Stnd w/ Soil Plate		1	8			8	1	
25	LT	17	639+05	12.103	SB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)	45 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	12			12	1	
26	RT	17	653+52	12.377	NB	W1-4R W13-1P	Right Reverse Curve XX MPH (Advisory Speed)	40 mph	36 x 36 18 x 18	Black Black	FL Yellow FL Yellow	XL XL	9.00 2.25		Stnd w/ Soil Plate		1	11			11	1	
27	LT	18	654+78	12.401	SB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
28	LT	18	655+95	12.423	NB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
29	LT	18	657+11	12.445	NB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
30	LT	18	658+27	12.467	SB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
31	RT	17	660+57	12.511	SB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
32	RT	17	661+74	12.533	SB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	
33	RT	17	662+91	12.555	SB	W1-8R W1-8L	Right Chevron Left Chevron		18 x 24 18 x 24	Black Black	FL Yellow FL Yellow	XL XL	3.00 3.00		Stnd w/ Soil Plate		1	8			8	1	

FRANKLIN COUNTY US 421
ITEM NO. 05-9052.00

SIGN LOCATION					SHEETING										SBM Alum		SBM Alum		Installation Type	Bracing Req'd	# of Sign Posts	Estimated Length of 2" Post (ft)	Estimated Length of 2-1/2" Post (ft)	2-1/4" Stiffener Req'd (includntl to post)	TOTAL Estimated Sign Post Length (LF)	Barcode Sign Inv. (EACH)
Assembly ID	Side of Road	Approx Offset (ft)	Approx Station	Approx. Mile Point	Facing Traffic Traveling	MUTCD Code	Sign Description	Sign Text / Remarks	Sign Dimensions (in x in)	Text/ Symbol Color	Background Color	Sheeting Type	Sheet Signs 0.080 IN (SQ.FT)	Sheet Signs 0.125 IN (SQ.FT)												
34	LT	17	664+97	12.594	SB	W1-4R W13-1P	Right Reverse Curve XX MPH (Advisory Speed)	35 mph	36 x 36	Black	FL Yellow	XI	9.00			Strnd w/ Soil Plate		1	11			11	1			
						W1-1R W13-1P	Right Turn XX MPH (Advisory Speed)		36 x 36	Black	FL Yellow	XI	2.25			Strnd w/ Soil Plate								1		
35	RT	17	665+28	12.600	NB	W13-1P	XX MPH (Advisory Speed)	30 mph	18 x 18	Black	FL Yellow	XI	2.25			Strnd w/ Soil Plate		1	11			11	1			
						--	Reflective Panel		2 x 60	--	Yellow	XI	0.83			Strnd w/ Soil Plate		1	11			11	1			
36	RT	17	666+60	12.625	NB	W2-2L	Side Road Left		36 x 36	Black	FL Yellow	XI	9.00			Strnd w/ Soil Plate		1						1		
						W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1						1		
37	LT	18	667+71	12.646	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate							2			
						W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1						1		
38	LT	18	668+47	12.660	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate							2			
						W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1						1		
39	LT	18	669+24	12.675	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate							2			
						W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1						1		
40	LT	18	670+01	12.690	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate							2			
						W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1						1		
41	LT	18	670+78	12.704	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate							2			
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1						1		
42	LT	17	673+60	12.758	SB	W13-1P	XX MPH (Advisory Speed)	35 mph	18 x 18	Black	FL Yellow	XI	2.25			Strnd w/ Soil Plate		1	11			11	1			
						--	Reflective Panel		2 x 60	--	FL Yellow	XI	0.83			Strnd w/ Soil Plate							1			
43	RT	16	679+74	12.874	NB	W13-1P	XX MPH (Advisory Speed)	35 mph	18 x 18	Black	FL Yellow	XI	2.25			Strnd w/ Soil Plate		1	11			11	1			
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
44	RT	17	681+60	12.909	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
45	RT	17	682+68	12.930	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
46	RT	17	683+75	12.950	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
47	RT	17	684+82	12.970	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						W1-4L	Left Reverse Curve		36 x 36	Black	FL Yellow	XI	9.00			Strnd w/ Soil Plate								1		
48	RT	16	686+40	13.000	NB	W13-1P	XX MPH (Advisory Speed)	35 mph	18 x 18	Black	FL Yellow	XI	2.25			Strnd w/ Soil Plate		1	11			11	1			
						--	Reflective Panel		2 x 60	--	FL Yellow	XI	0.83			Strnd w/ Soil Plate								1		
49	LT	18	686+69	13.005	SB	W13-1P	XX MPH (Advisory Speed)	35 mph	18 x 18	Black	FL Yellow	XI	2.25			Strnd w/ Soil Plate		1	12			12	1			
						W1-6L	Left One-Direction Lrg Arrow		48 x 24	Black	FL Yellow	XI		8.00		Strnd w/ Soil Plate		2	9			18	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate							2			
51	RT	16	689+98	13.068	SB	W1-6R	Right One-Direction Lrg Arrow		48 x 24	Black	FL Yellow	XI		8.00		Strnd w/ Soil Plate		2	9			18	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate								2		
52	RT	17	693+35	13.132	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						SB	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
						Both	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate								2		
53	RT	17	694+37	13.151	SB	W1-8R	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate								2		
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
54	RT	17	695+39	13.170	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						Both	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate								2		
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
55	RT	17	696+42	13.190	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						--	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate								2		
						W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
56	RT	17	697+44	13.209	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						Both	Reflective Panels		2 x 60	--	FL Yellow	XI	1.67			Strnd w/ Soil Plate								2		
						W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
57	LT	17	701+17	13.280	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
						NB	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
58	LT	17	702+23	13.300	NB	W1-8R	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			
						SB	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate								1		
59	LT	17	703+29	13.320	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00			Strnd w/ Soil Plate		1	8			8	1			

FRANKLIN COUNTY US 421
ITEM NO. 05-9052.00

SIGN SUMMARY

SIGN LOCATION				SIGN DESCRIPTION				SHEETING				SBM Alum		SBM Alum		Installation		Bracing		Estimated Length of 2-1/2" Post (ft)		2-1/4" Stiffener Req'd (includnt to post)		TOTAL Estimated Sign Post Length (LF)		Barcode Sign Inv. (EACH)	
Assembly ID	Side of Road	Approx Offset (ft)	Approx Station	Approx. Mile Point	Facing Traffic Travelling	MUTCD Code	Sign Description	Sign Text / Remarks	Sign Dimensions (in x in)	Text/ Symbol Color	Background Color	Sheeting Type	Sheet Signs 0.080 IN (SQ.FT)	Sheet Signs 0.125 IN (SQ.FT)	Installation Type	Req'd	# of Sign Posts	Estimated Length of 2" Post (ft)	# of Sign Posts	Estimated Length of 2" Post (ft)	2-1/4" Stiffener Req'd (includnt to post)	Estimated Sign Post Length (LF)	Barcode Sign Inv. (EACH)				
113	RT	17	872+22	16.519	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
114	LT	17	876+56	16.602	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
115	LT	17	877+71	16.623	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
116	LT	17	878+85	16.645	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
117	LT	17	879+43	16.656	SB	W2-1	Cross Road		36 x 36	Black	Yellow	XI	9.00		Std w/ Soil Plate		1	12					12	1			
					NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
118	LT	17	880+00	16.667	SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					NB	W1-4L	Left Reverse Curve		36 x 36	Black	FL Yellow	XI	9.00		Std w/ Soil Plate								12	1			
119	LT	17	881+59	16.697	SB	W13-1P	XX MPH (Advisory Speed)	35 mph	18 x 18	Black	FL Yellow	XI	2.25		Std w/ Soil Plate		1	12					12	1			
					NB	W13-1P	Left Turn		36 x 36	Black	FL Yellow	XI	9.00		Std w/ Soil Plate								12	1			
120	RT	16	886+63	16.792	NB	W13-1P	XX MPH (Advisory Speed)	30 mph	18 x 18	Black	FL Yellow	XI	2.25		Std w/ Soil Plate		1	10					10	1			
					NB	M2-1	Junction		21 x 15	Black	White	XI	2.19		Std w/ Soil Plate								10	1			
121	RT	16	888+01	16.818	NB	M1-5a	State Route Sign (3 or 4 digit)	561	30 x 24	Black	White	XI	5.00		Std w/ Soil Plate		1	8					8	1			
					NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
122	RT	17	889+04	16.838	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
123	RT	17	889+79	16.852	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
124	RT	17	890+54	16.866	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
125	RT	17	891+30	16.881	SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
126	LT	16	893+70	16.926	SB	W13-1R	Right Turn	30 mph	36 x 36	Black	FL Yellow	XI	9.00		Std w/ Soil Plate		1	11					11	1			
					NB	W13-1P	XX MPH (Advisory Speed)		18 x 18	Black	FL Yellow	XI	2.25		Std w/ Soil Plate								11	1			
127	RT	17	895+99	16.970	NB	W13-1P	Left Winding Road		36 x 36	Black	FL Yellow	XI	9.00		Std w/ Soil Plate		1	11					11	1			
					NB	W13-1P	XX MPH (Advisory Speed)	30 mph	18 x 18	Black	FL Yellow	XI	2.25		Std w/ Soil Plate								11	1			
128	RT	17	898+00	17.008	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
129	RT	17	898+82	17.023	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
130	RT	17	899+52	17.036	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
131	RT	17	900+28	17.051	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
132	RT	17	911+21	17.258	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
133	RT	17	912+38	17.280	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
134	RT	17	913+55	17.302	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
135	RT	17	914+72	17.324	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
136	LT	17	916+52	17.358	NB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
137	LT	17	917+28	17.373	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
138	LT	17	918+06	17.388	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
139	LT	17	918+82	17.402	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
140	LT	17	919+58	17.416	NB	W1-8R	Right Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate		1	8					8	1			
					SB	W1-8L	Left Chevron		18 x 24	Black	FL Yellow	XI	3.00		Std w/ Soil Plate								8	1			
141	LT	17	921+34	17.450	NB	W1-5L	Left Winding Road		36 x 36	Black	FL Yellow	XI	9.00		Std w/ Soil Plate		1	12					12	1			
					SB	W13-1P	XX MPH (Advisory Speed)	30 mph	18 x 18	Black	FL Yellow	XI	2.25		Std w/ Soil Plate								12	1			


BID ITEM	DESCRIPTION	UNIT	QUANTITY
6406	SBM ALUM SHEET SIGNS 080 IN	SQFT	1037
6407	SBM ALUM SHEET SIGNS 125 IN	SQFT	108
6410	STEEL POST TYPE 1	LF	1391
24631EC	BARCODE SIGN INVENTORY	EACH	331

- Measure chevron spacing along outside of curve.
- These numbers are for estimate purposes only. Final location and quantities will be determined by the Engineer in the field.
- All quantities carried over to General Summary.


COUNTY OF	ITEM NO.
FRANKLIN	5-9052.00

PROPOSED SIGNS				
STATION	OFFSET	ASS'Y ID	MUTCD CODE	DESCRIPTION
607+12	RT	9	W1-8L	LEFT CHEVRON
608+30	RT	10	W1-8L	LEFT CHEVRON
609+25	LT	11	W1-2R	RIGHT CURVE
609+25	LT	11	W13-1P	45 MPH (ADVISORY SPEED)
610+32	RT	12	W1-2L	LEFT CURVE
610+32	RT	12	W13-1P	40 MPH (ADVISORY SPEED)
610+95	RT	13	W2-1	CROSS ROAD (ENTRANCE) (MODIFIED)
611+57	RT	14	W1-8L	LEFT CHEVRON
611+57	RT	14	W1-8R	RIGHT CHEVRON
612+64	RT	15	W1-8L	LEFT CHEVRON
612+64	RT	15	W1-8R	RIGHT CHEVRON
613+71	RT	16	W1-8L	LEFT CHEVRON
613+71	RT	16	W1-8R	RIGHT CHEVRON
614+78	RT	17	W1-8L	LEFT CHEVRON
614+78	RT	17	W1-8R	RIGHT CHEVRON
616+51	LT	18	W1-2R	RIGHT CURVE
616+51	LT	18	W13-1P	35 MPH (ADVISORY SPEED)

REMOVE EXISTING SIGNS		
STATION	OFFSET	DESCRIPTION
611+73	RT	INTERSECTION WARNING
616+78	RT	REVERSE CURVE 45 MPH

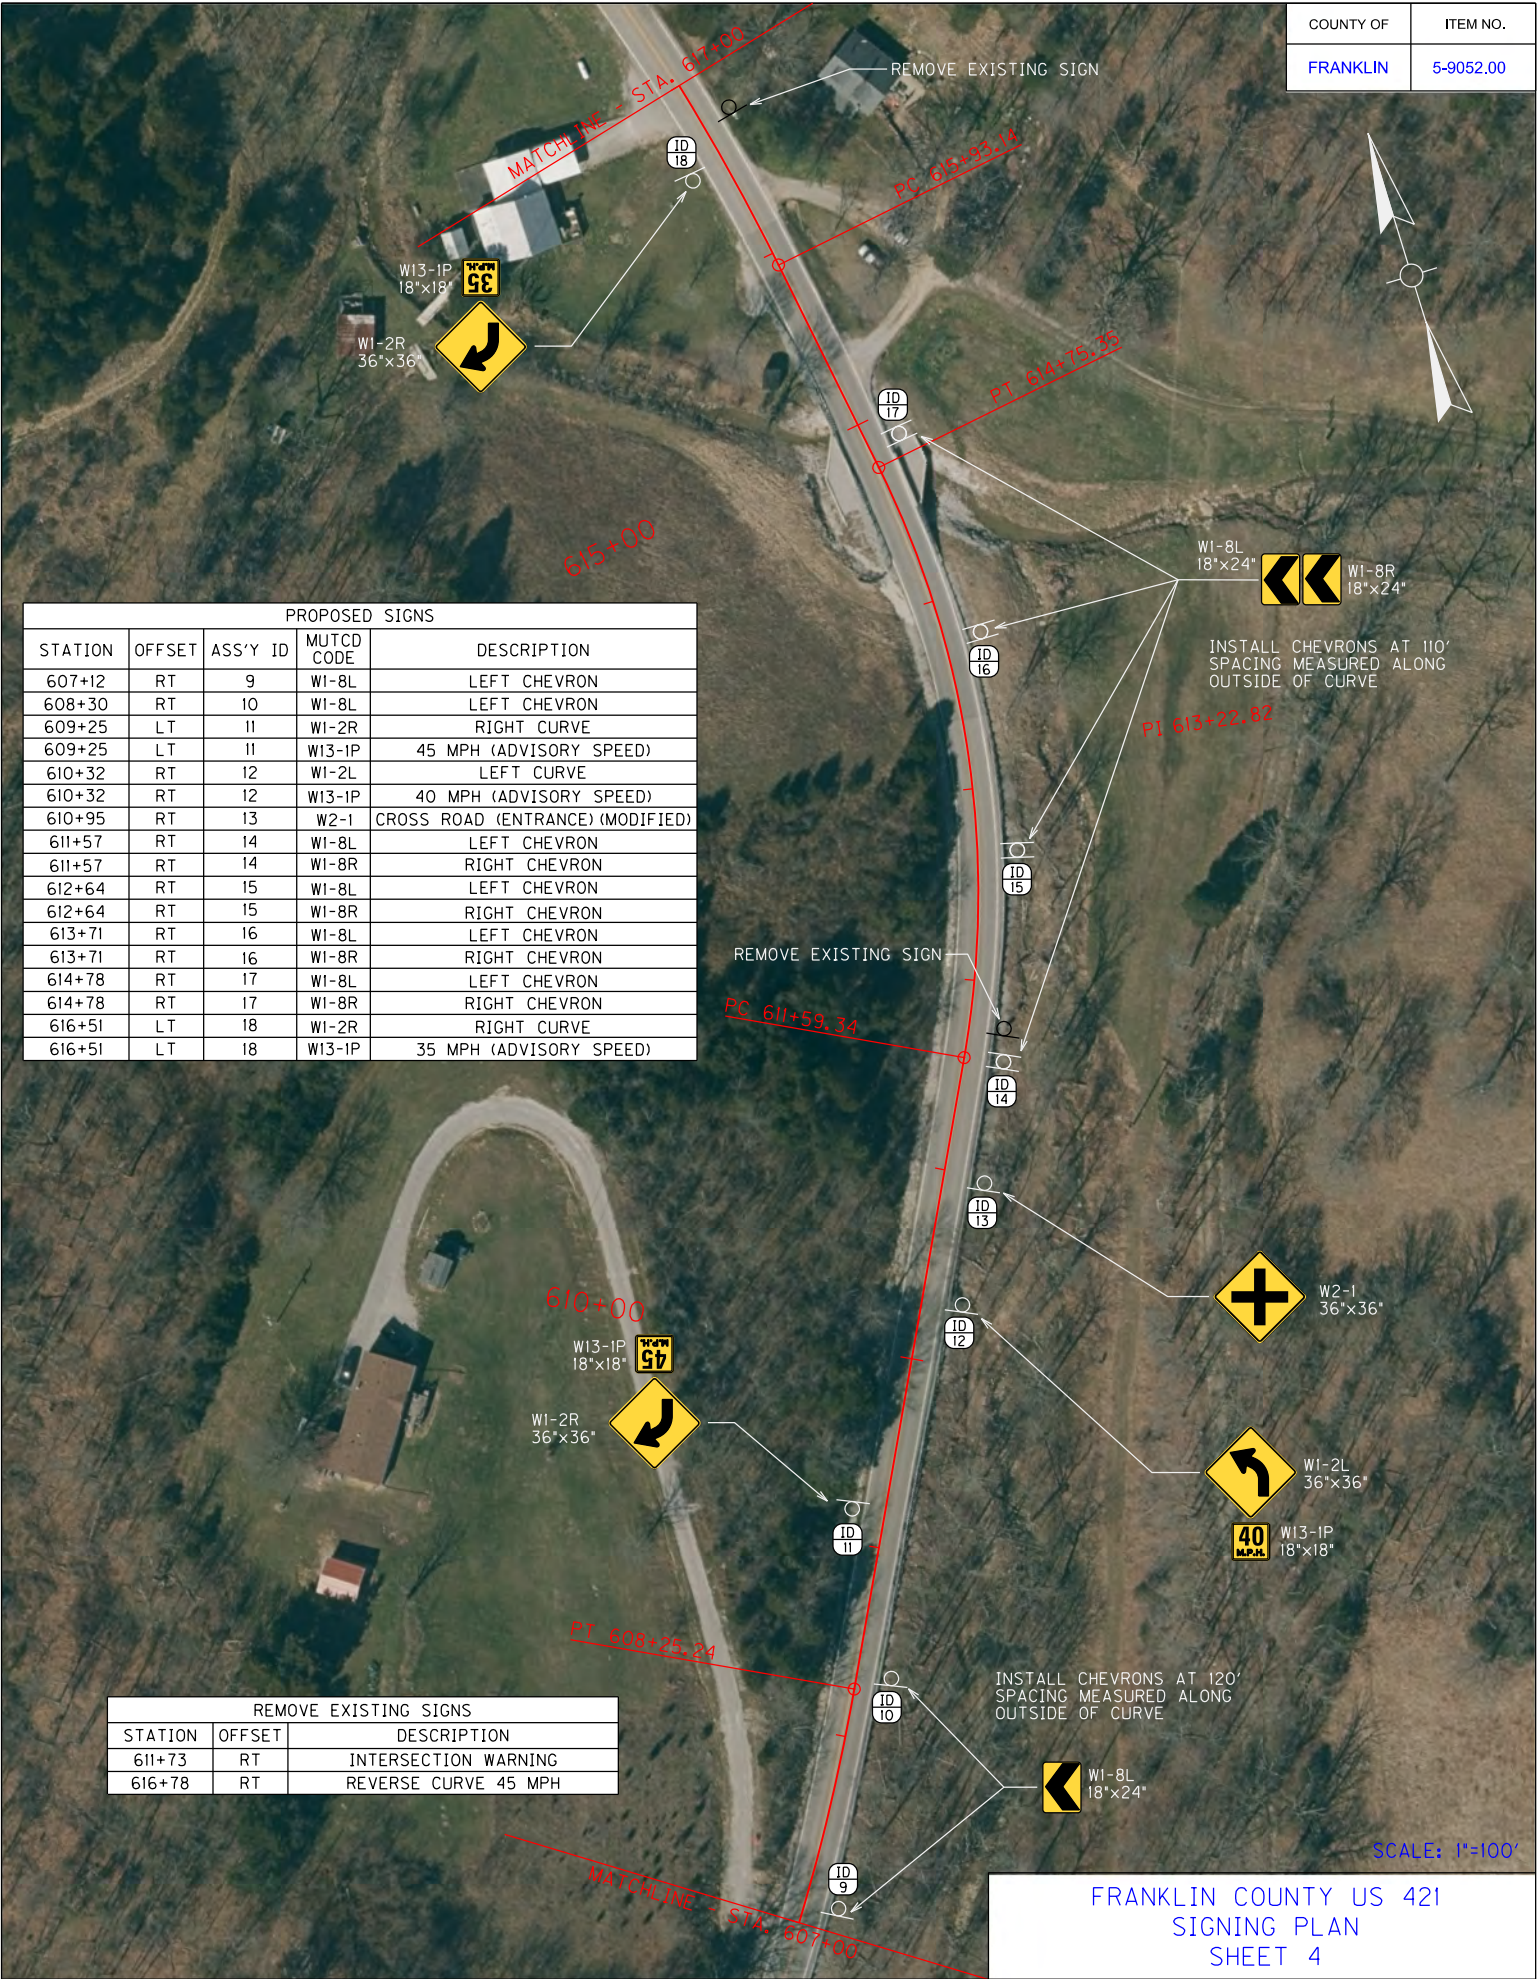


COUNTY OF	ITEM NO.
FRANKLIN	5-9052.00

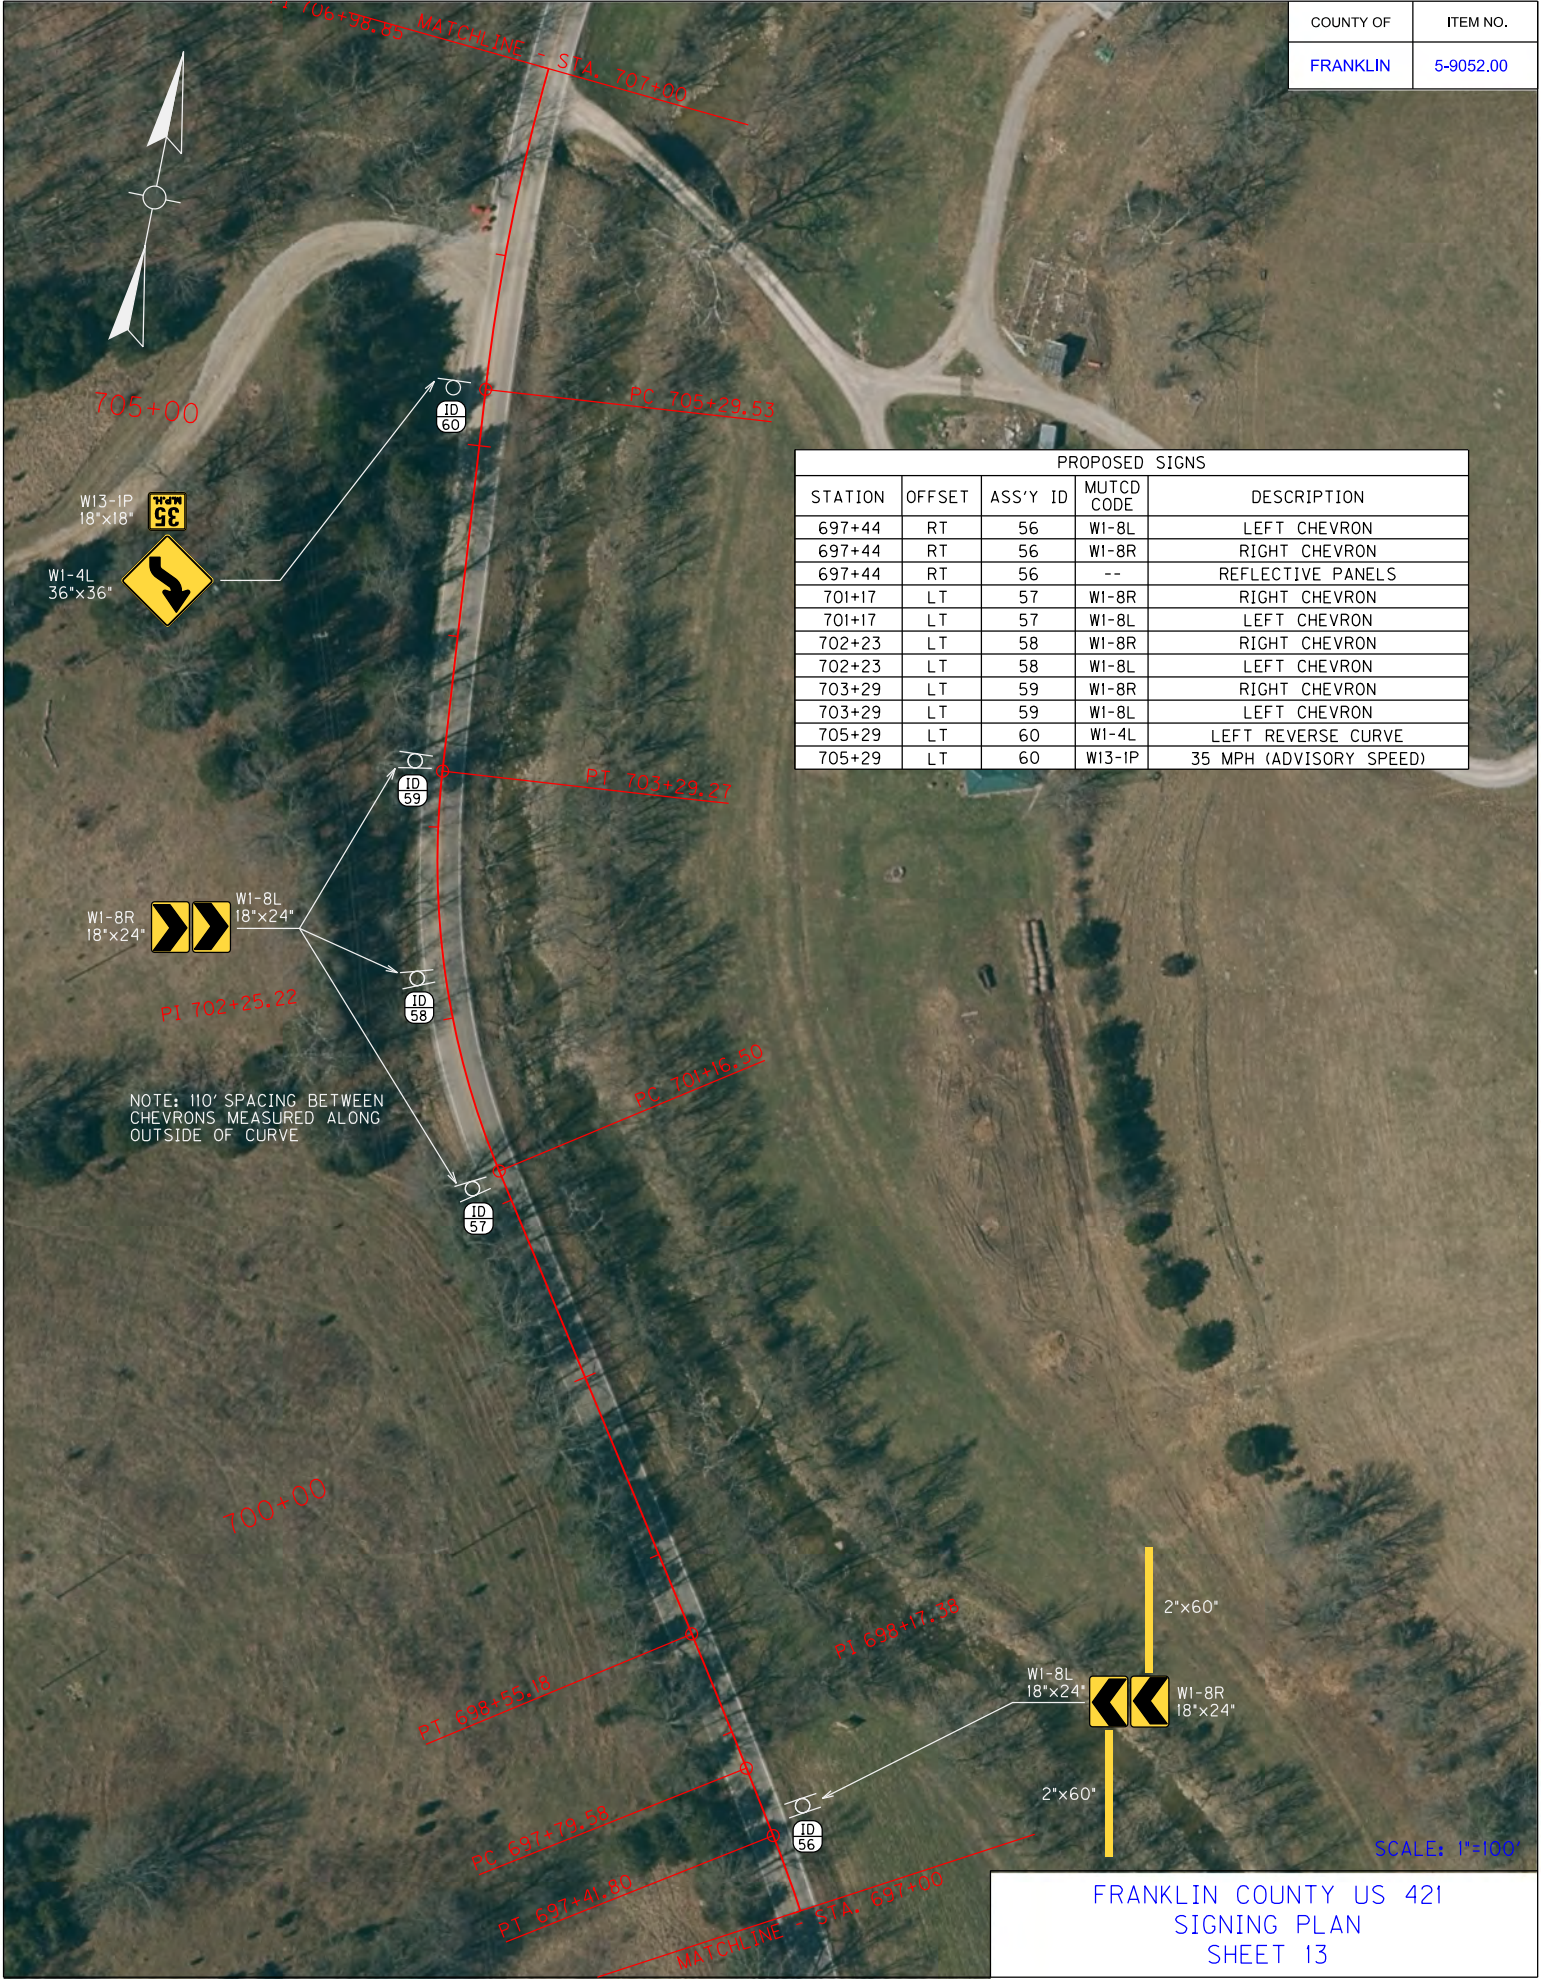

COUNTY OF	ITEM NO.
FRANKLIN	5-9052.00

PROPOSED SIGNS				
STATION	OFFSET	ASS'Y ID	MUTCD CODE	DESCRIPTION
888+01	RT	121	M2-1	JUNCTION
888+01	RT	121	M1-5a	561
889+04	RT	122	W1-8L	LEFT CHEVRON
889+04	RT	122	W1-8R	RIGHT CHEVRON
889+79	RT	123	W1-8L	LEFT CHEVRON
889+79	RT	123	W1-8R	RIGHT CHEVRON
890+54	RT	124	W1-8L	LEFT CHEVRON
890+54	RT	124	W1-8R	RIGHT CHEVRON
891+30	RT	125	W1-8L	LEFT CHEVRON
891+30	RT	125	W1-8R	RIGHT CHEVRON
893+70	LT	126	W1-1R	RIGHT TURN
893+70	LT	126	W13-1P	30 MPH (ADVISORY SPEED)
895+99	RT	127	W1-5L	LEFT WINDING ROAD
895+99	RT	127	W13-1P	30 MPH (ADVISORY SPEED)

REMOVE EXISTING SIGNS		
STATION	OFFSET	DESCRIPTION
888+84	LT	REVERSE CURVE 40 MPH
889+57	RT	GUIDE SIGN ASSEMBLY
895+37	LT	RIGHT CURVE 35 MPH
896+02	RT	LEFT CURVE 40 MPH

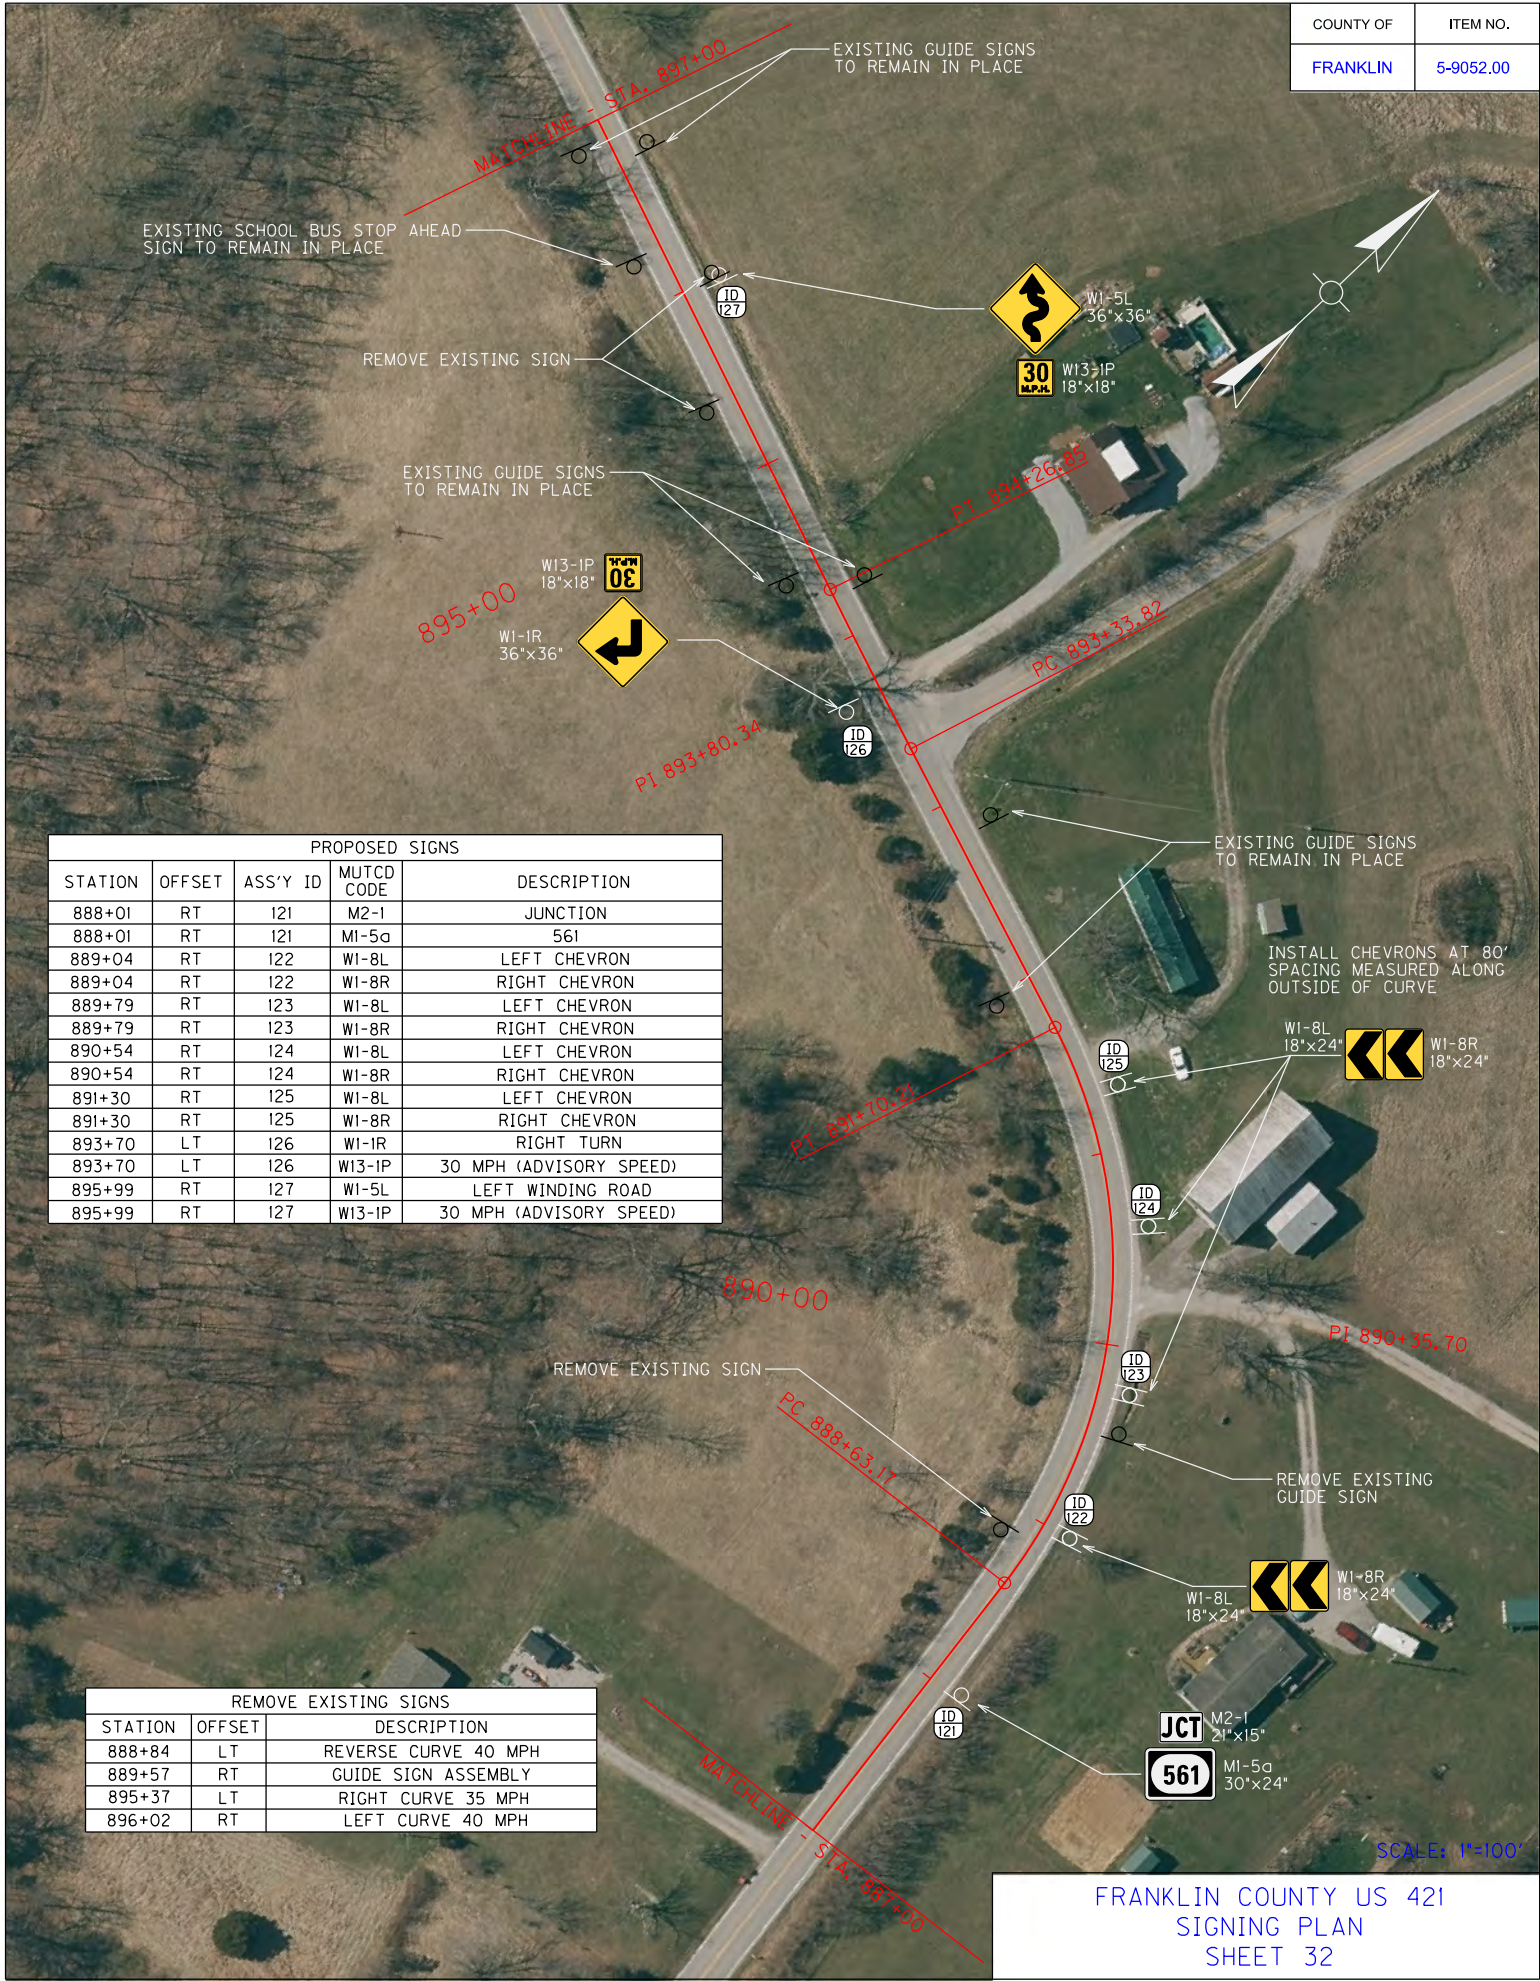

TRIMBLE COUNTY KY 625
ITEM NO. 05-9054.00
SIGN SUMMARY

Assembly ID	SIGN LOCATION			MUTCD Code	Sign Description	Sign Text / Remarks	SHEETING			SBM Alum Sheet Signs 0.080 IN (SQ FT)	SBM Alum Sheet Signs 0.125 IN (SQ FT)	Installation Type	Bracing Req'd	# of Sign Posts	Estimated Length of 2" Post (ft)	Estimated Length of 2-1/2" Post (ft)	2-1/4" Stiffener Req'd (incont'l to post)	TOTAL Estimated Sign Post Length (LF)	Barcode Sign Inv. (EACH)
	Side of Road	Approx Offset (ft)	Approx Station	Approx. Mile Point	Facing Traffic Traveling	Sign Dimensions (in x in)	Text/ Symbol Color	Background Color	Sheeting Type										
82	RT	16	289+56	5.484	NB		Black	FL Yellow	XL	9.00		Std w/ Soil Plate		1	11			11	1
83	LT	16	292+73	5.544	NB	XX MPH (Advisory Speed)	Black	FL Yellow	XL	2.25		Std w/ Soil Plate		2	9			18	1
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate							
84	LT	16	292+81	5.546	SB		Black	FL Yellow	XL			Std w/ Soil Plate		2	9			18	1
85	RT	30	297+12	5.627	NB	Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	8			16	1
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate							
86	RT	30	297+19	5.629	SB		Black	FL Yellow	XL			Std w/ Soil Plate		2	8			16	1
87	RT	16	301+06	5.702	NB	Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	8			16	2
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate							
88	RT	16	301+40	5.708	SB		Black	FL Yellow	XL			Std w/ Soil Plate		2	8			16	3
89	LT	16	307+58	5.825	NB	Right One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
						Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate							
90	LT	16	307+68	5.827	SB		Black	FL Yellow	XL			Std w/ Soil Plate		2	10			20	1
91	LT	16	309+90	5.869	SB	Left Winding Road	Black	FL Yellow	XL	9.00		Std w/ Soil Plate		1	12			12	1
						XX MPH (Advisory Speed)	Black	FL Yellow	XL	2.25		Std w/ Soil Plate							
92	RT	16	320+37	6.068	NB		Black	FL Yellow	XL	9.00		Std w/ Soil Plate		1	12			12	1
93	RT	16	332+21	6.292	NB	XX MPH (Advisory Speed)	Black	FL Yellow	XL	2.25		Std w/ Soil Plate		1	12			12	1
						Left Winding Road	Black	FL Yellow	XL	9.00		Std w/ Soil Plate							
94	LT	16	332+28	6.293	SB	XX MPH (Advisory Speed)	Black	FL Yellow	XL	2.25		Std w/ Soil Plate		1	12			12	1
						Stop Ahead	Red & Black	Yellow	XL	9.00		Std w/ Soil Plate		1	11			11	1
95	RT	16	334+95	6.344	NB		Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
96	RT	16	335+07	6.346	SB	Left One-Direction Lrg Arrow	Black	FL Yellow	XL			Std w/ Soil Plate		2	10			20	1
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL			Std w/ Soil Plate							
97	LT	16	338+00	6.402	NB	Right One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	9			18	1
						Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate							
98	LT	16	338+13	6.404	SB		Black	FL Yellow	XL			Std w/ Soil Plate		2	9			18	1
99	LT	16	343+31	6.502	NB	Right One-Direction Lrg Arrow	Black	FL Yellow	XL	1.67		Std w/ Soil Plate		2	9			18	1
						Reflective Panels	--	FL Yellow	XL			Std w/ Soil Plate							2
100	LT	16	343+55	6.507	SB	Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
						Reflective Panels	--	FL Yellow	XL	1.67		Std w/ Soil Plate							2
101	RT	16	345+51	6.544	NB	Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL		5.00	Std w/ Soil Plate							1
					SB	XX MPH (Advisory Speed Confirmation)	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL		5.00	Std w/ Soil Plate							2
					Both	Reflective Panels	--	FL Yellow	XL	3.32		Std w/ Soil Plate							1
						Right One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
					NB	XX MPH (Advisory Speed Confirmation)	Black	FL Yellow	XL		5.00	Std w/ Soil Plate							1
						Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
102	LT	16	346+83	6.569	SB	Left One-Direction Lrg Arrow	Black	FL Yellow	XL		8.00	Std w/ Soil Plate		2	10			20	1
						XX MPH (Advisory Speed Confirmation)	Black	FL Yellow	XL		5.00	Std w/ Soil Plate							1
					Both	Reflective Panels	--	FL Yellow	XL	3.32		Std w/ Soil Plate							2


TRIMBLE COUNTY KY 625
ITEM NO. 05-9054.00

SIGN SUMMARY

Assembly ID	SIGN LOCATION			MUTCD Code	Sign Description	Sign Text / Remarks	Sign Dimensions (in x in)	SHEETING			SBM Alum Sheet Signs 0.080 IN (SQ FT)	SBM Alum Sheet Signs 0.125 IN (SQ FT)	Installation Type	Bracing Req'd	# of Sign Posts	Estimated Length of 2" Post (ft)	Estimated Length of 2-1/2" Post (ft)	2-1/4" Stiffener Req'd (incont'l to post)	TOTAL Estimated Sign Post Length (LF)	Barcode Sign Inv. (EACH)
	Side of Road	Approx Offset (ft)	Approx Mile Point	Facing Traffic Traveling				Text/ Symbol Color	Background Color	Sheeting Type										
150	RT	16	615+25	NB	W2-2R	Side Road Right	Modified - see detail below	Black	Yellow	XI	9.00		Strnd w/ Soil Plate		1	12			12	1
151	RT	16	616+27	NB	W1-2R W13-1P	Right Curve XX MPH (Advisory Speed)		Black	FL Yellow	XI	9.00		Strnd w/ Soil Plate		1	12			12	1
152	LT	16	618+42	NB	W1-6R	Right One-Direction Lrg Arrow		Black	FL Yellow	XI		8.00	Strnd w/ Soil Plate		2	9			18	1
153	LT	16	620+94	SB	W1-2L W13-1P	Left Curve XX MPH (Advisory Speed)		Black	FL Yellow	XI	9.00		Strnd w/ Soil Plate		1	11			11	1

BID ITEM	DESCRIPTION	UNIT	QUANTITY
6406	SBM ALUM SHEET SIGNS .080 IN	SQFT	871
6407	SBM ALUM SHEET SIGNS .125 IN	SQFT	506
6410	STEEL POST TYPE 1	LF	1958
24631EC	BARCODE SIGN INVENTORY	EACH	321

- Measure chevron spacing along outside of curve.
- These numbers are for estimate purposes only. Final location and quantities will be determined by the Engineer in the field.
- All quantities carried over to General Summary.

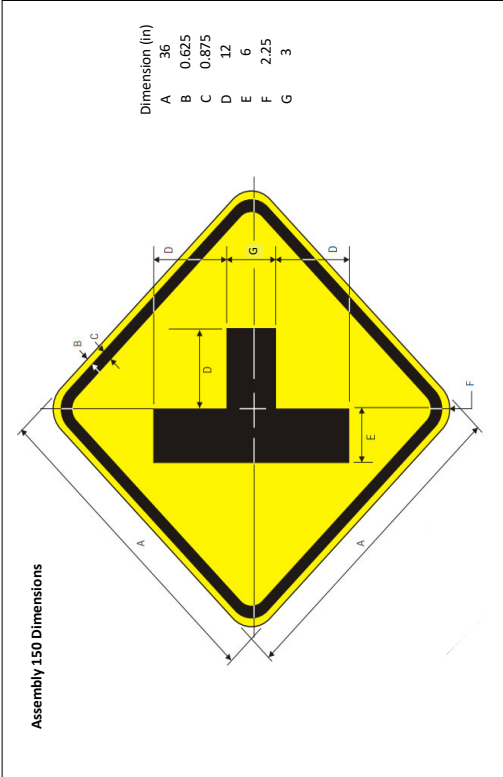


TRIMBLE COUNTY KY 625 ITEM NO. 05-9054.00 REMOVE SIGN SUMMARY			
STATION	OFFSET	DESCRIPTION	QUANTITY
56+30	RT	REVERSE TURN 30 MPH	1
72+73	LT	REVERSE TURN 30 MPH	1
90+78	RT	REVERSE TURN 30 MPH	1
95+67	RT	CHEVRONS	1
95+89	RT	CHEVRONS	1
96+07	RT	RIGHT ONE-DIRECTION LG ARROW	1
96+61	RT	CHEVRONS	1
98+66	LT	CHEVRONS	1
101+21	RT	REVERSE CURVE 35 MPH	1
101+27	LT	REVERSE TURN 30 MPH	1
116+15	LT	REVERSE CURVE 35 MPH	1
123+94	RT	LEFT CURVE	1
131+77	LT	RIGHT CURVE	1
139+61	RT	LEFT CURVE	1
147+76	LT	RIGHT CURVE	1
161+31	RT	RIGHT CURVE 35 MPH	1
168+57	LT	LEFT CURVE 35 MPH	1
180+76	RT	RIGHT CURVE	1
192+70	LT	LEFT CURVE	1
198+80	RT	RIGHT CURVE	1
204+91	LT	JCT 2869	1
207+75	LT	LEFT CURVE	1
223+02	RT	WINDING ROAD 25 MPH	1
250+53	LT	WINDING ROAD 25 MPH	1
254+02	RT	LEFT TURN 25 MPH	1
259+45	LT	RIGHT TURN 25 MPH	1
259+51	RT	RIGHT CURVE	1
236+59	LT	LEFT & RIGHT LARGE ONE-DIRECTION ARROW	1
265+79	RT	RIGHT CURVE	1
265+79	LT	LEFT CURVE	1
273+78	LT	LEFT CURVE	1
289+01	RT	REVERSE TURN 20 MPH	1
291+99	LT	CHEVRONS	1
292+49	LT	CHEVRONS	1
292+93	LT	CHEVRONS	1
299+63	LT	RIGHT REVERSE TURN	1
303+15	RT	RIGHT CURVE	1
304+55	LT	RIGHT CURVE	1
311+55	LT	LEFT CURVE	1
328+63	RT	WINDING ROAD 20 MPH	1
337+32	LT	STOP AHEAD	1
348+82	LT	RIGHT TURN	1
360+79	LT	RIGHT WINDING ROAD	1
361+52	RT	LEFT TURN 25 MPH	1
371+23	LT	RIGHT TURN 25 MPH	1
371+55	RT	RIGHT TURN 20 MPH	1
378+24	LT	LEFT TURN 20 MPH	1
495+00	LT	REVERSE CURVE	1
496+00	RT	RIGHT CURVE	1
521+86	RT	LEFT CURVE	1
533+32	RT	REVERSE CURVE 30 MPH	1
547+54	LT	REVERSE CURVE 30 MPH	1
589+83	RT	LEFT CURVE	1
598+80	LT	RIGHT CURVE	1
614+45	RT	RIGHT CURVE	1
616+70	RT	SIDE ROAD RIGHT	1
624+53	LT	LEFT CURVE	1

BID ITEM	DESCRIPTION	UNIT	QUANTITY
21373ND	REMOVE SIGN	EACH	57


- These numbers are for estimate purposes only. Final location and quantities will be determined by the Engineer in the field.
- All quantities carried over to General Summary.

COUNTY OF	ITEM NO.
TRIMBLE	5-9054.00

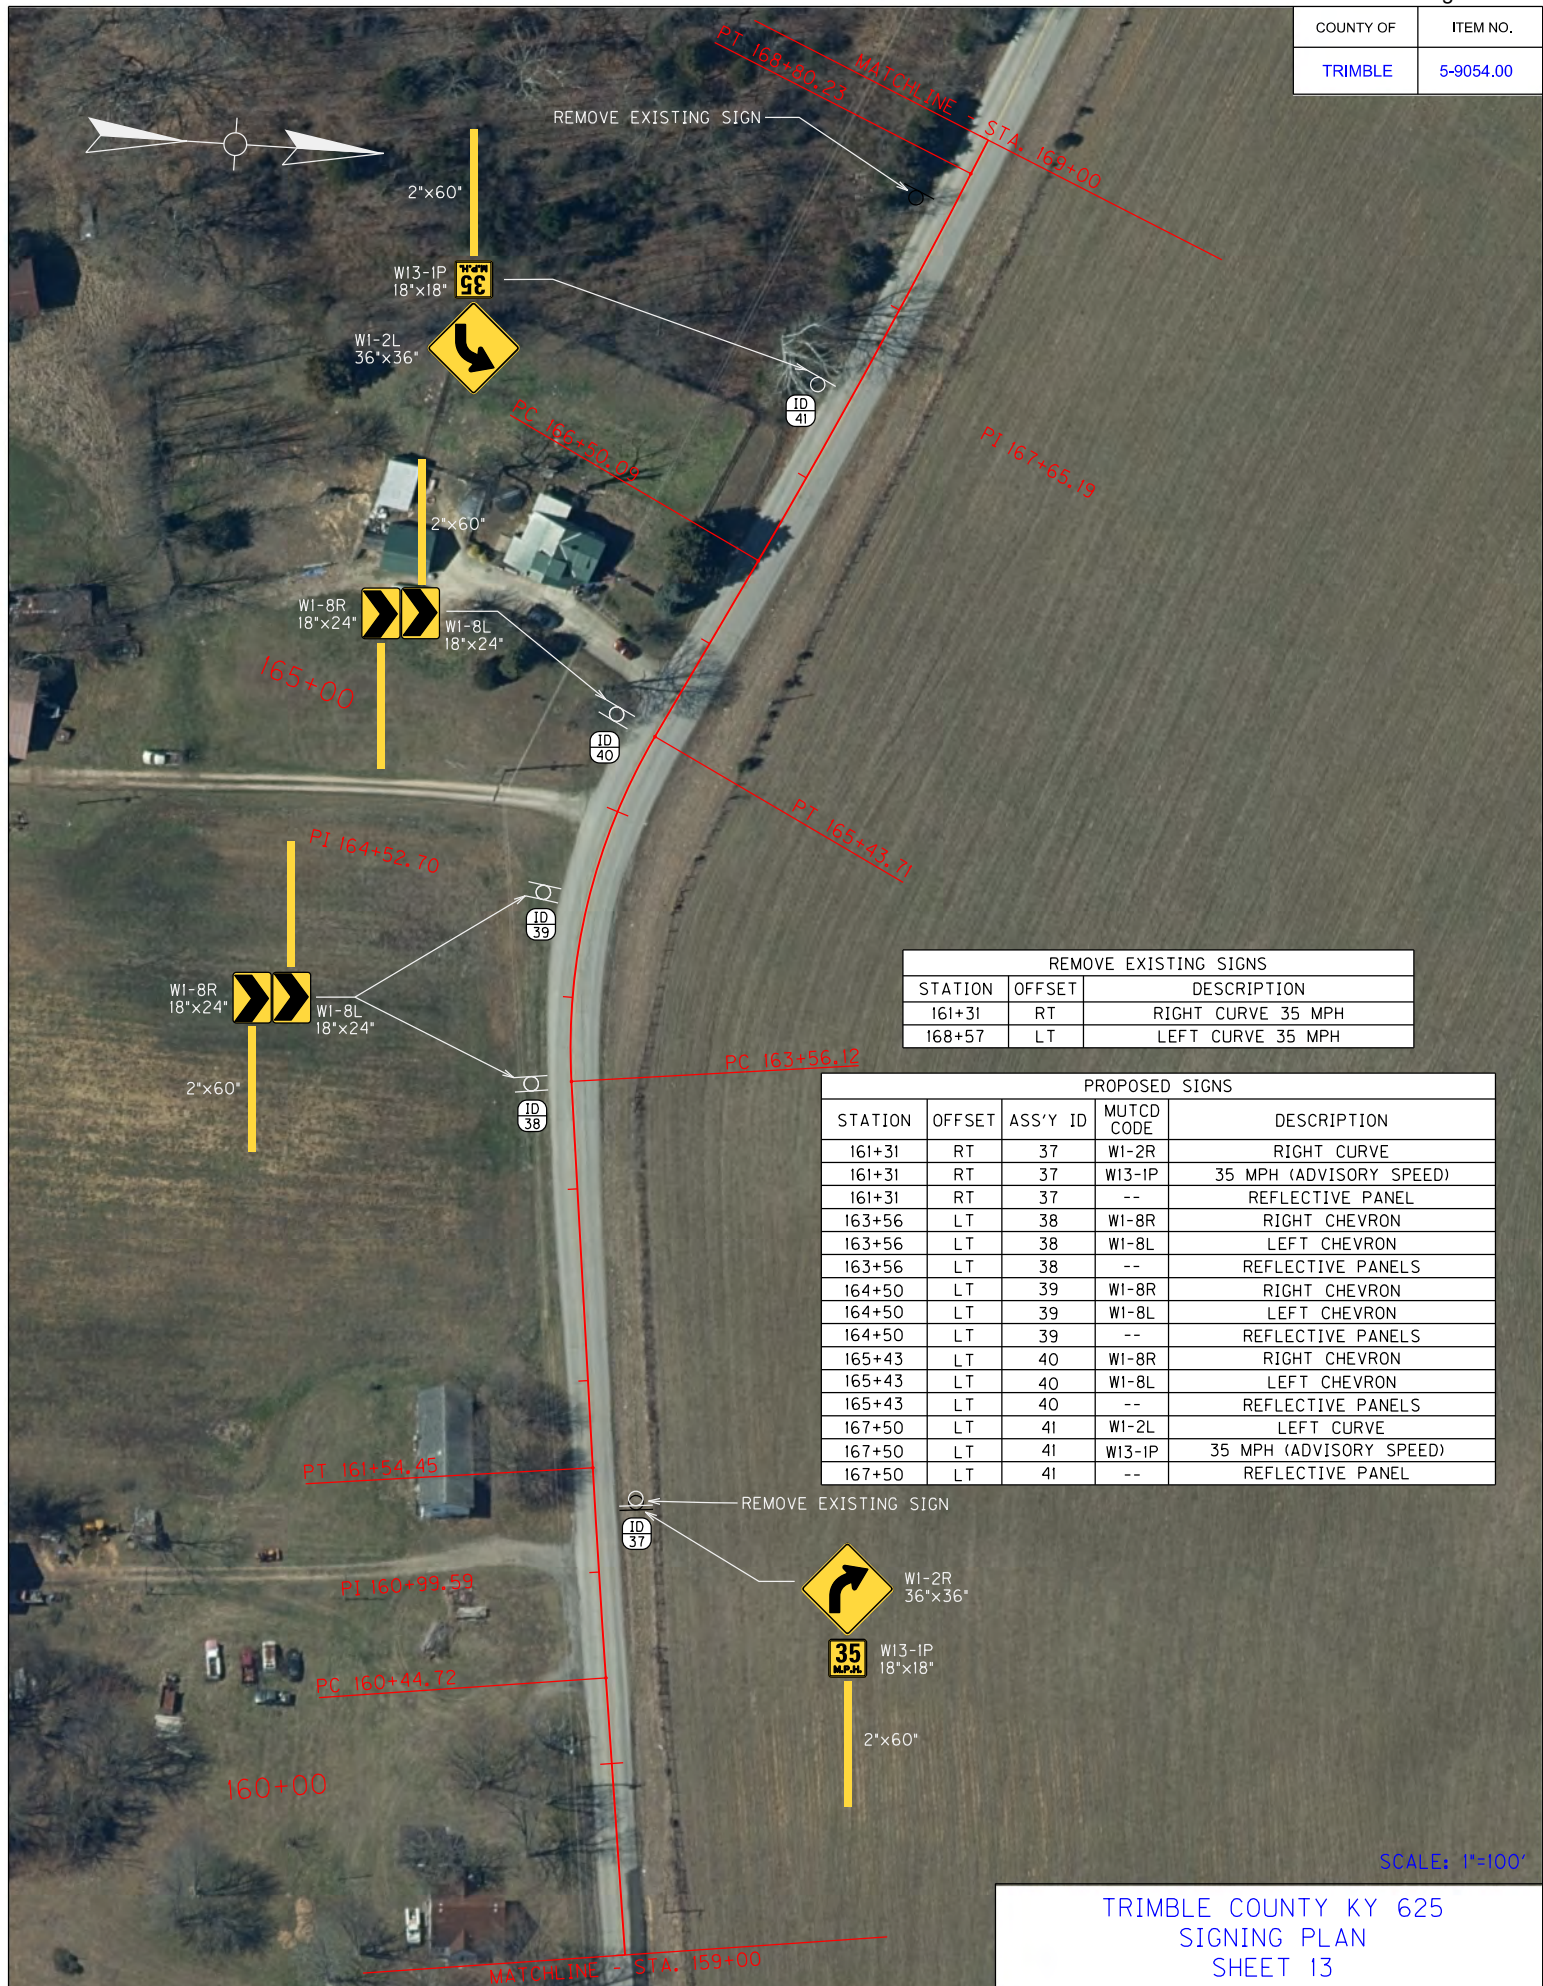

REMOVE EXISTING SIGNS		
STATION	OFFSET	DESCRIPTION
161+31	RT	RIGHT CURVE 35 MPH
168+57	LT	LEFT CURVE 35 MPH

PROPOSED SIGNS				
STATION	OFFSET	ASS'Y ID	MUTCD CODE	DESCRIPTION
161+31	RT	37	W1-2R	RIGHT CURVE
161+31	RT	37	W13-1P	35 MPH (ADVISORY SPEED)
161+31	RT	37	--	REFLECTIVE PANEL
163+56	LT	38	W1-8R	RIGHT CHEVRON
163+56	LT	38	W1-8L	LEFT CHEVRON
163+56	LT	38	--	REFLECTIVE PANELS
164+50	LT	39	W1-8R	RIGHT CHEVRON
164+50	LT	39	W1-8L	LEFT CHEVRON
164+50	LT	39	--	REFLECTIVE PANELS
165+43	LT	40	W1-8R	RIGHT CHEVRON
165+43	LT	40	W1-8L	LEFT CHEVRON
165+43	LT	40	--	REFLECTIVE PANELS
167+50	LT	41	W1-2L	LEFT CURVE
167+50	LT	41	W13-1P	35 MPH (ADVISORY SPEED)
167+50	LT	41	--	REFLECTIVE PANEL

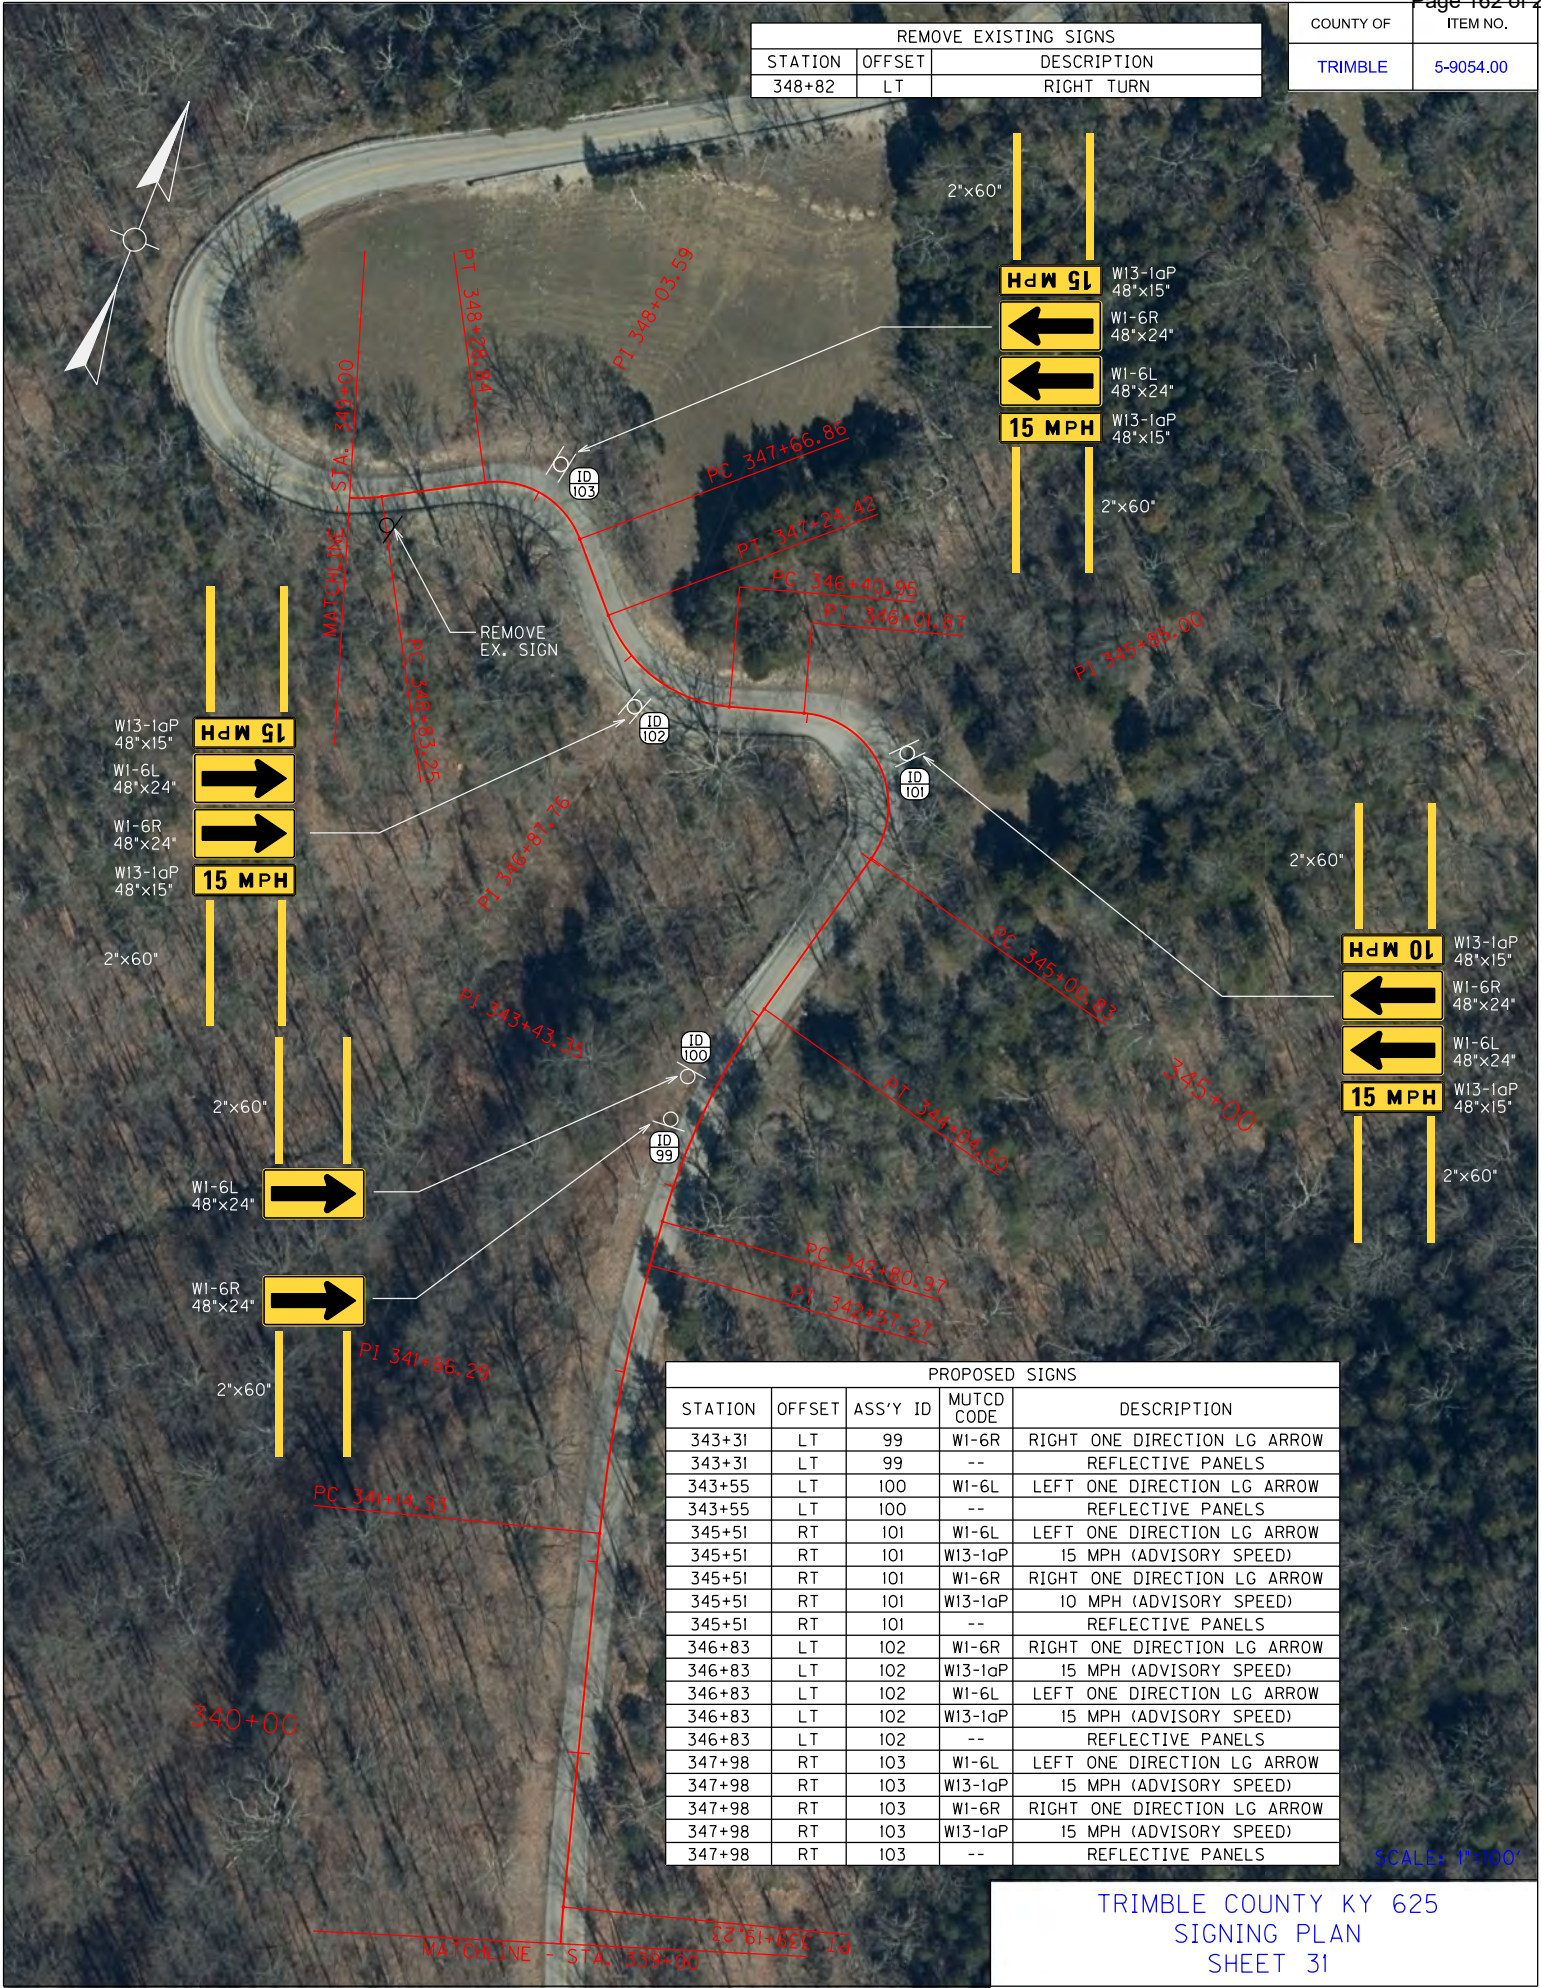

"General Decision Number: KY20250038 03/07/2025

Superseded General Decision Number: KY20240038

State: Kentucky

Construction Type: Highway

Counties: Anderson, Bath, Bourbon, Boyd, Boyle, Bracken, Breckinridge, Bullitt, Carroll, Carter, Clark, Elliott, Fayette, Fleming, Franklin, Gallatin, Grant, Grayson, Greenup, Hardin, Harrison, Henry, Jefferson, Jessamine, Larue, Lewis, Madison, Marion, Mason, Meade, Mercer, Montgomery, Nelson, Nicholas, Oldham, Owen, Robertson, Rowan, Scott, Shelby, Spencer, Trimble, Washington and Woodford Counties in Kentucky.

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels, building structures in rest area projects & railroad construction; bascule, suspension & spandrel arch bridges designed for commercial navigation, bridges involving marine construction; and other major bridges).

Note: Contracts subject to the Davis-Bacon Act are generally required to pay at least the applicable minimum wage rate required under Executive Order 14026 or Executive Order 13658. Please note that these Executive Orders apply to covered contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but do not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(1).

If the contract is entered into on or after January 30, 2022, or the contract is renewed or extended (e.g., an option is exercised) on or after January 30, 2022:	. Executive Order 14026 generally applies to the contract. . The contractor must pay all covered workers at least \$17.75 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2025.
If the contract was awarded on or between January 1, 2015 and January 29, 2022, and the contract is not renewed or extended on or after January 30, 2022:	. Executive Order 13658 generally applies to the contract. . The contractor must pay all covered workers at least \$13.30 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2025.

The applicable Executive Order minimum wage rate will be adjusted annually. If this contract is covered by one of the Executive Orders and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must still submit a

Additional information on contractor requirements and worker protections under the Executive Orders is available at <http://www.dol.gov/whd/govcontracts>.

Modification Number	Publication Date
0	01/03/2025
1	03/07/2025

* BRIN0004-003 06/01/2024

BRECKENRIDGE COUNTY

	Rates	Fringes
BRICKLAYER.....	\$ 33.70	16.57

* BRKY0001-005 06/01/2024

BULLITT, CARROLL, GRAYSON, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, & TRIMBLE COUNTIES:

	Rates	Fringes
BRICKLAYER.....	\$ 35.00	17.13

* BRKY0002-006 06/01/2024

BRACKEN, GALLATIN, GRANT, MASON & ROBERTSON COUNTIES:

	Rates	Fringes
BRICKLAYER.....	\$ 35.00	17.13

* BRKY0007-004 06/01/2024

BOYD, CARTER, ELLIOT, FLEMING, GREENUP, LEWIS & ROWAN COUNTIES:

	Rates	Fringes
BRICKLAYER.....	\$ 41.05	21.79

* BRKY0017-004 06/01/2024

ANDERSON, BATH, BOURBON, BOYLE, CLARK, FAYETTE, FRANKLIN, HARRISON, JESSAMINE, MADISON, MERCER, MONTGOMERY, NICHOLAS, OWEN, SCOTT, WASHINGTON & WOODFORD COUNTIES:

	Rates	Fringes
BRICKLAYER.....	\$ 35.00	17.13

CARP0064-001 04/01/2024

	Rates	Fringes
CARPENTER.....	\$ 32.90	23.33
Diver.....	\$ 49.73	23.33
PILEDRIVERMAN.....	\$ 33.40	23.33

BRACKEN, GALLATIN and GRANT COUNTIES

	Rates	Fringes
ELECTRICIAN.....	\$ 35.43	22.05

ELEC0212-014 11/27/2023		

BRACKEN, GALLATIN & GRANT COUNTIES:

	Rates	Fringes
Sound & Communication Technician.....	\$ 27.20	14.54

ELEC0317-012 06/03/2024		

BOYD, CARTER, ELLIOT & ROWAN COUNTIES:

	Rates	Fringes
ELECTRICIAN (Wiremen).....	\$ 38.30	23.12

ELEC0369-007 05/29/2024		

ANDERSON, BATH, BOURBON, BOYLE, BRECKINRIDGE, BULLITT, CARROLL, CLARK, FAYETTE, FRAONKLIN, GRAYSON, HARDIN, HARRISON, HENRY, JEFFERSON, JESSAMINE, LARUE, MADISON, MARION, MEADE, MERCER, MONTGOMERY, NELSON, NICHOLAS, OLDHAM, OWEN, ROBERTSON, SCOTT, SHELBY, SPENCER, TRIMBLE, WASHINGTON, & WOODFORD COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 37.88	21.38

ELEC0575-002 05/29/2023		

FLEMING, GREENUP, LEWIS & MASON COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 37.00	22.26

ENGI0181-018 07/01/2024		

	Rates	Fringes
POWER EQUIPMENT OPERATOR		
GROUP 1.....	\$ 40.05	19.10
GROUP 2.....	\$ 37.19	19.10
GROUP 3.....	\$ 37.64	19.10
GROUP 4.....	\$ 36.87	19.10

OPERATING ENGINEER CLASSIFICATIONS

GROUP 1 - A-Frame Winch Truck; Auto Patrol; Backfiller; Batcher Plant; Bituminous Paver; Bituminous Transfer Machine; Boom Cat; Bulldozer; Mechanic; Cableway; Carry-All Scoop; Carry Deck Crane; Central Compressor Plant; Cherry Picker; Clamshell; Concrete Mixer (21 cu. ft. or Over); Concrete Paver; Truck-Mounted Concrete Pump; Core Drill; Crane; Crusher Plant; Derrick; Derrick Boat; Ditching &

Trenching Machine; Dragline; Dredge Operator; Dredge Engineer; Elevating Grader & Loaders; Grade-All; Gurries; Heavy Equipment Robotics Operator/Mechanic; High Lift; Hoe-Type Machine; Hoist (Two or More Drums); Hoisting Engine (Two or More Drums); Horizontal Directional Drill Operator; Hydrocrane; Hyster; KeCal Loader; LeTourneau; Locomotive; Mechanic; Mechanically Operated Laser Screed; Mechanic Welder; Mucking Machine; Motor Scraper; Orangepeel Bucket; Overhead Crane; Piledriver; Power Blade; Pumpcrete; Push Dozer; Rock Spreader, attached to equipment; Rotary Drill; Roller (Bituminous); Rough Terrain Crane; Scarifier; Scoopmobile; Shovel; Side Boom; Subgrader; Tailboom; Telescoping Type Forklift; Tow or Push Boat; Tower Crane (French, German & other types); Tractor Shovel; Truck Crane; Tunnel Mining Machines, including Moles, Shields or similar types of Tunnel Mining Equipment

GROUP 2 - Air Compressor (Over 900 cu. ft. per min.); Bituminous Mixer; Boom Type Tamping Machine; Bull Float; Concrete Mixer (Under 21 cu. ft.); Dredge Engineer; Electric Vibrator; Compactor/Self-Propelled Compactor; Elevator (One Drum or Buck Hoist); Elevator (When used to Hoist Building Material); Finish Machine; Firemen & Hoist (One Drum); Flexplane; Forklift (Regardless of Lift Height); Form Grader; Joint Sealing Machine; Outboard Motor Boat; Power Sweeper (Riding Type); Roller (Rock); Ross Carrier; Skid Mounted or Trailer Mounted Concrete Pump; Skid Steer Machine with all Attachments; Switchman or Brakeman; Throttle Valve Person; Tractair & Road Widening Trencher; Tractor (50 H.P. or Over); Truck Crane Oiler; Tugger; Welding Machine; Well Points; & Whirley Oiler

GROUP 3 - All Off Road Material Handling Equipment, including Articulating Dump Trucks; Greaser on Grease Facilities servicing Heavy Equipment

GROUP 4 - Bituminous Distributor; Burlap & Curing Machine; Cement Gun; Concrete Saw; Conveyor; Deckhand Oiler; Grout Pump; Hydraulic Post Driver; Hydro Seeder; Mud Jack; Oiler; Paving Joint Machine; Power Form Handling Equipment; Pump; Roller (Earth); Steerman; Tamping Machine; Tractor (Under 50 H.P.); & Vibrator

CRANES - with booms 150 ft. & Over (Including JIB), and where the length of the boom in combination with the length of the piling leads equals or exceeds 150 ft. - \$1.00 over Group 1 rate

EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE TO BE PAID 10%

ABOVE BASIC WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK.

IRON0044-009 06/01/2024

BRACKEN, GALLATIN, GRANT, HARRISON, ROBERTSON,
BOURBON (Northern third, including Townships of Jackson, Millersburg, Ruddel Mills & Shawhan);
CARROLL (Eastern third, including the Township of Ghent);
FLEMING (Western part, excluding Townships of Beechburg, Colfax, Elizaville, Flemingsburg, Flemingsburg Junction, Foxport, Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills, Nepton, Pecksridge, Plummerts Landing, Plummerts Mill, Poplar Plains, Ringos Mills, Tilton & Wallingford);
MASON (Western two-thirds, including Townships of Dover,

Lewisburg, Mays Lick, Maysville, Minerva, Moranburg, Murphysville, Ripley, Sardis, Shannon, South Ripley & Washington);
NICHOLAS (Townships of Barefoot, Barterville, Carlisle, Ellisville, Headquarters, Henryville, Morningglory, Myers & Oakland Mills);
OWEN (Townships of Beechwood, Bromley, Fairbanks, Holbrook, Jonesville, Long Ridge, Lusby's Mill, New, New Columbus, New Liberty, Owenton, Poplar Grove, Rockdale, Sanders, Teresita & Wheatley);
SCOTT (Northern two-thirds, including Townships of Biddle, Davis, Delaplain, Elmville, Longlick, Muddy Ford, Oxford, Rogers Gap, Sadieville, Skinnersburg & Stonewall)

	Rates	Fringes
IRONWORKER		
Fence Erector.....	\$ 33.60	23.00
Structural.....	\$ 35.37	23.00

IRON0070-006 06/01/2024		

ANDERSON, BOYLE, BRECKINRIDGE, BULLITT, FAYETTE, FRANKLIN, GRAYSON, HARDIN, HENRY, JEFFERSON, JESSAMINE, LARUE, MADISON, MARION, MEADE, MERCER, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE, WASHINGTON & WOODFORD
BOURBON (Southern two-thirds, including Townships of Austerlity, Centerville, Clintonville, Elizabeth, Hutchison, Littlerock, North Middletown & Paris);
CARROLL (Western two-thirds, including Townships of Carrollton, Easterday, English, Locust, Louis, Prestonville & Worthville);
CLARK (Western two-thirds, including Townships of Becknerville, Flanagan, Ford, Pine Grove, Winchester & Wyandotte);
OWEN (Eastern eighth, including Townships of Glenmary, Gratz, Monterey, Perry Park & Tacketts Mill);
SCOTT (Southern third, including Townships of Georgetown, Great Crossing, Newtown, Stampling Ground & Woodlake);

	Rates	Fringes
IRONWORKER.....	\$ 34.59	25.00

IRON0769-007 06/01/2024		

BATH, BOYD, CARTER, ELLIOTT, GREENUP, LEWIS, MONTGOMERY & ROWAN
CLARK (Eastern third, including townships of Bloomingdale, Hunt, Indian Fields, Kiddville, Loglick, Rightangele & Thomson);
FLEMING (Townships of Beechburg, Colfax, Elizaville, Flemingsburg, Flemingsburg Junction, Foxport, Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills, Nepton, Pecksrige, Plummers Landing, Plummers Mill, Poplar Plains, Ringos Mills, Tilton & Wallingford);
MASON (Eastern third, including Townships of Helena, Marshall, Orangeburg, Plumville & Springdale);
NICHOLAS (Eastern eighth, including the Township of Moorefield Sprout)

	Rates	Fringes
IRONWORKER		
ZONE 1.....	\$ 37.66	29.24
ZONE 2.....	\$ 38.06	29.24

ZONE 3.....\$ 39.66 29.24

ZONE 1 - (no base rate increase) Up to 10 mile radius of Union Hall, 1643 Greenup Ave, Ashland, KY.

ZONE 2 - (add \$0.40 per hour to base rate) 10 to 50 mile radius of Union Hall, 1643 Greenup Ave, Ashland, KY.

ZONE 3 - (add \$2.00 per hour to base rate) 50 mile radius & over of Union Hall, 1643 Greenup Ave, Ashland, KY.

LAB00189-003 07/01/2024

BATH, BOURBON, BOYD, BOYLE, BRACKEN, CARTER, CLARK, ELLIOTT, FAYETTE, FLEMING, FRANKLIN, GALLATIN, GRANT, GREENUP, HARRISON, JESSAMINE, LEWIS, MADISON, MASON, MERCER, MONTGOMERY, NICHOLAS, OWEN, ROBERTSON, ROWAN, SCOTT, & WOOLFORD COUNTIES

	Rates	Fringes
Laborers:		
GROUP 1.....	\$ 23.96	18.58
GROUP 2.....	\$ 24.21	18.58
GROUP 3.....	\$ 24.26	18.58
GROUP 4.....	\$ 24.86	18.58

LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushhammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter; Green Concrete Cutting; Hand Operated Grouter & Grinder Machine Operator; Jackhammer; Pavement Breaker; Paving Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven Georgia Buggy & Wheel Barrow; Power Post Hole Digger; Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal

Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LAB00189-008 07/01/2024

ANDERSON, BULLITT, CARROLL, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE & WASHINGTON COUNTIES

	Rates	Fringes
Laborers:		
GROUP 1.....	\$ 23.96	18.58
GROUP 2.....	\$ 24.21	18.58
GROUP 3.....	\$ 24.26	18.58
GROUP 4.....	\$ 24.86	18.58

LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushhammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter; Green Concrete Cutting; Hand Operated Grouter & Grinder Machine Operator; Jackhammer; Pavement Breaker; Paving Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven Georgia Buggy & Wheel Barrow; Power Post Hole Digger; Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LAB00189-009 07/01/2024

BRECKINRIDGE & GRAYSON COUNTIES

Laborers:		
GROUP 1.....	\$ 23.96	18.58
GROUP 2.....	\$ 24.21	18.58
GROUP 3.....	\$ 24.26	18.58
GROUP 4.....	\$ 24.86	18.58

LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer); Brickmason Tender; Mortar Mixer Operator; Scaffold Builder; Burner & Welder; Bushhammer; Chain Saw Operator; Concrete Saw Operator; Deckhand Scow Man; Dry Cement Handler; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C; Forklift Operator for Masonary; Form Setter; Green Concrete Cutting; Hand Operated Grouter & Grinder Machine Operator; Jackhammer; Pavement Breaker; Paving Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven Georgia Buggy & Wheel Barrow; Power Post Hole Digger; Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind Trencher; Sand Blaster; Concrete Chipper; Surface Grinder; Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

PAIN0012-005 06/11/2005

BATH, BOURBON, BOYLE, CLARK, FAYETTE, FLEMING, FRANKLIN, HARRISON, JESSAMINE, MADISON, MERCER, MONTGOMERY, NICHOLAS, ROBERTSON, SCOTT & WOODFORD COUNTIES:

	Rates	Fringes
PAINTER		
Bridge/Equipment Tender and/or Containment Builder..	\$ 18.90	5.90
Brush & Roller.....	\$ 21.30	5.90
Elevated Tanks; Steeplejack Work; Bridge & Lead Abatement.....	\$ 22.30	5.90
Sandblasting &		

Waterblasting.....	\$ 22.05	5.90
Spray.....	\$ 21.80	5.90

PAIN0012-017 05/01/2015

BRACKEN, GALLATIN, GRANT, MASON & OWEN COUNTIES:

	Rates	Fringes
PAINTER (Heavy & Highway Bridges - Guardrails - Lightpoles - Striping)		
Bridge Equipment Tender and Containment Builder.....	\$ 20.73	9.06
Brush & Roller.....	\$ 23.39	9.06
Elevated Tanks; Steeplejack Work; Bridge & Lead Abatement.....	\$ 24.39	9.06
Sandblasting & Water Blasting.....	\$ 24.14	9.06
Spray.....	\$ 23.89	9.06

PAIN0118-004 06/01/2018

ANDERSON, BRECKINRIDGE, BULLITT, CARROLL, GRAYSON, HARDIN,
HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY,
SPENCER, TRIMBLE & WASHINGTON COUNTIES:

	Rates	Fringes
PAINTER		
Brush & Roller.....	\$ 22.00	12.52
Spray, Sandblast, Power Tools, Waterblast & Steam Cleaning.....	\$ 23.00	12.52

PAIN1072-003 12/01/2024

BOYD, CARTER, ELLIOTT, GREENUP, LEWIS and ROWAN COUNTIES

	Rates	Fringes
Painters:		
Bridges; Locks; Dams; Tension Towers & Energized Substations.....	\$ 37.53	23.95
Power Generating Facilities.	\$ 34.29	23.95

PLUM0248-003 06/01/2024

BOYD, CARTER, ELLIOTT, GREENUP, LEWIS & ROWAN COUNTIES:

	Rates	Fringes
Plumber and Steamfitter.....	\$ 41.50	25.01

PLUM0392-007 06/01/2024

BRACKEN, CARROLL (Eastern Half), GALLATIN, GRANT, MASON, OWEN &
ROBERTSON COUNTIES:

Rates	Fringes
-------	---------

Plumbers and Pipefitters.....	\$ 40.70	26.75

PLUM0502-003 08/01/2024		

BRECKINRIDGE, BULLITT, CARROLL (Western Half), FRANKLIN
(Western three-fourths), GRAYSON, HARDIN, HENRY, JEFFERSON,
LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE &
WASHINGTON COUNTIES

	Rates	Fringes
PLUMBER.....	\$ 41.90	24.89

* SUKY2010-160 10/08/2001		

	Rates	Fringes
Truck drivers:		
GROUP 1.....	\$ 16.57 **	7.34
GROUP 2.....	\$ 16.68 **	7.34
GROUP 3.....	\$ 16.86 **	7.34
GROUP 4.....	\$ 16.96 **	7.34

TRUCK DRIVER CLASSIFICATIONS

- GROUP 1 - Mobile Batch Truck Tender
- GROUP 2 - Greaser; Tire Changer; & Mechanic Tender
- GROUP 3 - Single Axle Dump; Flatbed; Semi-trailer or Pole
Trailer when used to pull building materials and equipment;
Tandem Axle Dump; Distributor; Mixer; & Truck Mechanic
- GROUP 4 - Euclid & Other Heavy Earthmoving Equipment &
Lowboy; Articulator Cat; 5-Axle Vehicle; Winch & A-Frame
when used in transporting materials; Ross Carrier; Forklift
when used to transport building materials; & Pavement
Breaker

WELDERS - Receive rate prescribed for craft performing
operation to which welding is incidental.

=====

** Workers in this classification may be entitled to a higher
minimum wage under Executive Order 14026 (\$17.75) or 13658
(\$13.30). Please see the Note at the top of the wage
determination for more information. Please also note that the
minimum wage requirements of Executive Order 14026 are not
currently being enforced as to any contract or subcontract to
which the states of Texas, Louisiana, or Mississippi, including
their agencies, are a party.

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave
for Federal Contractors applies to all contracts subject to the
Davis-Bacon Act for which the contract is awarded (and any
solicitation was issued) on or after January 1, 2017. If this
contract is covered by the EO, the contractor must provide
employees with 1 hour of paid sick leave for every 30 hours
they work, up to 56 hours of paid sick leave each year.
Employees must be permitted to use paid sick leave for their
own illness, injury or other health-related needs, including

preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <https://www.dol.gov/agencies/whd/government-contracts>.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than ""SU"", ""UAVG"", ?SA?, or ?SC? denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The ""SU"" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

?SU? wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The ""SA"" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ?SA? identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

- a) a survey underlying a wage determination
- b) an existing published wage determination
- c) an initial WHD letter setting forth a position on a wage determination matter
- d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

=====

END OF GENERAL DECISION"

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	02650		MAINTAIN & CONTROL TRAFFIC (FRANKLIN US 421 HSIP)	1.00	LS		\$	
0020	02650		MAINTAIN & CONTROL TRAFFIC (SHELBY KY 1779 HSIP)	1.00	LS		\$	
0030	02650		MAINTAIN & CONTROL TRAFFIC (TRIMBLE KY 625 HSIP)	1.00	LS		\$	
0040	02671		PORTABLE CHANGEABLE MESSAGE SIGN	6.00	EACH		\$	
0050	02726		STAKING (FRANKLIN US 421 HSIP)	1.00	LS		\$	
0060	02726		STAKING (SHELBY KY 1779 HSIP)	1.00	LS		\$	
0070	02726		STAKING (TRIMBLE KY 625 HSIP)	1.00	LS		\$	

Section: 0002 - SIGNING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0080	06406		SBM ALUM SHEET SIGNS .080 IN (REV 3-10-25)	2,392.00	SQFT		\$	
0090	06407		SBM ALUM SHEET SIGNS .125 IN	854.00	SQFT		\$	
0100	06410		STEEL POST TYPE 1 (REV 3-10-25)	4,347.00	LF		\$	
0110	21373ND		REMOVE SIGN	121.00	EACH		\$	
0120	24631EC		BARCODE SIGN INVENTORY (REV 3-10-25)	845.00	EACH		\$	

Section: 0003 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0130	02569		DEMOBILIZATION	1.00	LS		\$	