



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Jim Gray
SECRETARY

January 17, 2025

CALL NO. 204
CONTRACT ID NO. 252017
ADDENDUM # 1

Subject: Graves-Hickman-Fulton Counties, 121GR25P001-FD52
Letting January 23, 2025

- (1) Revised - Material Summary - Pages 72-74 of 137
- (2) Revised - Summary Sheet - Page 75 of 137
- (3) Revised - Detail Sheet - Page 77 of 137
- (4) Revised - Proposal Bid Items - Pages 136-137 of 137

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills". The signature is written in a cursive, flowing style.

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

MATERIAL SUMMARY

CONTRACT ID: 252017

121GR25P001 - FD52

MP03890032501

PURCHASE PARKWAY (JC 9003) BEGIN AT THE NORTH END OF THE IC RAILROAD BRIDGE EXTENDING NORTH TO THE FULTON/HICKMAN COUNTY LINE PAVEMENT (WITH ALTERNATIVES), A DISTANCE OF 1.57 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	02562	TEMPORARY SIGNS	510.00	SQFT
0010	02650	MAINTAIN & CONTROL TRAFFIC - (FULTON COUNTY)	1.00	LS
0015	02775	ARROW PANEL	4.00	EACH
0020	06531	PAVE STRIPING REMOVAL-6 IN	45,000.00	LF
0025	06542	PAVE STRIPING-THERMO-6 IN W	27,000.00	LF
0030	06543	PAVE STRIPING-THERMO-6 IN Y	18,000.00	LF
0035	20411ED	LAW ENFORCEMENT OFFICER	32.00	HOURL
0040	23071EN	OVERBAND CRACK SEALING	7,000.00	LB
0045	24489EC	INLAID PAVEMENT MARKER	450.00	EACH
0050	24880EC	REMOVE PAVEMENT MARKER	450.00	EACH
0055	25075EC	QUEUE PROTECTION VEHICLE	50.00	HOURL
0060	25117EC	FURNISH QUEUE PROTECTION VEHICLES	3.00	MONT
0065	26136EC	PORTABLE QUEUE WARNING ALERT SYSTEM	2.00	MONT
0070	26137EC	QUEUE WARNING PCMS	6.00	MONT
0075	26138EC	QUEUE WARNING PORTABLE RADAR SENSORS	6.00	MONT
0080	06510	PAVE STRIPING-TEMP PAINT-4 IN - (MICROSURFACE)	90,000.00	LF
0085	20814EC	MICROSURFACING-SURFACE COURSE - TYPE A	52,318.00	SQYD
0090	21652EN	MICROSURFACING-LEVELING COURSE	61,633.00	SQYD
0095	25051EC	FIBER REINFORCEMENT FOR MICROSURFACING	52,318.00	SQYD
0100	00190	LEVELING & WEDGING PG64-22	385.00	TON
0105	00356	ASPHALT MATERIAL FOR TACK	26.00	TON
0110	02676	MOBILIZATION FOR MILL & TEXT - (FULTON COUNTY)	1.00	LS
0115	02677	ASPHALT PAVE MILLING & TEXTURING (REV 1-17-25)	66.00	TON
0120	06510	PAVE STRIPING-TEMP PAINT-4 IN - (THINLAY)	55,000.00	LF
0125	24887EC	CL3 ASPH SURF NO.4A PG64-22	2,160.00	TON
0130	25054EC	FIBER REINFORCEMENT FOR SURF NO.4	2,160.00	TON
0135	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 252017

121GR25P001 - FD52

MP04290032501

PURCHASE PARKWAY (JC 9003) BEGIN AT THE HICKMAN/GRAVES COUNTY LINE EXTENDING NORTH TO THE CARDINAL ROAD OVERPASS PAVEMENT (WITH ALTERNATIVES), A DISTANCE OF 11.94 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0250	02562	TEMPORARY SIGNS	2,100.00	SQFT
0255	02650	MAINTAIN & CONTROL TRAFFIC - (GRAVES COUNTY)	1.00	LS
0260	02775	ARROW PANEL	4.00	EACH
0265	06531	PAVE STRIPING REMOVAL-6 IN	324,000.00	LF
0270	06542	PAVE STRIPING-THERMO-6 IN W	194,000.00	LF
0275	06543	PAVE STRIPING-THERMO-6 IN Y	130,000.00	LF
0280	20411ED	LAW ENFORCEMENT OFFICER	50.00	HOURL
0285	23071EN	OVERBAND CRACK SEALING	50,000.00	LB
0290	24489EC	INLAID PAVEMENT MARKER	3,300.00	EACH
0295	24880EC	REMOVE PAVEMENT MARKER	3,300.00	EACH
0300	25075EC	QUEUE PROTECTION VEHICLE	50.00	HOURL
0305	25117EC	FURNISH QUEUE PROTECTION VEHICLES	2.00	MONT
0310	26136EC	PORTABLE QUEUE WARNING ALERT SYSTEM	1.00	MONT
0315	26137EC	QUEUE WARNING PCMS	6.00	MONT
0320	26138EC	QUEUE WARNING PORTABLE RADAR SENSORS	6.00	MONT
0325	06510	PAVE STRIPING-TEMP PAINT-4 IN - (MICROSURFACE)	648,000.00	LF
0330	20814EC	MICROSURFACING-SURFACE COURSE - TYPE A	398,073.00	SQYD
0335	21652EN	MICROSURFACING-LEVELING COURSE	411,922.00	SQYD
0340	25051EC	FIBER REINFORCEMENT FOR MICROSURFACING	398,073.00	SQYD
0345	00190	LEVELING & WEDGING PG64-22	571.00	TON
0350	00356	ASPHALT MATERIAL FOR TACK	173.00	TON
0355	02676	MOBILIZATION FOR MILL & TEXT - (GRAVES COUNTY)	1.00	LS
0360	02677	ASPHALT PAVE MILLING & TEXTURING (REV 1-17-25)	510.00	TON
0365	06510	PAVE STRIPING-TEMP PAINT-4 IN - (THINLAY)	340,000.00	LF
0370	24887EC	CL3 ASPH SURF NO.4A PG64-22	16,425.00	TON
0375	25054EC	FIBER REINFORCEMENT FOR SURF NO.4	16,425.00	TON
0380	02568	MOBILIZATION	1.00	LS
0385	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 252017

121GR25P001 - FD52

MP05390032501

PURCHASE PARKWAY (JC 9003) BEGIN AT THE FULTON/HICKMAN COUNTY LINE EXTENDING NORTH TO THE HICKMAN/GRAVES COUNTY LINE PAVEMENT (WITH ALTERNATIVES), A DISTANCE OF 5.09 MILES.


Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0140	02562	TEMPORARY SIGNS	510.00	SQFT
0145	02650	MAINTAIN & CONTROL TRAFFIC - (HICKMAN COUNTY)	1.00	LS
0150	02775	ARROW PANEL	4.00	EACH
0155	06531	PAVE STRIPING REMOVAL-6 IN	134,000.00	LF
0160	06542	PAVE STRIPING-THERMO-6 IN W	80,000.00	LF
0165	06543	PAVE STRIPING-THERMO-6 IN Y	54,000.00	LF
0170	23071EN	OVERBAND CRACK SEALING	21,000.00	LB
0175	24489EC	INLAID PAVEMENT MARKER	1,400.00	EACH
0180	24880EC	REMOVE PAVEMENT MARKER	1,400.00	EACH
0185	06510	PAVE STRIPING-TEMP PAINT-4 IN - (MICROSURFACE)	270,000.00	LF
0190	20814EC	MICROSURFACING-SURFACE COURSE - TYPE A	163,881.00	SQYD
0195	21652EN	MICROSURFACING-LEVELING COURSE	177,723.00	SQYD
0200	25051EC	FIBER REINFORCEMENT FOR MICROSURFACING	163,881.00	SQYD
0205	00190	LEVELING & WEDGING PG64-22	571.00	TON
0210	00356	ASPHALT MATERIAL FOR TACK	75.00	TON
0215	02676	MOBILIZATION FOR MILL & TEXT - (HICKMAN COUNTY)	1.00	LS
0220	02677	ASPHALT PAVE MILLING & TEXTURING (REV 1-17-25)	154.00	TON
0225	06510	PAVE STRIPING-TEMP PAINT-4 IN - (THINLAY)	150,000.00	LF
0230	24887EC	CL3 ASPH SURF NO.4A PG64-22	6,770.00	TON
0235	25054EC	FIBER REINFORCEMENT FOR SURF NO.4	6,770.00	TON
0240	02568	MOBILIZATION	1.00	LS
0245	02569	DEMOBILIZATION	1.00	LS

**Milling
Summary
FD52 038 9003 001-021**

Total					730	
Milepoint	Comment	Length	Width	Avg Depth	Tons	County
1.864	Beginning Edge Key/Bridge End	100	76	0.3125	14.5	Fulton
2.442	KY 307 Underpass				51.0	Fulton
4.152	KY 2569 Underpass				51.0	Hickman
5.129	KY 94 Underpass				51.0	Hickman
6.539	KY 1529 Underpass				51.0	Hickman
9.111	Bridge Edge Keys	200	76	0.3125	29.0	Graves
10.186	CR 1320 Underpass				51.0	Graves
11.428	CR1316 Underpass				51.0	Graves
12.612	KY 944 Underpass				51.0	Graves
12.798	Bridge Edge Keys	200	76	0.3125	29.0	Graves
13.653	KY 339 Underpass				51.0	Graves
15.302	Tater Rd Underpass				51.0	Graves
16.542	KY 58 Underpass				51.0	Graves
16.771	Bridge Edge Keys	200	76	0.3125	29.0	Graves
17.352	KY 1748 Underpass				51.0	Graves
17.797	Bridge Edge Keys				51.0	Graves
20.298	End of Project Edge Key	100	76	0.3125	14.5	Graves

All milling at underpass bridges calculated following the milling detail sheet with a full depth of 0.6250" and an average depth for edge keys of 0.3125".

MILLING DETAIL @ JC 9003 UNDERPASSES

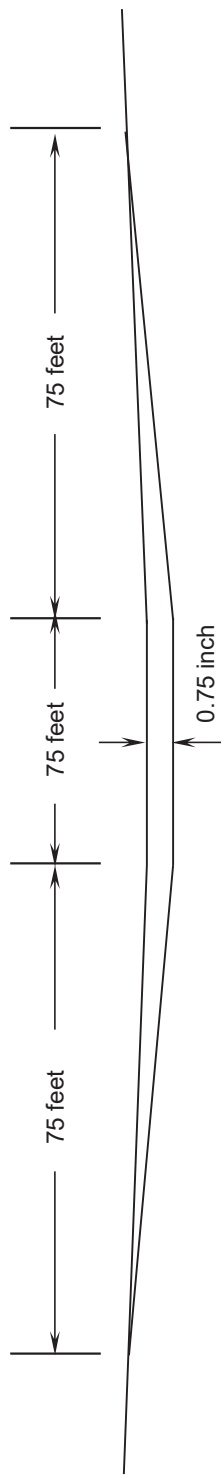

Milling at the underpasses will be required for both alternates in order to maintain the existing clearance under the bridges.
NOTE: Milling for the microsurface application is considered incidental per the special notes contained in the proposal

252017

PROPOSAL BID ITEMS

Report Date 1/17/25

Page 1 of 2

Section: 0001 - MICROSURFACE

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	06510		PAVE STRIPING-TEMP PAINT-4 IN (MICROSURFACE)	1,008,000.00	LF		\$	
0020	20814EC		MICROSURFACING-SURFACE COURSE - TYPE A	614,272.00	SQYD		\$	
0030	21652EN		MICROSURFACING-LEVELING COURSE	651,278.00	SQYD		\$	
0040	25051EC		FIBER REINFORCEMENT FOR MICROSURFACING	614,272.00	SQYD		\$	

Section: 0002 - THINLAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0050	00190		LEVELING & WEDGING PG64-22	1,527.00	TON		\$	
0060	00356		ASPHALT MATERIAL FOR TACK	274.00	TON		\$	
0070	02676		MOBILIZATION FOR MILL & TEXT (FULTON COUNTY)	1.00	LS		\$	
0080	02676		MOBILIZATION FOR MILL & TEXT (GRAVES COUNTY)	1.00	LS		\$	
0090	02676		MOBILIZATION FOR MILL & TEXT (HICKMAN COUNTY)	1.00	LS		\$	
0100	02677		ASPHALT PAVE MILLING & TEXTURING (REV. 1-17-25)	730.00	TON		\$	
0110	06510		PAVE STRIPING-TEMP PAINT-4 IN (THINLAY)	545,000.00	LF		\$	
0120	24887EC		CL3 ASPH SURF NO.4A PG64-22	25,355.00	TON		\$	
0130	25054EC		FIBER REINFORCEMENT FOR SURF NO.4	25,355.00	TON		\$	

Section: 0003 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0140	02562		TEMPORARY SIGNS	3,120.00	SQFT		\$	
0150	02650		MAINTAIN & CONTROL TRAFFIC (FULTON COUNTY)	1.00	LS		\$	
0160	02650		MAINTAIN & CONTROL TRAFFIC (GRAVES COUNTY)	1.00	LS		\$	
0170	02650		MAINTAIN & CONTROL TRAFFIC (HICKMAN COUNTY)	1.00	LS		\$	
0180	02775		ARROW PANEL	12.00	EACH		\$	
0190	06531		PAVE STRIPING REMOVAL-6 IN	503,000.00	LF		\$	
0200	06542		PAVE STRIPING-THERMO-6 IN W	301,000.00	LF		\$	
0210	06543		PAVE STRIPING-THERMO-6 IN Y	202,000.00	LF		\$	
0220	20411ED		LAW ENFORCEMENT OFFICER	82.00	HOURL		\$	
0230	23071EN		OVERBAND CRACK SEALING	78,000.00	LB		\$	
0240	24489EC		INLAID PAVEMENT MARKER	5,150.00	EACH		\$	
0250	24880EC		REMOVE PAVEMENT MARKER	5,150.00	EACH		\$	
0260	25075EC		QUEUE PROTECTION VEHICLE	100.00	HOURL		\$	
0270	25117EC		FURNISH QUEUE PROTECTION VEHICLES	5.00	MONT		\$	
0280	26136EC		PORTABLE QUEUE WARNING ALERT SYSTEM	3.00	MONT		\$	
0290	26137EC		QUEUE WARNING PCMS	12.00	MONT		\$	

Report Date 1/17/25

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0300	26138EC		QUEUE WARNING PORTABLE RADAR SENSORS	12.00	MONT		\$	

Section: 0004 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0310	02568		MOBILIZATION	1.00	LS		\$	
0320	02569		DEMOBILIZATION	1.00	LS		\$	