



COMMONWEALTH OF KENTUCKY  
TRANSPORTATION CABINET  
[www.transportation.ky.gov/](http://www.transportation.ky.gov/)

Andy Beshear  
GOVERNOR

Jim Gray  
SECRETARY

CALL NO. 205  
CONTRACT ID NO. 202222  
ADDENDUM # 1

**Subject:** MARTIN COUNTY, 080GR20P050-ER  
Letting December 11, 2020

- (1) Revised - Project Map - Page 43 of 94
- (2) Revised - Material Summary - Page 44 of 94
- (3) Revised - Delete Page 45 of 94
- (4) Revised - Site Summary - Page 46 of 94
- (5) Revised - Delete Page 47 of 94
- (6) Revised - Guardrail Summary - Page 48 of 94
- (7) Revised - Delete Page 49 of 94
- (8) Revised - Typical Section - Page 50 of 94
- (9) Revised - Proposal Bid Items - Page 93 of 94
- (10) Revised - Delete Page 94 of 94

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.


Sincerely,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:mr  
Enclosures

# FLOYD COUNTY

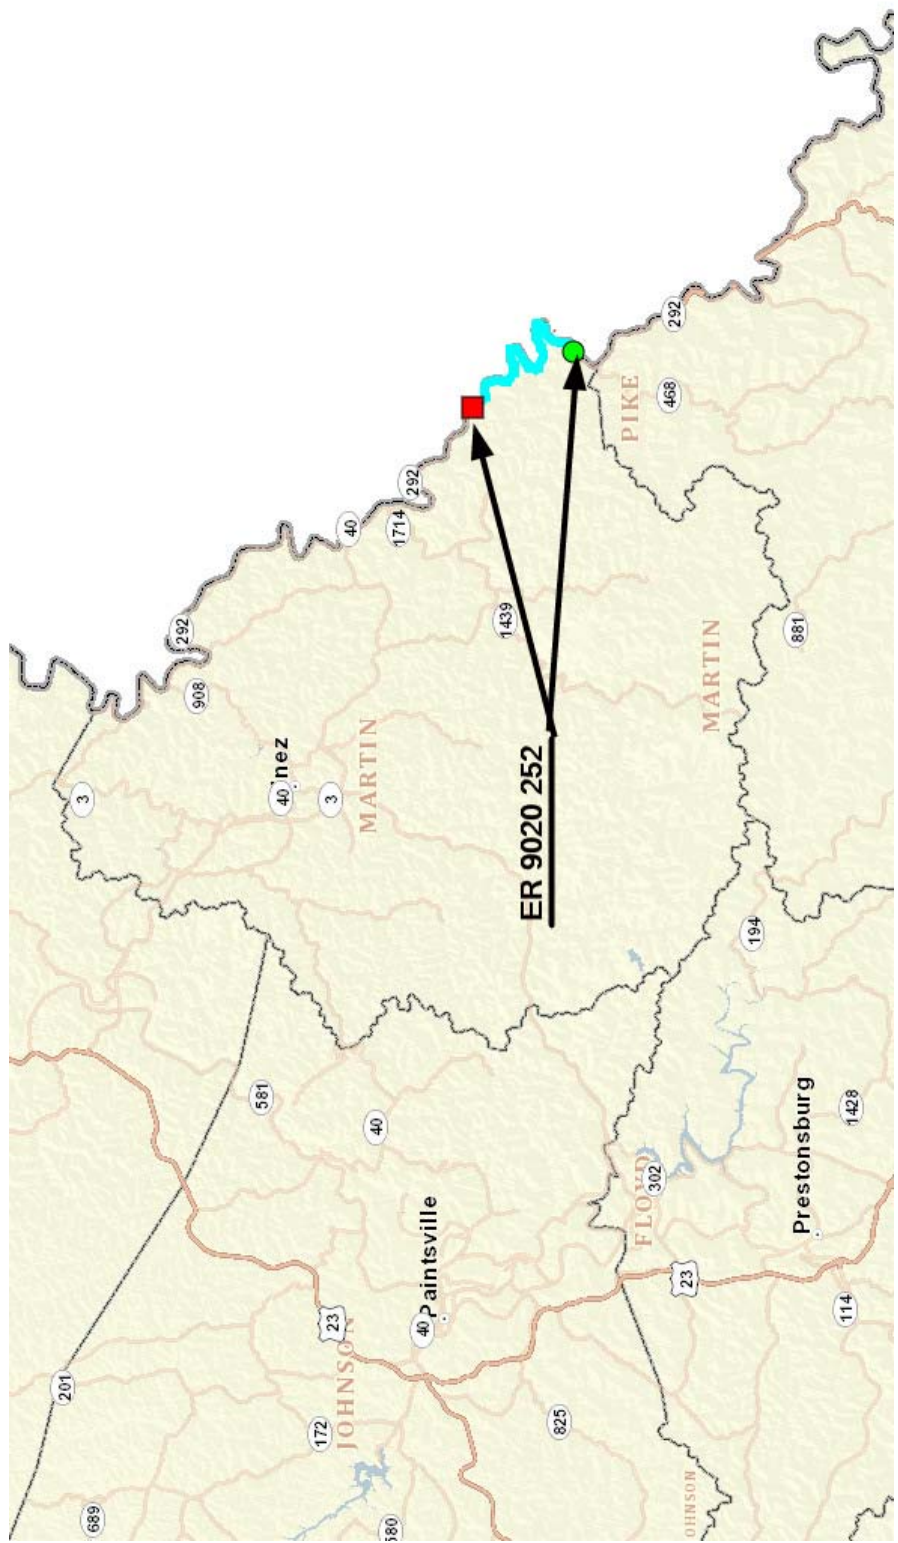

# MATERIAL SUMMARY

**CONTRACT ID: 202222**

**080GR20P050-ER**

**MP08002922001**

RIVERFRONT ROAD (KY 292) FROM 0.26 MILES NORTH OF RUNYON DRIVE EXTENDING NORTH (OMITTING MILEPOINT 1.339-1.443) TO 0.488 MILES NORTH OF STEPP BRANCH SLIDE REPAIR, A DISTANCE OF 6.16 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	125.00	TON
0010	01987	DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE - (REVISED: 12-1-20)	39.00	EACH
0015	02014	BARRICADE-TYPE III	4.00	EACH
0020	02351	GUARDRAIL-STEEL W BEAM-S FACE - (REVISED: 12-1-20)	1,000.00	LF
0025	02367	GUARDRAIL END TREATMENT TYPE 1 - (REVISED: 12-1-20)	1.00	EACH
0030	02381	REMOVE GUARDRAIL	825.00	LF
0035	02396	REMOVE GUARDRAIL END TREATMENT - TYPE 7 (REVISED: 12-1-20)	1.00	EACH
0040	02562	TEMPORARY SIGNS	200.00	SQFT
0045	02603	FABRIC-GEOTEXTILE CLASS 2 - (REVISED: 12-1-20)	1,540.00	SQYD
0050	02650	MAINTAIN & CONTROL TRAFFIC - (SITE 1)	1.00	LS
0055	02650	MAINTAIN & CONTROL TRAFFIC - (SITE 4)	1.00	LS
0060	02650	MAINTAIN & CONTROL TRAFFIC - (SITE 5, 6, 7)	1.00	LS
0065	02650	MAINTAIN & CONTROL TRAFFIC - (SITES 8)	1.00	LS
0070	03234	RAILROAD RAILS-DRILLED - (REVISED: 12-1-20)	7,761.00	LF
0075	03235	EXCAVATION AND BACKFILL - (REVISED: 12-1-20)	780.00	CUYD
0080	03236	CRIBBING - (REVISED: 12-1-20)	7,039.00	SQFT
0085	20257NC	SITE PREPARATION - (SITE 1)	1.00	LS
0090	20257NC	SITE PREPARATION - (SITE 4)	1.00	LS
0095	20257NC	SITE PREPARATION - (SITES 5, 6, 7)	1.00	LS
0100	20257NC	SITE PREPARATION - (SITES 8)	1.00	LS
0105	21415ND	EROSION CONTROL - (SITE 1)	1.00	LS
0110	21415ND	EROSION CONTROL - (SITE 4)	1.00	LS
0115	21415ND	EROSION CONTROL - (SITE 8)	1.00	LS
0120	21415ND	EROSION CONTROL - (SITES 5, 6, 7)	1.00	LS
0125	02569	DEMOBILIZATION	1.00	LS

### SITE SUMMARY - SITES 1, 4-8


Site	Begin	End	Length (Ft.)	Cribbing Depth (Ft.)	Excavation Width (Ft.)	Depth to Rock (Ft.)	Number of Rows	Rail Spacing (Ft.)	Cribbing Amount (SQ FT)	Railroad Rails (LF)	Excav. & Backfill (CU YD)	Class 2 Geotextile Fabric (SQ YD)
1	0.819	0.825	31	15	3	26	1	3	527	468	50	115
2	NOT PART OF THIS CONTRACT											
3	NOT PART OF THIS CONTRACT											
4	2.127	2.151	127	10	3	26	1	3	1,524	1,716	145	325
5	3.005	3.027	120	10	4	26	1	3	1,440	1,599	180	325
6	3.090	3.111	113	10	4	26	1	3	1,356	1,521	170	300
7	3.300	3.311	56	15	4	26	1	3	952	780	125	213
8	6.950	6.973	124	8	3	26	1	3	1,240	1,677	110	263
<b>TOTALS</b>										<b>7,761</b>	<b>780</b>	<b>1,540</b>

<b>GUARDRAIL SUMMARY - SITES 1, 4-8</b>												
<b>NEW GUARDRAIL</b>						<b>REMOVE GUARDRAIL</b>						
LANE	END TREAT.	BEGIN MILEPOINT	END MILEPOINT	END TREAT.	LIN FEET	REMARKS	LANE	BEGIN MILEPOINT	END MILEPOINT	LIN FEET	REMARKS	
RIGHT	TYPE 1	0.819	0.851	TIE-INTO EXISTING	175.0		RIGHT	0.830		0.0	REMOVE TYPE 7	
RIGHT	TIE-INTO EXISTING	2.122	2.155	TIE-INTO EXISTING	187.5		RIGHT	2.122	2.155	187.5		
RIGHT	TIE-INTO EXISTING	3.000	3.032	TIE-INTO EXISTING	175.0		RIGHT	3.000	3.032	175.0		
RIGHT	TIE-INTO EXISTING	3.085	3.116	TIE-INTO EXISTING	175.0		RIGHT	3.085	3.116	175.0		
RIGHT	TIE-INTO EXISTING	3.295	3.315	TIE-INTO EXISTING	112.5		RIGHT	3.295	3.315	112.5		
RIGHT	TIE-INTO EXISTING	6.945	6.978	TIE-INTO EXISTING	175.0		RIGHT	6.945	6.978	175.0		
<b>TOTAL =</b>						1000.0						
							<b>TOTAL =</b>					
							825.0					

End Treat Ty. 1                      2 Ea

**TYPICAL SECTION  
MARTIN COUNTY  
KY 292  
SITES 1 & 4-8**

\*Guardrail as directed by Engineer

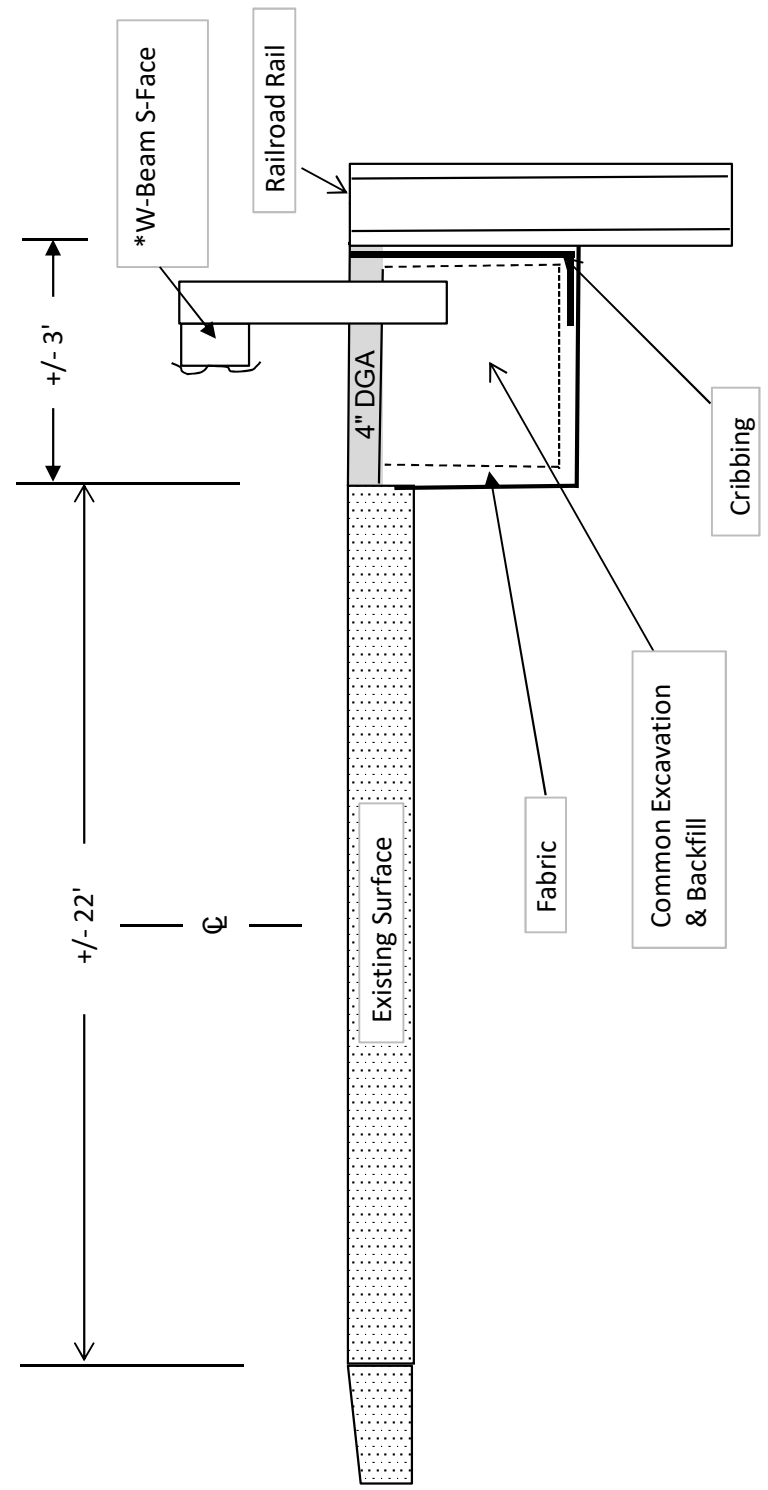

**PROPOSAL BID ITEMS**

202222

Page 1 of 1

Report Date 12/1/20

**Section: 0001 - ROADWAY**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	125.00	TON		\$	
0020	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE (REVISED: 12-1-20)	39.00	EACH		\$	
0030	02014		BARRICADE-TYPE III	4.00	EACH		\$	
0040	02351		GUARDRAIL-STEEL W BEAM-S FACE (REVISED: 12-1-20)	1,000.00	LF		\$	
0050	02367		GUARDRAIL END TREATMENT TYPE 1 (REVISED: 12-1-20)	1.00	EACH		\$	
0060	02381		REMOVE GUARDRAIL	825.00	LF		\$	
0070	02396		REMOVE GUARDRAIL END TREATMENT TYPE 7 (REVISED: 12-1-20)	1.00	EACH		\$	
0080	02562		TEMPORARY SIGNS	200.00	SQFT		\$	
0090	02603		FABRIC-GEOTEXTILE CLASS 2 (REVISED: 12-1-20)	1,540.00	SQYD		\$	
0100	02650		MAINTAIN & CONTROL TRAFFIC (SITE 1)	1.00	LS		\$	
0110	02650		MAINTAIN & CONTROL TRAFFIC (SITE 4)	1.00	LS		\$	
0120	02650		MAINTAIN & CONTROL TRAFFIC (SITE 5, 6, 7)	1.00	LS		\$	
0130	02650		MAINTAIN & CONTROL TRAFFIC (SITES 8)	1.00	LS		\$	
0140	03234		RAILROAD RAILS-DRILLED (REVISED: 12-1-20)	7,761.00	LF		\$	
0150	03235		EXCAVATION AND BACKFILL (REVISED: 12-1-20)	780.00	CUYD		\$	
0160	03236		CRIBBING (REVISED: 12-1-20)	7,039.00	SQFT		\$	
0170	20257NC		SITE PREPARATION (SITE 1)	1.00	LS		\$	
0180	20257NC		SITE PREPARATION (SITE 4)	1.00	LS		\$	
0190	20257NC		SITE PREPARATION (SITES 5, 6, 7)	1.00	LS		\$	
0200	20257NC		SITE PREPARATION (SITES 8)	1.00	LS		\$	
0210	21415ND		EROSION CONTROL (SITE 1)	1.00	LS		\$	
0220	21415ND		EROSION CONTROL (SITE 4)	1.00	LS		\$	
0230	21415ND		EROSION CONTROL (SITE 8)	1.00	LS		\$	
0240	21415ND		EROSION CONTROL (SITES 5, 6, 7)	1.00	LS		\$	

**Section: 0002 - DEMOBILIZATION**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0250	02569		DEMOBILIZATION	1.00	LS		\$	