

CALL NO. <u>406</u> CONTRACT ID. <u>212967</u> <u>LIVINGSTON - CALLOWAY COUNTIES</u> FED/STATE PROJECT NUMBER <u>121GR21M073-FE02</u> DESCRIPTION <u>KY 121 CALLOWAY COUNTY & KY 135 LIVINGSTON COUNTY</u> WORK TYPE <u>BRIDGE DECK RESTORATION & WATERPROOFING</u> PRIMARY COMPLETION DATE <u>6/30/2022</u>

LETTING DATE: July 23,2021

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 am EASTERN DAYLIGHT TIME July 23,2021. Bids will be publicly announced at 10:00 am EASTERN DAYLIGHT TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I SCOPE OF WORK

- PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES
- CONTRACT NOTES
- STATE CONTRACT NOTES
- SPECIAL NOTE(S) APPLICABLE TO PROJECT
- ASBESTOS ABATEMENT REPORT
- MATERIAL SUMMARY
- BRIDGE DRAWINGS

PART II SPECIFICATIONS AND STANDARD DRAWINGS

- SPECIFICATIONS REFERENCE
- SUPPLEMENTAL SPECIFICATION
- STANDARD DRAWINGS THAT APPLY

PART III EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

- LABOR AND WAGE REQUIREMENTS
- EXECUTIVE BRANCH CODE OF ETHICS
- KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY / STATE
- PROJECT WAGE RATES / STATE FUNDED
- PART IV INSURANCE
- PART V BID ITEMS

LIVINGSTON - CALLOWAY COUNTIES 121GR21M073-FE02

PART I

SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 01

CONTRACT ID - 212967

121GR21M073-FE02

COUNTY - CALLOWAY

PCN - MB01801212021 FE02 018 0121 B00019N 03.66

NEW CONCORD ROAD (KY 121) BRIDGE 018B00019N OVER BEECHY CREEK AT MP 03.66BRIDGE DECK RESTORATION & WATERPROOFING GEOGRAPHIC COORDINATES LATITUDE 36:32:08.00 LONGITUDE 88:08:43.00

PCN - MB01801212022 FE02 018 0121 B00020N 03.21

NEW CONCORD ROAD (KY 121) BRIDGE 018B00020N OVER BEECHY CREEK AT MP 03.21BRIDGE DECK RESTORATION & WATERPROOFING GEOGRAPHIC COORDINATES LATITUDE 36:31:59.00 LONGITUDE 88:08:24.00

COUNTY - LIVINGSTON

PCN - MB07001352021 FE02 070 0135 B00009N 12.08

TOLU ROAD (KY 135) BRIDGE 070B00009N OVER BUCK CREEK AT MP 12.08BRIDGE DECK RESTORATION & WATERPROOFING GEOGRAPHIC COORDINATES LATITUDE 37:23:48.00 LONGITUDE 88:22:05.00

COMPLETION DATE(S):

COMPLETED BY 06/30/2022	APPLIES TO ENTIRE CONCTRACT
30 CALENDAR Days	APPLIES TO 018B00019N
30 CALENDAR Days	APPLIES TO 018B00020N
30 CALENDAR Days	APPLIES TO 070B00009N

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by <u>KRS 14A.9-010</u> to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under <u>KRS 14A.9-030</u> unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in <u>KRS 14A.9-010</u>, the foreign entity should identify the applicable exception. Foreign entity is defined within <u>KRS 14A.1-070</u>.

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at <u>https://secure.kentucky.gov/sos/ftbr/welcome.aspx</u>.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to <u>kytc.projectquestions@ky.gov</u>. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (<u>www.transportation.ky.gov/contract</u>). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially

disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004.

April 30, 2018

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

RECIPROCAL PREFERENCE TO BE GIVEN BY PUBLIC AGENCIES TO RESIDENT BIDDERS

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the electronic bidding software. Submittal of the Affidavit should be done along the bid in Bid Express.

April 30, 2018

SPECIAL NOTES DISTRICT NO. 1 BRIDGE DECK RESTORATION AND WATERPROOFING CALLOWAY - LIVINGSTON COUNTIES CID 212967 ~ 121GR21M073

FE02 018 0121 B00019N 03.66

Calloway County ~ KY 121 (New Concord Road) over Beechy Creek

Geographic Coordinates

Latitude ~ 36° 32'08.00'' Longitude ~ -88° 08' 43.00''

Description

33'-33'-33' RCDG Spans, Drawing No. 05147.

FE02 018 0121 B00020N 03.21 Calloway County ~ KY 121 (New Concord Road) over Beechy Creek

Geographic Coordinates

Latitude ~ 36° 31'59.00'' Longitude ~ -88° 08' 24.00''

Description 33'-33'-33' RCDG Spans, Drawing No. 05145.

FE02 070 0135 B00009N 12.08

Livingston County ~ $\overline{KY 135}$ (Tolu Road) over Buck Creek

Geographic Coordinates

Latitude ~ 37° 23'48.00'' Longitude ~ -88° 22' 05.00''

Description

70'-100'-70' RCDG Spans, Drawing No. 12991.

SPECIAL NOTES FOR BRIDGE DECK RESTORATION AND WATERPROOFING

SPECIAL NOTE FOR BRIDGE DECK RESTORATION AND WATERPROOFING WITH CONCRETE OVERLAYS

SPECIAL NOTE FOR REPLACING EXPANSION JOINTS AND/OR INSTALLING ARMORED EDGES FOR CONCRETE ON BRIDGES

SPECIAL NOTE FOR ELIMINATING TRANSVERSE JOINTS ON BRIDGES

SPECIAL NOTE FOR DECK DRAIN RETROFIT

SPECIAL NOTE FOR BRIDGE CLEANING AND PREVENTIVE MAINTENANCE

SPECIAL NOTE FOR CONTRACT COMPLETION DATE AND PENALTIES ON BRIDGE REPAIR CONTRACTS

SPECIAL NOTE FOR MAINTAINING AND CONTROLLING TRAFFIC

SPECIAL NOTE FOR BRIDGE DECK RESTORATION AND WATERPROOFING WITH CONCRETE OVERLAYS

1. **DESCRIPTION.** Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings (current editions), this Note, and the attached detail drawings. Section references are to the Standard Specifications. This work consists of the following: (1) Furnish all labor, materials, tools, and equipment, (2) Machine prep the existing slab, (3) Complete full-depth and partial depth repairs as directed by the Engineer, (4) Repair/replace damaged and corroded reinforcing bars, (5) Place new concrete overlay and epoxy-sand slurry in accordance with Section 606, (6) Complete asphalt approach pavement, and (7) Any other work specified as part of this contract. All construction will be in accordance with Section 606 unless otherwise specified.

2. MATERIALS.

- A. Latex Concrete. See Section 606.03.17.
- B. Class "M" Concrete. Use either "M1" or "M2". See Section 601.
- C. Bituminous Asphalt. Use CL2 ASPH SURF 0.38D PG64-22.
- **D. Epoxy-Sand Slurry.** See Section 606.03.10.

3. CONSTRUCTION.

- **A. Remove Existing Overlay.** In addition to Section 606.03.03, totally remove the existing concrete overlay by milling.
- **B. Machine Preparation of Existing Slab (070B0009N only).** Remove concrete from existing slab to a depth of at least ¹/₄" below the existing surface, and remove all patches completely, in accordance with the requirements of Section 606.03.03.
- C. Partial Depth Slab Repair and Latex Overlay. Remove areas determined to be unsound by the Engineer via hydro-demolition or via hand held jackhammers weighing less than 45lbs in accordance with Section 606.02.10 D. Repair/Replace all damaged or severely corroded reinforcing bars prior to partial depth repair operation. The Department will not measure material removal and will consider this work incidental to the bid item "PARTIAL DEPTH PATCHING". Mix and place Latex Modified Concrete Overlay in accordance with Sections 606.03.08 and 606.03.17.
- **D.** Asphalt Approach Pavement. Mill each existing asphalt approach to the distance indicated in the attached detailed drawings. Remove the bituminous material uniformly by making an edge key, so as to provide a smooth transition to the finished bridge when a new bituminous overlay of compacted depth of approximately $1\frac{1}{2}$ " is added to the approaches. The grinding depth may vary depending on the condition of the existing approach and final elevation of bridge end. Dispose of all removed material away from the site.
- **E.** Surface Texturing. Texture the concrete surface of the overlay in accordance with Section 609.03.10.
- **F. Verifying Field Conditions.** The Contractor shall field verify all dimensions before ordering any material. New material that is unsuitable due to variation in existing structure shall be replaced at the Contractors expense.

G. Damage to the Structure. The Contractor shall bear all responsibility and expense for all damage to the structure during the repair work even to removal and replacement of a fallen span, should the fallen span result from the Contractor's actions.

4. **MEASUREMENT.** See Section 606 and the following:

A. Latex Modified Concrete for Overlay. The Department will measure the quantity in cubic yards using the theoretical volume as follows for each bridge:

018B00019N	(99'0"x 23'0'x 1.50") = 10.6
018B00020N	(99'0"x 23'0'x 1.50") = 10.6
070B00009N	(245'0"x 24'0'x 1.50") = 27.3

- **B.** Remove Epoxy Bit Foreign Overlay, Machine Prep of Slab, Blast Cleaning, Epoxy Sand Slurry and Bridge Overlay Approach Pavement. The Department will measure the removal of the existing overlay in square yards.
- **C. Partial Depth Patching.** The Department will measure the quantity in cubic yards by deducting the theoretical volume of bridge deck overlay (LMC) from the total volume (as indicated by the batch quantity tickets) of Concrete required to obtain the finished grade shown on the plans or established by the Engineer.
- **D.** Concrete Class M Full Depth Patch and Concrete Latex Overlay. The Department will measure the quantity in cubic yards.
- **E. Steel Reinforcement.** The Department will measure any reinforcing steel necessary for the partial or full depth patch in pounds.
- F. Pave Striping-Perm 4 Inch. The Department will measure the quantity in lineal feet.
- **5. PAYMENT.** See Section 606 and the following:
 - A. Remove Epoxy Bit Foreign Overlay (08510). The Department will make payment for the removal of the existing overlay.
 - **B.** Machine Pre of Slab (08551). The Department will make payment for the machine preparation of the existing slab.
 - **C. Partial Depth Patching (24094EC).** The Department will make payment for removing exiting materials, furnishing and placing all new materials completed and accepted.
 - **D.** Concrete Class M Full Depth Patch (08526). The Department will make payment for removing exiting materials, furnishing and placing all new materials.
 - **E. Blast Cleaning (08549).** The Department will make payment for blast cleaning all surfaces specified.
 - F. Epoxy Sand Slurry (08504). The Department will make payment for furnishing and placing all new materials as specified.
 - **G.** Concrete Latex Overlay (08534). The Department will make payment for furnishing and placing all new material as specified.
 - **H. Steel Reinforcement (08150).** The Department will make payment for steel reinforcement, if necessary.

- **I.** Asphalt Approach Pavement (03304). The Department will make payment for removing existing materials, furnishing and placing all new materials as specified.
- J. Pave Striping-Perm 4 Inch (06514). The Department will make payment for furnishing and placing permanent striping as specified.

SPECIAL NOTE FOR REPLACING EXPANSION JOINTS AND/OR INSTALLING ARMORED EDGES FOR CONCRETE ON BRIDGES

1. **DESCRIPTION.** Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings (current editions), this Note, and the attached detail drawings. Section references are to the Standard Specifications. This work consists of the following: (1) Furnish all labor, materials, tools, and equipment; (2) Remove existing concrete and expansion joint(s) and/or bridge ends, (3) Install armored edges, expansion joint seals and new concrete as specified and in accordance with the attached detail drawings, (4) Install new joint seals (where required), and (5) Any other work specified as part of this contract.

2. MATERIALS.

- A. Class "M" Concrete. Use either "M1" or "M2". See Section 601.
- **B.** Structural Steel. Use new, commercial grade steel suitable for welding. The Engineer will base acceptance on visual inspection. See attach detailed drawings
- C. Stud Anchors.
- D. Steel Reinforcement. Use Grade 60. See Section 602.
- E. Epoxy Bond Coat. See Section 511.
- F. Joint Seals.

Pre-compressed Silicon and Hybrid Foam Joint Seals (Bridge Deck and Parapet). See Section 807.03.02. Choose one from the following list of manufactures:

1" Joint Seal: SSI SES-100,
Watson Bowman Acme FS-100
BEJS EMSEAL-BEJS-ON-A-Reel.
4" Joint Seal: SSI SES-400, RJ Watson SF-400
Watson Bowman Acme SF-400 or
BEJS EMSEAL (4") or DS Brown V-400. (Parapet for 4" Strip Seal)
4" Neoprene Strip Seals (Bridge Deck). See Section 807.03.03.

3. EQUIPMENT.

- A. Hammer. Provide Power driven hammers lighter than nominal 45 lb. class.
- **B.** Sawing Equipment. Sawing equipment shall be a concrete saw capable of sawing concrete to the specified depth.
- **C. Hydraulic Impact Equipment.** Hydraulic Impact/Skid Steer Type Equipment with a maximum rated striking Energy of 360 ft-lbs are permitted only in areas of concrete removal more than 6 inches away from boundaries of surface areas to remain in service. The Contractor is to provide data information to the engineer on the equipment they wish to utilize to ensure compliance with this note.

4. CONSTRUCTION.

- A. Remove Existing Materials. Remove existing expansion joints, existing modular expansion join assembly, bridge end armored edges and specified areas of concrete. See Standard Drawings BJE-003 and BJE-006 (Current Editions). Remove debris and/or expansion joint filler as directed by the Engineer. Clean and leave all existing steel reinforcement encountered in place. Damaged steel reinforcement will be repaired/replaced as directed by the Engineer at no additional cost to the Department. Dispose of all removed material entirely away from the job site. This work is incidental to the contract unit price for "Expansion Joint Replacement" or "Armored Edge for Concrete".
- **B.** Place New Concrete and Armored Edges. After all specified existing materials have been removed; place new armored edges to match the original grade. See Standard Drawings BJE-001, BJE-003 and BJE-006 (Current Editions). Place the new Class "M" concrete to the original grade and finish with broom strokes drawn transversely from curb to curb. All new structural steel shall be cleaned and painted in accordance with requirements of Section 607.03.23, except that surfaces to come in contact with concrete are not to be painted. Blast clean all areas of existing concrete and structural steel to come in contact with new concrete until free of all laitance and deleterious substances immediately prior to the placement of the Class "M" Concrete. The surface areas of existing concrete to come in contact with the new Class "M" Concrete in accordance with Section 511. The interfaces of the new and old concrete shall be as nearly vertical and horizontal as possible. Shop drawings will not be required.
- **C.** Additional Steel Reinforcement. Furnish for replacement, as directed by the Engineer, 200 linear feet for each joint of #4 steel reinforcing bars in 20' lengths. Place these bars in areas deemed by the Engineer to require additional reinforcement. Field cutting and bending is permitted. Do not place any additional steel reinforcement above the height of the top row of Nelson Studs on the armored edges. Ensure that all exposed steel reinforcement is tied in accordance with Section 602.03.04 prior to pouring the new Class "M" concrete. Deliver unused bars to the Local County Maintenance Barn. Payment will be made in accordance with Section 602.
- **D. Stage Construction.** Installation of concrete, armored edges and modular expansion joint assembly in two (or more if specified) stages is necessary. Join the armored edges and modular expansion joint assembly at or near the centerline of the roadway or lane line, field weld and grind smooth.
- **E. Preformed Neoprene Joint Seal.** Place the preformed joint seal in one continuous, unbroken length. Place neoprene strip seals as recommended by the manufacturer and in accordance with Section 609.03.04 except that shop drawings will not be required.
- **F. Pre-compressed Silicone and Foam Hybrid Seals.** Place pre-compressed silicone and foam Hybridge seals as recommended by the manufacturer. Shop drawings will not be required.

- **G. Residual Lead.** Residual lead paint may still be on bridge. The Contractor is advised to take all necessary protective measures including worker safety and environmental regulations when performing surface preparation. The Department will not consider any claims based on residual lead paint.
- **H. Verifying Field Conditions.** The Contractor shall field verify all joint openings, locations and manufacture before ordering any material. New material that is unsuitable due to variation in existing structure shall be replaced at the Contractors expense.
- **I. Damage to the Structure.** The Contractor shall bear all responsibility and expense for all damage to the structure during the repair work even to removal and replacement of a fallen span, should the fallen span result from the Contractor's actions.

5. MEASUREMENT.

- **A.** Expansion Joint Replace 1 In. The Department will measure the quantity in linear feet from gutter line to gutter line along the centerline of the joint.
- **B.** Expansion Joint Replace 4 In. The Department will measure the quantity in linear feet from gutter line to gutter line along the centerline of the joint.
- **C. Armored Edge for Concrete.** The Department will measure the quantity in linear feet from gutter line to gutter line along the face of the bridge end.
- **D. Steel Reinforcement.** See Section 602.

6. **PAYMENT**.

- A. Expansion Joint Replace 1 In. (03293) Payment at the contract unit price per linear foot is full compensation for removing specified existing materials, furnishing and installing the new armored edges, concrete, joint seal, and all incidental items necessary to complete the work within the specified pay limits as specified by this note and Standard Drawing BJE-003 (Current Edition).
- **B.** Expansion Joint Replace 4 In. (03298) Payment at the contract unit price per linear foot is full compensation for removing specified existing materials, furnishing and installing the new armored edges, concrete, neoprene strip seal (bridge deck), Pre-compressed Silicone and Foam Hybrid Seals (parapets) and all incidental items necessary to complete the work within the specified pay limits as specified by this note Standard Drawing BJE-006 (Current Edition). and attached detailed drawings.
- C. Armored Edge for Concrete (03299). Payment at the contract unit price per linear foot is full compensation for placing new armored edge and any approach pavement repair, traffic striping repair and all incidental items necessary to complete the work within the specified pay limits as specified by this note and Standard Drawing BJE-001 (Current Edition).
- D. Steel Reinforcement (08150). See Section 602.

SPECIAL NOTE FOR ELIMINATING TRANSVERSE JOINTS ON BRIDGES

1. **DESCRIPTION.** Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings (current editions), this Note, and the Attached Detailed Drawings. Section references are to the Standard Specifications. This work consists of the following: (1) Furnish all labor, materials, tools, and equipment, (2) Remove existing concrete and expansion device(s), (3) Place new concrete and steel reinforcement as specified, (4) Any other work specified as part of this contract. See attached detailed drawings.

- 2. MATERIALS.
 - A. Class "M" Concrete. Use either "M1" or "M2". See Section 601.
 - B. Steel Reinforcement. Use Grade 60. See Section 602.
 - C. Epoxy Bond Coat. See Section 511.

3. EQUIPMENT.

- A. Hammer. See Section 606.02.10 B.
- B. Sawing Equipment. See Section 606.02.10 C.
- C. Hydraulic Impact Equipment. See Section 606.02.10 D.

4. CONSTRUCTION.

A. Remove Existing Materials. Remove the existing transverse joints, joint filler, and specified areas of concrete as shown on the plans or as directed by the Engineer. Clean and leave all existing steel reinforcement encountered in place. Damaged steel reinforcement will be repaired/replaced as directed by the Engineer at no additional cost to the Department.

Dispose of all removed material entirely away from the job site. This work is incidental to the contract unit price for "Eliminate Transverse Joint".

- **B.** Additional Steel Reinforcement. Furnish for this work steel reinforcing bars as shown on the plans. Splice these bars to the existing longitudinal reinforcement in the deck and curb/sidewalk in the areas of removed concrete to tie the slabs together as shown on the plans. Ensure that all exposed steel reinforcement is tied in accordance with Section 602.03.04 prior to pouring the new Class "M" concrete.
- C. Place New Concrete. Blast-clean all areas of existing concrete and structural steel to come in contact with new concrete until free of all laitance and deleterious substances immediately prior to the placement of the Class "M" Concrete. The surface areas of existing concrete to come in contact with the new Class "M" Concrete are to be coated with an epoxy bond coat immediately prior to placing new concrete in accordance with Section 511. The interfaces of the new and old concrete shall be as nearly vertical and horizontal as possible. Place new Class "M" Concrete to the specified grade and finish to receive the new overlay or as shown on the plans. On the sidewalk and curb, place the new concrete to original grade and finish to match the existing curb/sidewalk. Repair all pavement striping that is disturbed.
- **D. Stage Construction.** Installation of concrete in two (or more if specified) stages is necessary.

- **E. Residual Lead.** Residual lead paint may still be on bridge. The Contractor is advised to take all necessary protective measures including worker safety and environmental regulations when performing surface preparation. The Department will not consider any claims based on residual lead paint.
- **F. Verifying Field Conditions.** The Contractor shall field verify all dimensions before ordering any material. New material that is unsuitable due to variation in existing structure shall be replaced at the Contractors expense.
- **G. Damage to the Structure.** The Contractor shall bear all responsibility and expense for all damage to the structure during the repair work even to removal and replacement of a fallen span, should the fallen span result from the Contractor's actions.

5. MEASUREMENT.

- **A. Eliminate Transverse Joint.** The Department will measure the quantity in linear feet from plinth to plinth along the centerline of the joint.
- **B. Steel Reinforcement.** See Section 602.
- 6. PAYMENT.
 - A. Eliminate Transverse Joint (03300). Payment at the contract unit price per linear foot is full compensation for furnishing equipment, labor, tools and materials needed to complete removal and disposal of the specified existing materials, cleaning and straightening of existing steel reinforcement, furnishing and installing the concrete, repairing traffic striping and all incidental items necessary to complete the work within the specified pay limits as specified by this note and as shown on the attached detail drawings.
 - B. Steel Reinforcement (08150). See Section 602.

SPECIAL NOTES FOR DECK DRAIN RETROFIT

1. DESCRIPTION. Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings, (current editions), this note, and the attached detail drawings. This work consists of: (1) Furnish all labor, materials, tools, and equipment, (2) Install Deck Drain Retrofit and (3) Any other work specified as part of this contract.

2. MATERIALS

- A. Poly-methyl Methacrylate (PMMA). Use new, commercial grade, ¹/₄" thick Poly-methyl methacrylate known as acrylic glass or its various trade names, like Plexiglass®. The Engineer will base acceptance on visual inspection.
- **B.** Anchors. Will allow galvanized all-tread ¹/₂"x6" or an approved alternate.
- C. Grout. See Section 511.

3. CONSTRUCTION

- A. Install Deck Drain Retrofit. Place PMMA glass as shown in attached detail drawing.
- **B.** Clean Deck Drains. All deck drains shall be clean of debris. All cost to clean the deck drains shall be considered incidental to the unit price bid for deck drain retrofit.
- C. Verifying Field Conditions. The Contractor shall field verify all dimensions before ordering any material. New material that is unsuitable due to variation in existing structure shall be replaced at the Contractors expense.
- **D. Damage to the Structure.** The Contractor shall bear all responsibility and expense for all damage to the structure during the repair work even to removal and replacement of a fallen span, should the fallen span result from the Contractor's actions.

4. **MEASUREMENT**

A. Deck Drain Retrofit. The Department will measure this quantity as each.

5. PAYMENT

A. Deck Drain Retrofit (24692EC). Payment at the contract unit price per each is full compensation for furnishing and installing new acrylic glass panels, and all incidental items necessary to complete the work within the specified pay limits as specified by this note and as shown on the attached detail drawing.

SPECIAL NOTE FOR PREVENTIVE MAINTENANCE

1. **DESCRIPTION.**

Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings, (current editions), this Note and Attached Detailed Drawings. Section references are to the Standard Specifications. This work consists of the following: (1) Furnish all labor, materials, tools, and equipment, (2) Bridge Cleaning, (3) Concrete Coatings (4) Bearing Lubrication (5) Any other work specified as part of this contract.

2. MATERIALS.

A. Wash Water

Use clean potable water for all pressure washing.

B. Concrete Coatings

See the Division of Material's list of approved materials for concrete coatings and Section 821.

C. Bearing Lubricant

Use one of the lubricants from the following manufactures:

Manufacture	Lubricant
Bostik Inc.,	Never Seez - Mariner's Choice
Mobil Oil	Mobil Centaur Moly NLGI Grades 1 or 2
Certified Labs	Premalube #1 WG

3. CONSTRUCTION.

A. Bridge Cleaning.

All debris shall be removed from the bridge components. See attached detailed drawings addressing components having debris removal. Equipment for removing debris from the bridge components shall be determined by the Contractor, subject to the approval of the Engineer. The Contractor shall prevent any debris from entering any body of water, bridge drainage system, or traffic lanes. All debris removed shall be disposed of in a suitable off-site disposal facility. All vegetation present at areas of the bridge that are to be addressed in this proposal shall be removed as determined by the Engineer.

All cost to complete Debris Removal and Remove Vegetation shall as specified shall be included in the Lump Sum price for "Bridge Cleaning".B. Stratified and Pact Rust Removal.

Stratified and pack rust shall be removed from all bearing devices and specified limits of beams. All existing bearing lubrication shall be removed. See attached detailed drawings for each bridge showing location and quantity of the bearing devices. Hand tools including wire brushes, scrapers or impact devices (hand hammers or power chisels) are to be used for removing stratified and pack rust. All surfaces to have stratified and pack rust removed shall be cleaned to an SSPC SP-2 level. All debris collected shall be disposed of in a suitable off-site disposal facility. All cost to complete Stratified, Pack Rust Removal and removal of existing bearing lubricant shall be considered incidental to the unit price bid for "Bearing Lubrication".

C. Pressure Washing.

Specified bridge components shall be pressure washed. See attached detailed drawings addressing components to be pressure washed. All equipment for pressure washing shall be operated at a minimum pressure of up 4,000 psi with 0 degree spinner tip and/or fan tips as determined by the engineer at the working location with a minimum flow rate of 3.5 gal/minute provided that these pressures do not damage any components of the structure. Pressure and flow rates shall be reduced to a level satisfactory to the Engineer should any damage occur due to power washing procedures. Pressure washing shall be operated at distance of approximately six inches from and perpendicular to the surface. All pressure washing wands shall be equipped with a gauge to accurately determine the amount pressure used. Pressure washing of any bridge element will proceed from top of wash area to bottom of wash area. Wash water will not be released to a bridge element previously washed. Preform all pressure washing at temperatures above 40 degrees Fahrenheit. All cost to complete Pressure Washing as specified shall be included in the Lump Sum price for Lump Sum price for "Bridge Cleaning".

D. Concrete Coatings Application.

Specified bridge components shall have concrete coating applied to as specified after bridge cleaning. See attached detailed drawings for addressing the bridge components. Use compressed air to remove any loose debris from the surfaces that are to be coated after power washing. See concrete coating diagram. All coatings shall be applied within manufacturers recommended dry film thickness range. For recommended conditions for application, see Section 614.03.02 and coatings supplier specifications. Allow the surfaces to be coated to dry before any coating is applied. The coating must be applied to a clean and dry surface. All coating application shall be executed using brushes, rollers, etc. No spray application will be permitted. The Department requires acceptance testing of samples obtained on a per-lot basis pershipment. The Division of Materials will perform acceptance testing. See Section 821.04. The finish coat shall be Light Gray for Concrete. See Section 821.02. All cost to complete Concrete Coating Application as specified shall be included in the Lump Sum price for "Concrete Coatings".

E. Bearing Lubrication Application.

Bearing devices shall be lubricated as specified after all stratified rust and pack rust is removed and power washing is complete, bearing devices shall have lubricant applied to all surfaces of the bearing including bearing plates and points of movement. See attached detailed drawings for each bridge showing location and quantity of the bearing devices. Allow bearing devices to dry before lubricant is applied. Preform all bearing lubrication application at temperatures above 40 degrees Fahrenheit or in accordance with manufactures specifications. All cost to complete Bearing Lubrication Application as specified shall be included in the unit price Each for "Bearing Lubrication"

F. Sequence of Work.

- Complete work in the sequence listed below:
- 1. Debris Removal
- 2. Stratified Rust Removal
- 3. Pressure Washing
- 4. Concrete Coating Application
- 5. Bearing Lubrication Application

G. Inspection.

The Cabinet will provide inspection for all items required in this contract. Visual inspection will be required upon completion of each work item for each structure component or at the discretion of the Engineer at any time. All visual inspection shall be performed within arm's length distance.

- 1. Debris Removal: Visual Inspection.
- 2. Stratified Rust or Pack Rust Removal: Visual Inspection and Scraper Test any surface cleaned to SSPC SP2 will be inspected by a dull scraper test to ascertain adherence of existing coating and a hammer test for tightness of pact rust.
- 3. Power Washing: Visual Inspection.
- 4. Concrete Coating:

Prime Coat Application Check for wet film thickness*, and defects in the Paint.

Finish Coat Application Check for wet film thickness*, paint appearance, color and quality of application.

5. Bearing Lubrication. Visual Inspection.

H. Verifying Field Conditions.

The Contractor shall be familiar with all conditions at each bridge site. The Cabinet will not consider any claims due to the Contractor having not familiarized themselves with requirements of this work.

I. Residual Lead.

Residual lead paint may still be on bridge. The Contractor is advised to take all necessary protective measures including worker safety and environmental regulations when performing surface preparation. The Department will not consider any claims based on residual lead paint.

J. Damage to the structure.

The Contractor shall bear all responsibility and expense for all damage to the structure during the repair work, even to the removal and replacement of a fallen span, should the fallen span result from the Contractors actions.

4. MEASUREMENT.

A. Bridge Cleaning.

The Cabinet will measure this item by Lump Sum, completed and accepted.

B. Concrete Coating.

The Cabinet will measure this item by Lump Sum, completed and accepted.

C. Bearing Lubrication: The Cabinet will measure this item by Each, completed and accepted.

5. PAYMENT.

A. Bridge Cleaning (24981EC).

Payment at the contract unit price for "Lump Sum" is full compensation for Debris Removal, Pressure Washing and all incidental items required to complete this with as specified in this note and attached detailed drawings.

B. Concrete Coating (24982EC).

Payment at the contract unit price for "Lump Sum" is full compensation for applying the concreate coatings and all incidental items required to complete this work as specified in this note and attached detailed drawings.

C. Bearing Lubrication (24983EC): Payment at the contract unit price "Each" is full compensation for applying bearing lubrication and all incidental items required to complete this work as specified in this note and attached detailed drawings.

SPECIAL NOTE FOR CONTRACT COMPLETION DATE AND PENALTIES ON BRIDGE REPAIR CONTRACTS

1. **COMPLETION DATE.** The Contractor has the option of selecting the starting date for this Contract. Once selected, notify the Department in writing of the date selected at least two weeks prior to beginning work. All work is to be completed by the date listed below. An allotted number of Calendar days are assigned to each structure in this contract as shown below.

<u>STRUCTURE</u>	<u>NO. OF CALENDAR DAYS</u>	COMPLETION DATE
018B00019N	30	June 30, 2022
018B00020N	30	June 30, 2022
070B00009N	30	June 30, 2022

Contrary to Section 108.07.03, the Engineer will begin charging calendar days for a structure on the day the Contractor starts work or sets up traffic control on that particular structure. A **penalty of \$500.00 per day** will be assessed when the allotted number of calendar days is exceeded for each structure.

All construction must be completed in accordance with the weather limitations specified in Section 606 and/or Section 601 as applicable. No extension of Contract time will be granted due to inclement weather or temperature limitations that occur due to starting work on the Contract or a structure late in the construction season.

SPECIAL NOTE FOR TRAFFIC CONTROL ON BRIDGE REPAIR CONTRACTS

1. TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the Standard Specifications (current edition), Section 112. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic". Contrary to Section 106.01, traffic control devices used on this project may be new or used in new condition, at the beginning of the work and maintained in like new condition until completion of the work.

2. TRAFFIC COORDINATOR

Furnish a Traffic Coordinator as per Section 112. The Traffic Coordinator shall inspect the project maintenance of traffic, at least three times daily, or as directed by the Engineer, during the Contractor's operations and at any time a lane closure is in place. The personnel shall have access on the project to a radio or telephone to be used in case of emergencies or accidents. The Traffic Coordinator shall report all incidents throughout the work zone to the Engineer on the project. The Contractor shall furnish the name and telephone number where the Traffic Coordinator can be contacted at all times.

3. SIGNS

Contrary to Section 112.04.02, only long term signs (sign intended to be continuously in place for more than 3 days) will be measured for payment; short term signs (signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic.

The contractor is to install warning signs for wide loads in advance of the bridge under the direction of the Engineer. The Department will not measure installation, maintenance, or removal for payment, and will consider these incidentals to Maintain and Control Traffic.

4. TEMPORARY PAVEMENT STRIPING

Skip lines and/or solid lines through the length of the tapers for lane closures and other striping as directed by the Engineer shall be temporarily covered with 6" black removable tape. Permanent removal of all other pavement striping for traffic control shall be considered incidental to Maintain and Control Traffic. Temporary pavement striping shall be paid only once per course in accordance with Section 112.04.07. The Contractor shall replace any temporary striping that becomes damaged or fails to adhere to the pavement before dark on the day of the notification. A penalty of \$500.00 per day will be assessed for failing to replace temporary striping within this time limit.

5. PROJECT PHASING & CONSTRUCTION PROCEDURES

One lane of traffic shall be maintained on each bridge in accordance with Standard Drawing No. TTC-110 or TTC-115. The minimum clear lane width required is as follows:

<u>Structure</u>	Clear Lane Width
018B00019N	11'-6
019B00020N	11'-6
070B00009N	12'-0"

6. TEMPORARY SIGNAL

Provide, install, and maintain a temporary traffic signal as specified below. The Contractor must provide a 24-hour contact person and number available to maintain the temporary signals as needed.

<u>Structure</u>	<u>Signal</u>
018B00019N	2 Phase
018B00020N	2 Phase
070B00009N	2 Phase

7. MEASUREMENT.

Temporary Signs:

The Cabinet will measure this item by "Square Feet".

Maintain and Control Traffic:

The Cabinet will measure this item by "Lump Sum".

Lane Closure, and Temp Signal 2 Phase:

The Cabinet will measure this item by "Each".

Pave Striping-Temp Rem Tape-B, W, and Y:

The Department will measure the quantity in "Linear Feet".

8. PAYMENT.

Temporary Signs (02562)

Payment at the contract unit price for "Square Feet" is full compensation for all items to complete this work as specified.

Maintain and Control Traffic (02650):

Payment at the contract unit price for "Lump Sum" is full compensation for all items to complete this work as specified.

Lane Closure (02653) and Temp Signal 2 Phase (04933):

Payment at the contract unit price "Each" is full compensation for all items to complete this work as specified.

Pave Striping-Temp Rem Tape-B (06549), W (06550), and Y (06551):

Payment at the contract unit price "Lineal Feet" is full compensation for all items to complete this work as specified.



Commonwealth of Kentucky Transportation Cabinet transportation.ky.gov

Jim Gray Secretary

Asbestos Inspection Report

To: Tom Mathews

District: Central Office

Date: June 22, 2021

Conducted By: O'Dail Lawson

Report Prepared By: O'Dail Lawson

Project and Structure Identification

Project Number: CID# 212967

Structure ID: Calloway 018B00019N

Structure Location: KY 121 (New Concord Road) over Beechy Creek (Northern Structure)

Sample Description: Any suspect materials collected were negative for asbestos.

Inspection Date: June 15, 2021

Results and Recommendations

The results of the samples collected were negative for the presence of asbestos above 1%. No abatement is required at this time.

It is recommended that this report accompany the 10-Day Notice of Intent for Demolition (Notification Form DEP 7036) which is to be submitted to the Kentucky Division of Air Quality prior to abatement, demolition, or renovation of any building or structure in the Commonwealth.

Andy Beshear Governor MRS, INC.

MRS, Inc. Analytical Laboratory Division

332 West Broadway / Suite # 902 Louisville, Kentucky - 40202 - 2133

(502) 495-1212 Fax: (502) 491-7111

BULK SAMPLE ASBESTOS ANALYSIS

Analysis N#	# 3106212	Address:	Calloway County - 018B00019N
Client Name:	КҮТС		
Sampled By:	O'Dail Lawson		

				% FIBROUS ASBESTOS				% NON-ASBESTOS FIBERS			۲S
Sample ID	Color	Layered	Fibrous	Chrysotile	Amosite	crocidolite	Others	Cellulose	Fiberglass	Syn. Fiber	Other/Mat.
# 19 - 1	Black	Yes	No				None				100%

Methodology : EPA Method 600/R-93-116

Date Analyzed : 21-Jun-21 :

Analyst

Winterford Mensah

Reviewed By: __________

The test relates only to the items tested. This report does not represent endorsement by NVLAP or any agency of the U.S Government. Partial Reproduction of any part of this report is strictly prohibited. Samples shall be retained for (30) days.

AIHA # 102459

AJHA #1 02459

LIVINGSTON - CALLOWAY COUNTIES 121GR21M073-FE02

Chain of Custody Record Kentucky Transportation Cabinet 200 Mero Street, 5th Floor West Frankfort, Kentucky 40622 502) 564-7250 fax (502) 564-5655	SINET (worken structur) KY - 181 OVEr Beech, Creek mp 3 (signature):	had been	lested Matrix Color Cont. Preservative Type N/A N/A				Page 1
Chain of Custody Reco Kentucky Transportation Cabinet 200 Mero Street, 5th Floor West Frankfort, Kentucky 40622 (502) 564-7250 fax (502) 564-5655	CY TRANSPORTATION CAI Samplers		Analysis Requested Ashcan bulk		121		KYTC COC
RIATION	55	018B0009N	Collected Date Time $&/_{15f_{01}}$ 3:38	Date/Time:	Date/Time: Date/Time: Date/Time:	Date/Time:	
KENTUCKY KENTUCKY IRANSPORTATION CABINET	O'Dail Lawson <u>o'dail.lawson@ky.gov</u> KYTC Address: 200 Mero Street Frankfort KY Phone: 502-782-5020 Fax: 502-564-56 PO#:	Project ID CA Vou any OISF	Sample ID Sample Description P-1 Johr Compound	Relinouished By:	Winteres ?	Received at Lab By:	

L

CHC Training

Environmental Compliance Certification Experts

www.chctraining.com 303.412.6360

855.60.CERTIFY

1775 W. 55th Avenue Denver, Colorado 80221 United States of America

CERTIFICATE OF ACHIEVEMENT

This certificate is awarded to:

O'DAIL LAWSON

accordance with the Model Accreditation Plan (MAP) (40 CFR Part 763, Subpart E, Appendix C), AHERA of the In recognition of satisfactory completion of the EPA-approved annual asbestos refresher training in Toxic Substances Control Act (TSCA), and Colorado Regulation No. 8 entitled:

BUILDING INSPECTOR

FEBRUARY 11, 2021

4.0

February 11, 2022

February 11, 2021

Course Completion: Examination Date: Expiration Date: Course Hours:

Danaya N. Wilson

CEO & Training Program Manager

Credential License ID: 28699399

> TRAINING® EST. 2015 ACCREDITED ALUMNI

> > Instructor

Matthew Valdez

CHC Training Certificate No.: R21-0204-AI





COMMONWEALTH OF KENTUCKY TRANSPORTATION CABINET transportation.ky.gov

Jim Gray Secretary

Asbestos Inspection Report

To: Tom Mathews

District: Central Office

Date: June 22, 2021

Conducted By: O'Dail Lawson

Report Prepared By: O'Dail Lawson

Project and Structure Identification

Project Number: CID# 212967

Structure ID: Calloway 018B00020N

Structure Location: KY 121 (New Concord Road) over Beechy Creek (Southern Structure)

Sample Description: Any suspect materials collected were negative for asbestos.

Inspection Date: June 15, 2021

Results and Recommendations

The results of the samples collected were negative for the presence of asbestos above 1%. No abatement is required at this time.

It is recommended that this report accompany the 10-Day Notice of Intent for Demolition (Notification Form DEP 7036) which is to be submitted to the Kentucky Division of Air Quality prior to abatement, demolition, or renovation of any building or structure in the Commonwealth.

Andy Beshear Governor MRS, INC.

MRS, Inc. Analytical Laboratory Division

332 West Broadway / Suite # 902 Louisville, Kentucky - 40202 - 2133 (502) 495-1212 Fax: (502) 491-7111

BULK SAMPLE ASBESTOS ANALYSIS

Analysis N#	# 3106213	Address:	Calloway County - 018B00020N
Client Name:	КҮТС		
Sampled By:	O'Dail Lawson		

			% FIBROUS ASBESTOS % NON-ASBESTOS FIBERS					RS			
Sample ID	Color	Layered	Fibrous	Chrysotile	Amosite	crocidolite	Others	Cellulose	Fiberglass	Syn. Fiber	Other/Mat.
# 20 - 1	Black	Yes	No				None				100%

Methodology : EPA Method 600/R-93-116

Date Analyzed :	21-Jun-21

:

Analyst

Winterford Mensah

Reviewed By:

Wintegers Menal

The test relates only to the items tested. This report does not represent endorsement by NVLAP or any agency of the U.S Government. Partial Reproduction of any part of this report is strictly prohibited. Samples shall be retained for (30) days.

AIHA # 102459

AJHA #1 02459

0 TRANSPORT CABINET KENTUCKY

Chain of Custody Record

Kentucky Transportation Cabinet 200 Mero Street, 5th Floor West Frankfort, Kentucky 40622 (502) 564-7250 fax (502) 564-5655

0 ^T Dail Lawson <u>o'dail.lawson@ky.gov</u> Client Information KY TRANSPORTATION CABINET KYTC 200 Mero Street Frankfort KY 502-782-5020 Fax: 502-564-5655 N/A = Not Applicable Samplers (signature): ^	DISIGO620N WORDD		anno elisto, 13:20 Ascens built birman block		Date/Time:	and Merach 6/17/2/	Date/Time:	Date/Time:	KYTC COC Page 1
O'Dail Lawson <u>o'dd</u> KYTC Address: 200 Mero Street Frankfort KY Phone: 502-782-5020 PO#:	Project ID Calloway	Sample ID Sample Description	20-1 Join Conjourn		Relinquished By:	Received By: Mentery	Relinquished By:	Received at Lab By:	

LIVINGSTON - CALLOWAY COUNTIES 121GR21M073-FE02

Contract ID: 212967 Page 33 of 63

CHC Training

Environmental Compliance Certification Experts

www.chctraining.com 303.412.6360

855.60.CERTIFY

1775 W. 55th Avenue Denver, Colorado 80221 United States of America

CERTIFICATE OF ACHIEVEMENT

This certificate is awarded to:

O'DAIL LAWSON

accordance with the Model Accreditation Plan (MAP) (40 CFR Part 763, Subpart E, Appendix C), AHERA of the In recognition of satisfactory completion of the EPA-approved annual asbestos refresher training in Toxic Substances Control Act (TSCA), and Colorado Regulation No. 8 entitled:

BUILDING INSPECTOR

FEBRUARY 11, 2021

COURSE COMPLETION: EXAMINATION DATE: EXPIRATION DATE:

Course Hours:

4.0

February 11, 2022

February 11, 2021

Danaya N. Wilson CEO & Training Program Manager

Credential License ID: 28699399

> ACCREDITED ALUMNI

> > Matthew Valdey Instructor

CHC Training Certificate No.: R21-0204-AI



Renew this Certificate



Verify this Certificate



COMMONWEALTH OF KENTUCKY TRANSPORTATION CABINET transportation.ky.gov

Jim Gray Secretary

Asbestos Inspection Report

To: Tom Mathews

District: Central Office

Date: June 22, 2021

Conducted By: O'Dail Lawson

Report Prepared By: O'Dail Lawson

Project and Structure Identification

Project Number: CID# 212967

Structure ID: Livingston 070B00009N

Structure Location: KY 135 (Tolu Road) over Buck Creek

Sample Description: Any suspect materials collected were negative for asbestos.

Inspection Date: June 15, 2021

Results and Recommendations

The results of the samples collected were negative for the presence of asbestos above 1%. No abatement is required at this time.

It is recommended that this report accompany the 10-Day Notice of Intent for Demolition (Notification Form DEP 7036) which is to be submitted to the Kentucky Division of Air Quality prior to abatement, demolition, or renovation of any building or structure in the Commonwealth.

Andy Beshear Governor MRS, INC.

MRS, Inc. Analytical Laboratory Division

332 West Broadway / Suite # 902 Louisville, Kentucky - 40202 - 2133 (502) 495-1212 Fax: (502) 491-7111

BULK SAMPLE ASBESTOS ANALYSIS

Analysis N#	# 3106214	Address:	Livingston - 070B00009N
Client Name:	КҮТС		
Sampled By:	O'Dail Lawson		

				% FIBROUS ASBESTOS				% NON-ASBESTOS FIBERS				
Sample ID	Color	Layered	Fibrous	Chrysotile	Amosite	crocidolite	Others	Cellulose	Fiberglass	Syn. Fiber	Other/Mat.	
#9-1	Black	Yes	No				None				100%	

Methodology : EPA Method 600/R-93-116

Date Analyzed : 21-Jun-21

:

Analyst

Winterford Mensah

Reviewed By:

Mintegens Mencals

The test relates only to the items tested. This report does not represent endorsement by NVLAP or any agency of the U.S Government. Partial Reproduction of any part of this report is strictly prohibited. Samples shall be retained for (30) days.

AIHA # 102459

AJHA #1 02459

KENTUCKY TRANSPORTATION CABINET

Chain of Custody Record

Kentucky Transportation Cabinet 200 Mero Street, 5th Floor West Frankfort, Kentucky 40622 (502) 564-7250 fax (502) 564-5655

KY TRANSPORTATION CABINET 174-135 OUER Buch Crock Samplers (signature):	Oben/leur	Analysis Requested Matrix Color Cont. Type Preservative Asbern Sull. NIA						KYTC COC Page 1
I.lawson@ky.gov Client Information Figure Results Code: Results Code: Fax: 502-564-5655 N/A = Not Applicable	0	Collected Date Time W 11 Stap		Date/Time:	- CINZI	Date/Time:	Date/Time:	
O'Dail Lawson <u>o'dail.lawson@ky.gov</u> KYTC Address: 200 Mero Street Frankfort KY Phone: 502-782-5020 Fax: 502-564-5655 PO#:	Project ID Lichinghind 0709 00091	Sample ID Sample Description 9-1 Joint Congerno		Relinquished By:	Received By: Meridians Merid	Relinquished By:	Received at Lab By:	

LIVINGSTON - CALLOWAY COUNTIES 121GR21M073-FE02

CHC Training

Environmental Compliance Certification Experts

TRAINING 303.412.6360 www.chctraining.com

855.60.CERTIFY

United States of America Denver, Colorado 80221 1775 W. 55th Avenue

CERTIFICATE OF ACHIEVEMENT

This certificate is awarded to:

O'DAIL LAWSON

accordance with the Model Accreditation Plan (MAP) (40 CFR Part 763, Subpart E, Appendix C), AHERA of the In recognition of satisfactory completion of the EPA-approved annual asbestos refresher training in Toxic Substances Control Act (TSCA), and Colorado Regulation No. 8 entitled:

BUILDING INSPECTOR

FEBRUARY 11, 2021

EXAMINATION DATE: COURSE COMPLETION **EXPIRATION DATE:**

COURSE HOURS:

4.0

February 11, 2022

February 11, 2021

CEO & Training Program Manager Danaya N. Wilson

Credential License ID: 28699399

> ACCREDITED RAINING EST. 💉 2015 ALUMNI CHC

> > Matthew Valdez Instructor

CHC Training Certificate No.: R21-0204-A





MATERIAL SUMMARY

CONTRACT ID: 212967

121GR21M073-FE02

MB01801212021

NEW CONCORD ROAD (KY 121) BRIDGE 018B00019N OVER BEECHY CREEK AT MP 03.66 BRIDGE DECK RESTORATION & WATERPROOFING.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	02562	TEMPORARY SIGNS 018B00019N	145.00	SQFT
0010	02650	MAINTAIN & CONTROL TRAFFIC 018B00019N	1.00	LS
0015	02653	LANE CLOSURE 018B00019N	2.00	EACH
0020	03299	ARMORED EDGE FOR CONCRETE 018B00019N	46.00	LF
0025	03300	ELIMINATE TRANSVERSE JOINT 018B00019N	46.00	LF
0030	03304	BRIDGE OVERLAY APPROACH PAVEMENT 018B00019N	256.00	SQYD
0035	04933	TEMP SIGNAL 2 PHASE 018B00019N	1.00	EACH
0040	06514	PAVE STRIPING-PERM PAINT-4 IN 018B00019N	697.00	LF
0045	06549	PAVE STRIPING-TEMP REM TAPE-B 018B00019N	1,000.00	LF
0050	06550	PAVE STRIPING-TEMP REM TAPE-W 018B00019N	2,000.00	LF
0055	06551	PAVE STRIPING-TEMP REM TAPE-Y - 018B00019N	2,000.00	LF
0060	08150	STEEL REINFORCEMENT 018B00019N	500.00	LB
0065	08504	EPOXY SAND SLURRY 018B00019N	74.00	SQYD
0070	08510	REM EPOXY BIT FOREIGN OVERLAY 018B00019N	253.00	SQYD
0075	08526	CONC CLASS M FULL DEPTH PATCH 018B00019N	1.60	CUYD
0080	08534	CONCRETE OVERLAY-LATEX 018B00019N	10.60	CUYD
0085	08549	BLAST CLEANING 018B00019N	327.00	SQYD
0090	24094EC	PARTIAL DEPTH PATCHING 018B00019N	3.20	CUYD
0095	24692EC	DECK DRAIN RETROFIT 018B00019N	12.00	EACH
0100	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 212967

121GR21M073-FE02

MB01801212022

NEW CONCORD ROAD (KY 121) BRIDGE 018B00020N OVER BEECHY CREEK AT MP 03.21 BRIDGE DECK RESTORATION & WATERPROOFING.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0105	02562	TEMPORARY SIGNS 018B00020N	145.00	SQFT
0110	02650	MAINTAIN & CONTROL TRAFFIC 018B00020N	1.00	LS
0115	02653	LANE CLOSURE 018B00020N	2.00	EACH
0120	03299	ARMORED EDGE FOR CONCRETE 018B00020N	46.00	LF
0125	03300	ELIMINATE TRANSVERSE JOINT 018B00020N	46.00	LF
0130	03304	BRIDGE OVERLAY APPROACH PAVEMENT 018B00020N	256.00	SQYD
0135	04933	TEMP SIGNAL 2 PHASE 018B00020N	1.00	EACH
0140	06514	PAVE STRIPING-PERM PAINT-4 IN 018B00020N	697.00	LF
0145	06549	PAVE STRIPING-TEMP REM TAPE-B 018B00020N	1,000.00	LF
0150	06550	PAVE STRIPING-TEMP REM TAPE-W 018B00020N	2,000.00	LF
0155	06551	PAVE STRIPING-TEMP REM TAPE-Y - 018B00020N	2,000.00	LF
0160	08150	STEEL REINFORCEMENT 018B00020N	500.00	LB
0165	08504	EPOXY SAND SLURRY 018B00020N	74.00	SQYD
0170	08510	REM EPOXY BIT FOREIGN OVERLAY 018B00020N	253.00	SQYD
0175	08526	CONC CLASS M FULL DEPTH PATCH 018B00020N	1.60	CUYD
0180	08534	CONCRETE OVERLAY-LATEX 018B00020N	10.60	CUYD
0185	08549	BLAST CLEANING 018B00020N	327.00	SQYD
0190	24094EC	PARTIAL DEPTH PATCHING 018B00020N	3.20	CUYD
0195	24692EC	DECK DRAIN RETROFIT 018B00020N	12.00	EACH
0200	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY


CONTRACT ID: 212967


121GR21M073-FE02


MB07001352021

TOLU ROAD (KY 135) BRIDGE 070B00009N OVER BUCK CREEK AT MP 12.08 BRIDGE DECK RESTORATION & WATERPROOFING.


Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0205	02562	TEMPORARY SIGNS 070B00009N	145.00	SQFT
0210	02650	MAINTAIN & CONTROL TRAFFIC 070B00009N	1.00	LS
0215	02653	LANE CLOSURE 070B00009N	2.00	EACH
0220	03293	EXPAN JOINT REPLACE 1 IN 070B00009N	24.00	LF
0225	03298	EXPAN JOINT REPLACE 4 IN 070B00009N	24.00	LF
0230	03299	ARMORED EDGE FOR CONCRETE 070B00009N	48.00	LF
0235	03304	BRIDGE OVERLAY APPROACH PAVEMENT 070B00009N	534.00	SQYD
0240	04933	TEMP SIGNAL 2 PHASE 070B00009N	1.00	EACH
0245	06514	PAVE STRIPING-PERM PAINT-4 IN 070B00009N	890.00	LF
0250	06549	PAVE STRIPING-TEMP REM TAPE-B 070B00009N	1,000.00	LF
0255	06550	PAVE STRIPING-TEMP REM TAPE-W 070B00009N	2,000.00	LF
0260	06551	PAVE STRIPING-TEMP REM TAPE-Y 070B00009N	2,000.00	LF
0265	08150	STEEL REINFORCEMENT 070B00009N	270.00	LB
0270	08504	EPOXY SAND SLURRY 070B00009N	236.00	SQYD
0275	08526	CONC CLASS M FULL DEPTH PATCH 070B00009N	4.10	CUYD
0280	08534	CONCRETE OVERLAY-LATEX 070B00009N	27.30	CUYD
0285	08549	BLAST CLEANING 070B00009N	890.00	SQYD
0290	08551	MACHINE PREP OF SLAB 070B00009N	654.00	SQYD
0295	24094EC	PARTIAL DEPTH PATCHING 070B00009N	8.20	CUYD
0300	24692EC	DECK DRAIN RETROFIT 070B00009N	14.00	EACH
0305	24981EC	BRIDGE CLEANING 070B00009N	1.00	LS
0310	24982EC	CONCRETE COATING 070B00009N	1.00	LS
0315	24983EC	BEARING LUBRICATION 070B00009N	8.00	EACH
0320	02569	DEMOBILIZATION	1.00	LS

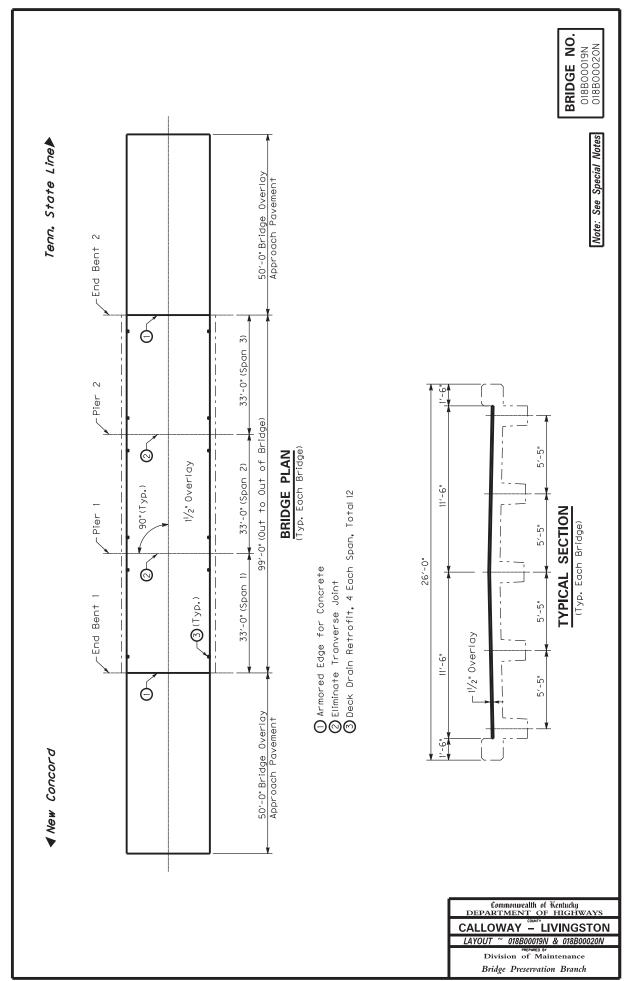


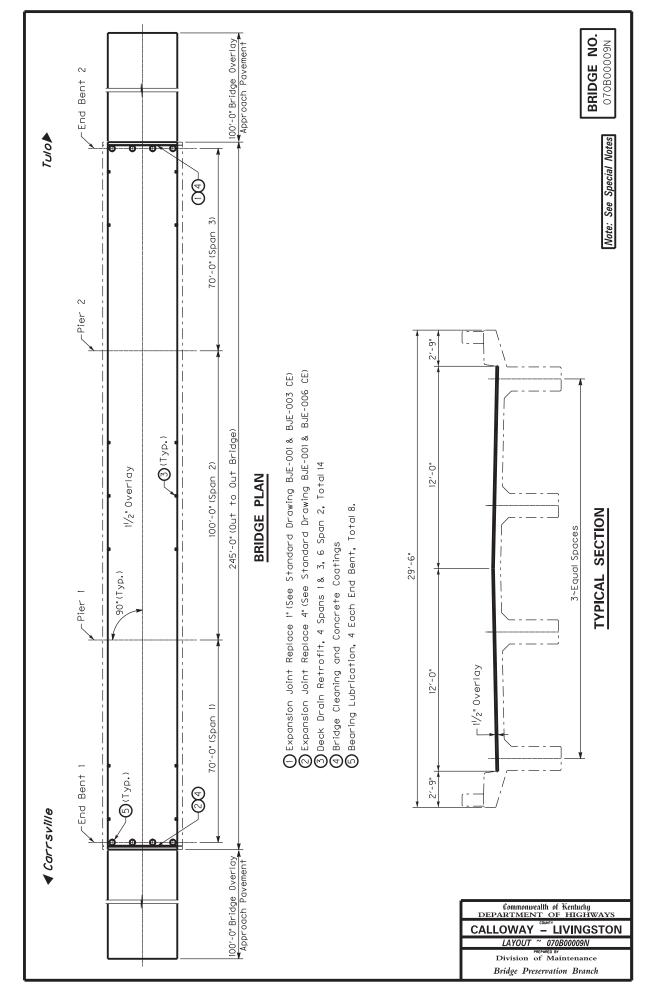


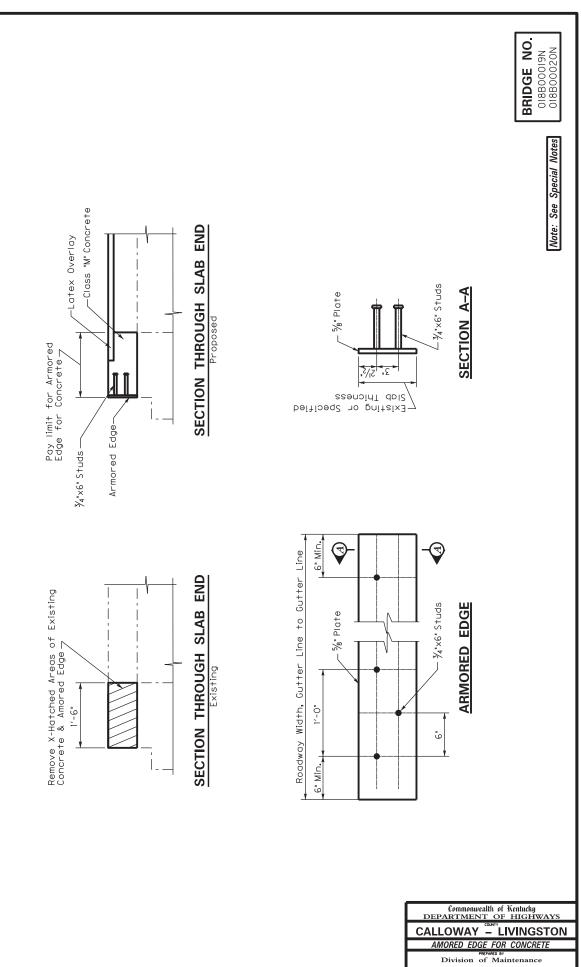



Bridge Preservation Branch

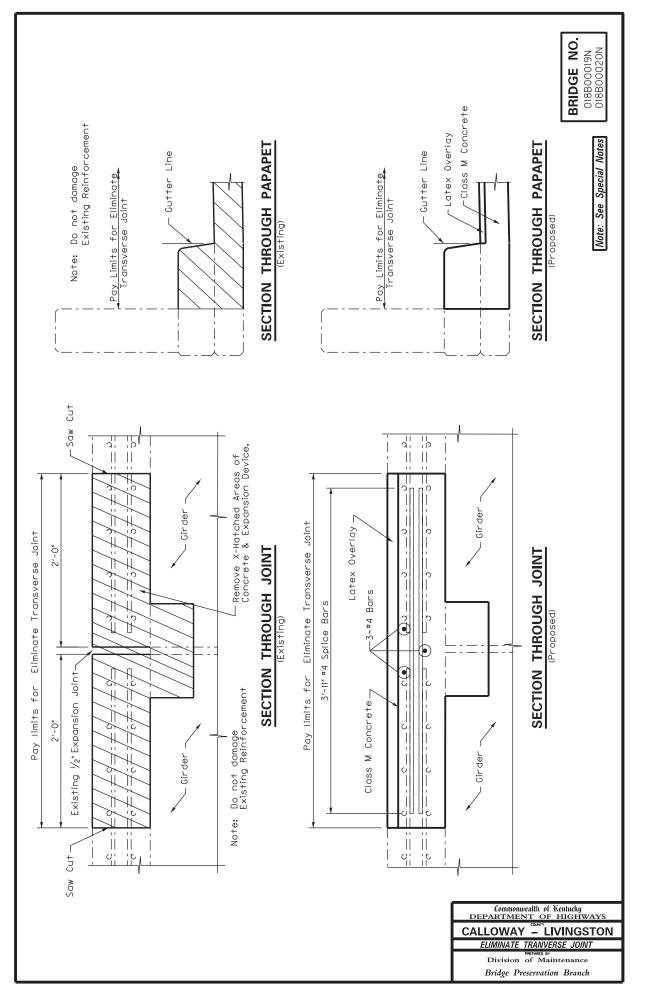

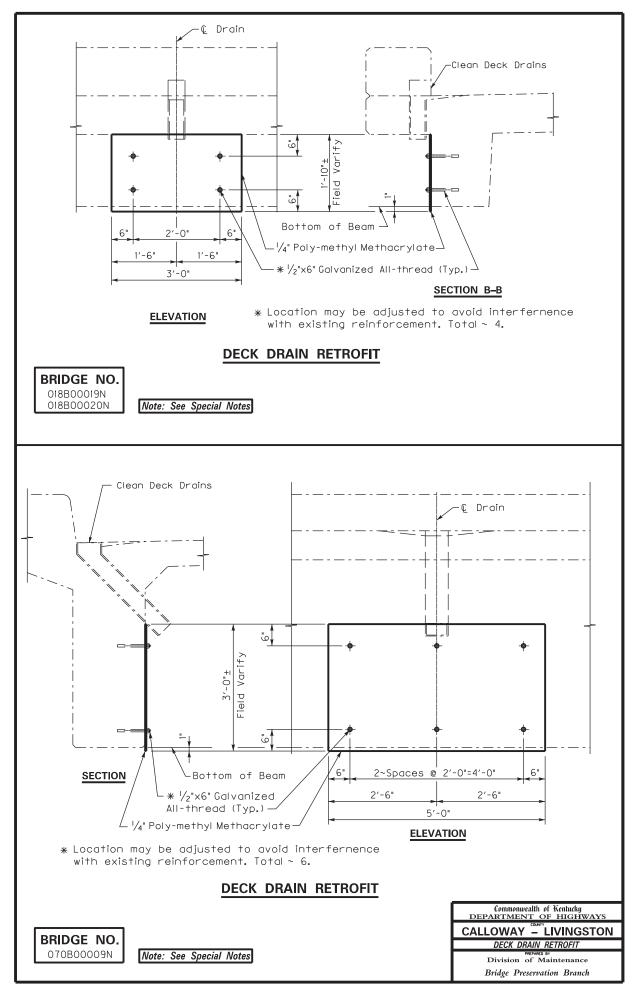

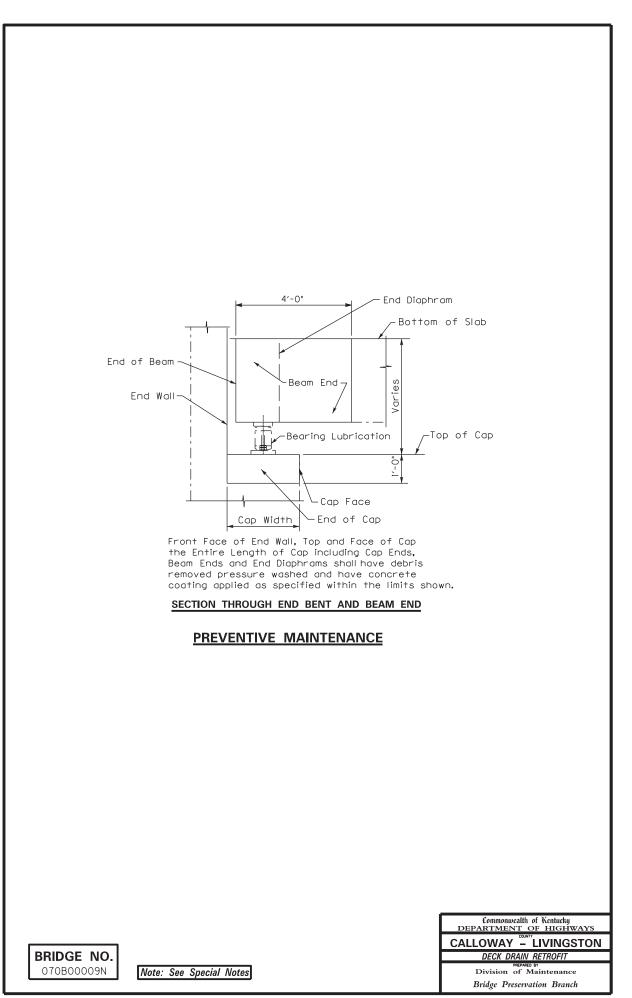

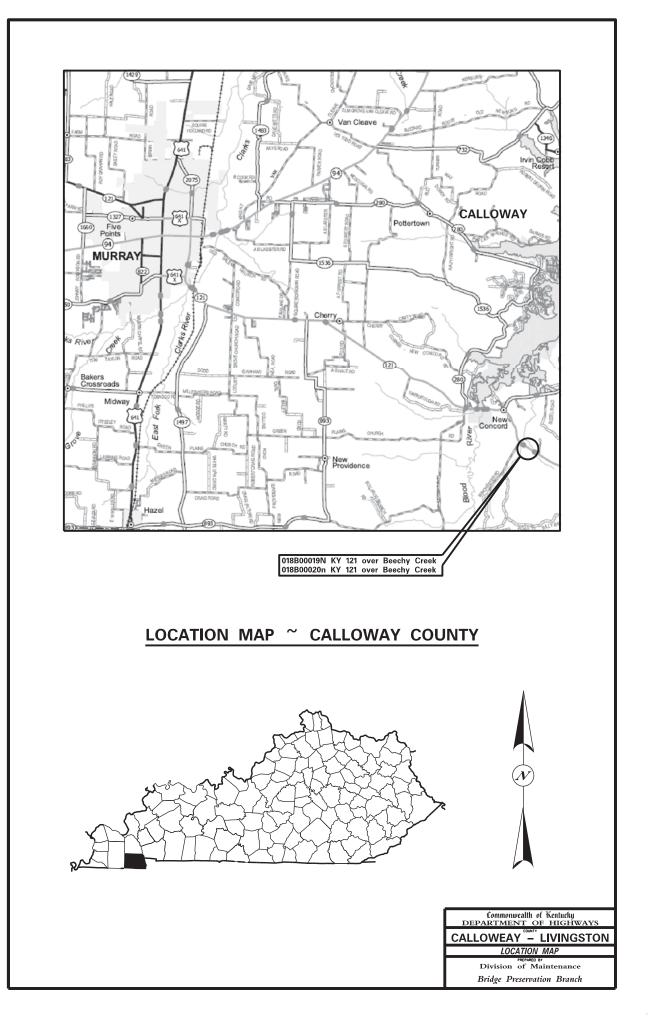

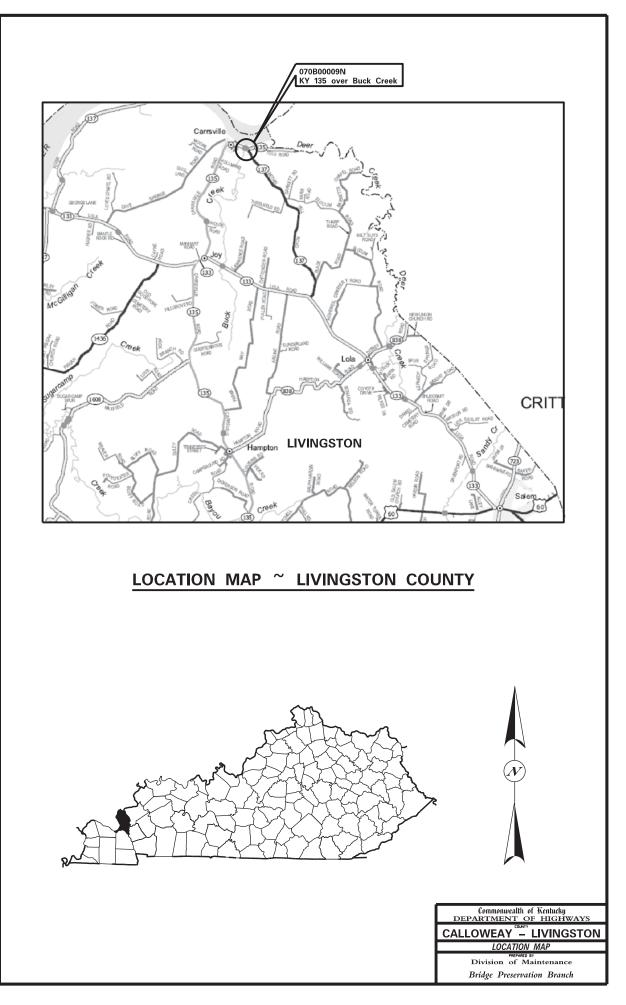

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

SPECIFICATIONS REFERENCE

Any reference in the plans or proposal to previous editions of the *Standard Specifications* for Road and Bridge Construction and Standard Drawings are superseded by Standard Specifications for Road and Bridge Construction, Edition of 2019 and Standard Drawings, Edition of 2020.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting. The Supplemental Specifications can be found at the following link:

http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx

Contract ID: 212967 Page 53 of 63

STANDARD DRAWINGS THAT APPLY

TRAFFIC ~ *TEMPORARY* ~ <u>TRAFFIC CONTROL</u>

LANE CLOSURE TWO LANE HIGHWAY. LANE CLOSURE USING TRAFFIC SIGNALS.

TTC-100 C.E. TTC-110 C.E.

BRIDGES

STANDARDS

BRIDGE RESTORATION AND WATERPROFING WITH CONCRETE OVERLAYS. AMORED EDGES EXPANSION JOINT REPLACEMENT 1"-3". EXPANSION JOINT REPLACEMENT 4" & 5".

BGX-009 C.E. BJE-001 C.E. BJE-003 C.E. BJE-006 C.E.

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

TRANSPORTATION CABINET DEPARTMENT OF HIGHWAYS

LABOR AND WAGE REQUIREMENTS APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS

I. Application

II. Nondiscrimination of Employees (KRS 344)

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

II. NONDISCRIMINATION OF EMPLOYEES

AN ACT OF THE KENTUCKY GENERAL ASSEMBLY TO PREVENT DISCRIMINATION IN EMPLOYMENT KRS CHAPTER 344 EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment. 3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administrating agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

No present or former public servant shall, within six (6) months following termination of his office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved during the last thirtysix (36) months of his tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 3 Fountain Place, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: January 27, 2017

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under *Vendor Information, Standard Attachments and General Terms* at the following address: <u>https://www.eProcurement.ky.gov</u>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

	FEDERAL MINIMUM WAGE \$7.25 PER HOUR BEGINNING JULY 24, 2009
OVERTIME PAY	At least 1^{1}_{2} times your regular rate of pay for all hours worked over 40 in a workweek.
CHILD LABOR	An employee must be at least 16 years old to work in most non-farm jobs and at least 18 to work in non-farm jobs declared hazardous by the Secretary of Labor.
	Youths 14 and 15 years old may work outside school hours in various non-manufactur- ing, non-mining, non-hazardous jobs under the following conditions:
	 No more than • 3 hours on a school day or 18 hours in a school week;
	• 8 hours on a non-school day or 40 hours in a non-school week.
	Also, work may not begin before 7 a.m. or end after 7 p.m. , except from June 1 through Labor Day, when evening hours are extended to 9 p.m. Different rules apply in agricultural employment.
TIP CREDIT	Employers of "tipped employees" must pay a cash wage of at least \$2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee's tips combined with the employer's cash wage of at least \$2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.
ENFORCEMENT	The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.
	Employers may be assessed civil money penalties of up to \$1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to \$11,000 for each employee who is the subject of a violation of the Act's child labor provisions. In addition, a civil money penalty of up to \$50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to \$100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.
ADDITIONAL NFORMATION	 Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions. Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands. Some state laws provide greater employee protections; employers must comply with both. The law requires employers to display this poster where employees can readily see it. Employees under 20 years of age may be paid \$4.25 per hour during their first 90 consecutive calendar days of employment with an employer. Certain full-time students, student learners, apprentices, and workers with disabilities

U.S. Department of Labor | Wage and Hour Division

PART IV

INSURANCE

Refer to Kentucky Standard Specifications for Road and Bridge Construction, current edition

PART V

BID ITEMS

212967

PROPOSAL BID ITEMS

Page 1 of 3

Report Date 6/25/21

Section: 0001 - BRIDGES

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	02562		TEMPORARY SIGNS - 018B00019N	145.00	SQFT		\$	
0020	02650		MAINTAIN & CONTROL TRAFFIC - 018B00019N	1.00	LS		\$	
0030	02653		LANE CLOSURE - 018B00019N	2.00	EACH		\$	
0040	03299		ARMORED EDGE FOR CONCRETE - 018B00019N	46.00	LF		\$	
0050	03300		ELIMINATE TRANSVERSE JOINT - 018B00019N	46.00	LF		\$	
0060	03304		BRIDGE OVERLAY APPROACH PAVEMENT - 018B00019N	256.00	SQYD		\$	
0070	04933		TEMP SIGNAL 2 PHASE - 018B00019N	1.00	EACH		\$	
0080	06514		PAVE STRIPING-PERM PAINT-4 IN - 018B00019N	697.00	LF		\$	
0090	06549		PAVE STRIPING-TEMP REM TAPE-B - 018B00019N	1,000.00	LF		\$	
0100	06550		PAVE STRIPING-TEMP REM TAPE-W - 018B00019N	2,000.00	LF		\$	
0110	06551		PAVE STRIPING-TEMP REM TAPE-Y - 018B00019N	2,000.00	LF		\$	
0120	08150		STEEL REINFORCEMENT - 018B00019N	500.00	LB		\$	
0130	08504		EPOXY SAND SLURRY - 018B00019N	74.00	SQYD		\$	
0140	08510		REM EPOXY BIT FOREIGN OVERLAY - 018B00019N	253.00	SQYD		\$	
0150	08526		CONC CLASS M FULL DEPTH PATCH - 018B00019N	1.60	CUYD		\$	
0160	08534		CONCRETE OVERLAY-LATEX - 018B00019N	10.60	CUYD		\$	
0170	08549		BLAST CLEANING - 018B00019N	327.00	SQYD		\$	
0180	24094EC		PARTIAL DEPTH PATCHING - 018B00019N	3.20	CUYD		\$	
0190	24692EC		DECK DRAIN RETROFIT - 018B00019N	12.00	EACH		\$	

Section: 0002 - BRIDGES

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0200	02562		TEMPORARY SIGNS - 018B00020N	145.00	SQFT		\$	
0210	02650		MAINTAIN & CONTROL TRAFFIC - 018B00020N	1.00	LS		\$	
0220	02653		LANE CLOSURE - 018B00020N	2.00	EACH		\$	
0230	03299		ARMORED EDGE FOR CONCRETE - 018B00020N	46.00	LF		\$	
0240	03300		ELIMINATE TRANSVERSE JOINT - 018B00020N	46.00	LF		\$	

212967

PROPOSAL BID ITEMS

Page 2 of 3

Report Date 6/25/21

LINE	BID CODE	ALT DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0250	03304	BRIDGE OVERLAY APPROACH PAVEMENT - 018B00020N	256.00	SQYD		\$	
0260	04933	TEMP SIGNAL 2 PHASE - 018B00020N	1.00	EACH		\$	
0270	06514	PAVE STRIPING-PERM PAINT-4 IN - 018B00020N	697.00	LF		\$	
0280	06549	PAVE STRIPING-TEMP REM TAPE-B - 018B00020N	1,000.00	LF		\$	
0290	06550	PAVE STRIPING-TEMP REM TAPE-W - 018B00020N	2,000.00	LF		\$	
0300	06551	PAVE STRIPING-TEMP REM TAPE-Y - 018B00020N	2,000.00	LF		\$	
0310	08150	STEEL REINFORCEMENT - 018B00020N	500.00	LB		\$	
0320	08504	EPOXY SAND SLURRY - 018B00020N	74.00	SQYD		\$	
0330	08510	REM EPOXY BIT FOREIGN OVERLAY - 018B00020N	253.00	SQYD		\$	
0340	08526	CONC CLASS M FULL DEPTH PATCH - 018B00020N	1.60	CUYD		\$	
0350	08534	CONCRETE OVERLAY-LATEX - 018B00020N	10.60	CUYD		\$	
0360	08549	BLAST CLEANING - 018B00020N	327.00	SQYD		\$	
0370	24094EC	PARTIAL DEPTH PATCHING - 018B00020N	3.20	CUYD		\$	
0380	24692EC	DECK DRAIN RETROFIT - 018B00020N	12.00	EACH		\$	

Section: 0003 - BRIDGES

LINE	BID CODE	ALT DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0390	02562	TEMPORARY SIGNS - 070B00009N	145.00	SQFT		\$	
0400	02650	MAINTAIN & CONTROL TRAFFIC - 070B00009N	1.00	LS		\$	
0410	02653	LANE CLOSURE - 070B00009N	2.00	EACH		\$	
0420	03293	EXPAN JOINT REPLACE 1 IN - 070B00009N	24.00	LF		\$	
0430	03298	EXPAN JOINT REPLACE 4 IN - 070B00009N	24.00	LF		\$	
0440	03299	ARMORED EDGE FOR CONCRETE - 070B00009N	48.00	LF		\$	
0450	03304	BRIDGE OVERLAY APPROACH PAVEMENT - 070B00009N	534.00	SQYD		\$	
0460	04933	TEMP SIGNAL 2 PHASE - 070B00009N	1.00	EACH		\$	
0470	06514	PAVE STRIPING-PERM PAINT-4 IN - 070B00009N	890.00	LF		\$	
0480	06549	PAVE STRIPING-TEMP REM TAPE-B - 070B00009N	1,000.00	LF		\$	
0490	06550	PAVE STRIPING-TEMP REM TAPE-W - 070B00009N	2,000.00	LF		\$	

212967

PROPOSAL BID ITEMS

Page 3 of 3

Report Date 6/25/21

LINE	BID CODE	ALT DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0500	06551	PAVE STRIPING-TEMP REM TAPE-Y - 070B00009N	2,000.00	LF		\$	
0510	08150	STEEL REINFORCEMENT - 070B00009N	270.00	LB		\$	
0520	08504	EPOXY SAND SLURRY - 070B00009N	236.00	SQYD		\$	
0530	08526	CONC CLASS M FULL DEPTH PATCH - 070B00009N	4.10	CUYD		\$	
0540	08534	CONCRETE OVERLAY-LATEX - 070B00009N	27.30	CUYD		\$	
0550	08549	BLAST CLEANING - 070B00009N	890.00	SQYD		\$	
0560	08551	MACHINE PREP OF SLAB - 070B00009N	654.00	SQYD		\$	
0570	24094EC	PARTIAL DEPTH PATCHING - 070B00009N	8.20	CUYD		\$	
0580	24692EC	DECK DRAIN RETROFIT - 070B00009N	14.00	EACH		\$	
0590	24981EC	BRIDGE CLEANING - 070B00009N	1.00	LS		\$	
0600	24982EC	CONCRETE COATING - 070B00009N	1.00	LS		\$	
0610	24983EC	BEARING LUBRICATION - 070B00009N	8.00	EACH		\$	

Section: 0004 - DEMOB

LINE	BID CODE	ALT DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0620	02569	DEMOBILIZATION	1.00	LS		\$	