



Andy Beshear  
GOVERNOR

## TRANSPORTATION CABINET

200 Mero Street  
Frankfort, Kentucky 40601

Jim Gray  
SECRETARY

September 12, 2025

CALL NO. 309  
CONTRACT ID NO. 252345  
ADDENDUM # 1

Subject: Mason County, FD05 081 0068 010-016  
Letting September 25, 2025

- (1) Revised - Special Note - Page 14 of 77
- (2) Revised - Summary Sheet - Page 54 of 77
- (3) Revised - Proposal Bid Items - Page 77 of 77

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,


A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:mr  
Enclosures

SPECIAL NOTE FOR PROPOSED MAINLINE/SHOULDER  
SURFACE JOINT

Pave 1' of the shoulder monolithically with each 12' driving lane utilizing the mainline asphalt mix (CL3 ASPH SURF 0.38D PG64-22). It is the intent of the Department to move the edge line asphalt joint 1' further onto the shoulder and away from traffic. The proposed striping locations will be the same as the existing locations to provide a 12' driving lane width. See the diagram below for more information.

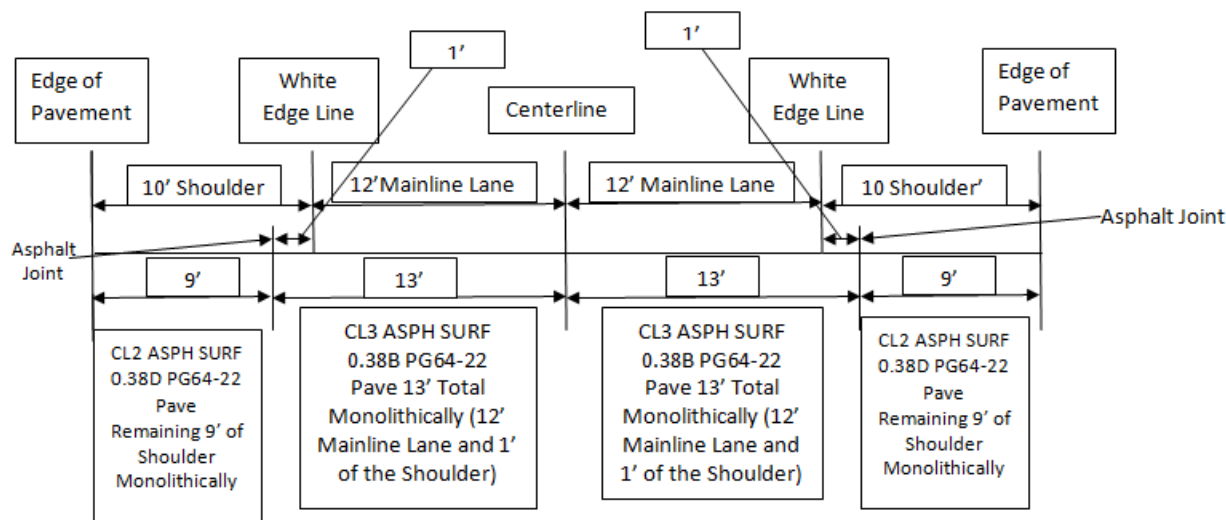

SPECIAL NOTE FOR TRANSVERSE IN-LANE RUMBLE STRIPS

Cut or milled strips—Such installations should have a maximum depth of 3/8 inch, width of 7 inches, and spacing of 24 inches between strips. Length to match mainline lane width.

Installations of Transverse In-Lane Rumble Strips should contain three sets of 10 strips. Spacing between sets will be determined by the project engineer. Some unusual situations may be encountered in which more sets or more strips per set will be required. The specific strip design is dependent on the selected method of installation.

**Measurement** – The Department will measure Transverse In-Lane Rumble Strips in the unit of EACH per set.

**Payment** - Payment at the contract unit price per EACH of Transverse In-Lane Rumble Strips shall be full compensation for all equipment, labor, materials, and incidentals necessary to complete the operation.

MASON COUNTY US 68 MILLED TRANSVERSE RUMBLE STRIP SUMMARY

| MILEPOINT | RUMBLE WIDTH (FT) | # OF RUMBLE STRIPS PER EACH INSTALLATION |
|-----------|-------------------|------------------------------------------|
| 10.459    | 13                | 10                                       |
| 10.504    | 12                | 10                                       |
| 10.544    | 12                | 10                                       |
| TOTAL     |                   | 30                                       |

PROPOSAL BID ITEMS

Report Date 9/12/25

Page 1 of 1

252345

Section: 0001 - PAVING

| LINE | BID CODE   | ALT | DESCRIPTION                                                 | QUANTITY   | UNIT | UNIT PRIC | FP | AMOUNT      |
|------|------------|-----|-------------------------------------------------------------|------------|------|-----------|----|-------------|
| 0010 | 00001      |     | DGA BASE                                                    | 800.00     | TON  |           | \$ |             |
| 0020 | 00190      |     | LEVELING & WEDGING PG64-22                                  | 881.00     | TON  |           | \$ |             |
| 0030 | 00301      |     | CL2 ASPH SURF 0.38D PG64-22                                 | 3,610.00   | TON  |           | \$ |             |
| 0040 | 00339      |     | CL3 ASPH SURF 0.38D PG64-22                                 | 10,705.00  | TON  |           | \$ |             |
| 0050 | 02562      |     | TEMPORARY SIGNS                                             | 310.00     | SQFT |           | \$ |             |
| 0060 | 02650      |     | MAINTAIN & CONTROL TRAFFIC                                  | 1.00       | LS   |           | \$ |             |
| 0070 | 02671      |     | PORTABLE CHANGEABLE MESSAGE SIGN                            | 2.00       | EACH |           | \$ |             |
| 0080 | 02676      |     | MOBILIZATION FOR MILL & TEXT                                | 1.00       | LS   |           | \$ |             |
| 0090 | 02677      |     | ASPHALT PAVE MILLING & TEXTURING                            | 5,420.00   | TON  |           | \$ |             |
| 0100 | 02697      |     | EDGE LINE RUMBLE STRIPS                                     | 78,300.00  | LF   |           | \$ |             |
| 0110 | 02775      |     | ARROW PANEL                                                 | 2.00       | EACH |           | \$ |             |
| 0120 | 06510      |     | PAVE STRIPING-TEMP PAINT-4 IN                               | 128,300.00 | LF   |           | \$ |             |
| 0130 | 06542      |     | PAVE STRIPING-THERMO-6 IN W                                 | 70,000.00  | LF   |           | \$ |             |
| 0140 | 06543      |     | PAVE STRIPING-THERMO-6 IN Y                                 | 56,500.00  | LF   |           | \$ |             |
| 0150 | 06546      |     | PAVE STRIPING-THERMO-12 IN W                                | 1,800.00   | LF   |           | \$ |             |
| 0160 | 06568      |     | PAVE MARKING-THERMO STOP BAR-24IN                           | 199.00     | LF   |           | \$ |             |
| 0170 | 06569      |     | PAVE MARKING-THERMO CROSS-HATCH                             | 262.00     | SQFT |           | \$ |             |
| 0180 | 06573      |     | PAVE MARKING-THERMO STR ARROW                               | 2.00       | EACH |           | \$ |             |
| 0190 | 06574      |     | PAVE MARKING-THERMO CURV ARROW                              | 26.00      | EACH |           | \$ |             |
| 0200 | 06575      |     | PAVE MARKING-THERMO COMB ARROW                              | 1.00       | EACH |           | \$ |             |
| 0210 | 10020NS    |     | FUEL ADJUSTMENT                                             | 23,653.00  | DOLL | \$1.00    | \$ | \$23,653.00 |
| 0220 | 10030NS    |     | ASPHALT ADJUSTMENT                                          | 59,410.00  | DOLL | \$1.00    | \$ | \$59,410.00 |
| 0230 | 20458ES403 |     | CENTERLINE RUMBLE STRIPS                                    | 20,850.00  | LF   |           | \$ |             |
| 0240 | 24679ED    |     | PAVE MARK THERMO CHEVRON                                    | 560.00     | SQFT |           | \$ |             |
| 0250 | 24689EC    |     | PAVE MARK THERMO-WRONG WAY ARROW                            | 6.00       | EACH |           | \$ |             |
| 0260 | 24970EC    |     | ASPHALT MATERIAL FOR TACK NON-TRACKING                      | 68.00      | TON  |           | \$ |             |
| 0270 | 24984EC    |     | TRANSVERSE IN-LANE RUMBLE STRIPS (MILLED) - REVISED 9-12-25 | 3.00       | EACH |           | \$ |             |
| 0280 | 26119EC    |     | INSTALL RADAR PRESENCE DETECTOR TYPE A                      | 4.00       | EACH |           | \$ |             |
| 0290 | 26120EC    |     | INSTALL RADAR ADVANCE DETECTOR TYPE B                       | 2.00       | EACH |           | \$ |             |
| 0300 | 26248EC    |     | ELECTRONIC DELIVERY MGMT SYSTEM - AGG                       | 1.00       | LS   |           | \$ |             |

Section: 0002 - DEMOBILIZATION

| LINE | BID CODE | ALT | DESCRIPTION    | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|----------|-----|----------------|----------|------|-----------|----|--------|
| 0310 | 02569    |     | DEMOBILIZATION | 1.00     | LS   |           | \$ |        |