



CALL NO. 309

CONTRACT ID. 262005

VARIOUS COUNTIES

FED/STATE PROJECT NUMBER FE01 121 DW26 0050000

DESCRIPTION VARIOUS ROUTES IN DISTRICT 5

WORK TYPE WATERBOURNE PAINT STRIPING

PRIMARY COMPLETION DATE 9/1/2026

LETTING DATE: January 29,2026

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN STANDARD TIME January 29,2026. Bids will be publicly announced at 10:00 AM EASTERN STANDARD TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I	SCOPE OF WORK <ul style="list-style-type: none">PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGESCONTRACT NOTESSTATE CONTRACT NOTESNATIONAL HIGHWAYSPECIAL NOTE(S) APPLICABLE TO PROJECTCOORDINATION OF WORK WITH OTHER CONTRACTSTRAFFIC CONTROL PLANCONTRACT COMPLETION DATE AND LIQUIDATED DAMAGESSKETCH MAP(S)SUMMARY SHEET(S)DETAIL SHEET(S)
PART II	SPECIFICATIONS AND STANDARD DRAWINGS <ul style="list-style-type: none">STANDARD AND SUPPLEMENTAL SPECIFICATIONSSTANDARD DRAWINGS THAT APPLY
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS <ul style="list-style-type: none">LABOR AND WAGE REQUIREMENTSEXECUTIVE BRANCH CODE OF ETHICSKENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY / STATEPROJECT WAGE RATES / STATE FUNDED
PART IV	BID ITEMS

PART I
SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 05

CONTRACT ID - 262005
FE01 121 DW26 0050000
COUNTY - VARIOUS
PCN - MP12100002605
FE01 121 DW26005000

VARIOUS ROUTES IN DISTRICT 5 VARIOUS ROUTES IN DISTRICT 5WATERBOURNE PAINT STRIPING
GEOGRAPHIC COORDINATES LATITUDE 38:18:06.00 LONGITUDE 85:16:20.00
ADT

COMPLETION DATE(S):

- | | |
|-------------------------|---|
| 15 WORKING Days | RESTRIPING ROUTES WITH FAILED RETROREFLECTIVITY |
| 5 WORKING Days | REMOVE STRIPING ERRORS AND SPILLS |
| COMPLETED BY 06/01/2026 | SPECIFIED COMPLETION DATE - PRIORITY ROUTES |
| COMPLETED BY 09/01/2026 | SPECIFIED COMPLETION DATE - ALL ITEMS IN CONTRACT |

CONTRACT NOTES

INSURANCE

Refer to Kentucky Standard Specifications for Road and Bridge Construction, current edition.

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by [KRS 14A.9-010](#) to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under [KRS 14A.9-030](#) unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the

foreign entity is not required to obtain a certificate as provided in [KRS 14A.9-010](#), the foreign entity should identify the applicable exception. Foreign entity is defined within [KRS 14A.1-070](#).

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at <https://secure.kentucky.gov/sos/ftbr/welcome.aspx>.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/construction-procurement). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The state agency certifies that it is in compliance with the provisions of KRS 45A.150, "Access to contractor's books, documents, papers, records, or other evidence directly pertinent to the contract." The Contractor, as defined in KRS 45A.030, agrees that the contracting agency, the

Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this agreement for the purpose of financial audit or program review. The Contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884. Records and other prequalification information confidentially disclosed as part of the bid process shall not be deemed as directly pertinent to the agreement and shall be exempt from disclosure as provided in KRS 61.878(1)(c).

BOYCOTT PROVISIONS

If applicable, the contractor represents that, pursuant to [KRS 45A.607](#), they are not currently engaged in, and will not for the duration of the contract engage in, the boycott of a person or an entity based in or doing business with a jurisdiction with which Kentucky can enjoy open trade. **Note:** The term Boycott does not include actions taken for bona fide business or economic reasons, or actions specifically required by federal or state law.

If applicable, the contractor verifies that, pursuant to KRS 41.480, they do not engage in, and will not for the duration of the contract engage in, in energy company boycotts as defined by KRS 41.472.

LOBBYING PROHIBITIONS

The contractor represents that they, and any subcontractor performing work under the contract, have not violated the agency restrictions contained in [KRS 11A.236](#) during the previous ten (10) years, and pledges to abide by the restrictions set forth in such statute for the duration of the contract awarded.

The contractor further represents that, pursuant to [KRS 45A.328](#), they have not procured an original, subsequent, or similar contract while employing an executive agency lobbyist who was convicted of a crime related to the original, subsequent, or similar contract within five (5) years of the conviction of the lobbyist.

Revised: 1/1/2025

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

RECIPROCAL PREFERENCE TO BE GIVEN BY PUBLIC AGENCIES TO RESIDENT BIDDERS

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the electronic bidding software. Submittal of the Affidavit should be done along the bid in Bid Express.

April 30, 2018

NATIONAL HIGHWAY

Be advised that some routes in this project are on the NATIONAL HIGHWAY SYSTEM.

SPECIAL NOTES FOR WATERBORNE PAINT STRIPING 2026 DISTRICT WIDE CONTRACT – DISTRICT 5

DESCRIPTION

Except as specified herein, perform all work according to the Commonwealth of Kentucky, Transportation Cabinet, Department of Highways' 2026 Standard Specifications for Road and Bridge Construction; Supplemental Specifications; and 2025 applicable Standard and Sepia Drawings; applicable Special Notes and Special Provisions; and Kentucky Methods; current editions. Section references are to the Standard Specifications.

SCOPE OF WORK

Furnish and apply waterborne striping paint for all routes, reflectorized with glass beads, to the sections of roadway provided in this Contract with an updated listing provided at the pre-construction meeting. This Contract is for the installation of centerlines, lane lines, edgelines, ramp lines, dotted lines and gore lines only. Gore line materials shall be the same as the mainline of the roadway. Special markings such as stop bars, crosswalks, cross-hatching, chevrons, railroad markings, etc. are not to be installed under this Contract.

Intersection approach markings such as the edgelines of large painted islands or edgelines on mountable medians may be included at the discretion of the Engineer provided they can be painted by the striping truck. Markings that would require application by equipment other than the striping truck are not to be installed under this Contract.

Retrace existing lines on the listed routes. The Department will pre-mark any section of roadway where there are no existing markings, old markings are no longer visible, or where the existing markings are to be changed. Do not place edge lines on any section of roadway where edgelines do not currently exist without written authorization from the Chief District Engineer. Do not paint over any non-painted lines, including but not limited to thermoplastic, HPS-8 or tape stripes. Use only one paint crew per route per county. Use only one paint crew per route per county, unless otherwise approved by the Engineer.

MATERIALS FOR WATERBORNE PAINT STRIPING

PAINT: Furnish paint materials for this project to meet the performance requirements detailed in Sections 842 of the Standard Specifications.

Submit initial samples for each paint formulation for approval prior to initiation of the striping operations. The Contractor's paint manufacturer may submit the initial sample directly to the Department. The Department will obtain subsequent samples of paint in accordance with the Materials Field Sampling Manual when striping operations are in progress. A minimum of one

sample will be obtained per color, per truck, per week and shall represent the quantity of striping applied per week. Deductions for application of non-specification paint shall be assessed to the quantity of striping represented by the sample.

BEADS: Use sufficient beads to ensure the pavement marking material meets retroreflectivity requirements. The Department will evaluate beads as part of the installed pavement marking in accordance with Kentucky Method 202 or 203 as applicable. Testing of the coatings, gradation and quality of the product applied shall be the responsibility of the Contractor.

MATERIALS SAMPLING AND ACCEPTANCE

If two or more random samples obtained during striping operations fail to meet minimum compositional requirements, striping operations shall be discontinued at the discretion of the Engineer. In the event striping operations are discontinued, the Department will randomly sample and test each batch of paint the Contractor has in stock at the storage location.

For batches of paint that fail to meet the minimum compositional criteria, the stock material will be rejected. The Contractor will be required to remove all failing paint from his central storage location. Batches that are tested and found to be in compliance with the compositional requirements may be used. After the Department has sampled all of the material at the central storage area, sampling and testing will resume according to the Materials Field Sampling Manual as soon as striping operations resume.

A deduction in payment will be made for any paint used that fails to meet material requirements according to Sections 842 and 846 as applicable.

EQUIPMENT

Each striper shall be equipped with electrical foot counters. The counters shall individually tabulate the amount of footage applied by each striping gun on the carriage, whether solid or dashed. The counters shall be capable of measuring up to six digits and shall have a reset feature. The counters shall be calibrated in the presence of a Department representative to ensure an accurate measurement of the paint applied. Perform the calibration prior to starting striping operations and as necessary thereafter. When done, the Department's representative will record the calibrations on the Engineer's Daily Work Report (DWR).

Each striper shall be equipped with an accurate dashing mechanism, capable of being adjusted to retrace existing lane line, dotted lines, or centerline markings as directed by the Engineer. The striper shall also be equipped with a detection device that will automatically cutoff the paint guns when a raised or recessed pavement marker is detected in the pavement. The Contractor, at his own expense, shall replace any pavement marker lens painted over; **DO NOT** attempt to clean.

Equip each striper with a Data Logging System (DLS) that will record operational details during striping operations, store data, and generate and export reports on a daily basis to the

manufacturer's secure server. Provide only DLS equipment certified by the manufacturer. Ensure the data is in Microsoft Excel format, or a comma or spaces delimited text file adequate for insertion into a computerized spreadsheet. The DLS shall monitor and report the quantities of paint and beads consumed in line and calculate, in real time, the gallons of paint per mile, average wet film thickness, and pounds of beads per gallon of paint for each line application. The DLS shall monitor and report the ambient temperature, pavement temperature, and paint temperature, and record the data at the beginning of each line application and at a minimum of 1 mile increments during application. The DLS shall be capable of storing and supplying the necessary scaling and calibration parameters to the flow meters, and shall provide a means of adjusting the scaling factor as necessary. The DLS shall include a remote cab mounted display, which shall indicate in real time, pavement temperature, application rate of paint in gallons per mile, paint film thickness in mils, and application rate of beads in pounds per gallon. In addition the Contractor's striper shall also be equipped with a calibrated measuring device for monitoring quantities of paint and beads consumed in line.

Export to the secure server a DLS report as raw data, and as an Excel spreadsheet containing the following information: route; the beginning and ending mile points; the beginning and ending coordinates determined by a Global Positioning System receiver with a 16 foot accuracy, and the direction of travel; line type, indicated as CL (Yellow Center Line Double-Solid, Mono-directional passing, or Bi-directional passing); EL (White Edge Line on all roads or Yellow Edge Line on Solid Median Multi-Lane Highways and Interstates); LL (Solid Yellow or White Lane Line to define turn or merge lanes); SK (Dashed Yellow or White Line 10'stripe/30'gap); GM (Gore Marking installed at 2x the Edge Line Width); DTLE (Dashed Yellow or White Line Extension 3'stripe/9'gap); line width; line color; direction of application (this must be indicated for each direction travelled i.e. must include a separate entry for both the North and South directions, cannot be one entry that says direction was North/South); weight of paint applied in pounds or number of strokes counted, appropriate scaling factors; paint film thickness in mils; paint application rate in gallons per mile; bead application rate in pounds per gallon; paint temperature obtained immediately after the heat exchanger; ambient temperature; pavement temperature; and vehicle speed in miles per hour. Report application and temperature data in one-mile increments for each line applied. Provide GPS mapping system that is capable of real time (within 20 minutes) tracking of material application rates, film thickness, beads pounds per gallon, vehicle speed, time, date, project numbers, operator manual data, and color coded alarms for film thickness. Film thickness alarms must have a tolerance of ± 0.5 mils.

Provide access to stored data on a secure password protected website. The Department reserves the right to obtain any and all raw data recorded by the DLS at any time during this Contract. The Engineer may require field verification of the DLS operation and calibration at any time to ensure the accuracy of the DLS data and output. If field personnel suspect that the DLS data and/or output are not accurate, the Engineer may direct additional checks be performed. The secure server shall allow the Department to be able to create a Daily Striping Report which automatically fills from the DLS's data. It shall auto-populate all fields shown on the attached DSR except for Route Type, Mobile, and Corrective Re-stripe. These fields will be drop downs to be chosen by the user. The route length shall be calculated from the GPS data and not the manually entered milepoints. The DSR shall compute the total striped line length in "Totals Summary" once the user picks the "Route Type."

Prior to starting striping operations, make all strippers available at a central location within Kentucky designated by the Department for inspection by the Department for compliance to Kentucky Method 64-267 and DLS requirements. Striping trucks that can fulfill the requirements of this method and these notes will be approved for use on this Contract. Striping trucks that have not been approved for use by Department personnel will not be allowed to stripe as part of this Contract. The Department reserves the right to perform random field verifications of striping equipment during this Contract.

The Engineer may require the Contractor to provide detailed operating instructions from the manufacturer of the striping equipment and/or the DLS if quality or reporting issues arise at any time during the Contract. The Contractor shall then be required to operate the striping equipment within the suggested operating guidelines of the manufacturer, with particular emphasis on the speed of the striping operation, or make other adjustments until the quality of the striping is satisfactory to the Engineer.

The Contractor shall provide a separate sweeping unit powerful enough to remove normal highway dirt and debris. This unit shall not be a part of the stripper.

Provide the KYTC inspector the same form of direct communication with the paint striping crew as that used by the paint striping crew (CB Radio, 2-Way Radio, etc.). The Department will return the item to the Contractor upon completion of the Contract.

SURFACE PREPARATION

Prepare the pavement surface for the striping operation in accordance with Section 713.03.02. Sweep all pavement surfaces prior to striping and maintain the cleaning operation far enough in advance of the striping operation to prevent any dust from the cleaning operation from mixing with the paint. The sweeper must maintain contact with the roadway. When the Engineer determines abnormal amounts of debris or other material have accumulated beyond the capability of the required sweeping unit which will require shoveling or other means to remove, the Engineer will make arrangements, prior to painting, to have the material removed by the Department or that section of roadway will be deleted from the Contract.

CONSTRUCTION

Except as specified herein, apply all striping according to Section 713.

QUALITY CONTROL (QC) and QUALITY ASSURANCE (QA)

The Contractor shall designate a Quality Control Coordinator (QCC) for the project who will be the contact person for any questions or concerns regarding the quality of the work performed under this Contract. The QCC shall:

- Hold current qualification from the Department as a Pavement Marking Inspection Technician;
- Plan and oversee the Contractor's evaluation of the lines applied on the project;
- Complete and submit Daily Striping Reports to the Engineer within 24 hours of completion of that days striping;
- Ensure that the DLS manufacturer submits electronic DLS raw data and Excel spreadsheets from the secure server by e-mail, at the e-mail addresses provided at the preconstruction meeting, to designated field personnel no later than the first working day following application of the pavement markings.
- Verify the electronic records are completed and received by the Engineer prior to the records being removed from the pavement marking equipment.
- Coordinate and review or Perform KM-202, for each section of striping and provide completed test reports (electronic copy) along with printouts from the handheld retroreflectometer to the Engineer within one (1) working day of completion (failure to provide the printouts within (1) working day will cause the Department to not accept that section and require corrective work in order to be eligible for the final 50% payment).
- Document all adjustments made to the application process to consistently produce the quality of line desired;
- Notify the Engineer of any changes in the striping work plan that are determined necessary
- Inform and mobilize crews to complete restriping or corrective work (after notification by the Department);
- Supply the appropriate certifications for paint and the DLS to the Engineer assigned to the particular project at the time of sampling;
- Track the quantities of materials supplied by the Contractor's vendors and applied by the painting crew;
- Meet with the Engineer to discuss and/or conduct field reviews on the project throughout the execution of the Contract;
- Perform QC testing in accordance with KM-202 for each section of striping on zones selected by the Department based on KM-64-113 The Department will **NOT** provide advanced notice of the randomly selected zones to the Contractor prior to the striping being placed, but will only provide the locations for each randomly selected zone on the day of the test. The Department's QA inspector will coordinate the date of the test with the Contractor's QCC.

At the Pre-construction Conference, the Contractor shall furnish the Department for approval a Quality Control Plan (QCP) that covers in detail the following items:

- The name, address, phone and fax numbers for the QCC;

- The names of individuals other than the QCC taking readings in accordance with KM-202 (these people shall hold qualification from the Department as Pavement Marking Inspection Technicians);
- An overall work plan which states the estimated starting and completion dates for the entire project, the number of crews to be used on the project and a general description of how the project will be completed;
- A description of the striping equipment to be used on the project, including make and model of each striper, minimum and maximum operating speeds, and type of instruments to be used to calibrate the flow of paint and beads;
- The frequency and method to be used to monitor application rates and quality of the line (specifically with regard to retroreflectivity, width, thickness, bead distribution, tracing accuracy, etc.);
- A list of paint(s) and bead(s) to be used in this Contract along with a statement from the paint manufacturer that indicates the recommended minimum and maximum application temperatures for ambient temperature, pavement temperature, paint temperature, and guidelines for any other environmental factors that would adversely affect the successful performance of the paint;
- The contact person, phone, e-mail and fax numbers for reporting claims for paint on vehicles
- A description and product literature of the reflectometer to be used by the Contractor;
- A description, product literature, and manufacturer's certification of the DLS to be used by the Contractor;
- The manufacturer's sampling procedure for sampling paint from the tote.

Obtain the Engineer's acceptance of the Contractor's QCP prior to the start of work. The Department reserves the right to require the Contractor to make changes in the QCP to obtain the quality specified in the Contract.

After acceptance by the Department, the Contractor shall notify the Engineer in writing of any proposed change(s) to the QCP. Proposed changes are subject to acceptance by the Department.

The Department will perform Quality Assurance (QA) testing on (at least) one segment of each section of striping completed by the Contractor. QA testing is intended to verify the Contractor's QC test data. Upon receipt of the Contractor's QC test reports for each section, the QA Inspector will randomly select (at least) one segment for QA evaluation. The Department will **NOT** provide advance notice to the Contractor of the selected segment. The Department will perform the test in accordance with KM-202 with the exception that QA testing will be conducted within the later of 30-60 calendar days after the striping application or 2 weeks of receipt of the Contractor's QC report.

The Department will base payment for each section evaluated in accordance with KM-202 on the Contractor's QC test results if the QC and QA mean values for each segment selected for QA testing differ by less than 10% of the QA mean value.

If a dispute should arise regarding the acceptability of the Contractor's QC test results the dispute resolution shall be conducted as follows:

1. If the retroreflectivity values obtained during the QA testing within a segment indicate a change in pay quantities (i.e. QC readings are passing and QA readings are failing) and the mean values differ by more than 10% of the QA mean value; additional testing will be required. Discard the original QC and QA test results for the section in question. The QA will randomly establish three new zones, in accordance with KM-113, in each segment within the section in question. The QC and QA will jointly evaluate each new zone within the section in accordance with KM-202 (with the exception of the evaluation period if greater than 60 days). The QC test results for each segment will be used for evaluation of the section if the QC and QA mean values for each segment differ by less than 10% of the QA mean value.
2. If the variance between QC and QA testing does not indicate a change in the pay quantities for the section (i.e. QC and QA readings are both passing) however, the QC mean values differ by more than 10% of the QA mean value, additional readings will not be required. Accept the QC test results for evaluation of the section. However, additional testing within the section in question should be conducted as soon as possible to determine the cause of the discrepancy. The Contractor and the Engineer shall document the resolution to the discrepancy.
3. If resolution to a dispute or variance of QC and QA test results cannot be achieved by the QC and QA, additional testing will be required. Discard the QC and QA test results for the section in question. Additional testing will be conducted by the QC, QA, and representatives of Central Office Division of Materials. Additional testing will be conducted within two weeks of receipt of a written request from the Engineer to the Division of Materials for each section in question. Three new zones, randomly selected in accordance with KM-113, will be established by the QA for each segment of the section in question. Each instrument to be used for testing will be calibrated in the presence of Central Office representatives prior to initiation of testing. The QC, QA and Central Office representatives will obtain readings for each new zone in accordance with KM-202 (with the exception of the evaluation period if greater than 60 days). The QC test results for each segment will be used for evaluation of the section if the QC mean values for each segment differ by less than 10% to the mean value obtained by Central Office. The QA test results for each segment will be used for evaluation of the section if the QC mean values differ by more than 10% to the mean value obtained by Central Office and the QA mean value differs by less than 10% to the Central Office mean value. If neither the QC nor QA mean values meet these requirements, the Central Office mean value for each segment will be used to evaluate the section in question. These results will be final and the basis of payment for the section in question.

The Contractor shall incur all costs associated with additional testing performed by Department personnel for dispute resolution that does not result in the use of QC test data as the basis of payment. These costs will include the cost to maintain and control traffic.

The Department reserves the right to take over the QC portion of testing. In the event that the Department exercises this option, the Contractor will incur the cost of testing performed by the Department.

The Department reserves the right to evaluate retroreflectivity on designated routes, in whole or in part, in accordance with KM-203. The Department will identify routes or portions of routes to be evaluated in accordance with KM-203. The evaluation of a section in accordance with KM-203 will be conducted at the Departments expense.

The Department will require the Department's approved vendor performing retroreflectivity evaluation in accordance with KM-203 to successfully demonstrate compliance to his/her quality control procedures prior to collection of data for this Contract. The Department will select an appropriate test site for demonstration purposes and conduct joint evaluations of both yellow and white longitudinal markings within the test site using approved 30M geometry handheld instruments. The demonstration will be deemed successful if the mean average obtained by the approved vendor differs by less than 10% to the mean average obtained by the Department for each marking evaluated within the test site.

The Department will base payment for each section evaluated in accordance with KM-203 solely on the test results obtained by the Department's approved vendor. Completed test results submitted by the Department's approved vendor will be considered final and are not subject to dispute.

The Department will furnish the Contractor with a blank electronic copy of the Contractors Daily Striping Report (DSR). The Contractor shall complete and furnish this standard DSR to the Engineer's office the next calendar day for each crew for each color and width of line applied. The information on the DSR shall reflect the milepoints and quantities for striping completed for that day and for that crew. The Contractor shall also include with the DSR the certification for the paint used on that day's striping according to Section 842.05 and 846.05, as applicable.

Export DLS reports each calendar day to the manufacturer's secure server. Ensure that the DLS manufacturer submits electronic DLS raw data and Excel spreadsheets from the secure server by e-mail, at the e-mail addresses provided at the preconstruction meeting, to the designated field personnel no later than the first working day following application of the pavement markings. Verify the electronic records are completed and received by the Engineer prior to the records being removed from the pavement marking equipment.

APPLICATION OF STRIPING

Roadways shall be marked with 4", 6", and 12" lines as indicated in the summaries and/or as directed by the Engineer. The four-inch line shall be not less than four inches nor more than five inches in width. The six-inch line shall be not less than six inches nor more than seven inches in width. The twelve-inch line shall be not less than twelve inches nor more than thirteen inches in width. The centerline of all newly applied lines shall be within one inch of the centerline of the existing stripe. Mark all other routes with 4-inch, 6-inch, and 12-inch Waterborne Paint meeting

the requirements of Section 842, except as specified herein. Apply gore lines at twice the width of the normal line width on that portion of roadway. All lines shall have distinct, clean edges with proper bead distribution across the entire width and length of the line.

Passing zones and lane lines shall be installed as a 10' segment of paint with a 30' gap. The length of the 10' segment shall not be less than 10' nor longer than 10 feet 6 inches. The stripe-gap cycle shall be not less than 39 feet 6 inches and no longer than 40 feet 6 inches.

Apply paint, in a single pass, in accordance with the application rates in Section 713.03.03. Contrary to Section 713.03.03, the Contractor may apply beads at any application rate that meets the retroreflectivity requirements of Section 713.03.05.

The Contractor shall be responsible for protecting the painted line from traffic until dry in order to eliminate tracking. If tracking is observed due to extended dry times, the Contractor shall cease work immediately once the issue is discovered. Do not resume striping operations until the problem is resolved, such as appropriate weather conditions and/or new material is available. Retroreflectivity readings will be taken on zones with substantial amounts of tracking and the readings will be used in the calculation of payment. If the Engineer Directs or the Contractor elects to use additional traffic control devices beyond what is specified in the TRAFFIC CONTROL PLAN, or other methods to control tracking, the additional cost shall be incidental to the bid item "Maintain and Control Traffic".

If the Engineer determines that the quality of the striping applied by the Contractor is unsatisfactory with regard to retroreflectivity, bead distribution, paint thickness, overspray, accuracy of retracing, line width, consistency, tracking, etc., the Engineer may stop the striping operation immediately until the Contractor can demonstrate that the problem has been corrected. If tracking, tracing or any other quality issues continue following a work stoppage, all contract striping will be stopped indefinitely until the problem(s) are corrected. If the Contractor chooses to continue operations, the Department shall not include subsequent work for payment until striping meets all Contract & Standard Specifications. No time extension shall be granted for any delays in work due to stoppages for quality deficiencies. Liquidated Damages shall be applied per the notes in this Proposal and the Standard Specifications. If it is determined by the Engineer that the striping is not applied at the specified application rate, restriping will be required.

CLEANING OF APPLIED STRIPING

The Contractor has the option to clean accumulated debris from affected route prior to performing QC testing. Cleaning is defined as a single pass using the broom truck to remove accumulated debris from the affected striping. Notify the Engineer 48 hours prior to performing the cleaning operations.

MARKING REMOVAL

The Contractor shall be responsible for all necessary cleanup of any paint or other material that is spilled onto the pavement or elsewhere as a result of his operations and for correcting any striping error (including tracking and

rain damage) that the Engineer determines removal to be required. Contrary to Section 713.03.04, remove all striping errors or paint spills by water blasting only (see attached note) at no additional cost to the Department. This removal process shall be performed in a manner that shall not be detrimental to the pavement. Upon notification of a striping error or paint spill by the Engineer, the Contractor shall be required to begin the process of correcting the striping error or paint spill within five (5) working days and shall work continuously to complete the corrective work prior to striping any other section of roadway included in this Contract. If any existing durable markings (tape, thermoplastic, HPS-8, etc.) are incorrectly painted, the contractor shall remove and replace the existing durable markings in-kind at no cost to the Department and to the satisfaction of the Engineer.

Prior to retracing, the Engineer will notify the Contractor if existing striping errors need to be removed. Contrary to Section 713.03.04, remove all existing striping errors by water blasting only (see attached note). The Department will measure and pay for water blasting removal of existing stripes directed by the Engineer in linear feet.

PAINT ON VEHICLES

The Contractor shall be responsible for addressing disputes with the public regarding paint on vehicles that occur as a result of his operations. All complaints from the public shall be addressed in a timely manner and the Contractor must demonstrate a “good faith” attempt to resolve disputes to the satisfaction of the citizen. However, the Contractor shall have the right to dispute fault and refuse settlement in cases where the Contractor feels that paint on the vehicle was a result of negligence on the part of the citizen. Unresolved disputes involving paint on vehicles shall be handled through the legal system. The Department shall not be held responsible for paint on vehicles under any circumstances.

RETROREFLECTIVITY REQUIREMENTS

The minimum retroreflectivity requirements shall be in accordance with Section 713.03.05A of the Standard Specifications.

Restriping will be required for striping that fails to meet the minimum retroreflectivity requirements. The provisions for restriping are described in the section of the Contract entitled MEASUREMENT AND PAYMENT. Complete the restriping within 15 calendar days after notification by the Engineer except that restriping will be suspended after **October 30, 2026** until the following spring at the discretion of the Engineer. All restriping not completed by **October 30, 2026** will be restriped at the Engineer’s discretion as a priority route in the spring of 2027 and completed by **June 1, 2027**. All aspects of this specification shall apply to lines that are repainted due to failure to meet the requirements of the specifications, including the retroreflectivity requirements.

SCHEDULING

At the Pre-construction conference, the Engineer may provide the Contractor with a list of Priority Routes (not to exceed 10 percent of the total project estimate) which are to be striped prior to

June 1, 2026. The painting of all scheduled routes shall be completed by **September 1, 2026.** The Contractor shall coordinate the daily striping schedule, one week in advance, with the Engineer. The Contractor shall submit their anticipated work schedule for the upcoming week to the Engineer no later than noon on Thursday. If a schedule is not submitted in a timely manner, the Engineer may not allow work to be performed the following week. If the Contractor chooses to stripe, the installed striping may not be included for payment. Unless approved by the Engineer, complete all striping in a county, for that type of paint, before starting striping for that type of paint in another county (for this Contract there are 5 types of paint striping: 4" yellow, 4" white, 6" yellow, 6" white, 12" white). The Contractor shall ensure that once striping begins in a county on a route that ALL striping on that route must be completed within two 15 calendar days. Failure to comply with this requirement shall result in Liquidated Damages being assessed at 25% of the daily rate specified in Section 108.09 of the Standard Specifications until all striping complies with this requirement.

The Engineer may eliminate any route from the schedule at any time prior to striping if it is determined that the route does not require retracing. Also, the Engineer may add additional routes to be striped. The Contractor shall be notified of added routes prior to July 1, 2026.

CONTRACT COMPLETION AND LIQUIDATED DAMAGES

All priority routes shall be striped by **June 1, 2026.** Contrary to the Standard Specifications, no time extension will be granted for failure to complete striping of these priority routes by the **June 1, 2026** milestone completion date. Liquidated damages in the amount specified in Section 108.09 of the Standard Specifications will be assessed for each day that any priority route remains unstriped after **June 1, 2026.**

Sections that are required to be re-striped due to failure to meet retroreflectivity requirements must be completed within 15 calendar days after notification by the Engineer. The Department will assess Liquidated Damages in the amount specified in Section 108.09 of the Standard Specifications for each day beyond the 15 calendar days that the restriping is not completed and shall accrue until **October 30, 2026.** Failure to complete all necessary corrective work by the **October 30, 2026** deadline will result in no additional payment for the stripe beyond the 50% that was initially paid for the installation of the stripe and payment will be based upon the Payment Schedule. At the Engineer's discretion, necessary corrective work not completed by the **October 30, 2026** deadline may be required to be restriped in the spring of 2027 as a priority route with a completion date of **June 1, 2027.** Any re-stripe required by the Engineer that is not completed by **June 1, 2027** shall accrue liquidated damages until **October 30, 2027.**

All routes that are required to be striped under this Contract shall be completed by **September 1, 2026.** Contrary to the Standard Specifications, no time extension will be granted. Liquidated damages will apply in accordance with Section 108.09 of the Standard Specifications for failure to complete the striping by **September 1, 2026.** Liquidated damages will accrue until **October 30, 2026;** no striping shall be performed after this date.

Remove all striping errors and spills within five (5) working days after notification by the Engineer. Liquidated damages, in the amount specified in Section 108.09 of the Standard Specifications, shall

apply for each day beyond the five (5) working days that the Contractor has not begun to correct the striping error/spill or continuously work to complete the corrective work.

The Department will apply all Liquidated Damages accumulatively.

RE-TESTING OF FAILURES

The Department's costs associated with re-testing of striping failures for Kentucky Method 203 shall be reimbursed to the Department by the Contractor. The reimbursement shall include mobilization of the Department's mobile striping vendor's mobile testing machine as well as the current per mile rate for the mobile striping according to the Cabinet's Master Agreement.

MEASUREMENT AND PAYMENT

STRIPING: The Department will measure the paint striping of each type in linear miles of paint stripe.

The Department will pay 50% of the Contract Unit Bid price for the applicable bid items after application of all striping to a particular section of roadway. Contrary to Section 104.02.02, the overrun and underrun formula shall not apply to this Contract. The remaining payment will be made based upon the following procedure and the Payment Schedule:

1. Each section of striping will be evaluated in accordance with KM-202 or KM-203, as applicable, and the QC/QA testing specified herein, for the purpose of evaluating retroreflectivity.
2. If a Section is accepted in accordance with the appropriate Kentucky Methods, the Department will make final payment according to the Payment Schedule listed below.
3. If a section is not accepted in accordance with the appropriate Kentucky Methods, restripe the entire section within fifteen (15) calendar days after notification by the Engineer subject to the same requirements as the original striping at no additional cost to the Department. If the restriped Section is accepted in accordance with the appropriate Kentucky Methods, the Department will make final payment according to the following Payment Schedule. If the section is not restriped by **October 30, 2026**, the Department will not make final payment and restriping may be required in the spring of 2027 where the corrective will become a priority route and re-striping must be completed by **June 1, 2027**
4. If the Engineer does not require re-striping to be completed in the spring of 2027, the Contractor shall accept the deduction in payment for the section that has been determined to be unacceptable.

Payment Schedule

	Initial Payment	Final Payment	Total Payment
Section is Accepted	50%	50%	100%
Section is Not Accepted	50%	0%	50%

QUALITY CONTROL: The Department will measure and pay the quantity as one lump sum. The Department will not measure the QCP, the DLS, any actions and personnel required to carry out the QCP, any testing, any testing equipment, or any other work necessary to perform the specified QC/QA procedures for payment, but will consider them incidental to this item of work.

MAINTAIN AND CONTROL TRAFFIC: See Traffic Control Plan.

LAW ENFORCEMENT OFFICER: See Traffic Control Plan.

WATER BLASTING EXISTING STRIPE: See Special Note for Water Blasting Existing Stripe.

SPECIAL NOTE FOR CENTERLINE & EDGELINE RUMBLE STRIPES

Be advised there may be some centerline and edgeline rumble stripes to be retraced. Place centerline and edgeline rumble stripes according to Standard Drawings TPR-100 through TPR-130. Notify the Engineer if questions arise regarding the striping patterns. If necessary, the Engineer will obtain guidance from the District Traffic Engineer and/or the Division of Traffic.

SPECIAL NOTE FOR WATER BLASTING EXISTING STRIPE

This Special Note will apply where indicated on the plans or in the proposal. Section references herein are to the Department’s 2012 Standard Specifications for Road and Bridge Construction.

1.0 DESCRIPTION. Remove pavement striping, temporary or permanent, from asphalt or concrete pavement using ultra-high pressure water.

2.0 MATERIALS AND EQUIPMENT.

2.1 Truck Mounted Ultra-high Pressure Pump and Water Tank. Use a truck having a separate hydrostatic transmission capable of speed increments of ±1 foot per minute at operator’s discretion. Use a pump capable of delivering a minimum of 30,000 psi to a bumper mounted deck containing an operator controlled rotating manifold that is speed variable up to at least 3,000 rpm and accepts interchangeable waterjet nozzles. Provide all necessary waterjet nozzle setups and patterns to ensure clean sufficient removal. Ensure the deck’s discharge directs the water and removal material in a manner that is not hazardous to vehicles or pedestrians.

2.2 Water. Conform to Section 803.

3.0 CONSTRUCTION. Before starting work, provide the Engineer with a contractor work history of 2 projects where striping removal was completed acceptably for a similar type of pavement. If no history is available, complete 1,000 linear feet of striping removal and obtain the Engineer’s approval before continuing.

Conduct striping removal under lane closures meeting the conditions of the MUTCD and Kentucky Standard Drawings and Specifications. Waterblast to remove temporary or permanent striping completely as the Engineer directs. Do not damage the pavement in any way and protect all joint seals. If damage is observed, stop the removal process until the operator can make changes and demonstrate acceptable striping removal. Repair any damage to the pavement. Vacuum all marking material and removal debris concurrently with the blasting operation.

4.0 MEASUREMENT. The Department will measure the quantity in linear feet. When the removal area’s width exceeds 8 inches and a second pass is required, the Department will measure the length of the additional pass for Payment. The Department will not measure for payment additional passes for widths of 8 inches or less or passes to further eradicate markings. The Department will not measure repair of damaged pavement for payment and will consider it incidental to this item of work.

5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
22664EN	Water Blasting Existing Stripe	Linear Foot

The Department will consider payment as full compensation for all work required under this note.

October 30, 2012

SPECIAL NOTE FOR PROJECTS TO BE RESTRIPE IN 2025 & 2026

Be advised that some projects listed herein may be scheduled for resurfacing in 2026. The Engineer may delete the striping on these routes from this Contract.

Be advised that some projects listed herein were scheduled for resurfacing or restriping in 2025, but may have been canceled or postponed. The Engineer may add the striping on canceled routes to this Contract.

EXPERIMENTAL / ENHANCED STRIPING LOCATIONS

Be advised that experimental and/or enhanced striping materials may be in place at the following locations. Verify with the Engineer if experiment has been concluded and/or if the enhanced striping can be retraced. Obtain the Engineer's approval before retracing any of these route segments. If the existing stripes on these routes are restriped without the Engineer's prior approval, be responsible for replacing the experimental and/or enhanced markings in like kind material and design at no additional cost to the Department.

District	County	Route	BMP	EMP	Dimension	Material
1	Marshall	US 62	0.000	7.258	6"	Thermoplastic
2	Christian	KY 115	2.322	2.877	4"	Thermoplastic
2	Union	KY 130	9.584	15.657	6"	Thermoplastic
3	Warren	KY 185	0.000	0.428	4"	HPS-8
3	Warren	I-65 (SB Only)	28.400	29.200	6"	HPS-8
3	Allen	KY 100	0.000	8.830	6"	Thermoplastic
4	Hardin	KY 9002	1.093	5.582	6"	HPS-8 & Polyurea
4	Hardin	KY 9002	5.582	8.837	6"	HPS-8, Polyurea, Thermoplastic, & Durable Waterborne
4	Taylor	KY 70	0.000	13.963	6"	Thermoplastic
4	Nelson	US 150	1.697	2.285	6"	Thermoplastic
4	Nelson	KY 245	0.000	0.122	6"	Thermoplastic
4	Taylor	US 68	7.404	13.531	6"	Thermoplastic
4	Marion	US 68	0.000	9.145	6"	Thermoplastic
5	Jefferson	I-71 S / 1-64 W Ramp to I-65 SB			6" and 12"	Thermoplastic
5	Franklin	US 421	0.000	3.072	6"	HPS-8
5	Franklin	KY 676	0.000	5.287	6"	HPS-8
5	Bullitt	KY 480	0.000	3.010	6"	Thermoplastic
6	Grant	I-75	162.600	164.400	6"	Thermoplastic
6	Kenton	I-75	186.750	190.700	6" and 12"	HPS-8
6	Boone	US 25	3.983	5.379	6"	Thermoplastic
6	Boone	KY 338	0.000	1.003	6"	Thermoplastic
6	Boone	KY 536	13.116	14.208	6"	Thermoplastic
6	Grant	KY 22	5.758	10.630	6"	Thermoplastic
7	Fayette	KY 1973	19.205	21.752	6"	Thermoplastic & Tape
7	Madison	US 25	0.000	2.863	6"	Thermoplastic & Tape

District	County	Route	BMP	EMP	Dimension	Material
7	Fayette	US 421	0.000	8.166	6"	HPS-8
7	Scott	US 421	0.000	0.754	6"	HPS-8
7	Scott	US 62	0.000	0.825	6"	HPS-8
7	Woodford	US 62	14.470	16.459	6"	HPS-8
7	Woodford	US 421	0.000	4.931	6"	HPS-8
7	Jessamine	KY 169	12.000	16.548	6"	Thermoplastic
7	Madison	KY 627	0.000	0.573	6"	HPS-8
7	Montgomery	KY 213	0.675	5.322	6"	Thermoplastic
7	Woodford	KY 338	0.000	11.646	4"	Thermoplastic
7	Scott	U 62	5.943	7.693	6"	Thermoplastic
8	Casey	KY 70	0.000	32.650	6"	Thermoplastic & Tape
8	Pulaski	KY 70	0.000	13.814	6"	Thermoplastic & Tape
8	Rockcastle	KY 70	0.000	6.566	6"	Thermoplastic & Tape
8	Rockcastle	I-75	71.600	73.400	6"	Thermoplastic
8	Rockcastle	US 25	0.000	27.052	6"	Thermoplastic & Tape
9	Rowan	US 60	0.240	7.099	6"	Thermoplastic
9	Rowan	US 60	9.683	17.112	6"	Thermoplastic
9	Carter	KY 9	0.000	18.262	6"	Thermoplastic
9	Bath	KY 36	0.000	0.890	6"	Thermoplastic
9	Nicholas	KY 36	5.335	13.642	6"	Thermoplastic
9	Greenup	US 23	23.000	28.760	6"	Thermoplastic
11	Laurel	I 75	41.290	44.000	6"	Thermoplastic
11	Laurel	US 25	13.621	23.949	6"	Thermoplastic & Tape
12	Pike	KY 632	0.000	7.000	6"	Durable Waterborne

COORDINATION OF WORK WITH OTHERS

Be advised, the Department may issue permits for work on the Department's right of way adjacent to or within the limits of this project. See Sections 107.06 and 107.14. The Engineer will coordinate the work of the Contractor and the permit holders.

Be advised, there may be an active project(s) adjacent to or within this project. The Engineer will coordinate the work of the Contractors. See Section 105.06.

Be advised the Department may be performing work adjacent to or within this project. The Engineer will coordinate the Department's operations with the Contractor's work. See Section 105.11.

The Department will not grant any time extension or monetary consideration, and will not consider any claims if the Contractor's forces are delayed in their operations.

2026 TRAFFIC CONTROL PLAN WATERBORNE PAINT STRIPING – DISTRICT 5

1. Maintain and Control Traffic in accordance with the Standard Specifications for Road and Bridge Construction, Supplemental Specification, Standard and Sepia Drawings, and the MUTCD, current editions.
2. Contrary to Section 112, include all items necessary to maintain and control traffic in the lump sum bid item “Maintain and Control Traffic”. The Department will measure and pay only the bid items listed; consider all other work and necessary items to be incidental to the listed bid items. The Department will measure and pay “Maintain and Control Traffic” as one lump sum.
3. Maintain possession of all temporary traffic control items, devices, materials, and incidentals, unless otherwise specified in the proposal, when no longer needed.
4. If the Contractor desires to deviate from the traffic control scheme outlined in the Standard Drawings, prepare an alternate plan and present it in writing to the Engineer. Do not use the alternate plan until reviewed and approved by the District Engineer and the Divisions of Construction, Maintenance, and Traffic Operations.
5. Provide for the Contractor’s vehicles to always move with and not across or against the flow of traffic. Do not allow vehicles to make U-turns at any location. Do not allow the striper to stop and back down the road or ramps to stripe gore lines and turn lanes. Require vehicles to enter or leave work areas in a manner that will not be hazardous to, or interfere with, normal traffic flow. If the Department observes any prohibited movements by work vehicles or staff, the Engineer will require that all striping operations be stopped. The Contractor will be required to submit a justification for the occurrence and provide assurance and solutions to prevent any improper maneuvers for the remainder of the project. If approved in advance by the Engineer, the contractor may use rolling road blocks to stripe intersections, and across exit & entrance ramps, not to exceed five (5) minutes duration, allowing the paint truck and broom to back up and paint the entire intersection. Do not allow vehicles to park or stop within the right-of-way except within work areas designated by the Engineer. Do not allow personal vehicles to park within the right-of-way except in specific areas designated by the Engineer.
6. Do not allow the paint supply truck to operate as one of the traffic control vehicles shown on the Standard Drawings. If one of the required traffic control vehicles experiences mechanical problems or for some other reason is not available to remain in position as shown in the traffic control scheme, cease the striping operation until all required vehicles are in place.

7. Do not perform striping operations on any roadway during the peak times of the day, holiday periods, or special events as determined by the Engineer. Below are anticipated time restrictions when striping operations will not be permitted. The Engineer may specify additional days and hours when work will not be allowed.

ALL INTERSTATES AND RAMPS

- Work affecting a single lane will be permitted nightly between the hours of 8:00 P.M. – 5:00 A.M.
- Work affecting multiple lanes will have hours determined by the Engineer.

JEFFERSON COUNTY (ALL ROUTES)

- Work will be permitted nightly between the hours of 8:00 P.M. – 5:00 A.M.

BULLITT, OLDHAM, SHELBY & FRANKLIN COUNTIES

- Select higher volume routes may have daytime restrictions, requiring night work. The Engineer will provide the permitted working hours prior to striping operations commencing.

LANE CLOSURES WILL NOT BE PERMITTED ON THE FOLLOWING DAYS:

Friday April 3 – Sunday April 5, 2026	Easter Weekend
Friday May 1 – Sunday May 3, 2026	KY Derby Weekend (Select routes)
Friday May 22 – Monday May 25, 2026	Memorial Day Weekend
Thursday July 2 – Sunday July 5, 2026	Independence Day Weekend
Dates to be Determined	KY State Fair (Select routes)
Friday September 4 – Monday September 7, 2026	Labor Day Weekend

8. On two-lane, two-way highways, make provisions to the satisfaction of the Engineer to periodically allow traffic to safely pass the train of vehicles in the striping operation. When painting center lines release traffic at least every two (2) miles.
9. In low speed, urban situations, the Engineer may permit the Contractor to delete the intermediate trail vehicle between the striper and the final trail vehicle shown on the Standard Drawings.
10. If requested by the Contractor, the Engineer may approve Law Enforcement Officer Police Support on Interstate highways while striping operations are taking place. If the Contractor requests Law Enforcement Officer Police Support on non-Interstate Highways, provide written justification for the Engineer's approval. If approved, provide one (1) police support unit for each lane closure, each unit consisting of an off-duty law enforcement officer from any police agency having lawful jurisdiction and a police car equipped with externally mounted flashing blue lights. Place the police support unit at a location that is most effective to alert traffic of the work, but safe for the workers and the officer. The Department will measure and pay for each approved individual police support unit on a per hour basis for the officer with the police vehicle. If police support is utilized without prior approval by the Engineer, the Department may deny payment for any invoiced hours prior to the approval date.
11. **LANE CLOSURE LIQUIDATED DAMAGES.** Do not leave lane closures in place or perform striping operations during non-working hours. In the event that lane closures on non-interstate routes are in place outside of the days and/or times included in this Proposal or outside of any time period approved by the Engineer, Liquidated Damages shall be applied as follows:

- \$ 2,500 for the first hour or fraction thereof
- \$ 5,000 for any additional hour or fraction thereof

In the event that lane closures on an interstate or ramp are in place outside of the days and/or times listed above or outside of any time period approved by the Engineer, Liquidated Damages shall be applied as follows:

- \$ 5,000 for the first hour or fraction thereof
- \$ 10,000 for any additional hour or fraction thereof

A lane closure shall be defined as any traffic control device, worker, or vehicle owned/operated by the Contractor or the Contractor's worker(s) in the traveled way that could potentially impact the flow of traffic. This includes but is not limited to signs, barricades, barrels, cones, arrow boards, flaggers, and equipment.

See the Special Note for Contract Completion Date and Liquidated Damages for additional Liquidated Damages.

CONTRACT COMPLETION DATE AND LIQUIDATED DAMAGES

All priority routes shall be striped by **June 1, 2026**. Contrary to the Standard Specifications, no time extension will be granted for failure to complete striping of these priority routes by the **June 1, 2026** milestone completion date. Liquidated damages in the amount specified in Section 108.09 of the Standard Specifications will be assessed for each day that any priority route remains unstriped after **June 1, 2026**.

Sections that are required to be re-striped due to failure to meet retroreflectivity requirements must be completed within 15 calendar days after notification by the Engineer. The Department will assess Liquidated Damages in the amount specified in Section 108.09 of the Standard Specifications for each day beyond the 15 calendar days that the restriping is not completed and shall accrue until **October 30, 2026**, **unless temperature limitations prohibit striping operations**. Failure to complete all necessary corrective work by the **October 30, 2026** deadline will result in no additional payment for the stripe beyond the 50% that was initially paid for the installation of the stripe and payment will be based upon the Payment Schedule. At the Engineer's discretion, necessary corrective work not completed by the **October 30, 2026** deadline may be required to be restriped in the spring of 2027 as a priority route with a completion date of **June 1, 2027**. Any re-stripe required by the Engineer that is not completed by **June 1, 2027** shall accrue liquidated damages until **October 30, 2027**.

All routes that are required to be striped under this Contract shall be completed by **September 1, 2026**. Contrary to the Standard Specifications, no time extension will be granted. Liquidated damages will apply in accordance with Section 108.09 of the Standard Specifications for failure to complete the striping by **September 1, 2024**. Liquidated damages will accrue until **October 30, 2025**; no striping shall be performed after this date. **Liquidated Damages will accrue until all contract work is complete. If work is not complete by October 30, 2026, Liquidated Damages and striping operations will pause. All remaining work shall not be performed until weather allows in 2027, with daily Liquidated Damages per Section 108.09 of the Standard Specifications applying the day striping operations resume until the contract is complete. Contrary to the Standard Specifications, between October 31, 2026 and the day prior to work resuming in 2027, daily Liquidated Damages shall be assessed at 25% of the rate specified in Section 108.09 of the Standard Specifications. If the Department chooses to not require the Contractor complete remaining contract work in 2027, Liquidated Damages will stop on October 30, 2026. However, any required corrective work to be completed in 2027 shall be subject to Liquidated Damages per the note above.**


For any striping error or spill, the Contractor shall notify the Engineer of the occurrence within 24 hours to allow the Department to review and determine any corrective action. If the Contractor fails to notify the Engineer, and the error or spill is later discovered while the project is active, the Engineer will require the Contractor stop all striping until the issue is corrected. Remove all striping errors and spills within five (5) working days after notification by the

Engineer. Liquidated damages, in the amount specified in Section 108.09 of the Standard Specifications, shall apply for each day beyond the five (5) working days that the Contractor has not begun to correct the striping error/spill or continuously work to complete the corrective work.

The Department will apply all Liquidated Damages accumulatively.



Highway District Map

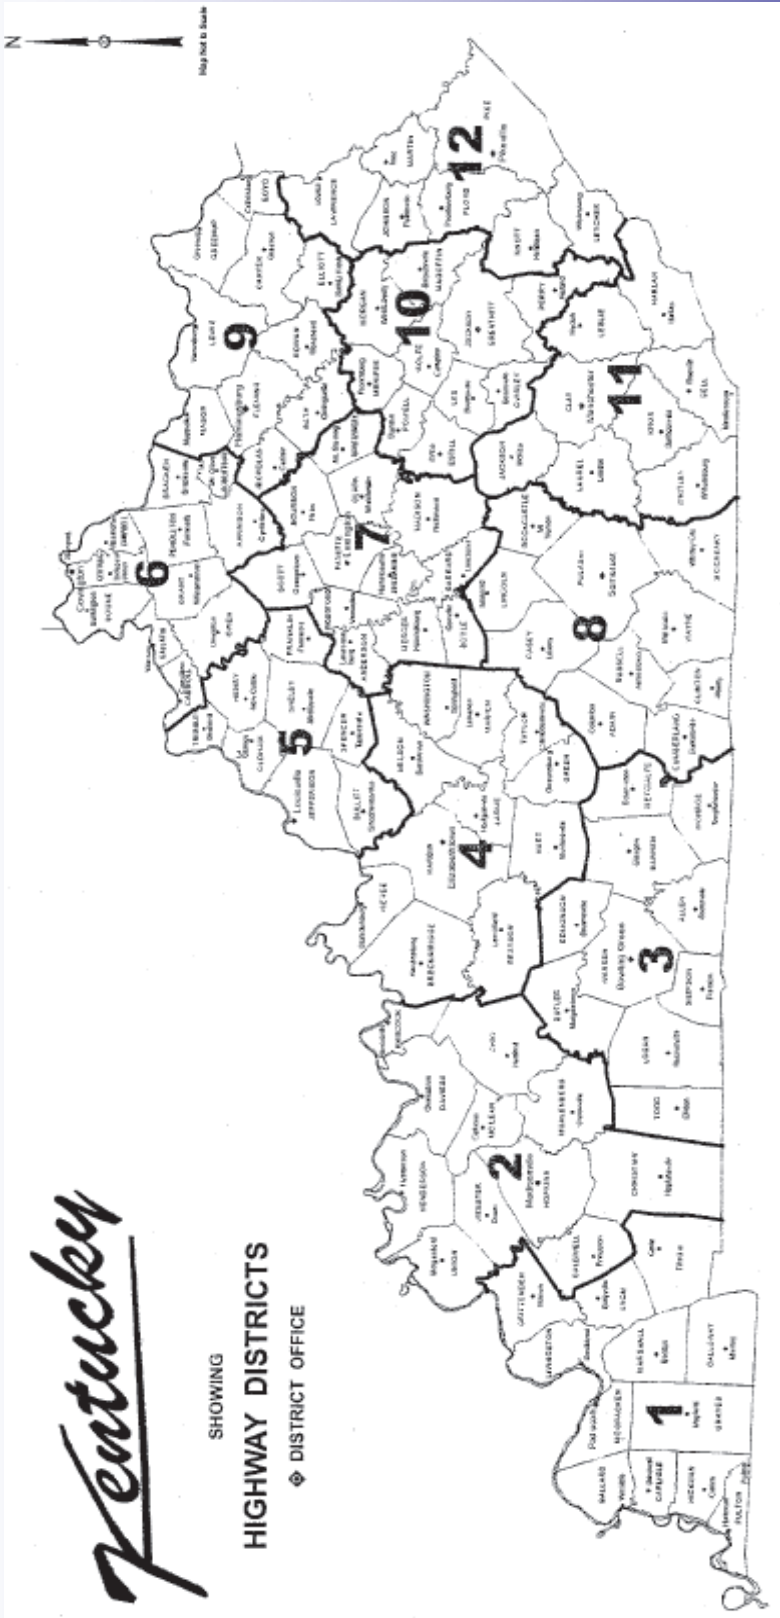

COUNTY	ROUTE	MILEPOINTS		ROADWAY MILES	6" LINE		12" Line White	COMMENTS
		BEGIN	END		YELLOW	WHITE		
BULLITT CO.	I-65	110.700	123.180	12.480	34.428	44.896	5.024	
HENRY CO.	I-71	37.090	38.086	0.996	1.992	2.490		Northbound and Southbound do not begin at same location
FRANKLIN CO.	I-64	46.303	47.400	1.097	2.194	3.291		Do not paint sections of durable markings on mainline & ramps.
FRANKLIN CO.	I-64	48.100	48.700	0.600	1.200	1.800		
FRANKLIN CO.	I-64	50.250	51.100	0.850	1.700	2.550		
FRANKLIN CO.	I-64	52.050	59.431	7.381	15.500	23.250	1.100	
JEFFERSON CO.	I-64	0.800	4.800	4.000	10.000	12.000	2.400	Do not paint thermo & tape striping on mainline & ramps at I-65/I-71 Interchange
JEFFERSON CO.	I-64	11.780	19.200	7.420	14.840	29.680	6.800	Begin at Beargrass Creek Bridge
JEFFERSON CO.	I-65	123.180	135.400	12.220	30.550	76.375	13.000	Stop around Hospital Curve where spray thermo starts. Ramps not excluded.
JEFFERSON CO.	I-71	2.500	3.660	1.160	2.320	3.480		
JEFFERSON CO.	I-264	0.000	12.500	12.500	25.000	45.000	13.000	Paint all ramps. Only stripe mainline over existing paint. Do not stripe over any tape. Verify limits with Engineer prior to striping.
JEFFERSON CO.	I-264	12.500	20.600	8.100	20.250	50.625	15.000	
JEFFERSON CO.	I-265	10.250	15.660	5.410	13.525	20.288	4.600	Include painted ramps at US 31E

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
INTERSTATE SYSTEM

COUNTY	ROUTE	MILEPOINTS		ROADWAY MILES	6" LINE		12" Line		COMMENTS
		BEGIN	END		YELLOW	WHITE	White		
JEFFERSON CO.	I-265	26.500	34.727	8.227	20.500	32.000	5.000		PAINTED RAMPS ONLY. Mainline consists of Tape & Thermo.
JEFFERSON CO.	KY 841	0.000	10.250	10.250	25.625	38.438	4.000		Do Not Paint HPS-8 striping on WB Exit Ramp to US 31W
OLDHAM CO.	I-71	14.400	18.100	3.700	9.650	14.475	1.000		Begin southbound at about 17.65
SHELBY CO.	I-64	43.800	46.303	2.503	5.006	7.509			
TRIMBLE CO.	I-71	38.086	38.808	0.722	1.444	2.166			
TOTALS				99.616	235.724	410.312	70.924		

- NOTES 1. 6" & 12" lines Waterborne Paint - Section 842.
2. Estimated quantities only. Re-trace as directed by the Engineer.
3. The Department will measure and pay only actual quantities re-traced.

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
STATE PRIMARY, STATE SECONDARY, & SUPPLEMENTAL SYSTEMS

COUNTY	ROUTE	MILEPOINTS		ROADWAY MILES	4" LINE		6" LINE		12" Line	EDGE LINES	COMMENTS
		BEGIN	END		YELLOW	WHITE	YELLOW	WHITE	White		
BULLITT	US 31 E	0.000	5.162	5.162			10.324	10.324	0.100	YES	BARDSTOWN RD
	KY 44	0.000	26.286	26.286			46.604	53.180	0.600	YES	MT. WASHINGTON RD.
	KY 61	0.000	19.351	19.351			38.702	43.540	0.500	YES	PRESTON HWY
	XX 61	0.000	0.800	0.800			1.600	1.600		YES	
	KY 434	0.000	1.932	1.932			3.864	3.864		YES	MAINSTREET LJ
	KY 480	1.350	1.720	0.370			0.925	0.925		YES	CEDARGROVE RD
	KY 480	2.950	11.723	8.773			17.546	17.546		YES	CEDARGROVE RD
	KY 1020	0.000	5.339	5.339			9.260	10.680		YES	CORAL RIDGE ROAD
	KY 1116	0.000	0.774	0.774			1.548	1.550		YES	OLD PRESTON HWY
	KY 1116	0.774	5.870	5.096	6.480					YES	ZONETON ROAD
	KY 1450	1.895	3.554	1.659			3.318	3.320		YES	BLUE LICK RD
	KY 1494	6.675	7.480	0.805	1.610					NO	BEECH GROVE ROAD
	KY 1494	7.480	8.073	0.593			1.186	1.186		YES	BEECH GROVE ROAD
	KY 1526	10.810	11.158	0.348			0.870	0.731		YES	JOHN HARPER HWY
	KY 1526	12.600	17.008	4.408			9.257	9.257		YES	Bells Mill
	KY 2237	0.000	0.452	0.452	0.904	0.904				YES	SALT RIVER RD
	KY 2553	0.000	0.394	0.394			0.788	0.788		YES	OLD PRESTON NORTH
	KY 2814	0.000	0.143	0.143	0.300	0.000				No	Whitefield Lane
	KY 3538	0.000	2.445	2.445			6.113	4.890	0.250	YES	Alpha Way, Ohm Dr. Conn
	KY 6303	0.000	0.087	0.087			0.174	0.174		YES	
FRANKLIN	KY 6313	0.000	1.660	1.660			3.735	3.486		Yes	Preston Hwy
	KY 6314	0.000	0.161	0.161	0.322	0.322				YES	
	US 60	5.940	7.292	1.352			3.718	4.056	0.400	YES	Louisville Rd
	US 60	12.300	13.220	0.920			2.300	2.760		YES	FRANKFORT RD
	US 60	13.465	14.038	0.573			1.146	1.146	0.150	YES	Versailles Rd
	US 127	6.045	6.246	0.201			0.402	0.804		YES	LAWRENCEBURG RD
	US 127	7.124	10.582	3.458			6.916	10.374	0.250	YES	LAWRENCEBURG RD
	US 127	11.100	11.880	0.780			1.560	1.950		YES	LAWRENCEBURG RD
	US 421	4.503	11.132	6.629			13.258	13.258		YES	BALD KNOB RD
	US 460	4.790	6.114	1.324			2.648	2.648		YES	EAST GEORGETOWN RD
	KY 151	0.000	3.244	3.244			7.299	8.110	0.100	Yes	
	KY 420	0.000	3.593	3.593			7.186	7.545	0.020	YES	Old Lawrenceburg Rd
	KY 420	4.152	4.732	0.580			1.160				High St & Mero St
	KY 420	4.254	4.702	0.448			0.600	0.500			Southbound One Way (Clinton & Ann Streets.)
	KY 898	0.000	4.602	4.602	9.200	0.000				NO	SHADRICK FERRY RD
	KY 1211	0.000	0.889	0.889			1.778	1.460		YES	Taylor Ave
	KY 1263	0.000	3.567	3.567	7.134					NO	BIG EDDY RD
	KY 1659	3.356	4.086	0.730			1.460	2.008	0.100	Yes	MLK Jr Blvd
	KY 1681	0.963	1.147	0.184	0.368	0.368				YES	
	KY 1784	0.990	2.632	1.642	3.284					NO	Old Glenns Creek Rd
	KY 2259	0.000	0.785	0.785	1.570					YES	SHELBY ST
	KY 2261	0.000	1.832	1.832			3.847	3.847	0.100	YES	
	KY 2271	0.000	0.309	0.309			0.618	0.618		YES	LAFAYETTE DR.
	KY 3163	0.000	0.464	0.464			0.928	0.928		YES	ANDERSON RD
	KY 3166	0.000	0.036	0.036			0.072	0.072		YES	BURLINGTON LN
	KY 3505	0.000	0.176	0.176			0.352	0.352		YES	DEVILS HOLLOW
	KY 3506	0.000	0.185	0.185	0.050					NO	
	KY 6003	0.000	0.290	0.290			0.580	0.580		YES	Road going toward Toyota dealership

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
STATE PRIMARY, STATE SECONDARY, & SUPPLEMENTAL SYSTEMS

COUNTY	ROUTE	MILEPOINTS		ROADWAY MILES	4" LINE		6" LINE		12" Line White	EDGE LINES	COMMENTS
		BEGIN	END		YELLOW	WHITE	YELLOW	WHITE			
HENRY	US 42	0.000	1.122	1.122			2.244	2.244		YES	
	US 421	0.000	6.263	6.263			12.526	14.530		YES	CAMPBELLSBURG RD
	US 421	13.258	21.483	8.225			16.450	16.450		YES	
	KY 22	0.000	7.420	7.420			14.840	14.840		YES	Ballardsville Rd
	US 22	7.522	22.528	15.006			30.012	30.012		YES	Elm/Bethlehem Rd
	KY 55	4.490	7.259	2.769	5.538	5.538				YES	CAMPBELLSBURG RD
	KY 146	0.000	9.828	9.828			19.656	19.656		YES	LAGRANGE RD
	KY 153	5.521	8.509	2.988			6.275	6.275	0.100	YES	LAKE JERICO RD
	KY 241	0.000	1.147	1.147			2.294	2.294		YES	PLEASUREVILLE RD
	KY 389	19.764	21.791	2.027			4.054	4.054		NO	River Rd
	KY 1361	0.000	3.983	3.983		7.966				YES	Vance Rd
JEFFERSON	US 31	0.000	1.122	1.122			2.244	1.122	0.050	YES	2nd Street bridge
	US 31 E	4.070	5.864	1.794			4.485	5.382	0.530	YES	Bardstown Road
	US 31 E	12.185	13.400	1.215			2.734	3.038		YES	Bardstown Road
	US 31 W	0.086	11.690	11.604			23.208	31.911	0.920	YES	Dxie Hwy
	US 31 W	15.389	20.292	4.903			9.806	12.258		YES	Dixie Hwy/22nd St/Dr WJ Hodge
	US 31 W	18.689	20.300	1.611				0.806		NO	22nd St (Southbound)
	US 42	0.165	0.580	0.415				1.038	0.196	YES	Main St/Mellwood Ave
	US 42	0.135	0.965	0.830				2.075	0.150	YES	Brownsboro Rd/Story Ave
	US 42	3.890	5.550	1.660			3.320	4.150		YES	Brownsboro Rd
	US 42	6.000	11.835	5.835			14.588	14.588	0.100	YES	Brownsboro Rd
	US 60	0.000	0.123	0.123			0.246	0.350		NO	Frankfort Ave (US42-US42)
	US 60	5.260	9.700	4.440			11.100	13.320	0.900	YES	Shelbyville Road
	US 60	13.750	14.652	0.902			2.255	2.255	0.200	YES	Shelbyville Road
	US 60	15.062	17.375	2.313			4.626	5.783		YES	Shelbyville Road
	US 60 A	0.800	1.473	0.673			1.346	0.673	0.150	YES	Berry Blvd
	US 60 A	3.409	6.831	3.422			6.844	3.422	0.050	YES	Eastern Pkwy
	US 150	0.515	4.094	3.579			8.948	10.737	0.800	YES	22nd St/Broadway
	US 150	0.515	0.841	0.326				0.082	0.100	NO	Dr WJ Hodge/22nd St Conn
	US 150 T	0.000	0.089	0.089			0.223	0.534		YES	Market St US 31W-US31W
	KY 22	0.000	1.450	1.450			2.900	3.263	0.050	YES	Brownsboro Rd
	KY 22	1.700	2.590	0.890			1.780	1.869		YES	Brownsboro Rd
	KY 22	2.945	6.725	3.780			8.505	8.505	0.400	YES	Ballardsville Rd
	KY 22 C	0.000	0.520	0.520			1.300	1.300		YES	Seminary Dr
	KY 44	0.000	0.558	0.558			1.116	1.116	0.010	YES	Shepherdsville Rd
	KY 61	0.000	1.893	1.893			3.786	5.679	0.200	YES	Preston Hwy
	KY 61	3.800	10.955	7.155			17.888	17.888	1.500	YES	Preston Hwy
	KY 61	9.957	10.468	0.511				0.511	0.100	NO	Shelby/Lynn St
	KY 61	10.955	13.227	2.272			0.000	2.272	0.150	NO	Preston Street ONLY
	KY 146	0.000	8.825	8.825			19.856	26.475	0.500	YES	Lagrange Rd
	KY 155	0.000	4.642	4.642			9.284	9.748	0.150	YES	Taylorsville Lake Rd
	KY 155	5.145	5.710	0.565			1.130	1.130		YES	Taylorsville Rd
	KY 155	9.024	11.395	2.371			5.928	7.113	0.150	YES	Taylorsville Rd
	KY 155	13.590	15.113	1.523			3.046	4.569	0.050	YES	Taylorsville Rd
	KY 329	0.000	0.785	0.785			1.570	1.570		YES	Covered Bridge Rd
	KY 864	3.365	4.250	0.885			2.213	1.859	0.100	YES	Beulah Church
	KY 864	6.390	6.914	0.524			1.048	1.572		YES	Fegenbush Ln
	KY 864	7.111	14.400	7.289			14.578	20.045	0.250	YES	Poplar Level Rd/Goss Ave
	KY 907	0.000	7.036	7.036			14.776	15.831		YES	Third Street Rd
	KY 913	1.569	3.072	1.503			3.006	6.012	0.200	YES	Blankenbaker Pkwy
	KY 1020	0.000	7.837	7.837			19.593	19.593	0.200	YES	National Turnpike/Southside
	KY 1020	9.150	12.724	3.574			7.148	7.148		YES	2nd/3rd St
	KY 1065	0.000	13.715	13.715			27.430	34.288	0.600	YES	Outer Loop(Omit tape section at Minor Lane)
	KY 1142	0.000	1.736	1.736			3.472	3.472		YES	Palatka rd

COUNTY	ROUTE	MILEPOINTS		ROADWAY MILES	4" LINE		6" LINE		12" Line	EDGE LINES	COMMENTS
		BEGIN	END		YELLOW	WHITE	YELLOW	WHITE	White		
	KY 1447	0.698	1.978	1.280			3.200	3.520	0.500	YES	Westport Rd
	KY 1450	0.000	3.542	3.542			8.855	7.438		YES	Blue Lick Rd
	KY 1631	0.000	1.582	1.582			4.351	4.351	0.250	YES	Crittenden Dr
	KY 1694	0.000	1.454	1.454			3.635	3.272	0.100	YES	Brownsboro rd
	KY 1703	0.000	0.497	0.497			0.994	1.367	0.100	YES	Newburg rd
	KY 1703	1.752	5.682	3.930			8.253	9.825	0.500	YES	Newburg Rd
	KY 1747	0.000	0.154	0.154			0.616	0.462	0.100	YES	Fern Valley Rd
	KY 1747	7.489	10.443	2.954						YES	Hurstbourne Pkwy
	KY 1747	1.148	4.280	3.132			7.047	8.613	0.400	YES	Fern Valley/Hurstbourne Pkwy
	KY 1747	11.033	17.040	6.007			12.615	16.519	0.750	YES	Hurstbourne Pkwy
	KY 1819	5.189	12.811	7.622			17.150	17.150		YES	Billtown Rd.
	KY 1865	0.000	2.200	2.200			5.500	6.050	0.200	YES	New Cut Rd
	KY 1865	5.360	5.824	0.464			1.276	1.276		YES	New Cut /Taylor Blvd
	KY 1931	0.538	10.528	9.990			24.975	24.975	0.200	YES	Seventh St. Rd.
	KY 1932	0.000	6.590	6.590			14.828	14.828	0.350	YES	Breckenridge Ln
	KY 1934	0.000	7.095	7.095			14.190	17.738		YES	Greenbelt Hwy/Cane Run
	KY 1934	7.280	7.618	0.338			0.676	0.879		YES	Cane Run Rd
	KY 1934	7.802	9.800	1.998			3.996	4.995		YES	Cane Run Rd/MP Vary NB/SB
	KY 2048	0.000	2.733	2.733			5.466	6.149	0.150	YES	Cannons lane
	KY 2049	0.000	1.720	1.720			3.440	3.440		YES	Crums Lane
	KY 2050	0.000	2.182	2.182			4.910	4.582		YES	Lyndon Lane
	KY 2051	0.000	1.975	1.975			4.444	4.444		YES	Camp Ground Rd
	KY 2052	0.000	4.205	4.205			10.513	10.933		YES	Shepherdsville rd
	KY 2054	0.000	3.299	3.299			6.598	8.248	0.260	YES	Algonquin Pkwy
	KY 2241	0.000	0.111	0.111			0.222	0.111		NO	Willis Ave.
	KY 2251	0.000	1.192	1.192			2.384	2.682		YES	Bardstown Road
	KY 2265	0.000	0.145	0.145	0.290					NO	Hatmaker Trail
	KY 2801	0.000	0.256	0.256			0.256	0.512	0.100	YES	W. Southern Heights
	KY 2803	0.000	0.276	0.276			0.276	0.552	0.075	YES	Arthur St
	KY 2860	0.000	0.981	0.981			2.453	2.207	0.050	YES	Grinstead
	KY 3064	0.000	1.601	1.601				4.003		YES	Portland and Northwestern Parkways.
	KY 3069	0.000	0.216	0.216			0.432	0.432		YES	Maint Garage at Popular Level
	KY 3077	0.000	0.664	0.664			1.328	1.826		YES	River Rd
	KY 3082	0.000	1.538	1.538				3.845		YES	Bank St
	KY 3084	0.000	1.978	1.978			4.945	5.934	0.250	YES	Old Henry Rd
	KY 3206	0.000	0.235	0.235	0.470	0.470				YES	Cane Run Rd
	KY 3216	0.000	0.155	0.155				0.310		YES	38th St
	KY 3217	0.000	0.153	0.153				0.306	0.150	YES	37th Street
	KY 6159	0.000	0.130	0.130			0.260	0.325	0.150	YES	Bluegrass pkwy access
	KY										

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
STATE PRIMARY, STATE SECONDARY, & SUPPLEMENTAL SYSTEMS

COUNTY	ROUTE	MILEPOINTS		ROADWAY MILES	4" LINE		6" LINE		12" Line White	EDGE LINES	COMMENTS
		BEGIN	END		YELLOW	WHITE	YELLOW	WHITE			
SHELBY	US 60	11.060	11.300	0.240			0.480	0.600		YES	Frankfort Rd - EB/WB Milepoints may Vary
	US 60	12.020	23.026	11.006			23.113	24.764		YES	Frankfort Rd
	KY 12	0.000	4.798	4.798			9.596	9.596		YES	BAGDAD RD
	KY 43	0.000	8.520	8.520			17.040	17.040		YES	CROPPER RD
	KY 44	0.000	10.398	10.398			17.630	20.800		YES	MT. EDEN RD
	KY 53	0.000	6.300	6.300			12.600	14.560		YES	MT.EDEN RD
	KY 53	8.006	19.609	11.603			23.786	25.746		YES	LaGrange Rd
	KY 55	0.000	5.407	5.407			10.814	10.814		YES	TAYLORSVILLE RD
	KY 55	7.903	12.400	4.497			11.243	11.243	0.250	YES	Shelbyville Bypass
	KY 241	0.000	2.800	2.800			5.600	5.600		YES	PLEASUREVILLE RD
	KY 395	8.470	16.193	7.723			15.446	15.446		YES	Waddy/Elmburg Rd
	KY 1005	0.000	0.165	0.165	0.260					NO	VIGO ROAD
	KY 1399	0.000	2.572	2.572			5.787	5.787		YES	
	KY 1667	0.000	0.391	0.391	0.782					NO	BOAT DOCK RD
	KY 1848	4.801	6.025	1.224			3.060	3.672	0.020	YES	Buck Creek Rd
	KY 1871	0.000	0.817	0.817			1.634	1.716		YES	ROCKET LANE
	KY 1871	0.817	2.089	1.272	2.544					NO	
	KY 2258	0.000	0.361	0.361			0.722	0.722		YES	Old Seven Mile Pike
	KY 2268	0.000	1.388	1.388			2.776	2.776		YES	TAYLORSVILLE RD
	KY 2862	0.000	1.633	1.633			3.266	3.266		YES	OLD FINCHVILLE RD
SPENCER	US 31 E	0.000	1.882	1.882			3.764	4.705		YES	
	KY 44	0.000	19.063	19.063			38.126	47.658	0.200	YES	TAYLORSVILLE RD
	KY 48	0.000	5.897	5.897			11.794	11.794		YES	HIGHGROVE RD
	KY 55	0.000	13.566	13.566			27.132	27.132	0.300	YES	SHELBYVILLE RD
	KY 155	0.000	4.247	4.247			8.494	8.494		YES	TAYLORSVILLE RD
	KY 248	0.000	7.778	7.778			15.556	16.334		YES	Briar Ridge
	KY 1392	0.000	4.572	4.572		9.144				YES	Grays Run Rd
	KY 2239	0.000	3.831	3.831			7.662	7.662		YES	OVERLOOK ROAD
	KY 2814	0.000	1.404	1.404	3.000	2.810				YES	WHITFIELD LN
	KY 3200	0.000	1.490	1.490			2.980	2.980		YES	TOWNHILL RD
TRIMBLE	KY 3230	0.000	0.120	0.120	0.240					NO	Park Rd
	US 42	0.000	14.520	14.520			29.040	29.040	0.020	YES	
	US 421	18.773	19.198	0.425			0.850	0.850		YES	Milton-Madison Bridge
	KY 36	0.000	2.211	2.211			4.422	4.422		YES	
	KY 55	0.000	1.133	1.133	2.266	2.266				YES	
TOTALS				635.601	53.938	37.824	1,199.918	1,316.496	17.601		

- NOTES: 1. 4", 6", & 12" lines- Waterbourne Striping - Section 842.
2. Estimated quantities only. Re-trace as directed by the Engineer. The Department will measure and pay only actual quantities re-traced.
3. 6" routes may have 4" or 6" spacing between the yellow stripes. Modify equipment as necessary to provide the correct spacing.
4. Stripe Franklin, Bullitt and Shelby Maintenance garage entrances as directed by the Engineer.

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
RIRAL SECONDARY SYSTEM

COUNTY	ROUTE	MILEPOINTS		ROADWAY	4" LINE		6" Line		EDGE	COMMENTS
		BEGIN	END	MILES	YELLOW	WHITE	Yellow	White	LINES	
BULLITT	KY 480C	0.000	0.916	0.916			1.832	1.832	YES	CEDAR GROVE ROAD
	KY 660	0.000	2.617	2.617	5.234	5.234			YES	WATERFORD ROAD
	KY 1319	0.000	3.710	3.710	7.420	7.420			YES	KINGS CHURCH ROAD
	KY 1417	0.000	2.289	2.289	4.578				NO	MARTIN HILL ROAD
	KY 1450	0.000	1.605	1.605	2.809				NO	Hebron Lane
	KY 1450	1.605	1.895	0.290			0.725	0.653	YES	Blue Lick Rd
	KY 1494	0.000	3.275	3.275	0.500	6.550			YES	Beech Grove Rd
	KY 1494	3.275	6.675	3.400	6.800				NO	Beech Grove Rd
	KY 1526	0.000	10.810	10.810	21.620	1.500			YES	Knob Creek/Brooks Hill Rd
	KY 1531	0.000	0.670	0.670	1.340	1.340			YES	Dawson Hill/Routt Rd
	KY 2673	0.000	3.233	3.233	6.466				NO	WEST BLUE LICK ROAD
	KY 2674	0.000	3.287	3.287	6.574				NO	STRINGER LANE
	KY 2723	0.000	2.830	2.830	5.660				NO	RAYMOND ROAD
	KY 3219	0.000	2.580	2.580	5.160				NO	CHAPEZE LANE
	KY 6302	0.000	0.616	0.616			1.386	1.232	YES	OLD PRESTON HWY
TOTAL				42.128	74.161	22.044	3.943	3.717		
FRANKLIN	KY 12	0.000	1.000	1.000	2.000				NO	DRY RIDGE ROAD
	KY 12	1.000	12.461	11.461		22.922			YES	DRY RIDGE ROAD/FLAT CREEK RD
	KY 368	0.000	3.414	3.414	6.828				NO	CEDAR ROAD
	KY 561	0.000	0.543	0.543	1.086				NO	Guist Road
	KY 1005	0.000	7.450	7.450	14.900	2.000			YES	DEVILS HOLLOW ROAD
	KY 1262	0.000	12.734	12.734	25.468	6.000			YES	JONES LANE
	KY 1472	0.000	0.341	0.341	0.682				NO	HICKORY RIDGE ROAD
	KY 1659	0.000	3.356	3.356	3.356	7.048			YES	GLEENS CREEK ROAD
	KY 1665	0.000	3.755	3.755	7.510	7.510			YES	EVERGREEN ROAD
	KY 1665	3.755	8.019	4.264	8.528				NO	Bridgeport-Benson Rd
	KY 1665	8.019	11.910	3.891		7.782			YES	Bryant-Benson Rd
	KY 1681	0.000	0.963	0.963			1.926	2.408	YES	Duncan Rd
	KY 1685	0.000	1.467	1.467	2.934				NO	BEDFORD ROAD
	KY 1688	0.000	0.354	0.354	0.708				NO	STAMPING GROUNG ROAD
	KY 1689	0.000	3.930	3.930	7.860				NO	SWITZER ROAD
	KY 1689	3.930	6.020	2.090		4.180			YES	SWITZER ROAD
	KY 1707	0.000	4.392	4.392		8.784			YES	Camp Pleasant Rd
	KY 1784	0.000	0.990	0.990	1.980	1.980			YES	COFFEE TREE RD
	KY 1900	0.000	5.936	5.936	11.872	1.200			YES	PEAKS MILL ROAD
	KY 2817	0.000	3.074	3.074			6.148	6.200	YES	CARDWELL LANE
	KY 2820	0.000	2.530	2.530	5.060	0.100			NO	GREEN WILSON
	KY 2821	0.000	2.905	2.905	5.810	5.810			YES	HANLEY LANE
	KY 2822	0.000	1.176	1.176			2.940	2.470	YES	STEADMANTOWN LN
	KY 2822	1.176	3.075	1.899	3.798				NO	STEADMANTOWN LN
	KY 2919	0.000	2.960	2.960	0.500	5.920			YES	Indian Gap Rd
TOTAL				86.875	110.880	81.236	11.014	11.077		

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
RURAL SECONDARY SYSTEM

[illegible]

DISTRICT 5 WATERBORNE PAINT STRIPING - 2026 RURAL SECONDARY SYSTEM

COUNTY	ROUTE	MILEPOINTS		ROADWAY	4" LINE		6" Line		EDGE	COMMENTS
		BEGIN	END	MILES	YELLOW	WHITE	Yellow	White	LINES	
OLDHAM	KY 329	7.226	8.935	1.709			3.418	3.418	YES	COVERED BRIDGE ROAD
	KY 362	0.000	3.039	3.039	6.078				NO	CENTRAL/ASH AVENUE
	KY 393	0.000	2.562	2.562			5.124	5.124	YES	PAYTON LANE
	KY 524	0.000	12.148	12.148	24.296	7.900			YES	COVINGTON RIDGE ROAD
	KY 712	0.000	2.855	2.855			5.710	5.710	YES	JERICO ROAD
	KY 1315	0.000	3.520	3.520	7.040	4.500			YES	HANNA ROAD
	KY 1408	0.000	3.132	3.132			6.400	6.260	YES	FLOYDSBURG ROAD
	KY 1488	0.000	4.181	4.181	8.362	4.578			YES	
	KY 1694	3.149	8.214	5.065	10.130				NO	Gum St
	KY 1793	0.000	2.141	2.141			5.353	4.817	YES	SOUTH HIGHWAY
	KY 1817	0.000	4.756	4.756	5.000	9.512			YES	Cedar Point Road
	KY 1818	0.000	5.864	5.864			11.728	11.728	YES	MOUNT ZION ROAD
	KY 2853	0.000	0.696	0.696			1.392	1.392	YES	JERICO ROAD
	KY 2854	0.000	2.592	2.592	5.184				NO	DAWKINS ROAD
	KY 2855	0.000	2.458	2.458	4.916				NO	FORT PICKENS ROAD
	KY 2856	0.000	4.103	4.103			8.206	8.206	YES	ELDER PARK ROAD
	KY 2857	0.000	1.576	1.576			4.030	5.130	YES	NEW MOODY LANE
	KY 2858	0.000	1.806	1.806			3.612	3.612	YES	ABBOTT LANE
	KY 2859	0.000	2.446	2.446	4.892	4.892			YES	FIBLE LANE
	KY 3223	0.000	4.800	4.800			8.840	9.600	YES	OLD SLIGO ROAD
	KY 3222	0.000	3.096	3.096	6.192				NO	ROSE ISLAND ROAD
TOTAL				74.545	82.090	31.382	63.813	64.997		
SHELBY	KY 12	4.798	8.829	4.031	6.400	8.062			YES	BAGDAD ROAD
	KY 43	8.520	12.535	4.015	6.640	8.030			YES	CROPPER ROAD
	KY 148	0.000	13.870	13.870			21.780	27.740	YES	FINCHVILLE ROAD
	KY 322	0.000	2.316	2.316	3.929				NO	LUCAS ROAD
	KY 636	0.000	5.425	5.425	9.491				NO	BACK CREEK ROAD
	KY 362	0.000	8.400	8.400	16.800				NO	AIKEN ROAD
	KY 362	8.400	12.022	3.622			7.244	7.244	YES	AIKEN ROAD
	KY 395	0.000	8.470	8.470	16.940	16.940			YES	WADDY ROAD
	KY 395	16.193	21.610	5.417	10.834				NO	Elmburg Rd
	KY 714	0.000	8.733	8.733	17.466				NO	HEMPRIDGE ROAD
	KY 1005	0.165	11.270	11.105	17.650				NO	VIGO ROAD
	KY 1315	0.000	1.975	1.975	3.950				NO	HANNAH ROAD
	KY 1408	0.000	0.871	0.871	1.742				NO	FLOYDSBURG ROAD
	KY 1472	0.000	11.349	11.349	21.176				NO	MINK RUN ROAD
	KY 1531	0.000	0.084	0.084			0.200	0.168	YES	AIKEN ROAD
	KY 1779	0.000	10.018	10.018	16.550	12.200			YES	BENSON PIKE
	KY 1790	0.000	4.449	4.449	8.350				NO	HOOPER STATION ROAD
	KY 1848	6.025	10.591	4.566	7.800				YES	TODDS POINT ROAD
	KY 1848	0.000	4.651	4.651	9.302				NO	Buck Creek Rd
	KY 1848	4.651	4.801	0.150			0.450	0.450	YES	Buck Creek Rd
	KY 1922	0.000	6.766	6.766	12.230				NO	CEDARMORE ROAD
	KY 2256	0.000	0.436	0.436	0.872				NO	GRAEFENBURG ROAD
	KY 2861	0.000	6.593	6.593			12.383	13.186	YES	ZARING MILL ROAD
	KY 2866	0.000	3.820	3.820	6.541				NO	WOODLAWN ROAD
	KY 2867	0.000	2.497	2.497	4.994				NO	KINGS HIGHWAY
TOTAL				133.629	199.657	45.232	42.057	48.788		


DISTRICT 5 WATERBORNE PAINT STRIPING - 2026
RIRAL SECONDARY SYSTEM

COUNTY	ROUTE	MILEPOINTS		ROADWAY	4" LINE		6" Line		EDGE	COMMENTS
		BEGIN	END	MILES	YELLOW	WHITE	Yellow	White	LINES	
SPENCER	KY 458	0.000	0.156	0.156	0.312				NO	KY 458
	KY 652	0.000	6.185	6.185	12.042				NO	LITTLE UNION CREEK
	KY 1060	0.000	5.169	5.169	10.270				NO	PLUM CREEK ROAD
	KY 1169	0.000	8.916	8.916	12.000	8.000			YES	PLUM RIDGE ROAD
	KY 1319	0.000	4.488	4.488	9.700				NO	DALE LANE
	KY 1416	0.000	4.396	4.396		8.792			YES	Hickory Ridge
	KY 1795	0.000	5.991	5.991	10.410				NO	MILL ROAD
	KY 2885	0.000	7.008	7.008		14.016			YES	West River Rd
	KY 3228	0.000	2.321	2.321		4.642			YES	Old Briar Ridge Rd
	KY 3192	0.000	2.950	2.950	6.220				NO	WILSONVILLE ROAD
TOTAL				47.580	60.954	35.450	0.000	0.000		
TRIMBLE	KY 625	0.000	12.215	12.215	18.320				NO	MT. PLEASANT ROAD
	KY 1335	0.000	4.104	4.104	7.350				NO	South Carlisle Rd
	KY 1488	0.000	1.743	1.743		3.486			YES	Pattons Creek Rd
	KY 2869	0.000	1.835	1.835		3.670			YES	Conner Ridge Rd
	KY 2871	0.000	0.295	0.295	0.590				NO	
	KY 3175	0.000	6.620	6.620		13.240			YES	Sulphur-Bedford Rd
TOTAL				26.812	26.260	20.396	0.000	0.000		

- NOTES: 1. 4" & 6" lines- Waterbourne Striping - Section 842.
2. 6" routes may have 4"or 6" spacing between the yellow stripes. Modify equipment as necessary to provide the correct spacing.
3. Estimated quantities only. Re-trace as directed by the Engineer. The Department will measure and pay only actual quantities re-traced.

DETAIL 6 INCH TO 4 INCH TRANSITION

PREFERRED METHOD TO OBTAIN 6" WIDTH FOR VARIOUS STRIPING SCENARIOS

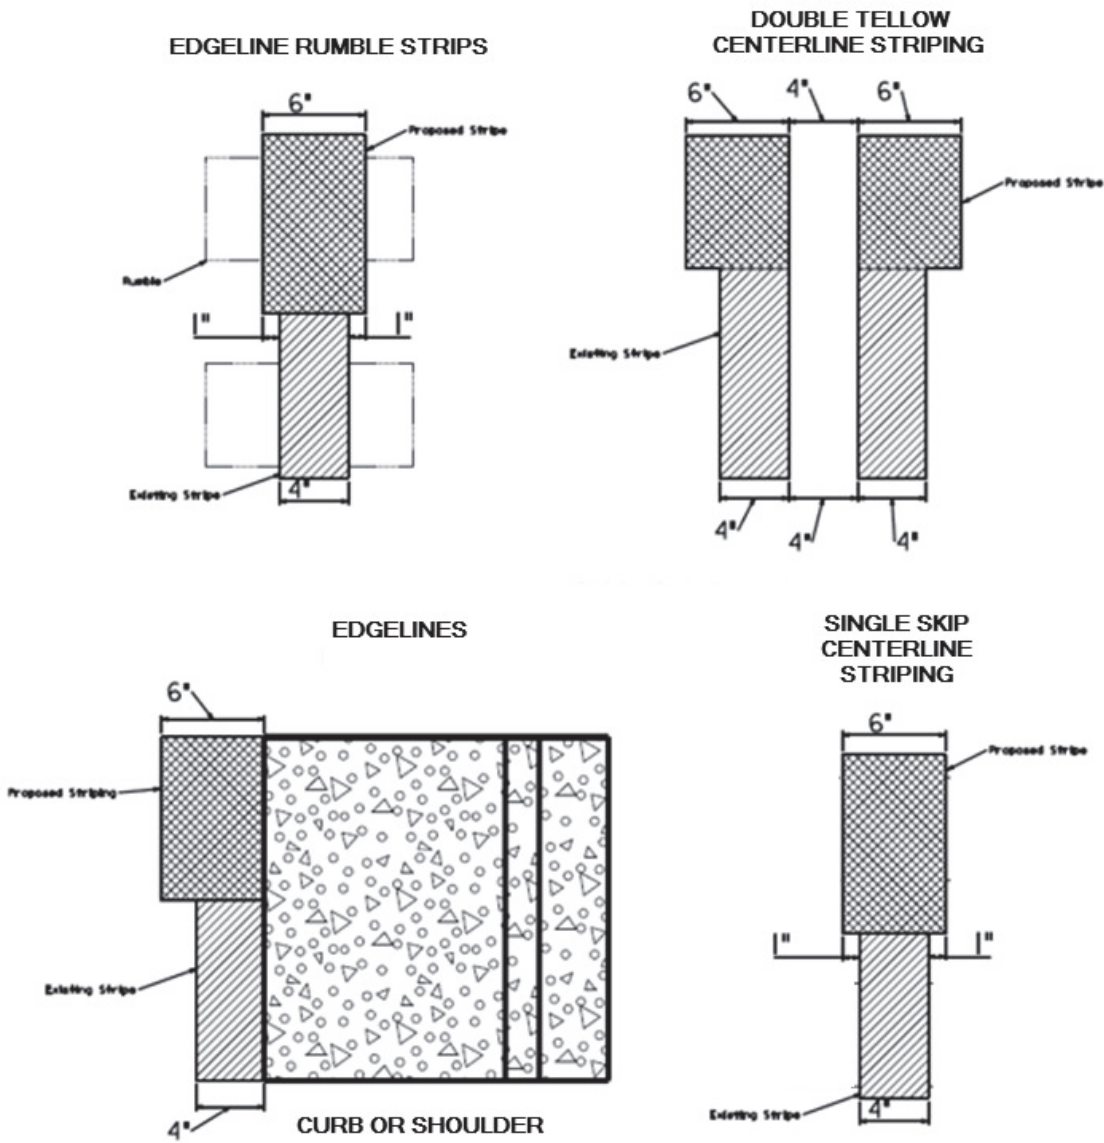

Contractor & District Information

Route Information

		Totals Summary									
Materials		Comments									
Yellow WB Traffic Paint	▶			Striped Line Length (Miles)		MP 4" W	MP 4" Y	MP 6" W	MP 6" Y	RS 4" W	RS 4" Y
White WB Traffic Paint	▶										

To request measurement of retroreflectivity in accordance with KIM203, please email all correspondence to brandi.mitchell@ky.gov. Please notify Central Office at least two (2) weeks in advance of when mobile testing is needed.

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

STANDARD SPECIFICATIONS

Any reference in the plans or proposal to previous editions of the *Standard Specifications for Road and Bridge Construction* and *Standard Drawings* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2026* and *Standard Drawings, Edition of 2025*.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting. The Supplemental Specifications can be found at the following link:
<http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx>

2025 KENTUCKY STANDARD DRAWINGS

CURVE WIDENING AND SUPERELEVATION TRANSITIONS	RGS-001-07
SUPERELEVATION FOR MULTILANE PAVEMENT	RGS-002-09
MISCELLANEOUS STANDARDS	RGX-001-06
APPROACHES, ENTRANCES, AND MAIL BOX TURNOUT	RPM-110-07
PAVEMENT MARKER ARRANGEMENTS MULTI-LANE ROADWAYS	TPM-100-04
PAVEMENT MARKER ARRANGEMENTS MULTI-LANE ROADWAYS	TPM-105-04
PAVEMENT MARKER ARRANGEMENTS MULTI-LANE ROADWAYS	TPM-110-04
PAVEMENT MARKER ARRANGEMENTS TWO-LANE TWO-WAY ROADWAYS	TPM-115-04
PAVEMENT MARKER ARRANGEMENT TWO-LANE TO FOUR-LANE TRANSITIONS	TPM-120-04
PAVEMENT MARKER ARRANGEMTEN ESIT GORE AND OFF-RAMP	TPM-125-04
PAVEMENT MARKER ARRANGEMTEN FOR PARALLEL DECELERATION LANE	TPM-126-01
PAVEMENT MARKER ARRANGEMTEN ON-RAMP W/ TAPERED ACCELERATION LANE	TPM-130-04
PAVEMENT MARKER ARRANGEMTEN ON-RAMP W/ PARALLLEL ACCELERATION LANE....	TPM135-04
PAVEMENT MARKER ARRANGEMTEN TWO-WAY, LEFT TURN LANE	TPM-140-05
PAVEMENT MARKER ARRANGEMENT CHANNELIZED INTERSECTION.....	TPM-145-04
PAVEMENT STRIPING DETAILS FOR TWO LANE TWO WAY ROADWAYS	TPM-175-01
TYPICAL ENTRANCE RAMP MARKINGS	TPM-200-00
TYPICAL EXIT RAMP MARKINGS PAGE 1	TPM-201-00
TYPICAL EXIT RAMP MARKINGS PAGE 2	TPM 202-00
TYPICAL MARKINGS AT SIGNALIZED INTERSECTIONS	TPM-203-00
TYPICAL MARKINGS FOR GORE AREAS	TPM-204-00
TYPICAL MARKINGS FOR ISLANDS AND MEDIANS	TPM-205-00
TYPICAL MARKINGS FOR TURN LANES PAGE 1	TPM-206-00
TYPICAL MARKINGS FOR TURN LANES PAGE 2	TPM-207-00
CENTERLINE RUMBLE STRIPS PLACEMENT DETAILS	TPR-100-00
CENTERLINE RUMBLE STRIPS 4 INCH STRIPING.....	TPR-105-00
CENTERLINE RUMBLE STRIPS 6 INCH STRIPING	TPR-110-00
SHOULDER & EDGELINE RUMBLE STRIPS PLACEMENT DETAILS	TPR-115-00
EDGELINE RUMBLE STRIP DETAILS TWO LANE ROADWAYS	TPR-120N-00
SHOULDER RUMBLE STRIP DETAILS TWO LANE ROADWAYS	TPR-125-00
RUMBLE STRIP DETAILS MULTI LANE ROADWAYS & RAMPS	TPR-130-01
PAVEMENT CONDITION WARNING SIGNS.....	TTD-125-03
MOBILE OPERATION FOR PAINT STRIPING CASE I.....	TTS-100-02
MOBILE OPERATION FOR PAINT STRIPING CASE II.....	TTS-105-02
MOBILE OPERATION FOR PAINT STRIPING CASE III.....	TTS-110-02
MOBILE OPERATION FOR PAINT STRIPING CASE IV	TTS-115-02
MOBILE OPERATION FOR DURABLE STRIPING CASE I	TTS-120-02
MOBILE OPERATION FOR DURABLE STRIPING CASE II.....	TTS-125-02
MOBILE OPERATION FOR DURABLE STRIPING CASE III.....	TTS-130-02
MOBILE OPERATION FOR DURABLE STRIPING CASE IV	TTS-135-02

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

**TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS**

**LABOR AND WAGE REQUIREMENTS
APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS**

- I. Application
- II. Nondiscrimination of Employees (KRS 344)

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

II. NONDISCRIMINATION OF EMPLOYEES

**AN ACT OF THE KENTUCKY
GENERAL ASSEMBLY TO PREVENT
DISCRIMINATION IN EMPLOYMENT
KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972**

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.

EXECUTIVE BRANCH CODE OF ETHICS

The Executive Branch Code of Ethics created by Kentucky Revised Statutes (KRS) Chapter 11A, effective July 14, 1992, establishes the ethical standards that govern the conduct of all executive branch employees. The Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

A present or former public servant listed in KRS 11A.010(9)(a) to (g) shall not, within one (1) year following termination of his or her office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of one (1) year, he or she personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his or her tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not to obtain private benefits.

If you have worked for the executive branch of state government within the past year, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 1025 Capital Center Drive, Suite 105, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: March 11, 2025

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address:
<https://www.eProcurement.ky.gov>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

EMPLOYEE RIGHTS UNDER THE FAIR LABOR STANDARDS ACT

THE UNITED STATES DEPARTMENT OF LABOR WAGE AND HOUR DIVISION

FEDERAL MINIMUM WAGE

\$7.25 PER HOUR

BEGINNING JULY 24, 2009

OVERTIME PAY

At least 1½ times your regular rate of pay for all hours worked over 40 in a workweek.

CHILD LABOR

An employee must be at least **16** years old to work in most non-farm jobs and at least **18** to work in non-farm jobs declared hazardous by the Secretary of Labor.

Youths **14** and **15** years old may work outside school hours in various non-manufacturing, non-mining, non-hazardous jobs under the following conditions:

No more than

- **3** hours on a school day or **18** hours in a school week;
- **8** hours on a non-school day or **40** hours in a non-school week.

Also, work may not begin before **7 a.m.** or end after **7 p.m.**, except from June 1 through Labor Day, when evening hours are extended to **9 p.m.** Different rules apply in agricultural employment.

TIP CREDIT

Employers of “tipped employees” must pay a cash wage of at least \$2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee’s tips combined with the employer’s cash wage of at least \$2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.

ENFORCEMENT

The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.

Employers may be assessed civil money penalties of up to \$1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to \$11,000 for each employee who is the subject of a violation of the Act’s child labor provisions. In addition, a civil money penalty of up to \$50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to \$100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.

ADDITIONAL INFORMATION

- Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions.
- Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands.
- Some state laws provide greater employee protections; employers must comply with both.
- The law requires employers to display this poster where employees can readily see it.
- Employees under 20 years of age may be paid \$4.25 per hour during their first 90 consecutive calendar days of employment with an employer.
- Certain full-time students, student learners, apprentices, and workers with disabilities may be paid less than the minimum wage under special certificates issued by the Department of Labor.

For additional information:



1-866-4-USWAGE

(1-866-487-9243)

TTY: 1-877-889-5627



WWW.WAGEHOUR.DOL.GOV

PART IV

BID ITEMS

262005

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	02572		QUALITY CONTROL	1.00	LS		\$	
0020	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0030	06520		PAVE STRIPING-WB PAINT-4 IN W RURAL SECONDARY ROUTES	324.41	MILE		\$	
0040	06520		PAVE STRIPING-WB PAINT-4 IN W STATE PRIMARY, SECONDARY & SUPPLEMENTAL ROUTES	37.82	MILE		\$	
0050	06521		PAVE STRIPING-WB PAINT-4 IN Y RURAL SECONDARY ROUTES	784.76	MILE		\$	
0060	06521		PAVE STRIPING-WB PAINT-4 IN Y STATE PRIMARY, SECONDARY & SUPPLEMENTAL ROUTES	53.94	MILE		\$	
0070	06522		PAVE STRIPING-WB PAINT-6 IN W INTERSTATE ROUTES	410.31	MILE		\$	
0080	06522		PAVE STRIPING-WB PAINT-6 IN W RURAL SECONDARY ROUTES	167.18	MILE		\$	
0090	06522		PAVE STRIPING-WB PAINT-6 IN W STATE PRIMARY, SECONDARY & SUPPLEMENTAL ROUTES	1,316.50	MILE		\$	
0100	06523		PAVE STRIPING-WB PAINT-6 IN Y INTERSTATE ROUTES	235.72	MILE		\$	
0110	06523		PAVE STRIPING-WB PAINT-6 IN Y RURAL SECONDARY ROUTES	160.40	MILE		\$	
0120	06523		PAVE STRIPING-WB PAINT-6 IN Y STATE PRIMARY, SECONDARY & SUPPLEMENTAL ROUTES	1,199.92	MILE		\$	
0130	06526		PAVE STRIPING-WB PAINT-12 IN W INTERSTATE ROUTES	70.92	MILE		\$	
0140	06526		PAVE STRIPING-WB PAINT-12 IN W STATE PRIMARY, SECONDARY & SUPPLEMENTAL ROUTES	17.60	MILE		\$	
0150	20411ED		LAW ENFORCEMENT OFFICER	300.00	HOURL		\$	
0160	22664EN		WATER BLASTING EXISTING STRIPE	500.00	LF		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0170	02569		DEMOBILIZATION	1.00	LS		\$	