

WIDE TRACC BILL OF MATERIAL		
PRODUCT CODE	QTY	DESCRIPTION
25939A	1	58" WIDETRACC UNIT ASS'LY
6825B	4	REFLECTIVE TAPE
6532B	1	PLASTIC NOSEPIECE

OPTIONAL TRACC ANCHOR ITEMS		
PRODUCT CODE	DESCRIPTION	
5205B	ADHESIVE DISPENSER	
5207B	MIXER HIT HY150 (NOZZLE)	
5208B	FILLER HIT HY150 (FILLER TUBE)	
5209B	BIT TE-C+ 11/16-18 (11/16" Ø BIT)	


** ANCHOR HARDWARE (CONCRETE BASE)		
5204B	50	5/8"Ø x 7 1/16" ANCHOR STUD
3310G	50	5/8" LOCKWASHER
3361G	50	5/8" HEX NUT
3300G	50	5/8" FLAT WASHER
5206B	4	ADHESIVE HIT HY150(CARTRIDGE)

** ANCHOR HARDWARE (ASPHALT BASE)		
6380G	50	5/8"Ø x 18" ALL THD ROD
3310G	50	5/8" LOCKWASHER
3361G	50	5/8" HEX NUT
3300G	50	5/8" FLAT WASHER
5206B	11	ADHESIVE HIT HY150(CARTRIDGE)


** SEE PRODUCT MANUAL

REINFORCED CONCRETE PAD 6" THICK (8" THICK IF NOT REINFORCED)
REINFORCEMENT DRAWINGS FOR THIS PAD AND OTHER SIZES ARE AVAILABLE.


ADHESIVE ANCHORED
** 5/8"Ø x 7 1/16" ANCHOR STUD
5/8" FLAT WASHER
5/8" LOCKWASHER
5/8" HEX NUT

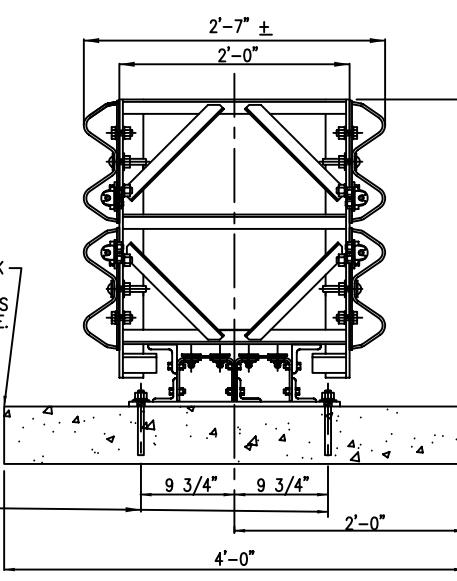

SECTION "A-A"

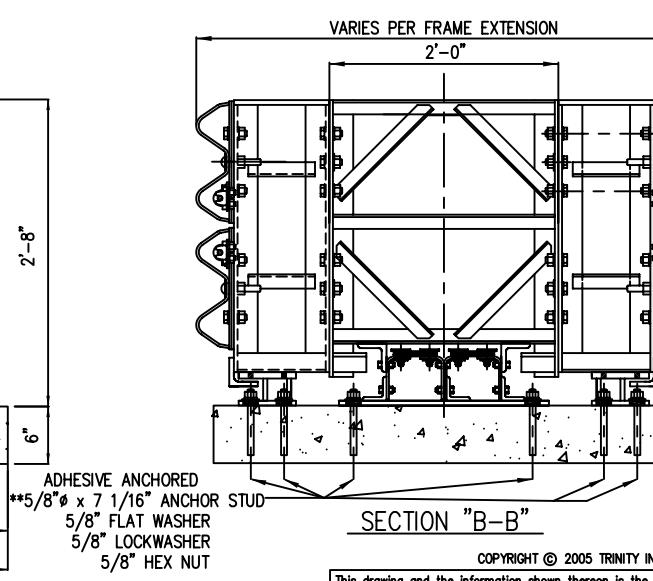

COPYRIGHT © 2005 TRINITY INDUSTRIES INC
This drawing and the information shown thereon is the sole property of TRINITY INDUSTRIES, INC. Neither the drawing nor such information is to be used for any purpose other than that for which it was specifically furnished by TRINITY INDUSTRIES, INC., nor is any reproduction authorized without written permission.

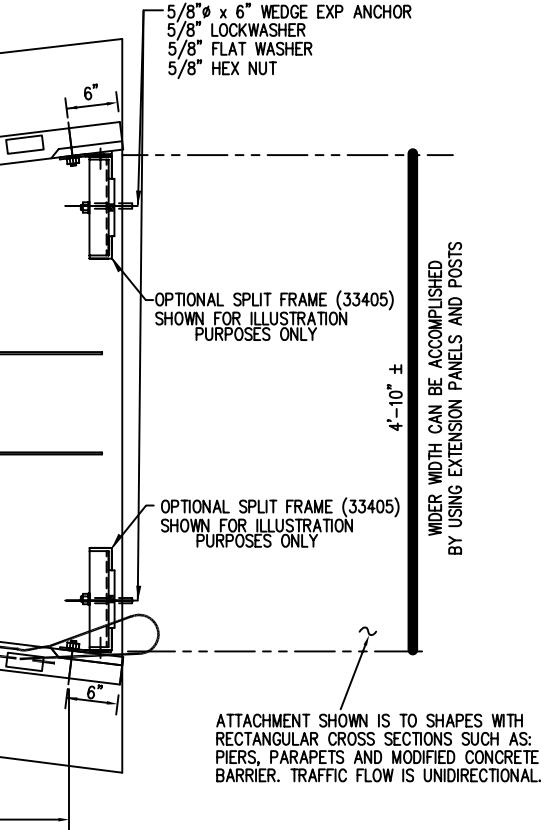

FOUNDATION NOTE:
6" REINFORCED CONCRETE PAD IS SHOWN

- OTHER OPTIONS ARE :
 a) 8" THICK MINIMUM UNREINFORCED CONCRETE
 b) 8" MINIMUM THICK ASPHALT
 c) 3" THICK (MIN) ASPHALT OVER 3" (MIN) CONCRETE
 d) 6" THICK ASPHALT OVER 6" COMPACTED SUBBASE.

REV.	CHK'D	BY	DATE	REMARKS
TRACC				
				DRAWN L.H. CHECKED C.C. APPROVED DATE 08-12-05 ENG. FILE # SS1019-01E SHT.NO. E1 OF 1 DRAWING NO. SS1019 REV. 0
				HIGHWAY SAFETY PRODUCTS 2525 STEMMONS FREEWAY, DALLAS, TX 75207