


GRADING AT BULLNOSE

~ NOTES ~

- 400 MINIMUM WORKING WIDTH 4'-2".
GRADING FROM POST 1 TO POST 13 AND THE 60' LEADING OR TRAILING THE THRIE BEAM TERMINAL SHALL BE 10:1 OR FLATTER.
GRADING BEYOND POST 13 MAY BE ADJUSTED FOR DRAINAGE, PROVIDED THERE IS A MINIMUM OF 2 FEET OF FILL BEHIND THE POSTS TO ENSURE ADEQUATE SUPPORT FOR THE SYSTEM.
- 401 FIXED OBJECT OR OTHER OBSTACLE.
- 402 EVALUATE MEDIAN DRAINAGE AND ENSURE POSITIVE FLOW. INCLUDE A DROP BOX INLET AND PIPING AS NEEDED, AND ENSURE THAT ALL NECESSARY BID ITEMS ARE INCLUDED.
- 403 WHILE MEDIAN GRADING DETAIL DEPICTS SYMMETRICAL THRIE BEAM BULLNOSE TERMINAL, ALL GRADING REQUIREMENTS APPLY TO ASYMMETRICAL SITUATIONS ALSO.
- 404 GRADING QUANTITIES MUST BE CALCULATED AND SHOWN AS BID ITEMS.

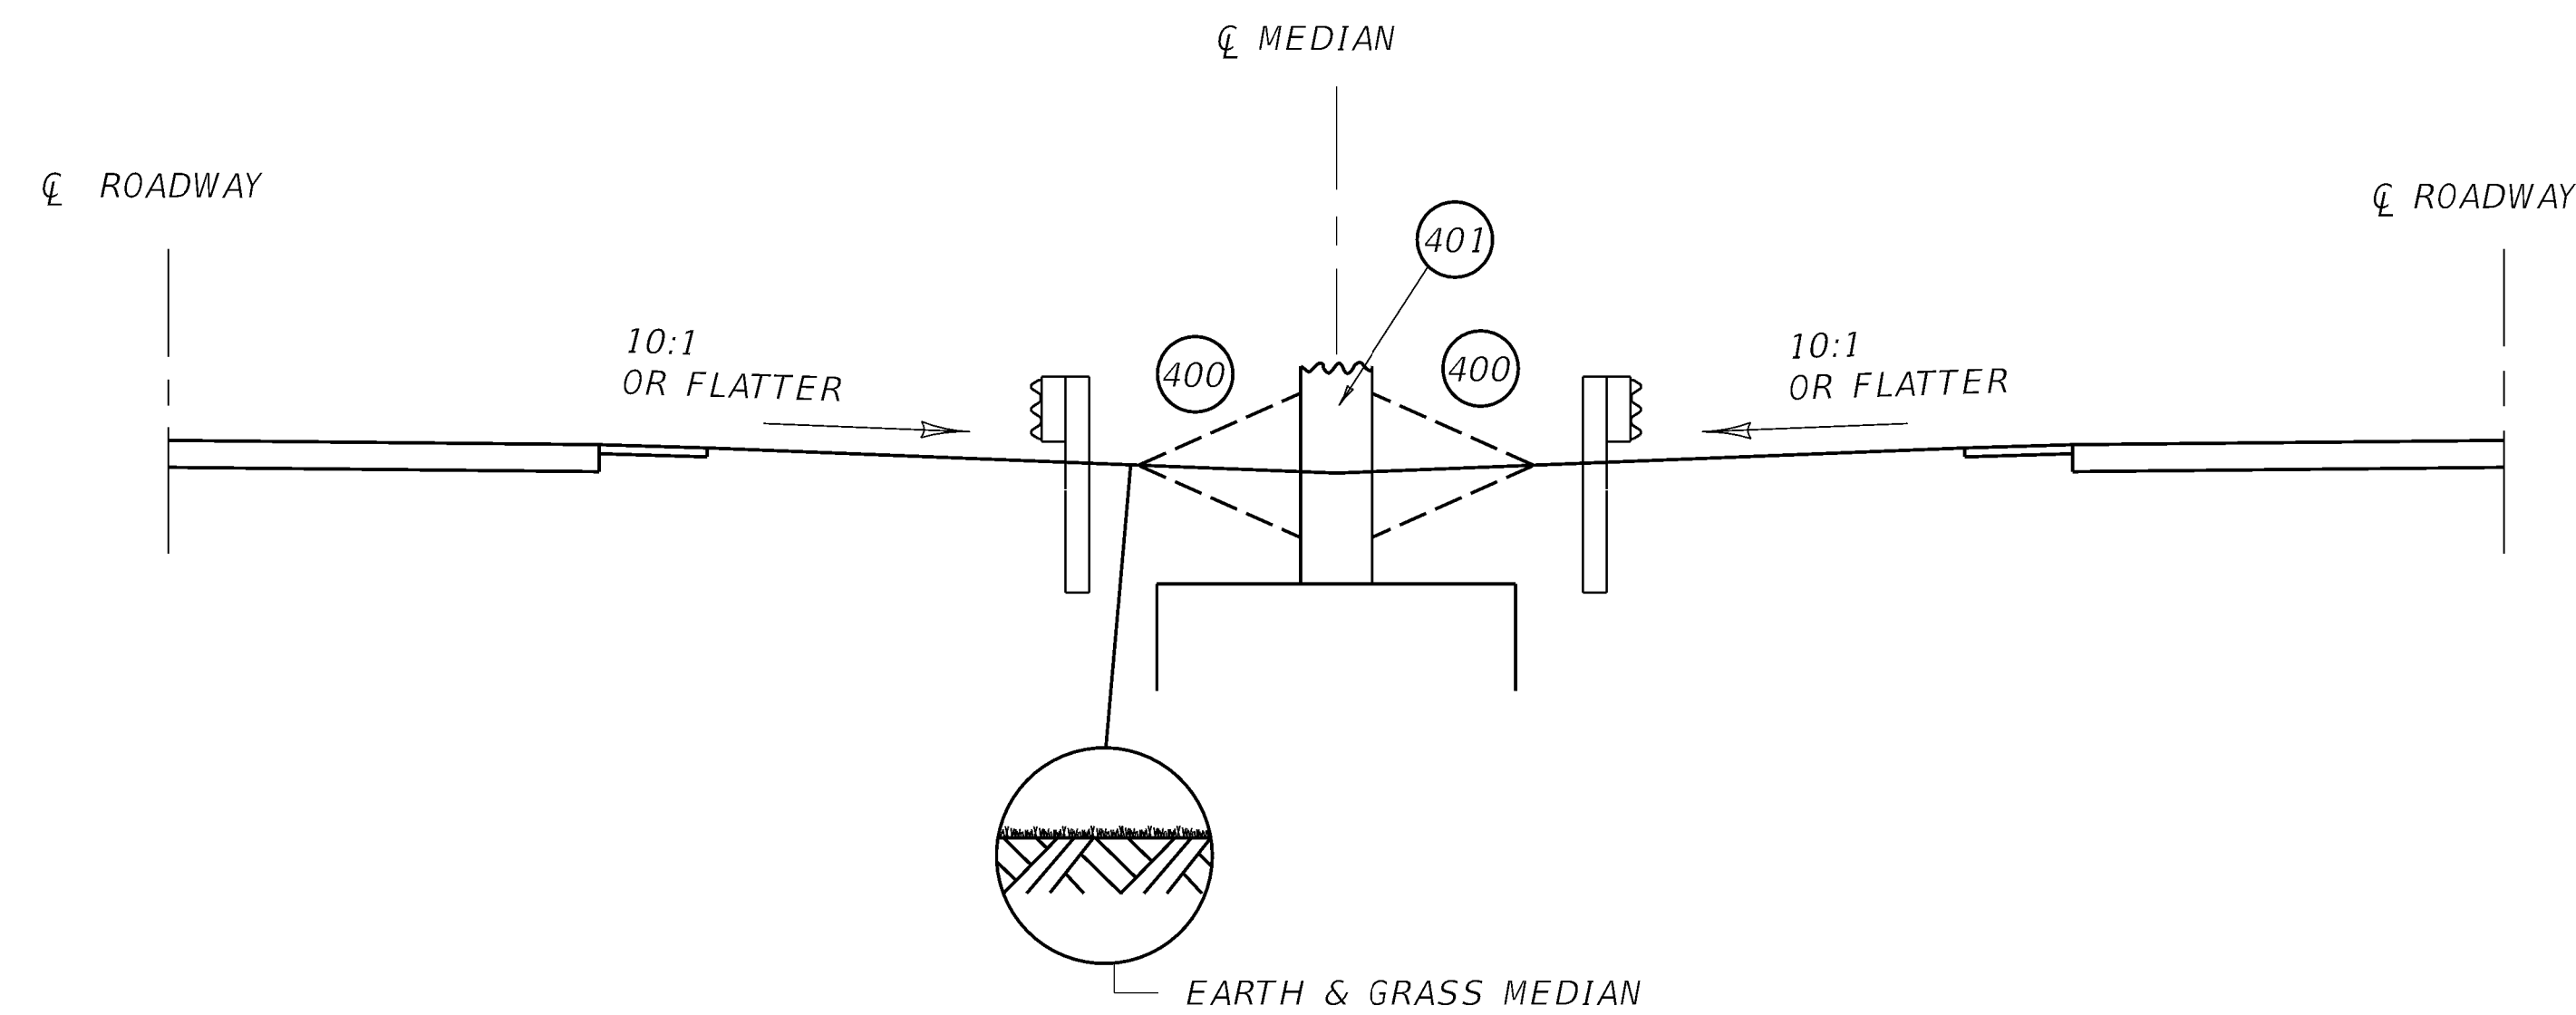

CROSS SECTION AT BULLNOSE

SUBMITTED *W. J. Jayson* 12-10-2024
DIVISION DIRECTOR DATE



COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS



SEPIA 095: STEEL THRIE BEAM BULLNOSE TERMINAL

SHEET 004: GRADING AT BULLNOSE

REVISION DATE: 12.10.2024
REVISION NUMBER: 0

ITEM NO. COUNTY OF
SHEET NO.