



DELINEATORS PLACED APPROX. 50'-0" ON CENTERS.

**NOTES:**

- DELINEATOR SHALL BE MEASURED AND PAID FOR AT THE CONTRACT UNIT PRICE EACH, AND SHALL INCLUDE ALL MATERIALS AND LABOR NECESSARY FOR ONE COMPLETE INSTALLATION.
- | CODE                              | PAY ITEM                                              | PAY UNIT |
|-----------------------------------|-------------------------------------------------------|----------|
| DELINEATORS FOR CONCRETE BARRIERS |                                                       |          |
| 1984                              | DELINEATOR FOR BARRIER WALL - MONO-DIRECTIONAL WHITE  | EACH     |
| 1985                              | DELINEATOR FOR BARRIER WALL - MONO-DIRECTIONAL YELLOW | EACH     |
| DELINEATORS ON GUARDRAIL          |                                                       |          |
| 1982                              | DELINEATOR FOR GUARDRAIL - MONO-DIRECTIONAL WHITE     | EACH     |
| 1983                              | DELINEATOR FOR GUARDRAIL - MONO-DIRECTIONAL YELLOW    | EACH     |
- THE DELINEATORS SHALL BE YELLOW IN COLOR WHEN THE BARRIER IS PLACED IN THE MEDIAN AND/OR ON THE LEFT SIDE OF THE DRIVING LANE. THE DELINEATORS SHALL BE WHITE IN COLOR WHEN THE BARRIER IS PLACED ON THE RIGHT SIDE OF THE DRIVING LANE.
- DELINEATORS SHALL BE APPLIED 300 FEET IN ADVANCE OF AND THROUGHOUT THE LENGTH OF ALL BRIDGES THAT DO NOT HAVE FULL WIDTH SHOULDERS. SPACING ON BRIDGES AND 300 FEET IN ADVANCE OF BRIDGES SHALL BE 50 FEET ON CENTERS. THE FIRST DELINEATOR ON THE GUARDRAIL SHALL BE PLACED 50 FEET FROM THE DELINEATOR AT THE END OF THE BRIDGE. DELINEATORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
- WHEN CONCRETE BARRIERS EXTEND ACROSS NARROW SHOULDER WIDTH STRUCTURES IN LIEU OF STEEL BEAM GUARDRAIL, DELINEATORS SHALL BE INSTALLED AT SAME VERTICAL ALIGNMENT AS ON THE GUARDRAIL AND DELINEATORS SHALL COMPLY WITH CURRENT SEPIA DRAWING 004.
- GUARDRAIL DELINEATORS SHALL COMPLY WITH CURRENT SEPIA DRAWING 002.
- SEE SECTION 718 OF THE CURRENT STANDARD SPECIFICATIONS FOR "OBJECT MARKER TYPE 2".

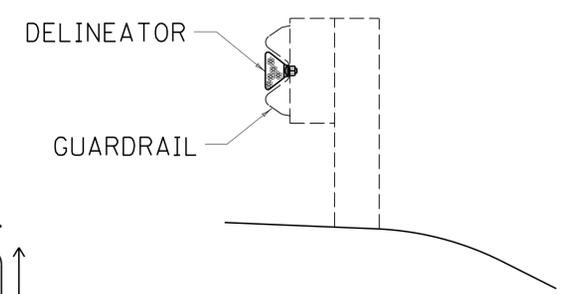

ELEV. VIEW

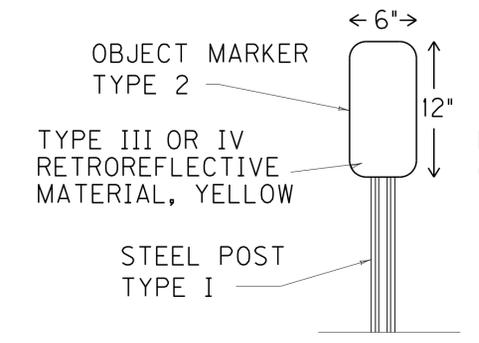

OBJECT MARKER TYPE 2  
DETAIL "A" 7

PRIMARY USE:  
(PAVEMENT REHABILITATION PROJECTS)

KENTUCKY  
DEPARTMENT OF HIGHWAYS  
**DELINEATORS AT  
NARROW SHOULDER  
BRIDGES**

SUBMITTED: *Jeff Jasper* 6-15-2012  
DIRECTOR DIVISION OF HIGHWAY DESIGN DATE

FILE NAME: C:\PWORK\JEFF.LAIL\00512631\SEPIA\_001.DGN  
 USER: Jeff.Lail  
 DATE PLOTTED: August 17, 2012  
 E-SHEET NAME:  
 MicroStation v8.11.7.180