





TYPICAL SECTION

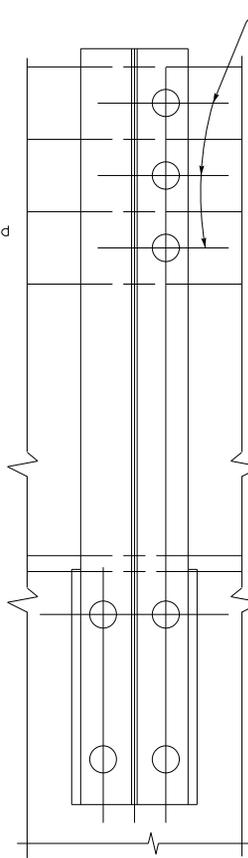


SECTION B-B



SECTION A-A

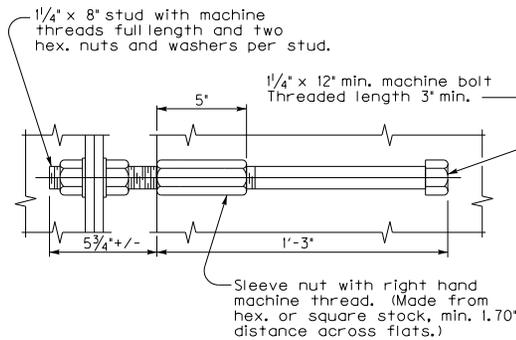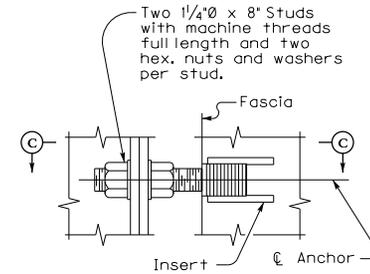

TYPE A ANCHOR DETAIL

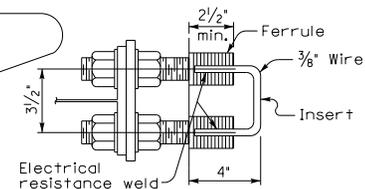

SECTION C-C
TYPE B ANCHOR DETAIL


TS 8 x 4 x 0.1875 tubing minimum length center to center with 12'-6" splices.

Holes in post Width 7/8" x height 1 1/8" @ 4" o.c.


Attach guardrail between these limits to the beams before shipment for Non-Composite Box Beam applications

Adjust space to fit span length but equal to or less than 6'-3"

Remainder Of Post Spacing At 6'-3"

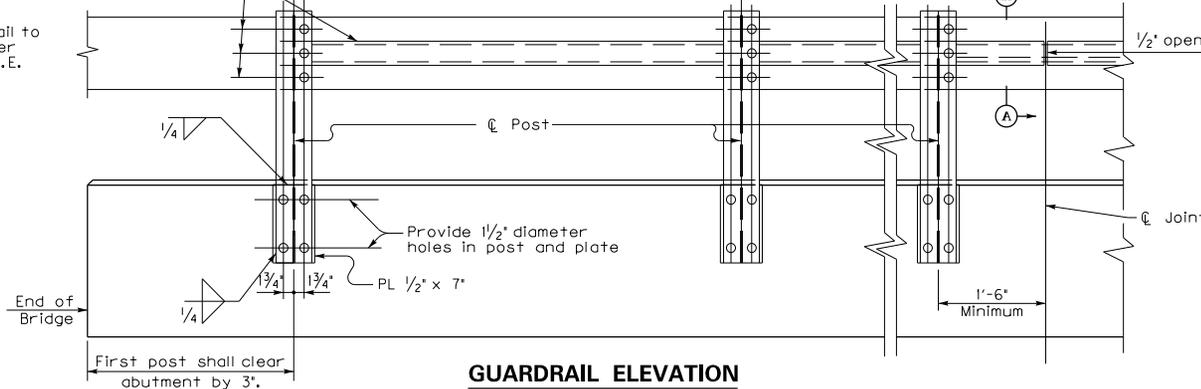

GUARDRAIL ELEVATION
Post Spacing

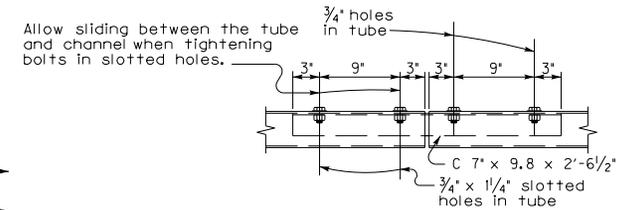

OPEN JOINT

KENTUCKY DEPARTMENT OF HIGHWAYS

RAILING SYSTEM TYPE II

STANDARD DRAWING NO. BDP-005-04

SUBMITTED *Mark Nite* 12-02-11
DIRECTOR DIVISION OF STRUCTURAL DESIGN DATE

APPROVED *Shelby* 12-02-11
STATE HIGHWAY ENGINEER DATE

Note: Connect bridge guardrail to Roadway Guardrail, refer to Std. Dwg. BHS-007, C.E.