

FIGURE NO. 1

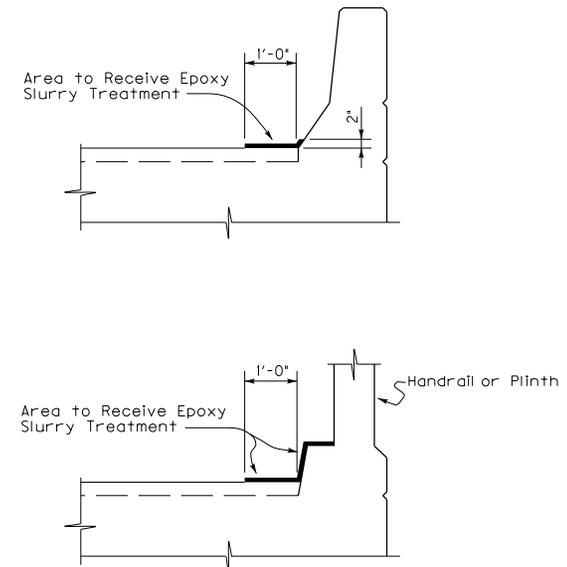


FIGURE NO. 2


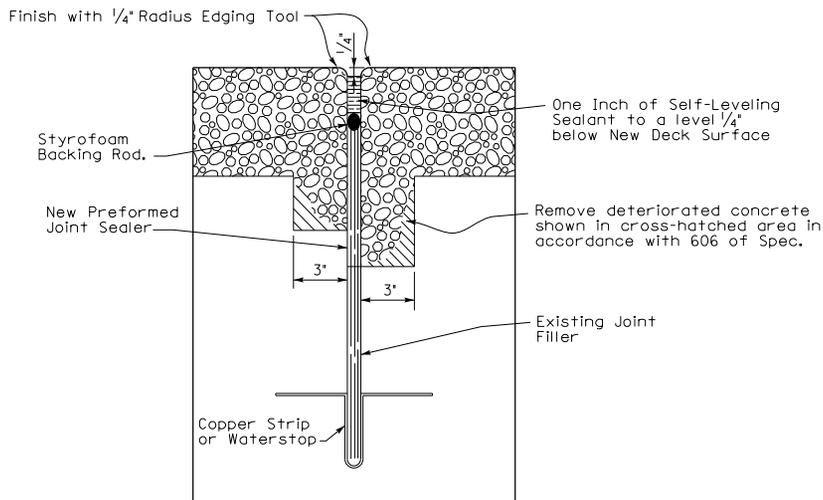


FIGURE NO. 3

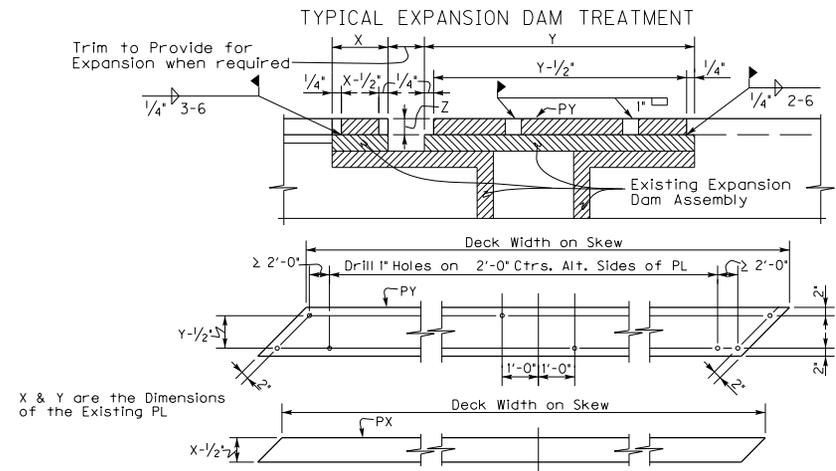

Structural Steel weights given are approximate and the Contractor is responsible for all measurements.

Determine dimension Z for thickness of the built-up plates as the minimum specified thickness of overlay minus 1/4".

Steel is to be furnished in 3-foot minimum lengths welded together as directed by the Engineer.

FIGURE NO. 4

KENTUCKY DEPARTMENT OF HIGHWAYS	
BRIDGE RESTORATION AND WATERPROOFING WITH CONCRETE OVERLAYS	
STANDARD DRAWING NO. BGX-009-04	
SUBMITTED <i>SE Goodrich</i>	12-1-99
<small>DIRECTOR DIVISION OF BRIDGE DESIGN</small>	
APPROVED <i>J. M. Howell</i>	DATE 12-1-99
<small>STATE HIGHWAY ENGINEER</small>	
DATE	