


- NOTES
- ① SEE PLANS FOR SIZE, LOCATION AND PAYMENT FOR RACEWAY WHEN REQUIRED.
 - ② FABRIC WRAPPED BACKFILL DRAIN, (ONE PER WEEP HOLE).
 3. ALL WALLS AND SLABS ARE 8" THICK UNLESS OTHERWISE SHOWN.
 - ④ MEDIAN BARRIER WALL MAY BE CAST-IN-PLACE, FIXED OR SLIP-FORMED, CONTRACTOR'S OPTION.
 5. WALL REINFORCEMENT IS DETAILED FOR CAST-IN-PLACE WALLS. FOR SLIP-FORMED WALLS SEE CURRENT STANDARD DRAWING [RDB-241](#) FOR STEEL DETAIL.

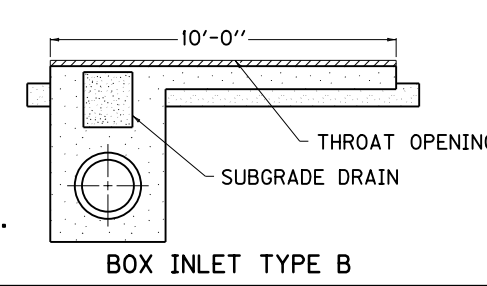

USE WITH CUR. STD. DWGS. [RBM-050](#), [RBM-053](#) & [RDB-241](#)

KENTUCKY
DEPARTMENT OF HIGHWAYS

CONCRETE MEDIAN
BARRIER BOX INLET
(50" TALL WALL)

STANDARD DRAWING NO. RDB-240-01

SUBMITTED: *David Kott* 11-21-07
DIRECTOR DIVISION OF DESIGN DATE

APPROVED: *November Mathews* 11-21-07
STATE HIGHWAY ENGINEER DATE