



TYPICAL SECTION

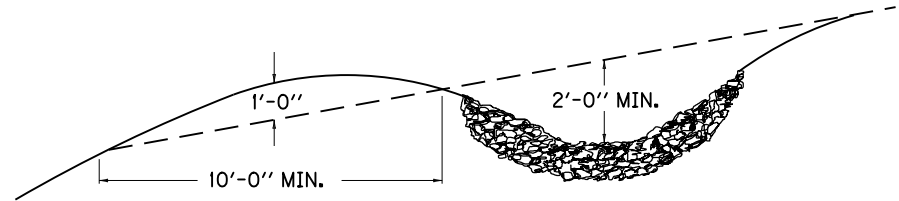

TYPICAL INTERCEPTOR DITCH

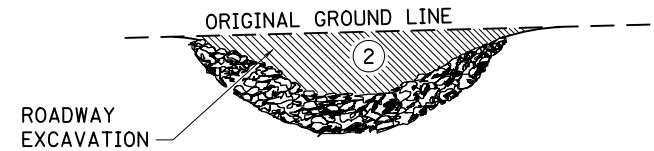

NOTES

CHANNEL LINING WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR EACH CLASS.
 CHANNEL LINING WILL NOT BE REQUIRED IN THE BOTTOM OF THE DITCH WHERE SOLID ROCK IS ENCOUNTERED.
 CHANNEL LINING ESTIMATED ON THE BASIS OF 0.50 TON PER SQ. YD. PER FOOT OF DEPTH.

- ① WIDEN CHANNEL LINING NEAR OUTLET END OF STRUCTURE AS DIRECTED BY THE ENGINEER.
- ② FROM THE TOP OF THE LINING TO THE ORIGINAL GROUNDLINE.
- ③ ALTERNATE LOCATION OF GROUNDLINE.
- ④ 15" MIN. CLASS II, OR 24" MIN. CLASS III.
- 5. D = DEPTH TO PROTECT, T = THICKNESS, (SEE PLAN NOTES FOR THESE VALUES)

KENTUCKY DEPARTMENT OF HIGHWAYS	
CHANNEL LINING CLASS II AND III	
STANDARD DRAWING NO. RDD-040-04	
SUBMITTED <i>John B. Sackett</i> DIRECTOR DIVISION OF DESIGN	12-1-99 DATE
APPROVED <i>F. M. Youell</i> STATE HIGHWAY ENGINEER	12-1-99 DATE