


SECTION A-A

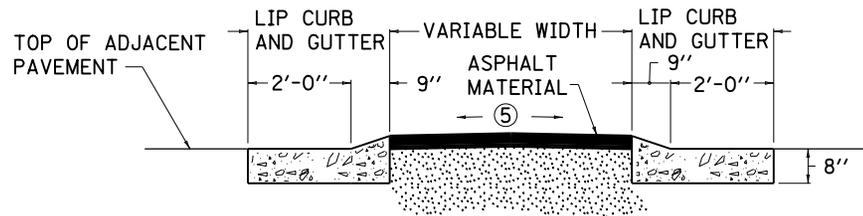

SECTION B-B

NOTES

1. THE BID ITEM PER SQUARE YARD BETWEEN POINTS (A) AND (B) SHALL BE "MOUNTABLE MEDIAN TYPE 6A".
2. THE VARIABLE LENGTH MOUNTABLE MEDIAN BETWEEN POINTS (A) AND (B)
3. SHALL MEET THE CURRENT REQUIRMENTS OF STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
4. CURB AND GUTTER TERMINATES AT POINT (C) (SEE PLANS).
- ⑤ CROSS SLOPE OF 2% ON TANGENTS AND PARALLEL PAVEMENT CROSS SLOPE ON SUPERELEVATED SECTIONS.

KENTUCKY DEPARTMENT OF HIGHWAYS	
MOUNTABLE MEDIAN TYPE 6A	
STANDARD DRAWING NO. RPM-012-03	
SUBMITTED: <i>John B. Sackett</i> DIRECTOR DIVISION OF DESIGN	12-1-99 DATE
APPROVED: <i>F. M. Powell</i> STATE/HIGHWAY ENGINEER	12-1-99 DATE