

# 0° SKEW VARIABLE BRIDGE WIDTH 2:1 FILL SLOPES 45° SKEW FROM ROADWAY ON WINGS


## Bill of Reinforcement

MARK	A1				A2				A3		A4		A5				A6				A7				A8				A9				A10	A11	A12	A13	A14				A15	A16	A17	A18																																	
	Str.				Str.				Str.		Str.		Str.				Str.				Str.				Str.				Str.				Str.				Str.				Str.	Str.	Str.	Str.	Str.				Str.	Str.	Str.	Str.																									
SIZE	#5				#5				#5		#5		#5				#5				#5				#5				#5				#5				#5	#5	#5	#5	#5				#5	#5	#5	#5																													
	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	A	B	C	D	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope	No.	Size	Length	Slope													
15-16	60+Nb=	10	11	8	12	60+Nb=	7	11	8	12	24	24	0	24	24	0	24	12	4	+Lb=	49+Nb=	9	9	11	12	8	1/8	1	10	0	11	3/4	8	6	52+Nb=	5	4	11	12	49+Nb=	6	12	10	12	52+Nb=	12	10	12	14	24	0	14	22	7	14	24	0	14	22	7	14	12	5	+Lb=	14	9	6	+Lb=	2	25	7	2	25	7	104	5	9

## Table of Dimensions

H	W		N		M2		M3		T2		T3		L2		L3		S2		S3		
	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length	Length
15-16	12	0	5	0	16	10	16	10	16	10	16	10	21	5	11	1/4	+0.5Lb=	5	9	1/4	+0.5Lb=

## Reinforcement Details

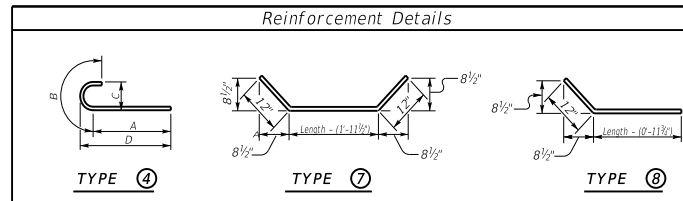

\*Concrete quantities computed using 21" beam depth on 1/2" pad & Variable Bridge Width

## Quantities

H	Concrete* C.Y.	Reinforcement LBS.
5	19.71+(0.71xLb) =	1851+(52.8xLb) =
6	21.47+(0.78xLb) =	1851+(52.8xLb) =
7	29.09+(0.93xLb) =	2651+(68.7xLb) =
8	31.15+(1.01xLb) =	2651+(68.7xLb) =
9	46.58+(1.19xLb) =	4307+(91xLb) =
10	49.23+(1.27xLb) =	4307+(91xLb) =
11	60.56+(1.41xLb) =	6117+(120.4xLb) =
12	63.5+(1.49xLb) =	6117+(120.4xLb) =
13	76.32+(1.64xLb) =	8656+(161xLb) =
14	79.56+(1.71xLb) =	8656+(161xLb) =
15	97.76+(1.86xLb) =	11857+(198.6xLb) =
16	101.44+(1.93xLb) =	11857+(198.6xLb) =

ABUTMENT SKEW CORRECTION FACTOR (SCF) = 1.0  
 NUMBER OF BARS TO ADD (Nb) = Bridge Width (feet) x SCF (round up to nearest whole number)  
 LENGTH OF ABUTMENT TO ADD (Lb) = Bridge Width (feet) x SCF (convert decimal to architectural)

## GENERAL NOTES

**SPECIFICATIONS:** Construct abutments according to the current edition of the Kentucky Department of Highways Standard Specifications for Road and Bridge Construction. Abutments are designed for side by side box beams as detailed in Standard Drawings BDP-001 through BDP-012, current edition. Dimensions may be adjusted to allow for any out to out bridge width. Abutments are also adequate for Std. Dwg. slabs or steel beam superstructures.

**FOUNDATION PRESSURE:** Construct abutment footings on solid rock bearing material that can support a pressure of 8000 psf service or 10,800 psf strength factored as recommended by a geotechnical engineer.

**WING LENGTHS:** Calculated assuming 21" superstructure depth and stream bank elevation at top of footing.

**FOOTING ELEVATION:** Construct bottom of footing below the anticipated scour elevation. (This typically entails embedding the footings 1'-0" to 2'-0" into rock and pouring concrete directly against cut rock faces, as recommended by geotechnical engineer.)

**NOTE:** Distances to bars shown are clear dimensions unless otherwise noted.

**MATERIAL SPECIFICATIONS:**  
 Concrete, Class "A" = 3500 psi  
 Steel Reinforcement = Grade 60



**PLAN OF SUPERSTRUCTURE SLAB**

KENTUCKY  
 DEPARTMENT OF HIGHWAYS  
  
 0° SKEW VARIABLE  
 WIDTH ABUTMENT  
 50% SKEWED WINGS  
  
 STANDARD DRAWING NO. BSA-002  
 SUBMITTED BY Bert Adams 02-26-20  
 DIRECTOR DIVISION OF STRUCTURAL DESIGN DATE  
 APPROVED BY \_\_\_\_\_ 02-26-20  
 STATE ENGINEER DATE