



~ NOTES ~
 SEE CURRENT STANDARD DRAWING NUMBER RBE-070N FOR ALL NOTES AND APPLICABLE MAINTENANCE NOTES.

CONDITION	NO. 5 STEEL REINF. BARS						POUNDS OF STEEL	CU. YDS. CLASS "A" CONC.
	(a) BAR QTY.	(a) BAR LGTH.	(b) BAR QTY.	(b) BAR LGTH.	(c) BAR QTY.	(c) BAR LGTH.		
BARRIER END AT BRIDGE PIERS							196	(5) 5.73
9" WALL	30	2'-9"	5	14'-4"	15	2'-3"		3.71
12" WALL								3.87
14" WALL								3.96


QUANTITIES FOR ONE CONCRETE MEDIAN BARRIER END

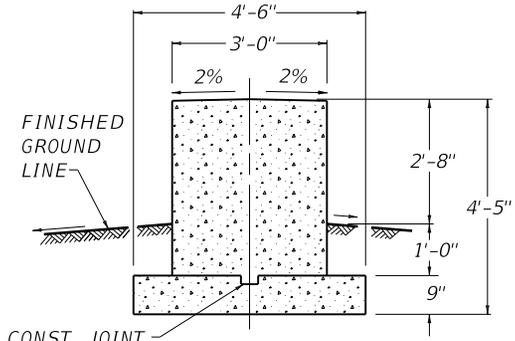


SECTION A-A
(WALL BETWEEN BRIDGE PIERS)

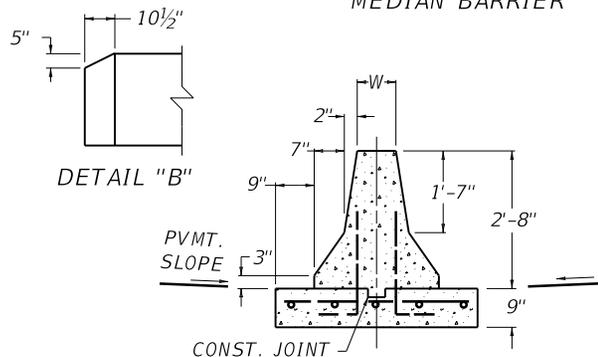


SECTION C-C

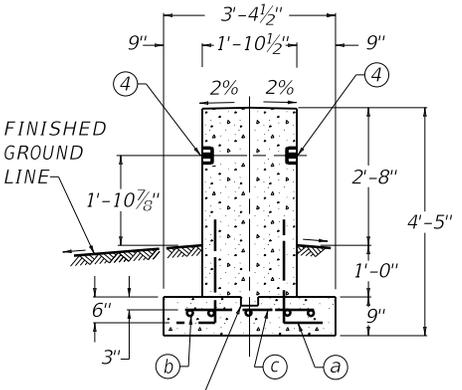


SECTION B-B

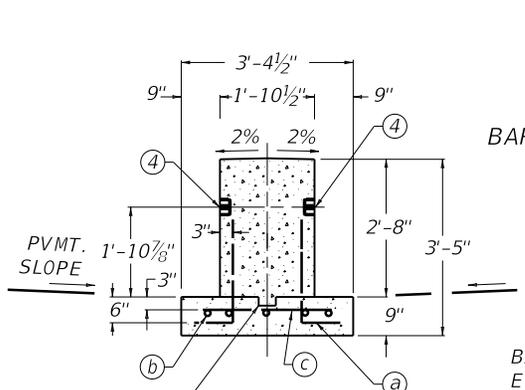

SECTION D-D

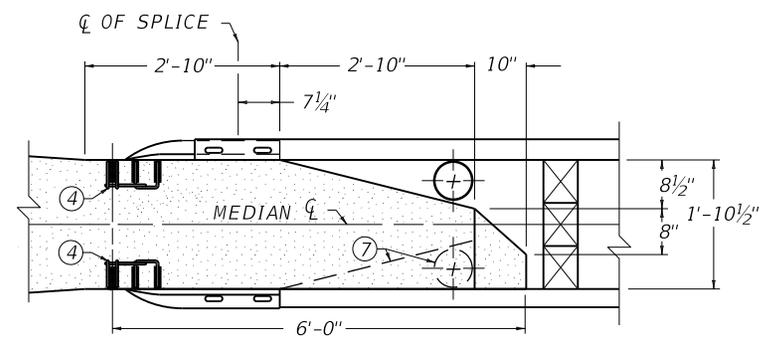

DETAIL "A"

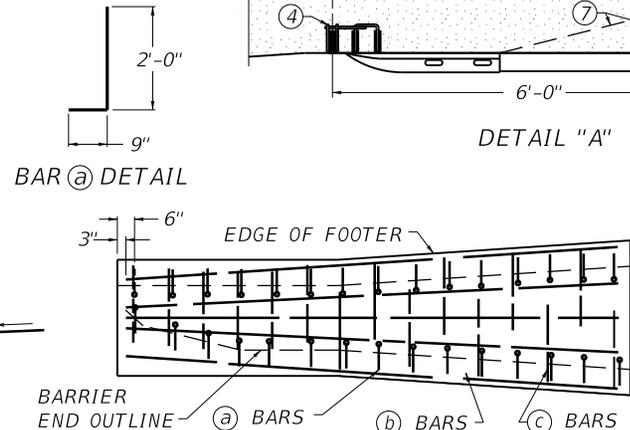

TYPICAL STEEL PLACEMENT

USE WITH CUR. STD. DWG.
 RBC-100 RBE-200

KENTUCKY
 DEPARTMENT OF HIGHWAYS

CONCRETE MEDIAN
 BARRIER END FOR CRASH
 CUSHION TYPE IX

STANDARD DRAWING NO. RBE-070-07

SUBMITTED *[Signature]* 12-01-15
DIRECTOR, BUREAU OF DESIGN DATE

APPROVED *[Signature]* 12-01-15
STATE HIGHWAY ENGINEER DATE