
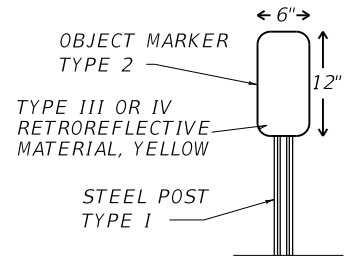


~ NOTES ~

BID ITEMS AND UNIT TO BID

DELINATORS FOR CONCRETE BARRIERS	
DELINATOR FOR BARRIER - WHITE	EACH
DELINATOR FOR BARRIER - YELLOW	EACH
DELINATORS ON GUARDRAIL	
DELINATOR FOR GUARDRAIL M/W	EACH
DELINATOR FOR GUARDRAIL M/Y	EACH
OBJECT MARKER TYPE 2	EACH
STEEL POST TYPE 1	LF

1. DELINATOR SHALL BE MEASURED AND PAID FOR AT THE CONTRACT UNIT PRICE EACH, AND SHALL INCLUDE ALL MATERIALS AND LABOR NECESSARY FOR ONE COMPLETE INSTALLATION.
2. THE DELINATORS SHALL BE YELLOW IN COLOR WHEN THE BARRIER IS PLACED IN THE MEDIAN AND/OR ON THE LEFT SIDE OF THE DRIVING LANE. THE DELINATORS SHALL BE WHITE IN COLOR WHEN THE BARRIER IS PLACED ON THE RIGHT SIDE OF THE DRIVING LANE.
3. DELINATORS SHALL BE APPLIED 300 FEET IN ADVANCE OF AND THROUGHOUT THE LENGTH OF ALL BRIDGES THAT DO NOT HAVE FULL WIDTH SHOULDERS. SPACING ON BRIDGES AND 300 FEET IN ADVANCE OF BRIDGES SHALL BE 50 FEET ON CENTERS. THE FIRST DELINATOR ON THE GUARDRAIL SHALL BE PLACED 50 FEET FROM THE DELINATOR AT THE END OF THE BRIDGE. DELINATORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
4. DELINATORS SHALL NOT BE INSTALLED WITHIN THE PAY LIMITS OF THE END TREATMENT.
5. WHEN CONCRETE BARRIERS EXTEND ACROSS NARROW SHOULDER WIDTH STRUCTURES IN LIEU OF STEEL BEAM GUARDRAIL, DELINATORS SHALL BE INSTALLED AT SAME VERTICAL ALIGNMENT AS ON THE GUARDRAIL AND DELINATORS SHALL COMPLY WITH CURRENT STANDARD DRAWING [RBM-020](#).
6. GUARDRAIL DELINATORS SHALL COMPLY WITH CURRENT STANDARD DRAWING [RBR-055](#).
7. SEE SECTION 718 OF THE CURRENT STANDARD SPECIFICATIONS FOR "OBJECT MARKER TYPE 2".

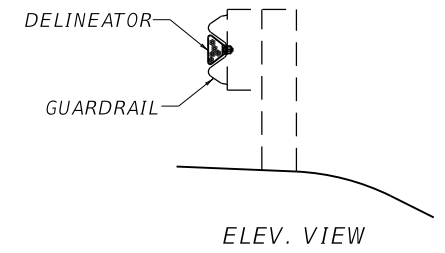

OBJECT MARKER TYPE 2  
DETAIL "A" ⑦

PRIMARY USE:  
(PAVEMENT REHABILITATION PROJECTS)

USE WITH CUR. STD. DWGS.  
[RBM-020](#) [RBR-055](#)

KENTUCKY DEPARTMENT OF HIGHWAYS	
DELINATORS AT NARROW SHOULDER BRIDGES	
STANDARD DRAWING NO. <a href="#">RBR-060</a>	
SUBMITTED <i>[Signature]</i>	12-01-15 DATE
APPROVED <i>[Signature]</i>	12-01-15 DATE
STATE HIGHWAY ENGINEER	