



R/W MONUMENT
TYPE 1 OR 1A




WITNESS R/W
MONUMENT
TYPE 2



R/W MONUMENT
TYPE 3 OR 3A



WITNESS R/W
MONUMENT
TYPE 4

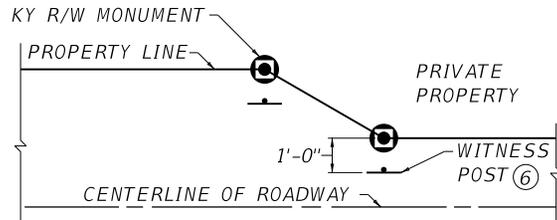

LAYOUT OF RURAL RIGHT-OF-WAY MONUMENTS

~ NOTES ~


BID ITEMS AND UNIT TO BID
RIGHT-OF-WAY MONUMENT TYPE Δ EACH

WITNESS RIGHT-OF-WAY MONUMENT TYPE $*$ EACH
WITNESS POST EACH


Δ EITHER TYPE 1, 1A, 3 OR 3A

$*$ EITHER TYPE 3 OR 4

1. MANUFACTURE RIGHT-OF-WAY MONUMENTS FROM ALUMINUM ALLOY.
2. TYPE 1A AND 3A MONUMENTS SHALL BE MOUNTED FLUSH IN EXISTING PAVEMENT, DRAINAGE BOXES, ETC. DRILL A $1\frac{1}{16}$ " DIAMETER HOLE AND EPOXY (COMMERCIAL GRADE) INTO EXISTING CONCRETE.
- ③ WITNESS POST SHALL BE BURIED 1'-6" TO 2'-0" IN GROUND.
- ④ WHEN ROCK IS ENCOUNTERED LENGTH MAY BE REDUCED.
5. SET ALL RIGHT-OF-WAY MONUMENTS FLUSH WITH GROUND OR ADJOINING SURFACE.
- ⑥ THE LAND SURVEYOR IN CHARGE OF MONUMENTATION IS ENCOURAGED TO PLACE A WITNESS POST FOR THE RIGHT-OF-WAY MONUMENTS WHERE PRACTICAL AND FEASIBLE. IF POSSIBLE, A MINIMUM OF THREE WITNESS POSTS PER PROJECT SHOULD BE PLACED.




ELEVATION VIEW
R/W MONUMENT
TYPE 1A AND 3A



ELEVATION VIEW
R/W MONUMENT
TYPE 1 AND 3

FORCE FIT R/W
MONUMENT TYPE 1 AND 3
1" OUTSIDE DIA. PIPE
(SCHEDULE 40)

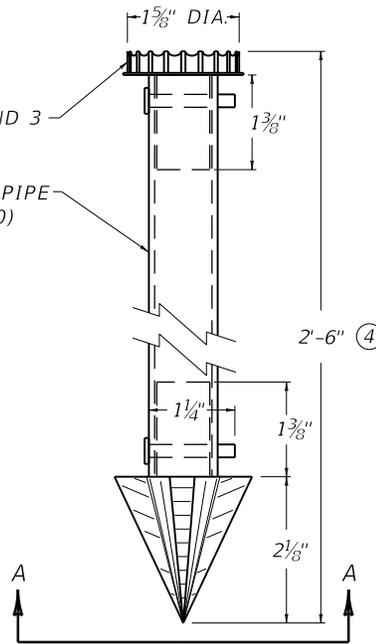


ELEVATION VIEW
R/W MONUMENT
TYPE 1 AND 3


ORANGE
FIBERGLASS
WITNESS POST



ELEVATION WITNESS POST

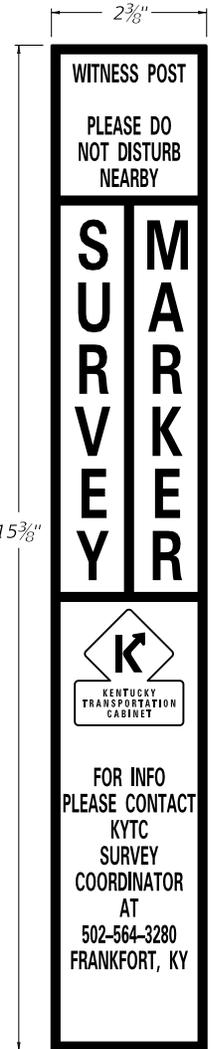

WITNESS POST DECAL



SECTION A-A

KENTUCKY
DEPARTMENT OF HIGHWAYS

RIGHT-OF-WAY
MONUMENTS

STANDARD DRAWING NO. RGX-005-06

SUBMITTED *W. S. Smith* 12-01-15
DATE
APPROVED *W. S. Smith* 12-01-15
DATE
STATE HIGHWAY ENGINEER