

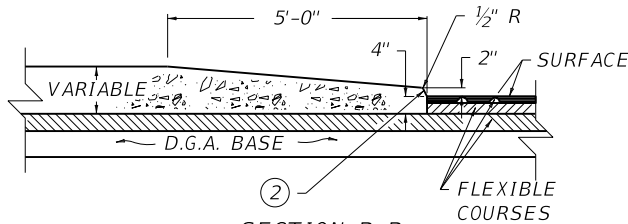
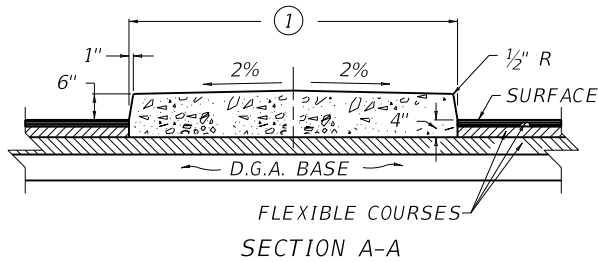




PLAN VIEW
BARRIER MEDIAN

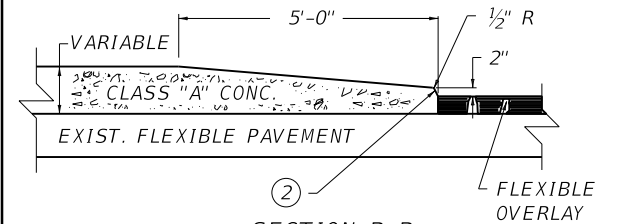



SECTION B-B
BARRIER MEDIAN
WITH FLEXIBLE PAVEMENT
(TYPE 2)

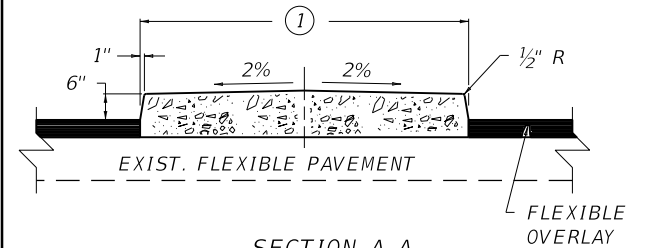



SECTION B-B
BARRIER MEDIAN
ON EXISTING FLEXIBLE PAVEMENT
(TYPE 4)

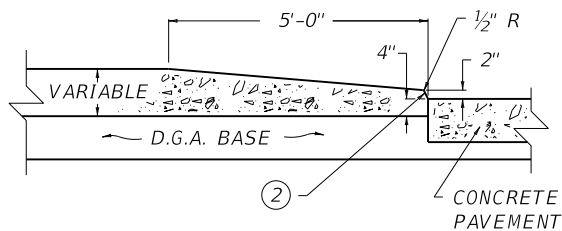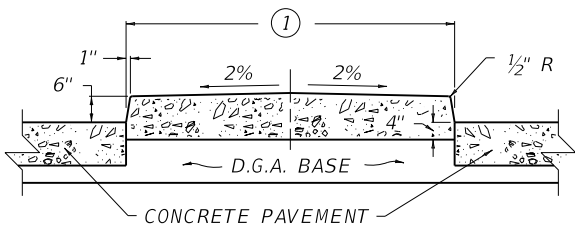

SECTION B-B
BARRIER MEDIAN
WITH RIGID PAVEMENT
(TYPE 1)

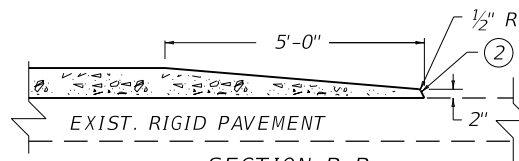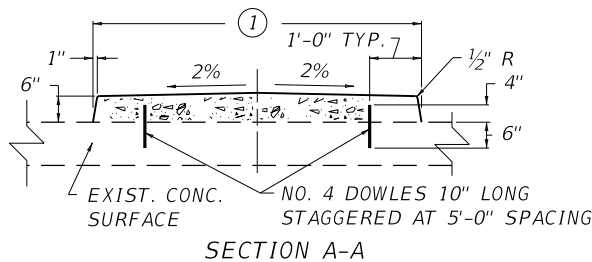


SECTION B-B
BARRIER MEDIAN
ON EXISTING RIGID PAVEMENT
(TYPE 3)

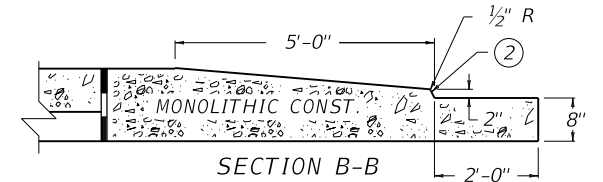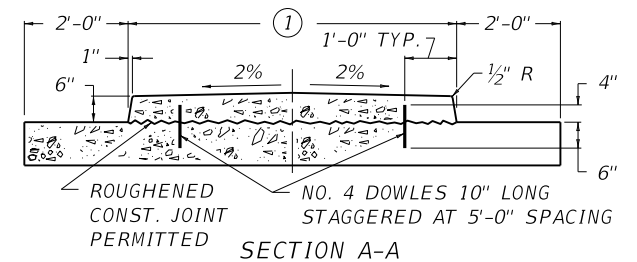

SECTION B-B
BARRIER MEDIAN
WITH FLEXIBLE PAVEMENT
(TYPE 5)

~ NOTES ~

- ① SEE PLANS FOR CONSTANT OR VARIABLE WIDTH DIMENSIONS.
- ② SLOPE TO CONFORM TO SIDE SLOPES.
3. ALL BARRIER MEDIANS SHALL BE CONSTRUCTED OF CLASS "A" CONCRETE.
 BID ITEM AND UNIT TO BID
 STANDARD BARRIER MEDIAN TYPE ☆ SQYD
 ☆ = 1 OR 2 OR 3 OR 4 OR 5.



ISOMETRIC VIEW
(NOSE)

KENTUCKY
DEPARTMENT OF HIGHWAYS

STANDARD
BARRIER MEDIAN

STANDARD DRAWING NO. RPM-010-06

SUBMITTED	<i>[Signature]</i>	12-01-15
DESIGNED BY	<i>[Signature]</i>	DATE
APPROVED	<i>[Signature]</i>	12-01-15
STATE HIGHWAY ENGINEER		DATE