




SINGLE INTERSECTIONS

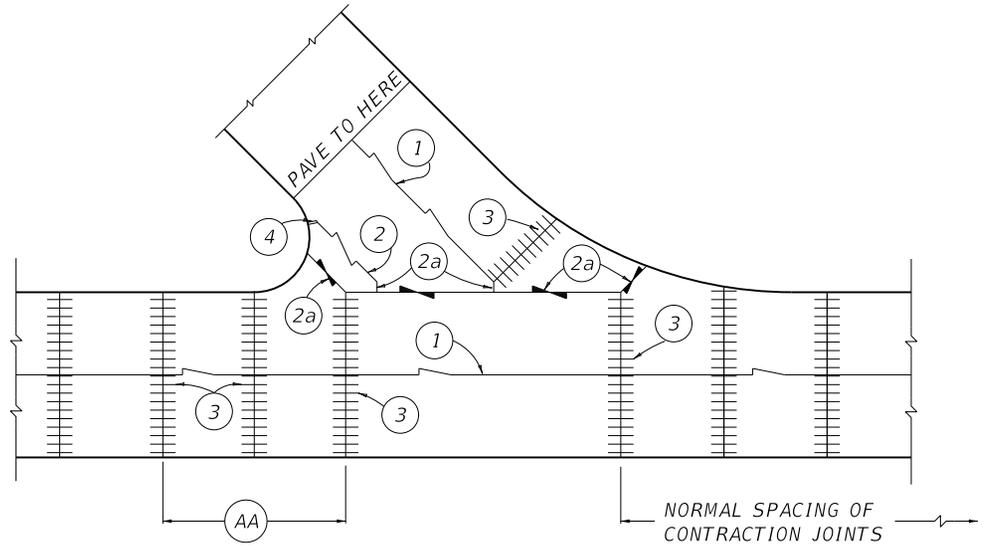


ANGLE INTERSECTION

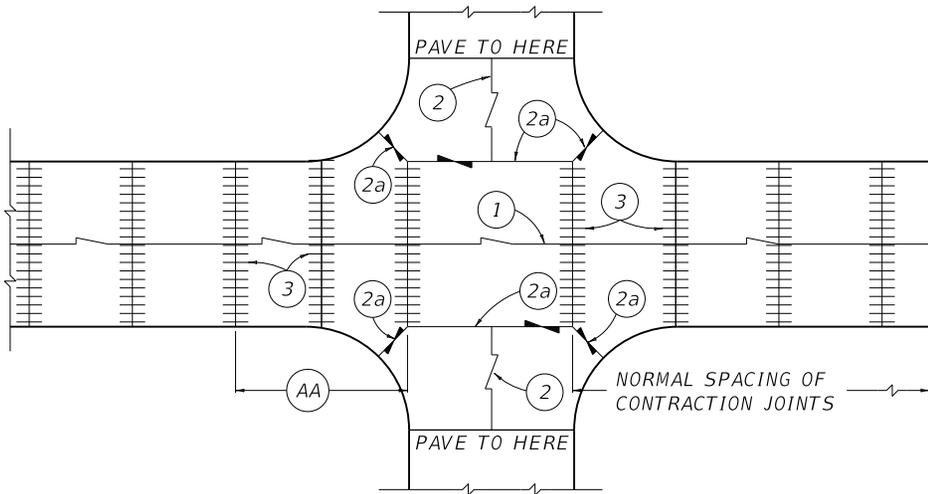

DOUBLE INTERSECTIONS

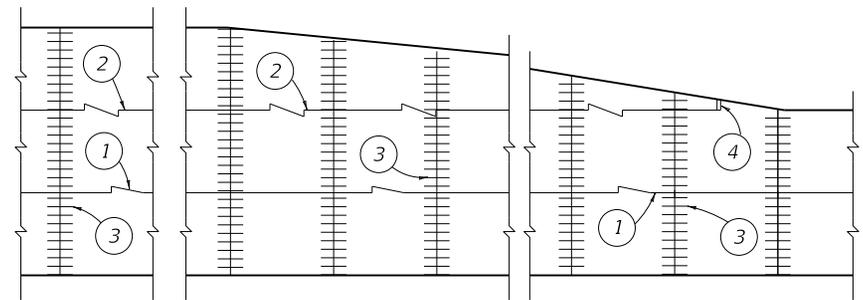

DECELERATING LANE

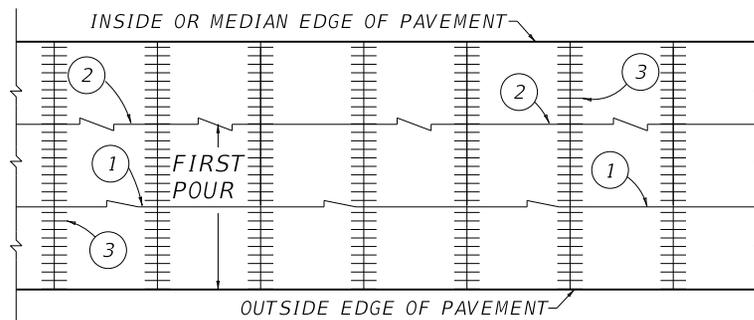

NORMAL THREE LANE PAVEMENT

~ NOTES ~

SEE CUR. STD. DWG. [RPS-010](#) FOR JOINT SYMBOLS AND DETAILS. DRAWINGS ON THIS SHEET ARE DETAILED ON THE PREMISE THAT PAVEMENT CONSTRUCTION WILL BE FROM LEFT TO RIGHT. IF PAVEMENT CONSTRUCTION IS IN THE OPPOSITE DIRECTION, TRANSVERSE JOINT SPACING DETAILS SHALL BE REVERSED END FOR END.

(AA) THIS DISTANCE TO BE EQUALLY DIVIDED WHEN GREATER THAN 20' AND LESS THAN 40'.

USE WITH CUR. STD. DWG. [RPS-010](#)

KENTUCKY
DEPARTMENT OF HIGHWAYS

CONCRETE
PAVEMENT JOINTS
TYPES AND SPACING

STANDARD DRAWING NO. [RPS-031-06](#)

SUBMITTED	<i>[Signature]</i>	12-01-15
DIRECTOR, BUREAU OF DESIGN		DATE
APPROVED	<i>[Signature]</i>	12-01-15
STATE HIGHWAY ENGINEER		DATE