

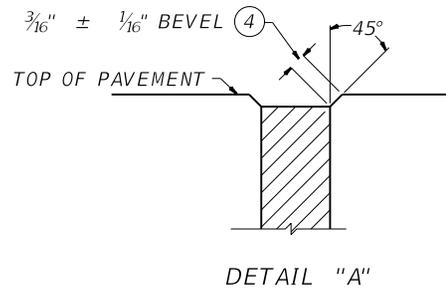


JOINT SHAPE FOR
TRANSVERSE SAWED CONTRACTION JOINT

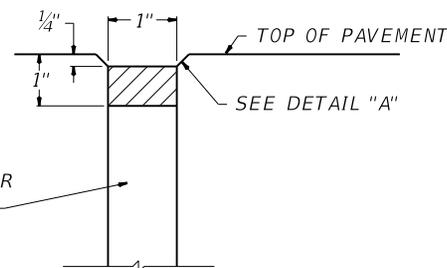

~ NOTES ~

1. PAYMENT FOR ALL WORK SHALL BE INCIDENTAL TO THE UNIT PRICE BID PER SQ. YD. OF PAVEMENT.
- ② THE REMAINING JOINT SHALL BE IN ACCORDANCE WITH CUR. STD. DWGS. [RPS-010](#) AND [RPS-020](#)
3. ALL LONGITUDINAL AND TRANSVERSE SAWED JOINTS SHALL BE CUT TO THE DEPTH SHOWN AND SHALL BE SEALED WITH HOT Poured ELASTIC JOINT SEAL.
- ④ THESE EDGES SHALL BE BEVELED USING A CUTTING OR GRINDING DEVICE .
- ⑤ 1/8" MIN. - 1/4" MAX.
- ⑥ JOINT DEPTH IS T/3 OR 4", WHICHEVER IS LESS.
T = PAVEMENT THICKNESS

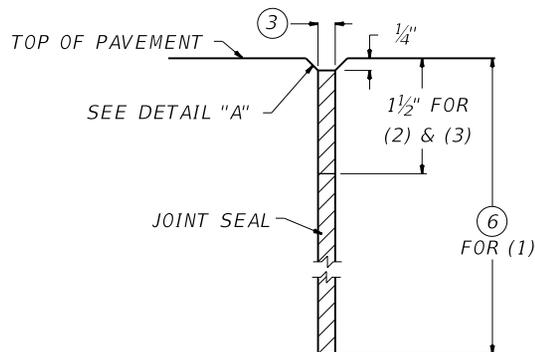

JOINT SHAPE FOR
TRANSVERSE EXPANSION JOINT

- (1) LONGITUDINAL SAWED JOINT (TIED)
- (2) LONGITUDINAL SAWED CONSTRUCTION JOINT (TIED)
- (3) TRANSVERSE SAWED CONSTRUCTION JOINT (TIED)

USE WITH CUR. STD. DWGS.
[RPS-010](#) [RPS-020](#)

KENTUCKY
DEPARTMENT OF HIGHWAYS

HOT-POURED ELASTIC
JOINT SEALS FOR
CONCRETE PAVEMENT

STANDARD DRAWING NO. [RPX-015-04](#)

SUBMITTED		12-01-15
DESIGNED BY	DATE	
APPROVED		12-01-15
STATE HIGHWAY ENGINEER	DATE	