



~ NOTES ~

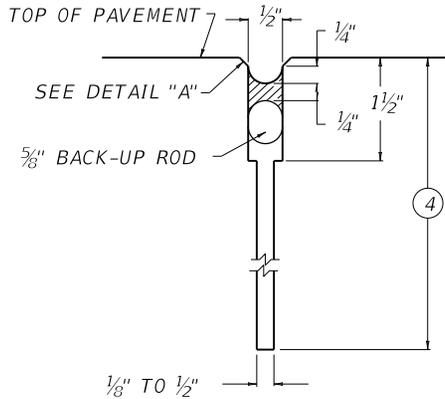


JOINT SHAPE FOR
TRANSVERSE SAWED CONTRACTION JOINT
(WHEN SLAB LENGTH DOES NOT EXCEED 25'-0")

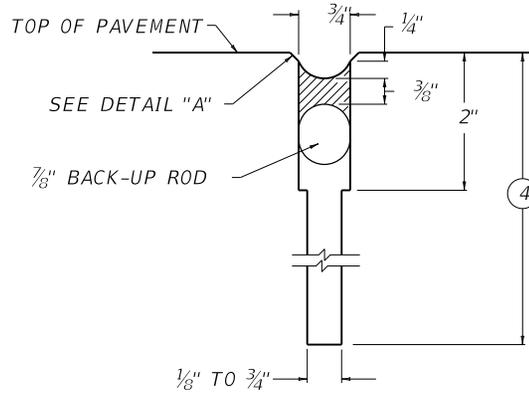


JOINT SHAPE FOR
TRANSVERSE SAWED CONTRACTION JOINT
(WHEN SLAB LENGTH EXCEEDS 25'-0")

1. PAYMENT FOR WORK SHALL BE INCIDENTAL TO THE UNIT PRICE PER SQ. YD. OF PAVEMENT.
- ② THE REMAINING JOINT SHALL BE IN ACCORDANCE WITH CUR. STD. DWGS. *RPS-020* AND *RPS-010*
- ③ THESE EDGES SHALL BE BEVELED USING A CUTTING OR GRINDING DEVICE.
JOINT TOLERANCES : SAW CUT DEPTH -0" TO + 1/2"
SAW CUT WIDTH -0" TO + 1/16"
SEAL BEAD THICKNESS -0" TO + 1/8"
- ④ JOINT DEPTH IS T/3 OR 4", WHICHEVER IS LESS.
T = PAVEMENT THICKNESS.

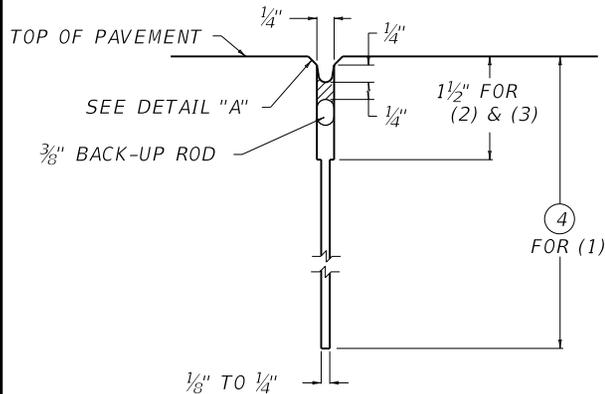


JOINT SHAPE FOR

- (1) LONGITUDINAL SAWED JOINT (TIED)
- (2) LONGITUDINAL SAWED CONSTRUCTION JOINT (TIED)
- (3) TRANSVERSE SAWED CONSTRUCTION JOINT (TIED)

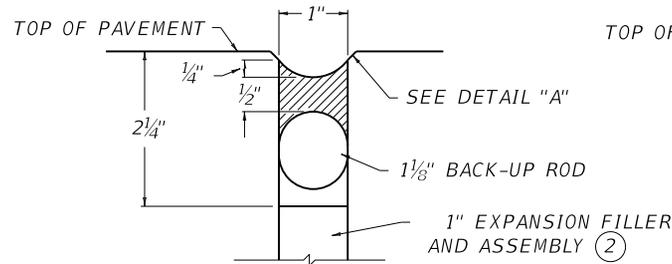

JOINT SHAPE FOR
TRANSVERSE EXPANSION JOINT

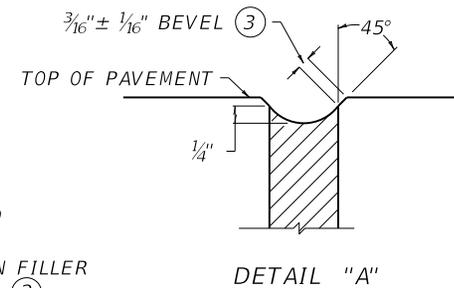

DETAIL "A"

USE WITH CUR. STD. DWGS.
RPS-010 *RPS-020*

KENTUCKY
DEPARTMENT OF HIGHWAYS
SILICONE RUBBER SEALS
FOR
CONCRETE PAVEMENT

STANDARD DRAWING NO. *RPX-020-06*

SUBMITTED *[Signature]* DIRECTOR, DEPT. OF DESIGN 12-01-15 DATE
APPROVED *[Signature]* STATE HIGHWAY ENGINEER 12-01-15 DATE