


## WARRANTS FOR USE OF MATERIAL TRANSFER VEHICLE

Specify the use of a material transfer vehicle (MTV) for all interstate and parkway asphalt paving projects. Also specify an MTV on other routes when the minimum single lane width plus paved shoulder width is at least 14 feet and:

- Rideability is required in accordance with section 410 of the standard specifications, or
- Any single route has a minimum of 5,000 combined tons (base, binder, and surface) of mainline pavement.

APPROVED: \_\_\_\_\_

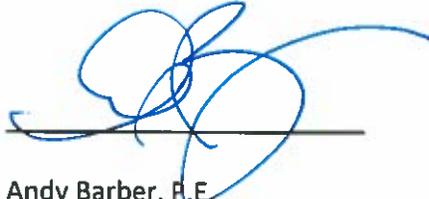

Andy Barber, P.E.  
State Highway Engineer  
Department of Highways  
Kentucky Transportation Cabinet

DATE: \_\_\_\_\_

8.16.18