CALL NO. 400

CONTRACT ID. 263075

HENDERSON COUNTY

FED/STATE PROJECT NUMBER 051GR26R029-CB06

DESCRIPTION VARIOUS ROADS IN HENDERSON CO

WORK TYPE ASPHALT RESURFACING

PRIMARY COMPLETION DATE 6/30/2027

LETTING DATE: November 19,2026

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN STANDARD TIME November 19,2026. Bids will be publicly announced at 10:00 AM EASTERN STANDARD TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I SCOPE OF WORK

- PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES
- CONTRACT NOTES
- STATE CONTRACT NOTES
- ASPHALT MIXTURE
- DGA BASE FOR SHOULDERS
- INCIDENTAL SURFACING
- FUEL AND ASPHALT PAY ADJUSTMENT
- COMPACTION OPTION B
- WASTE AND BORROW SITES
- EXPERIMENTAL KYCT AND HAMBURG TESTING
- COORDINATION OF WORK WITH OTHER CONTRACTS
- EDGE KEY (BY TON)
- ASPHALT MILLING AND TEXTURING
- BASE FAILURE REPAIR
- TYPICAL SECTION DIMENSIONS
- TRAFFIC CONTROL PLAN 2 LANE
- DURABLE PAVEMENT EDGE DETAILS
- SKETCH MAP(S)
- MATERIAL SUMMARY
- SUMMARY SHEET(S)
- TYPICAL SECTION(S)
- BRIDGE DETAIL FOR PAVING PROJECT

PART II SPECIFICATIONS AND STANDARD DRAWINGS

- STANDARD AND SUPPLEMENTAL SPECIFICATIONS
- STANDARD DRAWINGS THAT APPLY

PART III EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

- LABOR AND WAGE REQUIREMENTS
- EXECUTIVE BRANCH CODE OF ETHICS
- KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978
  LOCALITY / STATE
- PROJECT WAGE RATES / STATE FUNDED

PART IV BID ITEMS

PART I

SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 02

CONTRACT ID - 263075

051GR26R029-CB06

COUNTY - HENDERSON

PCN - 0205101362601
CB06 051 0136 011-013

KY 136 (KY 136) (MP 11.072) FROM BURBANK RD (CR 1327), EXTENDING EASTERLY TO MILL ST (CR 1335 A). (MP 12.258), A DISTANCE OF 01.19 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:48:06.32 LONGITUDE 87:46:22.22

ADT 49

PCN - 0205101452601
CB06 051 0145 006-009

KY 145 (KY 145) (MP 6.253) FROM J GIBSON RD (CR 1233), EXTENDING NORTHERLY TO US 60. (MP 8.131), A DISTANCE OF 01.88 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:43:46.94 LONGITUDE 87:41:47.20

ADT 725

PCN - 0205102662601
CB06 051 0266 000-002

KY 266 (KY 266) (MP 0.000) FROM KY 136, EXTENDING SOUTH TOWARDS TRIGG-TURNER RD (CR 1144). (MP 2.000), A DISTANCE OF 02.00 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:47:02.16 LONGITUDE 87:44:44.18

ADT 191

PCN - 0205104162605
CB06 051 0416 002-005

KY 416 (KY 416) (MP 2.644) FROM THOMASON RD (CR 1210), EXTENDING EASTERLY TO KY 283. (MP 4.976), A DISTANCE OF 02.33 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:40:28.76 LONGITUDE 87:34:36.97

ADT 672

PCN - 0205108112601
CB06 051 0811 005-009

KY 811 (KY 811) (MP 5.900) FROM 0.059 MILES EAST OF CARLINBURG RD Y (CR 1042), EXTENDING SOUTHERLY TO KY 3344. (MP 8.165), A DISTANCE OF 02.27 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:52:08.83 LONGITUDE 87:20:12.46

ADT 257

PCN - 0205108122601
CB06 051 0812 007-008

CLAY STREET (KY 812) (MP 7.450) FROM WEST OF KY 2084, EXTENDING WEST TO ATKINSON ST (CS 1014). (MP 7.935), A DISTANCE OF 0.49 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:49:22.10 LONGITUDE 87:34:26.40

ADT 5,779

PCN - 0205112992601
CB06 051 1299 000-006

KY 1299 (KY 1299) (MP 0.000) FROM KY 416, EXTENDING NORTHERLY TOWARDS KY 1217. (MP 5.500), A DISTANCE OF 05.50 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:42:30.59 LONGITUDE 87:35:15.35

ADT 191

PCN - 0205122532601
CB06 051 2253 000-004

KY 2253 (KY 2253) (MP 0.000) FROM KY 145, EXTENDING NORTHERLY TO US 41 A. (MP 3.342), A DISTANCE OF 03.34 MILES.ASPHALT RESURFACING

GEOGRAPHIC COORDINATES LATITUDE 37:41:27.08 LONGITUDE 87:39:39.79

ADT 131

COMPLETION DATE(S):

COMPLETED BY 06/30/2027 APPLIES TO ENTIRE CONTRACT

CONTRACT NOTES

INSURANCE
Refer to Kentucky Standard Specifications for Road and Bridge Construction, current edition.

PROPOSAL ADDENDA
All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL
Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING
Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION
The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY
Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by KRS 14A.9-010 to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under KRS 14A.9-030 unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the

foreign entity is not required to obtain a certificate as provided in KRS 14A.9-010, the foreign entity should identify the applicable exception. Foreign entity is defined within KRS 14A.1-070.

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at https://secure.kentucky.gov/sos/ftbr/welcome.aspx .

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/construction-procurement). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The state agency certifies that it is in compliance with the provisions of KRS 45A.150, "Access to contractor's books, documents, papers, records, or other evidence directly pertinent to the contract." The Contractor, as defined in KRS 45A.030, agrees that the contracting agency, the

Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this agreement for the purpose of financial audit or program review. The Contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884. Records and other prequalification information confidentially disclosed as part of the bid process shall not be deemed as directly pertinent to the agreement and shall be exempt from disclosure as provided in KRS 61.878(1)(c).

BOYCOTT PROVISIONS

If applicable, the contractor represents that, pursuant to KRS 45A.607, they are not currently engaged in, and will not for the duration of the contract engage in, the boycott of a person or an entity based in or doing business with a jurisdiction with which Kentucky can enjoy open trade. **Note:** The term Boycott does not include actions taken for bona fide business or economic reasons, or actions specifically required by federal or state law.

If applicable, the contractor verifies that, pursuant to KRS 41.480, they do not engage in, and will not for the duration of the contract engage in, in energy company boycotts as defined by KRS 41.472.

LOBBYING PROHIBITIONS

The contractor represents that they, and any subcontractor performing work under the contract, have not violated the agency restrictions contained in KRS 11A.236 during the previous ten (10) years, and pledges to abide by the restrictions set forth in such statute for the duration of the contract awarded.

The contractor further represents that, pursuant to KRS 45A.328, they have not procured an original, subsequent, or similar contract while employing an executive agency lobbyist who was convicted of a crime related to the original, subsequent, or similar contract within five (5) years of the conviction of the lobbyist.

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

RECIPROCAL PREFERENCE TO BE GIVEN BY PUBLIC AGENCIES TO RESIDENT BIDDERS

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the electronic bidding software. Submittal of the Affidavit should be done along the bid in Bid Express.

April 30, 2018

ASPHALT MIXTURE

Unless otherwise noted, the Department estimates the rate of application for all asphalt mixtures to be 110 lbs/sy per inch of depth.

DGA BASE FOR SHOULDERS

Unless otherwise noted, the Department estimates the rate of application for DGA Base for Shoulders to be 115 lbs/sy per inch of depth. The Department will not measure necessary grading and/or shaping of existing shoulders prior to placing of DGA Base, but shall be incidental to the Contract unit price per ton for DGA Base.

Accept payment at the Contract unit price per ton as full compensation for all labor, materials, equipment, and incidentals for grading and/or shaping of existing shoulders and furnishing, placing, and compacting the DGA Base.

INCIDENTAL SURFACING

The Department has included in the quantities of asphalt mixtures established in the proposal estimated quantities required for resurfacing or surfacing mailbox turnouts, farm field entrances, residential and commercial entrances, curve widening, ramp gores and tapers, and road and street approaches, as applicable. Pave these areas to the limits as shown on Standard Drawing RPM-110-06 or as directed by the Engineer. In the event signal detectors are present in the intersecting streets or roads, pave the crossroads to the right of way limit or back of the signal detector, whichever is the farthest back of the mainline. Surface or resurface these areas as directed by the Engineer. The Department will not measure placing and compacting for separate payment but shall be incidental to the Contract unit price for the asphalt mixtures.

FUEL AND ASPHALT PAY ADJUSTMENT

The Department has included the Contract items Asphalt Adjustment and Fuel Adjustment for possible future payments at an established Contract unit price of $1.00. The Department will calculate actual adjustment quantities after work is completed. If existing Contract amount is insufficient to pay all items on the contract with the adjustments, the Department will establish additional monies with a change order.

OPTION B

Be advised that the Department will control and accept compaction of asphalt mixtures furnished on this project under OPTION B in accordance with Sections 402 and 403.

SPECIAL PROVISION FOR WASTE AND BORROW SITES

Obtain U.S. Army Corps of Engineer's approval before utilizing a waste or borrow site that involves "Waters of the United States". The Corps of Engineers defines "Waters of the United States" as perennial or intermittent streams, ponds or wetlands. The Corps of Engineers also considers ephemeral streams, typically dry except during rainfall but having a defined drainage channel, to be jurisdictional waters. Direct questions concerning any potential impacts to "Waters of the United States" to the attention of the appropriate District Office for the Corps of Engineers for a determination prior to disturbance. Be responsible for any fees associated with obtaining approval for waste and borrow sites from the U.S. Army Corps of Engineer or other appropriate regulatory agencies.

1-296 Waste & Borrow Sites
01/02/2012

SPECIAL NOTE FOR EXPERIMENTAL KYCT AND FIELD RUT TESTING
June 2025 Update

1.0 General

1.1 Description. The KYCT (Kentucky Method for Cracking Test) and the IDEAL-RT/IDT-HT test results will help determine if the mixture is susceptible to cracking and rutting. During the experimental phase, data will be gathered and analyzed by the Department to determine the durability and stability of the bituminous mixes. Additionally, the data will help the Department to create future performance-based specifications which will include the KYCT and field rutting test methods.

2.0 Equipment

2.1 KYCT Testing Equipment. The Department will require a Marshall Test Press with digital recording capabilities. Other CT testing equipment may be used for testing with prior approval by the Department.

2.2 Water Baths. One or more water baths will be required that can maintain a temperature of 77^{o} +/- 1.8^{o} F with a digital thermometer showing the water bath temperature. Also, one water bath shall have the ability to suspend gyratory specimen fully submerged in water in accordance with AASHTO T-166, current edition.

2.3 Field Rutting Tests. I f t he contractor elects to perform the IDEAL-RT test, in conformance with ASTM D8360-22, the acquisition of the “Option A” or “Option B” test fixture is required. If the IDT-HT is desired, the test press utilized for the KYTC is sufficient. The Department shall approve all test configurations at their discretion.

2.4 Gyratory Molds. Gyratory molds will be required to assist in the production of gyratory specimens in accordance with AASHTO T-312, current edition.

2.5 Ovens. Adequate (minimum of two ovens) will be required to accommodate the additional molds and asphalt mixture necessary to perform the acceptance testing as outlined in Section 402 of the Kentucky Standard Specifications for Road and Bridge Construction, current edition.

2.6 Department Equipment. The Department will provide gyratory molds, PINE 850 Test Press with digital recordation, and CT testing equipment to assist during this experimental phase so data can be gathered.

3.0 Testing Requirements

3.1 Acceptance Testing. Perform all acceptance testing and aggregate gradation as according with Section 402 and Section 403 of the Kentucky Standard Specifications for Road and Bridge Construction, current edition.

3.2 KYCT Testing. Perform crack resistance analysis (KYCT) in accordance with the current Kentucky Method for KYCT Index Testing during the plant production of all surface mixtures. Conform to KYTC Specifications for Mix Design approvals. All production testing is currently informational.

3.2.1 KYCT Frequency. Obtain an adequate sample of hot mix asphalt to ensure the acceptance testing, gradation, and KYCT gyratory samples can be fabricated and is representative of the bituminous mixture. Acceptance specimens shall be fabricated first, then after the specified amount of oven conditioning, fabricate the KYCT samples with the gyratory compactor in accordance with Section 2.4 of this Special Note. Analysis of the KYCT specimens will be required one per sublot produced from the same asphalt material and at the same time as the acceptance specimen is sampled and tested.

3.2.2 Number of Specimens and Conditioning. Fabricate specimens in accordance with the Kentucky Method for KYCT Index Testing. Contrary to the method, for field specimens, fabricate three replicates for cracking resistance analyses and three replicates for rutting resistance analyses. The specimens shall be compacted at the temperature in accordance with KM 64-411.

Contrary to the Kentucky Method, plant produced bituminous material shall be short-term conditioned immediately after sampling for two hours uncovered in the oven at compaction temperature in accordance with KM 64-411.

While the fabricated specimens are allowed to cool in air (fan is permissible) for 30 minutes +/- 5 minutes, find the bulk specific gravity of each specimen according to AASHTO T166. Next, condition the replicates in a 77 °F water bath for 30 minutes +/- 5 minutes. To ensure confidence and reliability of the test results provided by KYCT testing and Field Rut testing, reheating of the asphalt mixture is prohibited.

3.2.3 Long Term Aging CT's. For long-term aging and cracking resistance considerations in mix design, mix and condition 3 specimens uncovered for 20 hours at compaction temperature in accordance with KM 64-411. Perform KYCT testing in accordance with KM 64-450 and record the results on the Long-Term KYCT tab of the latest version of the MixPack.

3.2.4 Record Times. For each sublot, record the time required between drying aggregates in the plant to KYCT specimen fabrication. The production time may vary due to the time that the bituminous material is held in the silo. Record the preconditioning time when the time exceeds the one-hour specimen cool down time as required in accordance with The Kentucky Method for KYCT Index Testing. The preconditioning time may exceed an hour if the technician is unable to complete the test on the same day or within the specified times as outlined in The Kentucky Method for KYCT Index Testing. The production time and the preconditioning time shall be recorded on the AMAW.

3.2.5 File Name. As according to section 7.12 of The Kentucky Method for KYCT Index Testing, save the filename with the following format: "CID_Approved Mix Number_Lot Number_Sublot Number_ Date"

3.3 Field Rut Testing. Perform the rut resistance analysis (IDEAL-RT or IDT-HT) in accordance with ASTM D8360-22 or ALDOT458, respectively. Contrary to ASTM D8360 & ALDOT458, precondition the test specimens in a water bath or forced draft oven at 50 °C +/- 1 °C for 60 +/- 5 min before completing the test.

3.3.1 Field Rut Testing Frequency. Perform one test per lot of mixture produced. The plant produced bituminous material sampled for the field rut test does not have to be obtained at the same time as the acceptance and KYCT sample. If the field rut test sample is not obtained at the same time as the KYCT sample, determine the Maximum Specific Gravity of the KYCT sample in accordance with AASHTO T-209 coinciding with the test specimens.

3.3.2 Number of Specimens and Conditioning. Fabricate in accordance with the Kentucky Method for KYCT Index Testing. Contrary to the method, for field specimens, fabricate three

replicates for rutting resistance analyses. The specimens shall be compacted at the temperature in accordance with KM 64-411. Contrary to the Kentucky Method, plant produced bituminous material shall be short-term conditioned immediately after sampling for two hours uncovered in the oven at compaction temperature in accordance with KM 64-411.

3.3.3 Record Times. Record the production time as according to section 3.2.3 in this special note. Also record the time that the specimens were fabricated. All times shall be recorded on the AMAW.

3.3.4 File Name. Record all field rut data in the latest version of the AMAW.

4.0 Data

Submit the AMAW and all test data that was obtained for acceptance, gradation, KYCT, and field rut testing within five working days once all testing has been completed for a lot to Central Materials Lab and the District Materials Engineer. Also, any data and or comments that the asphalt contractor or district personnel deem informational during this experimental phase, shall also be submitted to the Central Materials Lab and the District Materials Engineer. Any questions or comments regarding any item in this Special Note can be directed to the Central Office, Division of Materials, Asphalt Branch.

5.0 Payment

Any additional labor and testing equipment that is required to fabricate and test the KYCT and field rut specimens shall be considered incidental to the asphalt surface line item. The Department will perform the testing for the KYCT and field rut specimens if a producer does not possess the proper equipment.

June 12th, 2025

COORDINATION OF WORK WITH OTHER CONTRACTS

Be advised, there may be an active project(s) adjacent to or within this project. The Engineer will coordinate the work of the Contractors. See Section 105.06.

1-3193 Coordination Contracts
01/02/2012

SPECIAL NOTE FOR EDGE KEY

Construct Edge Keys at the beginning of project, end of project, at railroad crossings, and at ramps, as applicable. Unless specified in the Contract or directed by the Engineer, do not construct edge keys at intersecting streets, roads, alleys, or entrances. Cut out the existing asphalt surface to the required depth and width shown on the drawing and heel the new surface into the existing surface. The Department will make payment for this work at the Contract unit price per ton for Asphalt Pavement Milling and Texturing, which shall be full compensation for all labor, materials, equipment, and incidentals for removal and disposal of the existing asphalt surface required to construct the edge key.

EDGE KEY

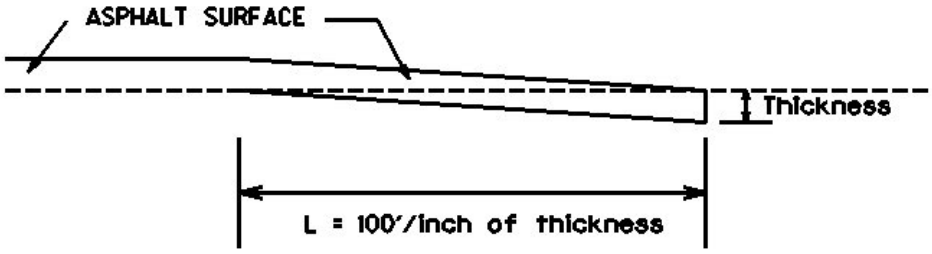

Thickness = 1 Inch

L = 100 LF

L= Length of Edge Key

1-3309 Edge key by Ton
01/02//2012

SPECIAL NOTE FOR
ASPHALT MILLING AND TEXTURING

Begin paving operations within **48 hours** of commencement of the milling operation. Continue paving operations continuously until completed. If paving operations are not begun within this time period, the Department will assess liquidated damages at the rate prescribed by Section 108.09 until such time as paving operations are begun.

Contrary to Section 408, the Department will retain possession of the material obtained from the milling operations. Deliver this material to the State Maintenance facility in Henderson County.

1-3530 48 hours State keeps millings
01/2/2012

SPECIAL NOTE FOR BASE FAILURE REPAIR
(CB06 051 0812 007-008)
(CB06 051 0416 002-005)

Repair locations listed on the summary are approximate only. The Engineer will determine actual repair locations and dimensions at the time of construction. Prior to overall milling and/or leveling and wedging, excavate the designated base failure areas to a depth 4 inches below the existing asphalt pavement surface level. Dispose of the excavated materials at waste sites off the Right-of-Way obtained by the Contractor at no additional cost to the Department. See Special Note for Waste and Borrow.

Backfill the excavated areas with Class 2 Asphalt Base 1.00D PG64-22. Compact the asphalt base to the compaction required in Section 403.03.10. Seal the asphalt base with leveling and wedging. Perform all base failure repairs in such a manner that removal and replacement are completed on the same day. Do this work as one of the Contractor's first operations in order to allow further compaction by traffic. Do not mill or place new asphalt surface over repaired base failure areas until a minimum of 7 calendar days have elapsed after placement of the asphalt base. After a minimum of 7 calendar days and when the Engineer determines the base failure repair areas have sufficiently stabilized, begin milling and/or resurfacing operations. Prior to milling and/or constructing the new asphalt surface, level and wedge any settlement of the repair areas.

The bidder must draw conclusions as to the conditions encountered. The Department does not give any guarantee as to the accuracy of the data and will not consider any claim for additional compensation if the materials encountered that are not in accord with the classification shown.

Accept payment at the Contract unit prices per square yard for Base Failure repair and per ton for Leveling and Wedging as full compensation for all labor, materials, equipment, and incidentals for removing pavement and disposing of the materials, furnishing and placing asphalt base, leveling and wedging, and all other items necessary to complete the work according to these notes to the satisfaction of the Engineer.

1-3606basefailurerepairmillinlaypaybysy
01/02/2012

SPECIAL NOTE FOR TYPICAL SECTION DIMENSIONS

Consider the dimensions shown on the typical sections for pavement and shoulder widths and thickness' to be nominal or typical dimensions. The Engineer may direct or approve varying the actual dimensions to be constructed to fit existing conditions. Do not widen existing pavement or shoulders unless specified elsewhere in this proposal or directed by the engineer.

1-3725 Typical Section Dimensions
01/02/2012

TRAFFIC CONTROL PLAN

TRAFFIC CONTROL GENERAL

Except as provided herein, maintain and control traffic in accordance with the Standard and Supplemental Specifications and the Standard and Sepia Drawings, current editions. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic".

Contrary to Section 106.01, furnish new, or used in like new condition, traffic control devices at the beginning of the work and maintain in like new condition until completion of the work.

PROJECT PHASING & CONSTRUCTION PROCEDURES

The Engineer may specify days and hours when lane closures will not be allowed.

Maintain alternating one way traffic during construction. Provide a minimum clear lane width of 8 feet; however, provide for passage of vehicles of up to 16 feet in width. If traffic should be stopped due to construction operations, and a school bus on an official run arrives on the scene, make provisions for the passage of the bus as quickly as possible.

LANE CLOSURES

Do not leave lane closures in place during non-working hours.

SIGNS

Sign posts and splices shall be compliant with NCHRP 350 or MASH. Manufacturer's documentation validating this compliance shall be provided to the Engineer prior to installation. Signs, including any splices, shall be installed according to manufacturer's specifications and installation recommendations. Contrary to section 112.04.02, only long-term signs (signs intended to be continuously in place for more than 3 days) will be measured for payment. Short-term signs (signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic.

CHANGEABLE MESSAGE SIGNS

If deemed necessary by the Engineer, the Department will furnish, operate, and maintain Changeable Message Signs.

TEMPORARY ENTRANCES

The Engineer will not require the Contractor to provide continuous access to farms, single family, duplex, or triplex residential properties during working hours; however, provide reasonable egress

and ingress to each such property when actual operations are not in progress at that location. Limit the time during which a farm or residential entrance is blocked to the minimum length of time required for actual operations, not extended for the Contractor's convenience, and in no case exceeding six (6) hours. Notify all residents twenty-four hours in advance of any driveway or entrance closings and make any accommodations necessary to meet the access needs of disabled residents.

Except as allowed by the Phasing as specified above, maintain direct access to all side streets and roads, schools, churches, commercial properties and apartments or apartment complexes of four or more units at all times.

The Department will measure asphalt materials required to construct and maintain any temporary entrances which may be necessary to provide temporary access; however, the Department will not measure aggregates, excavation, and/or embankment, but shall be incidental to Maintain and Control Traffic. The Engineer will determine the type of surfacing material, asphalt or aggregate, to be used at each entrance.

THERMOPLASTIC INTERSECTION MARKINGS

Consider the locations listed on the summary as approximate only. Prior to milling and/or resurfacing, locate and document the locations of the existing markings. After resurfacing, replace the markings at their approximate existing locations or as directed by Engineer. Place markings not existing prior to resurfacing as directed by the Engineer.

BARRICADES

The Department will not measure barricades used in lieu of barrels and cones for channelization or delineation, but shall be incidental to Maintain and Control Traffic according to Section 112.04.01.

The Department will measure barricades used to protect pavement removal areas in individual units Each. The Department will measure for payment the maximum number of barricades in concurrent use at the same time on a single day on all sections of the contract. The Department will measure individual barricades only once for payment, regardless of how many times they are set, reset, removed, and relocated during the duration of the project. The Department will not measure replacements for damaged barricades the Engineer directs to be replaced due to poor condition or reflectivity. Retain possession of the Barricades upon completion of construction.

PAVEMENT MARKINGS

If there is to be a deviation from the existing striping plan, the Engineer will furnish the Contractor a striping plan prior to placement of the final surface course.

Install Temporary Striping according to Section 112 with the following exception:

If the Contractor's operations or phasing requires temporary markings that must subsequently be removed from the final surface course, use an approved removable lane tape; however, the Department will not measure removable lane tape for separate payment, but will measure and pay for removable lane tape as temporary striping.

PAVEMENT EDGE DROP-OFFS

Do not allow a pavement edge between opposing directions of traffic or lanes that traffic is expected to cross in a lane change situation with an elevation difference greater than 1½". Place Warning signs (MUTCD W8-11 or W8-9A) in advance of and at 1500' intervals throughout the drop-off area. Dual post the signs on both sides of the traveled way. Wedge all transverse transitions between resurfaced and unresurfaced areas which traffic may cross with asphalt mixture for leveling and wedging. Remove the wedges prior to placement of the final surface course.

Protect pavement edges that traffic is not expected to cross, except accidentally, as follows:

Less than 2" - No protection required.

2" to 4" - Place plastic drums, vertical panels, or barricades every 50 feet. During daylight working hours only, the Engineer will allow the Contractor to use cones in lieu of plastic drums, panels, and barricades. Wedge the drop-off with DGA or asphalt mixture for leveling and wedging with a 1:1 or flatter slope in daylight hours, or 3:1 or flatter slope during nighttime hours, when work is not active in the drop-off area.

Greater than 4" - Protect drop-offs greater than 4 inches within 10 feet of traffic by placing drums, vertical panels, or barricades every 25 feet. The Engineer will not allow the use of cones in lieu of drums, vertical panels, or barricades for drop-offs greater than 4". Place Type III Barricades directly in front of the drop-off facing on coming traffic in both directions of travel. Provide warning signs as shown on the Standard Drawings or as directed by the Engineer

Pedestrians & Bicycles - Protect pedestrian and bicycle traffic as directed by the engineer.

DURABLE PAVEMENT EDGE DETAIL

(Resurfacing adjacent to low shoulder with dropoff of 5 inches or less)

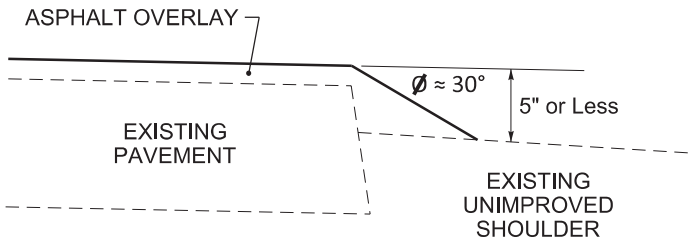

DURABLE PAVEMENT EDGE DETAIL

(Resurfacing adjacent to low shoulder with dropoff of more than 5 inches)

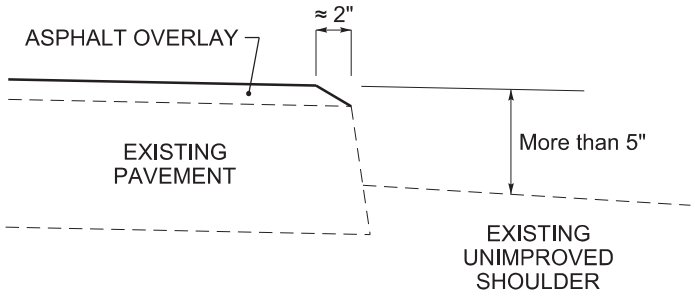

DURABLE PAVEMENT EDGE DETAIL

(Resurfacing adjacent to an obstruction, such as an existing headwall)

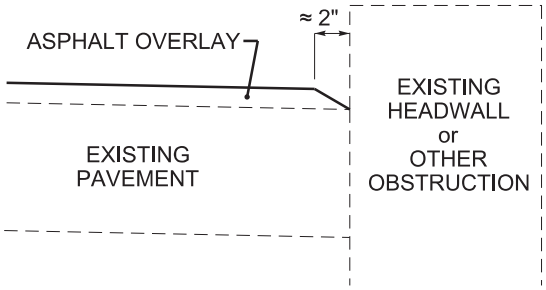

DURABLE PAVEMENT EDGE DETAIL

(Resurfacing adjacent to fill slope or ditch foreslope that is 3:1 or less)

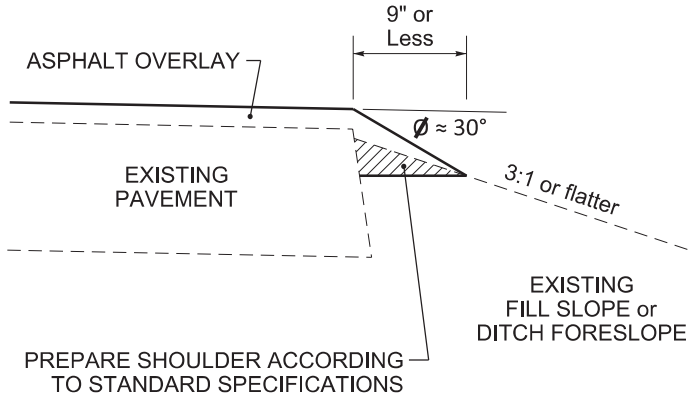

DURABLE PAVEMENT EDGE DETAIL

(Resurfacing adjacent to fill slope or ditch foreslope that is steeper than 3:1)

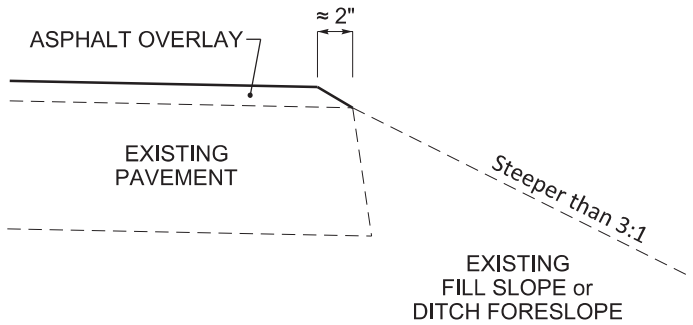

NOTES

1. DETAILS DO NOT APPLY TO OVERLAYS LESS THAN 1 INCH THICK.
2. THE DURABLE PAVEMENT EDGE DEVICE MAY BE DISENGAGED AT DRIVEWAYS, SIDE STREETS, HIGH SHOULDERS, AND OTHER LOCATIONS NOT FEASIBLE TO CONSTRUCT, AS APROVED BY THE ENGINEER.

DRAWING NOT TO SCALE

DURABLE PAVEMENT EDGE DETAILS

Henderson - KY 811
CB06 051 0811 005-009

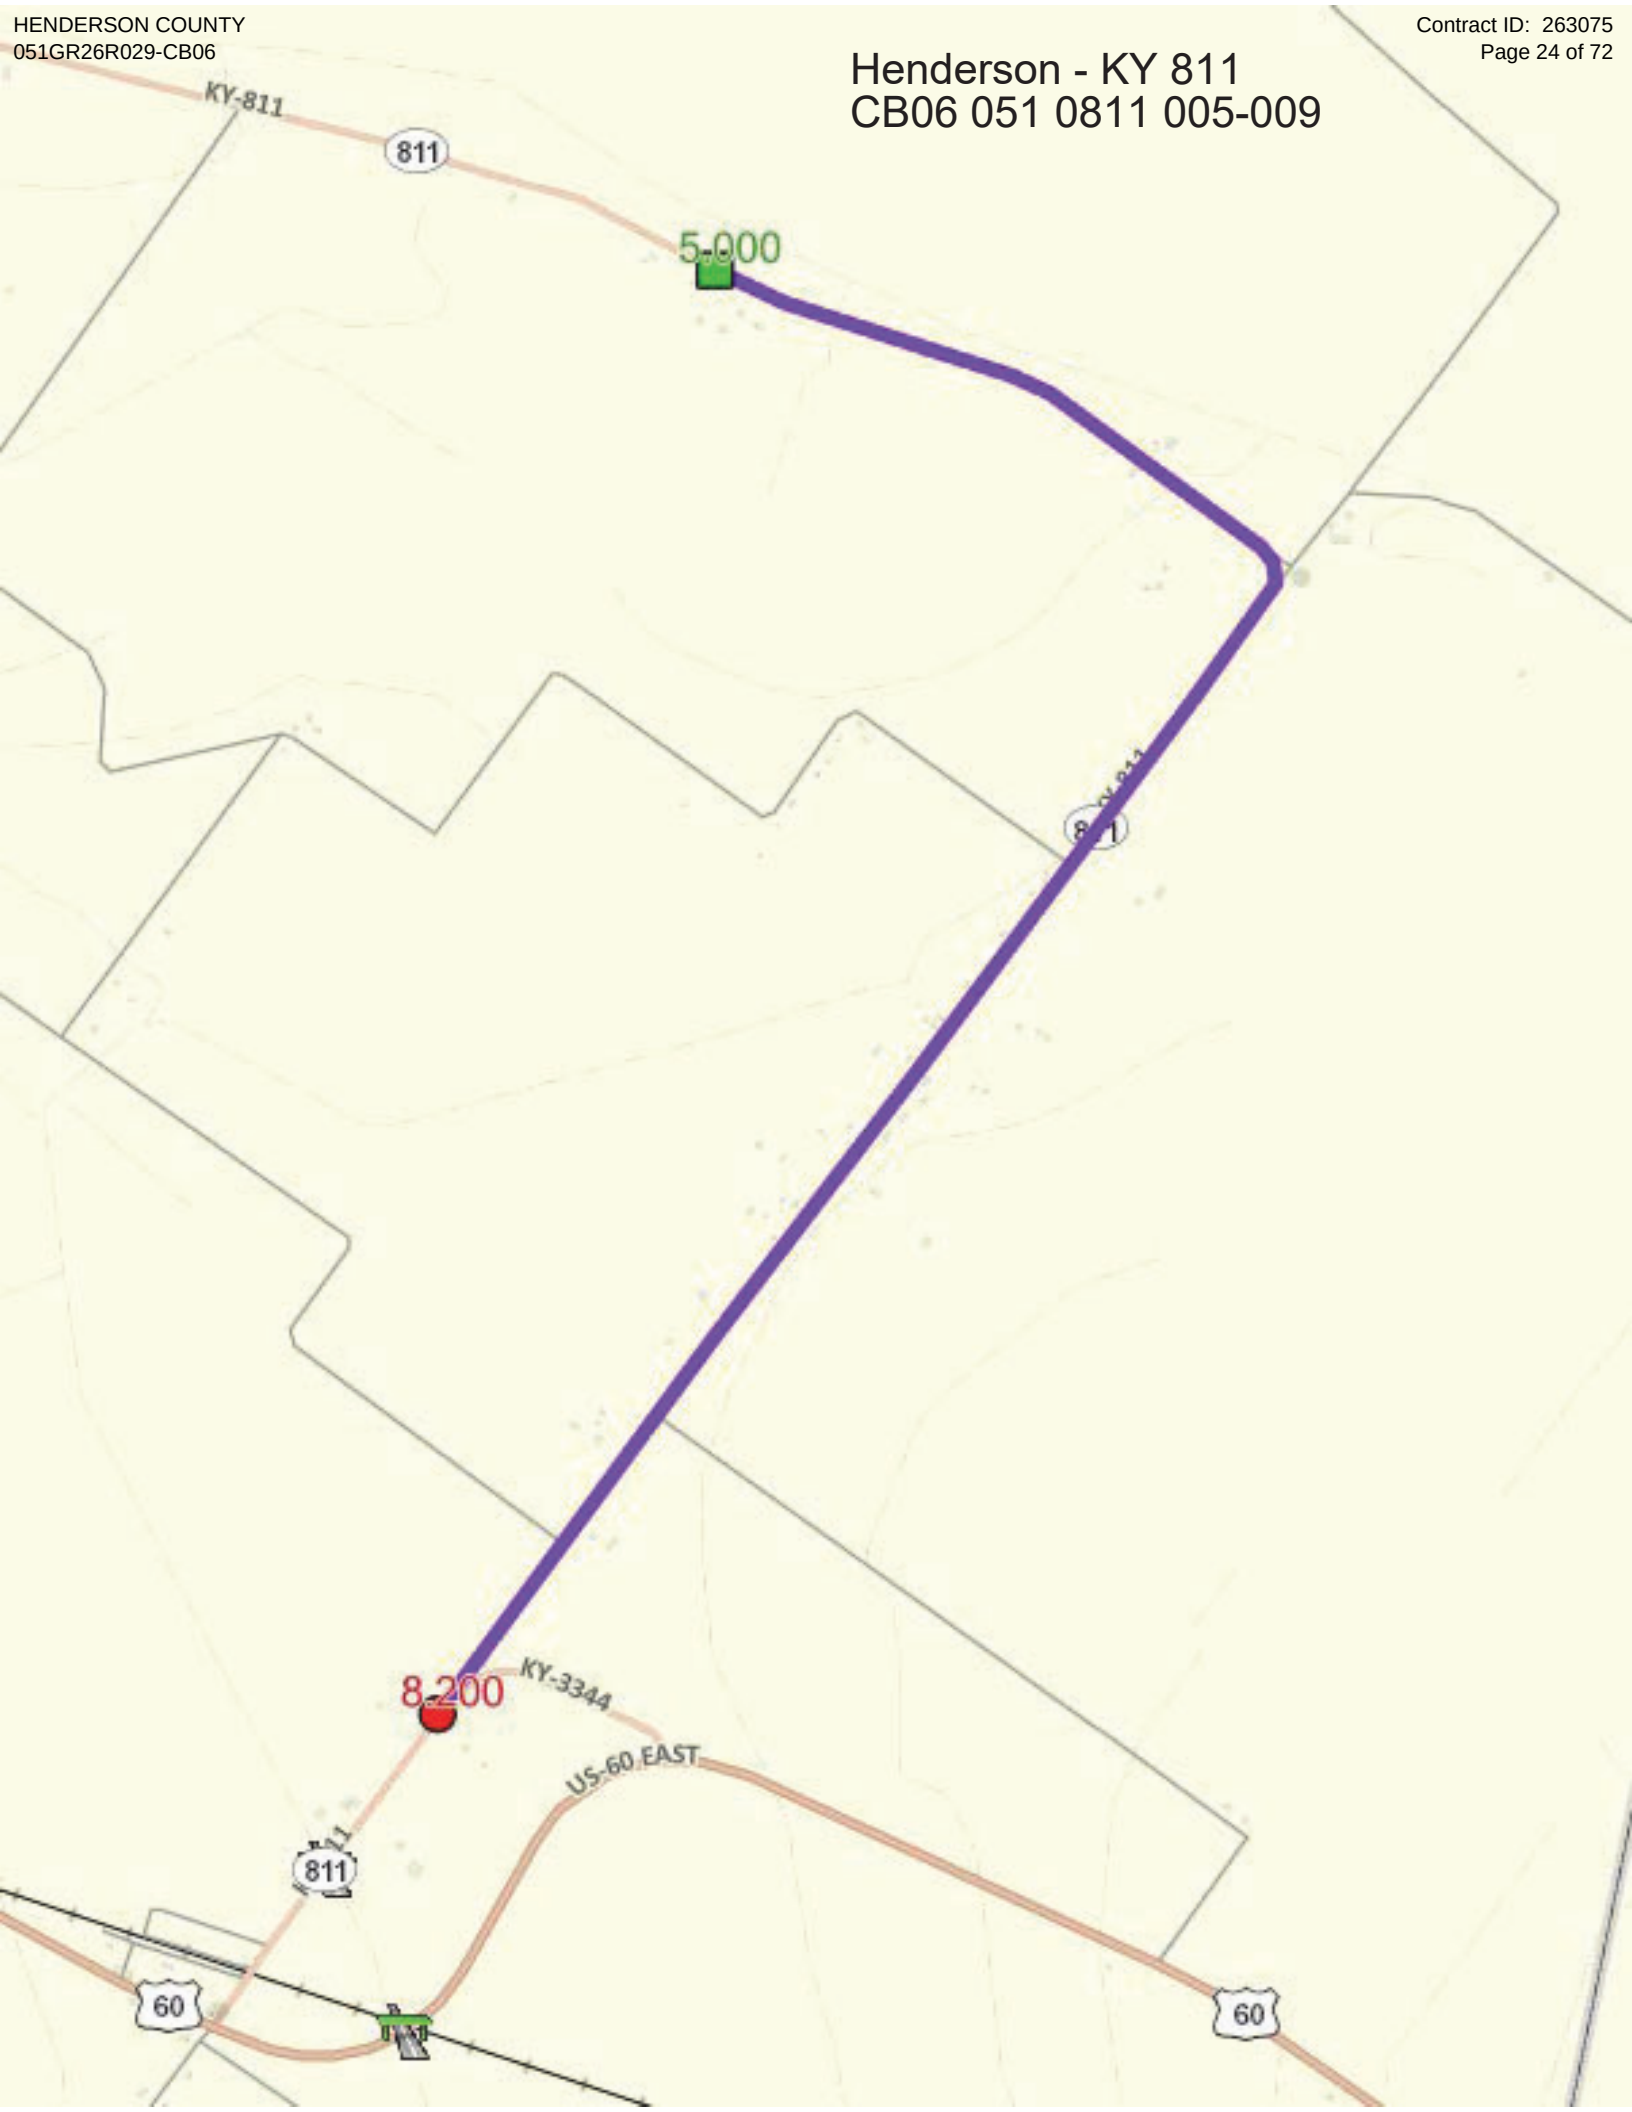

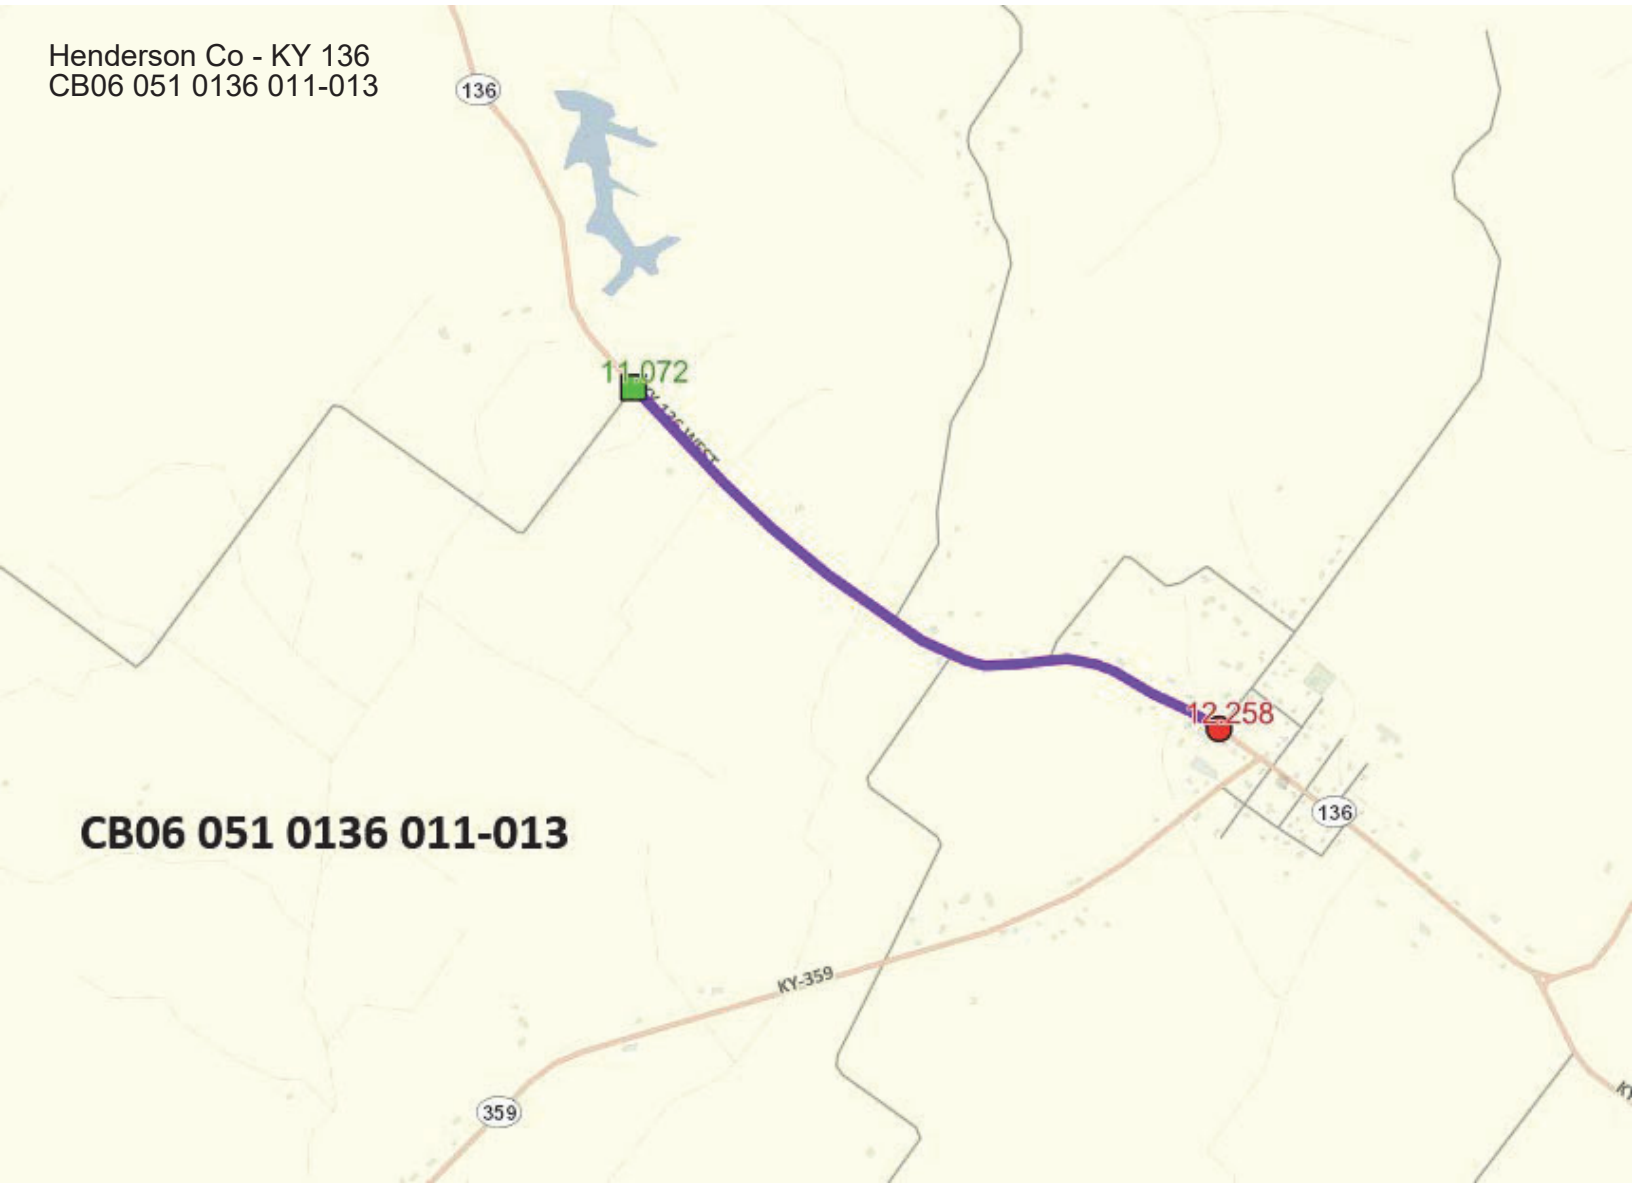
Henderson Co - KY 136
CB06 051 0136 011-013
136
11-072
12-258
CB06 051 0136 011-013
136
KY-359
359

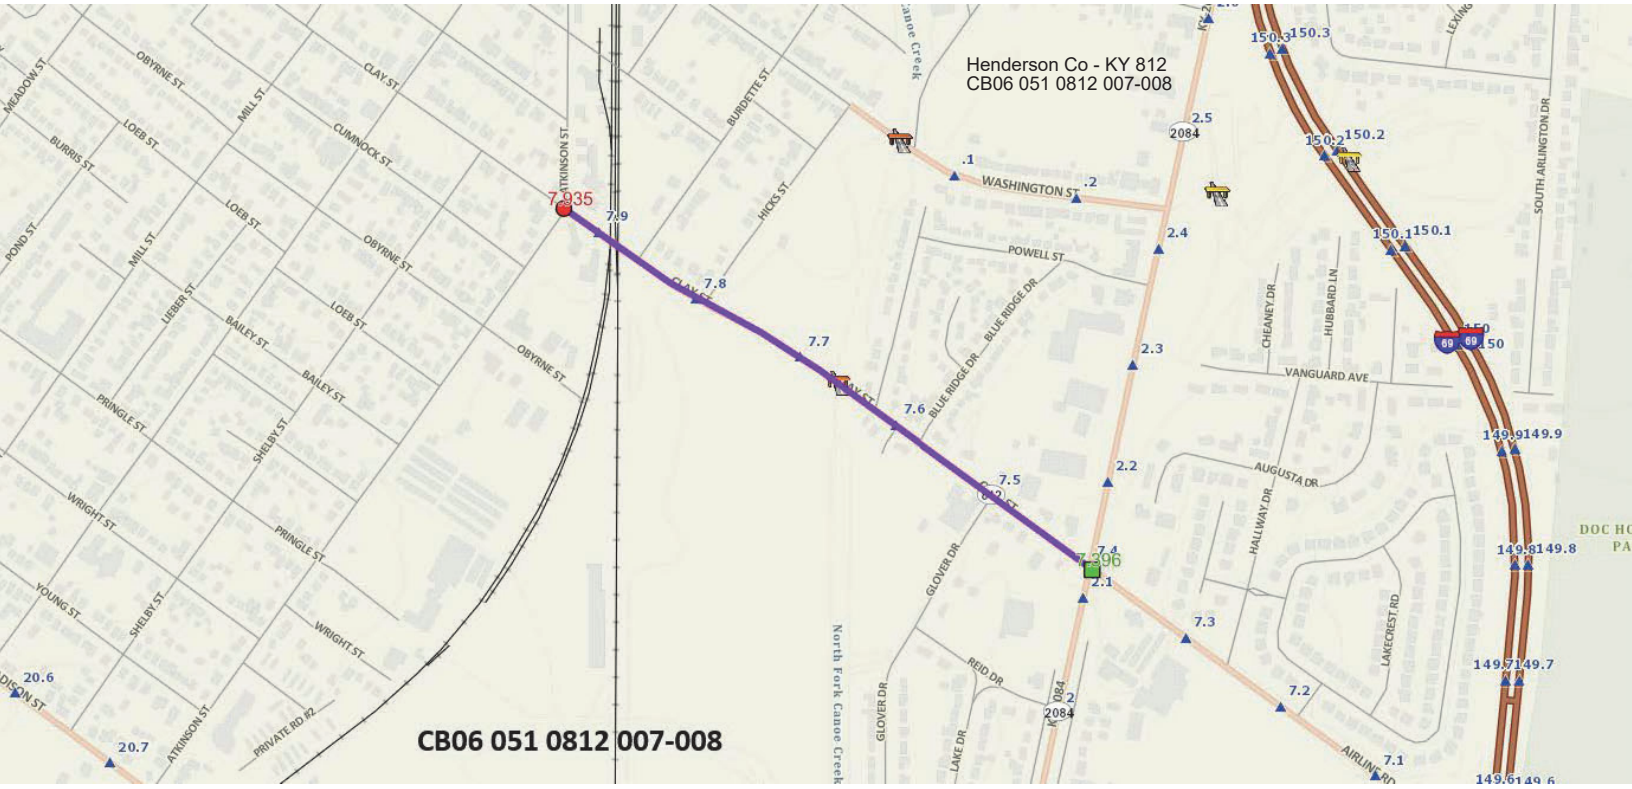
Henderson Co - KY 812
CB06 051 0812 007-008
CB06 051 0812 007-008
7.935
7.396
WASHINGTON ST
POWELL ST
CLAY ST
OBYRNE ST
LOEB ST
BAILEY ST
PRINGLE ST
WRIGHT ST
YOUNG ST
SHELBY ST
MILL ST
LIEBER ST
BURRIS ST
POND ST
MEADOW ST
CUMNOCK ST
BURDETTE ST
HICKS ST
ATKINSON ST
PRIVATE RD #2
BLUE RIDGE DR
GLOVER DR
LAKE DR
REID DR
HALLWAY DR
CHEANEY DR
HUBBARD LN
VANGUARD AVE
AUGUSTA DR
LAKECREST RD
SOUTH ARLINGTON DR
AIRLINE RD
North Fork Canoe Creek
2084
69

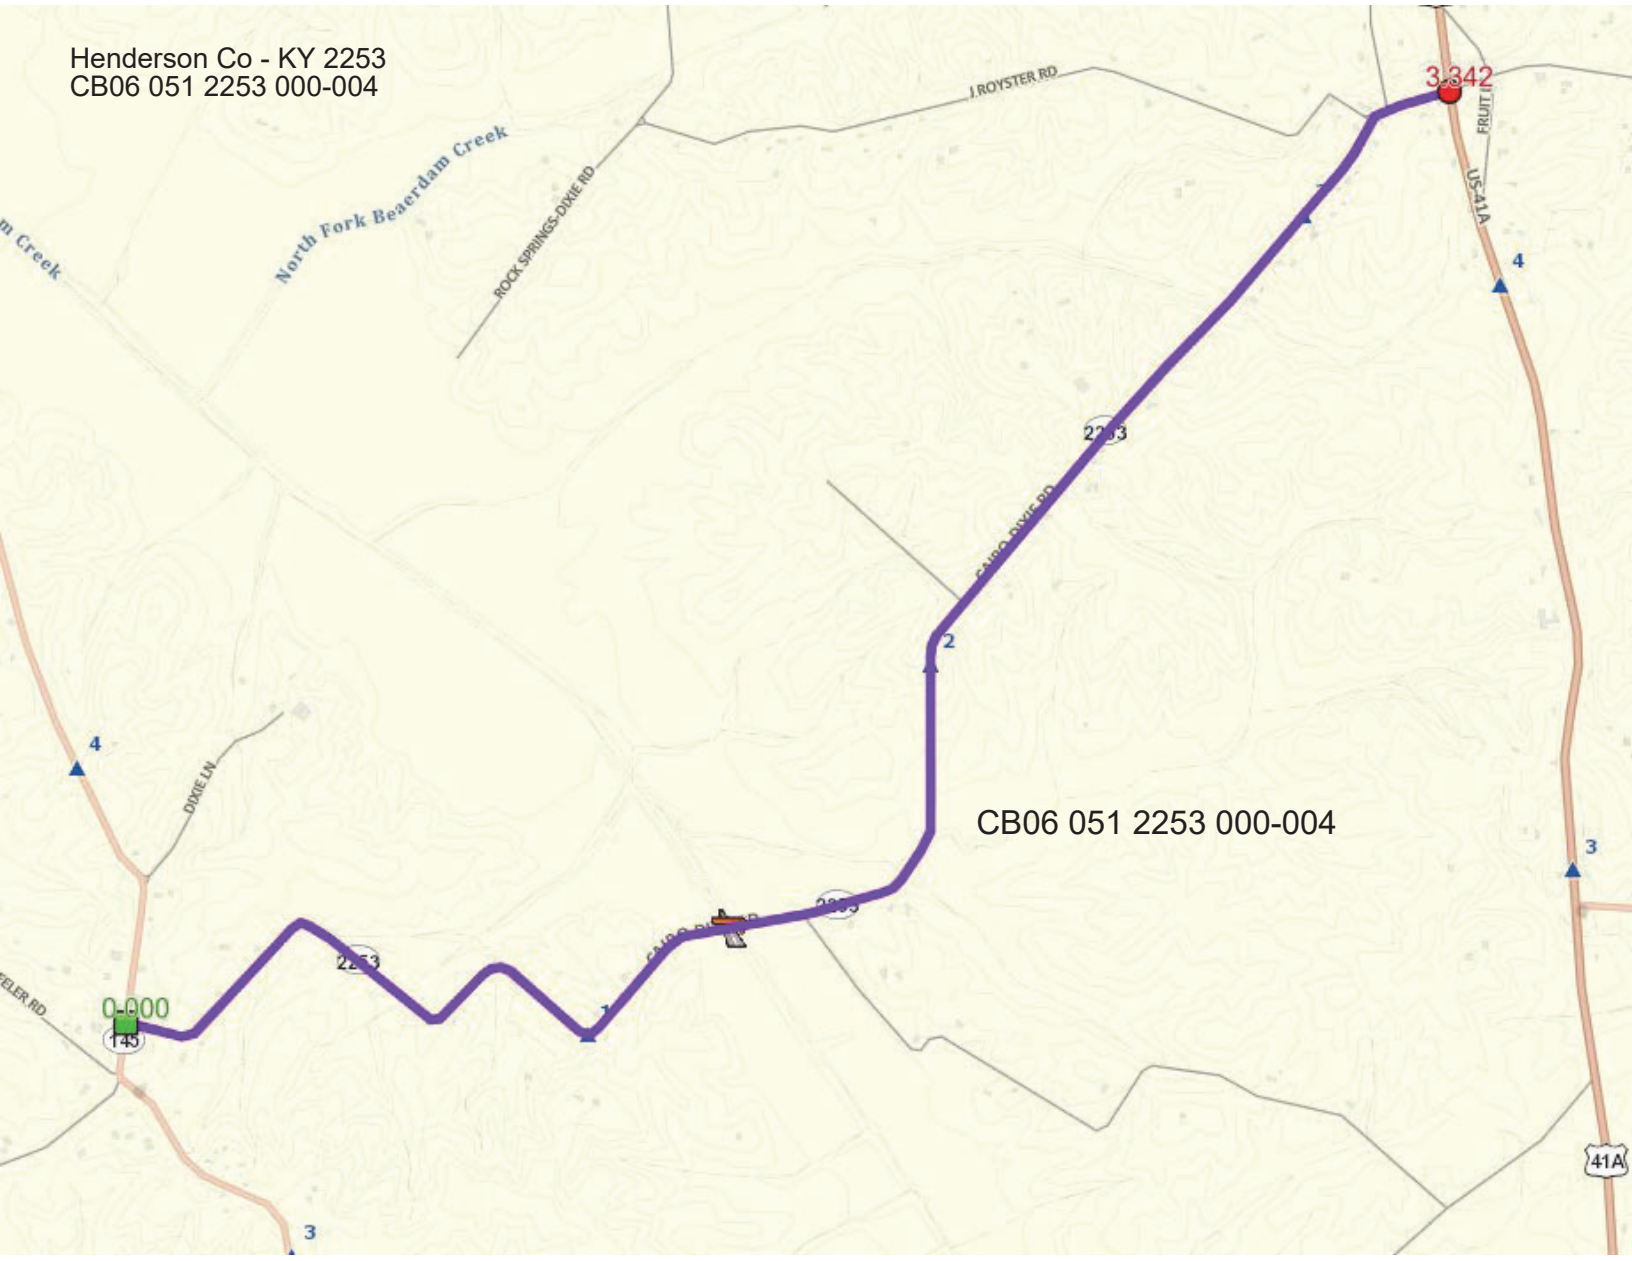
Henderson Co - KY 2253
CB06 051 2253 000-004
North Fork Bearedam Creek
ROCK SPRINGS-DIXIE RD
J ROYSTER RD
FRUIT
US-41A
DIXIE LN
CB06 051 2253 000-004
0.000
3.342
145
41A

Henderson Co - KY 145
CB06 051 0145 006-009

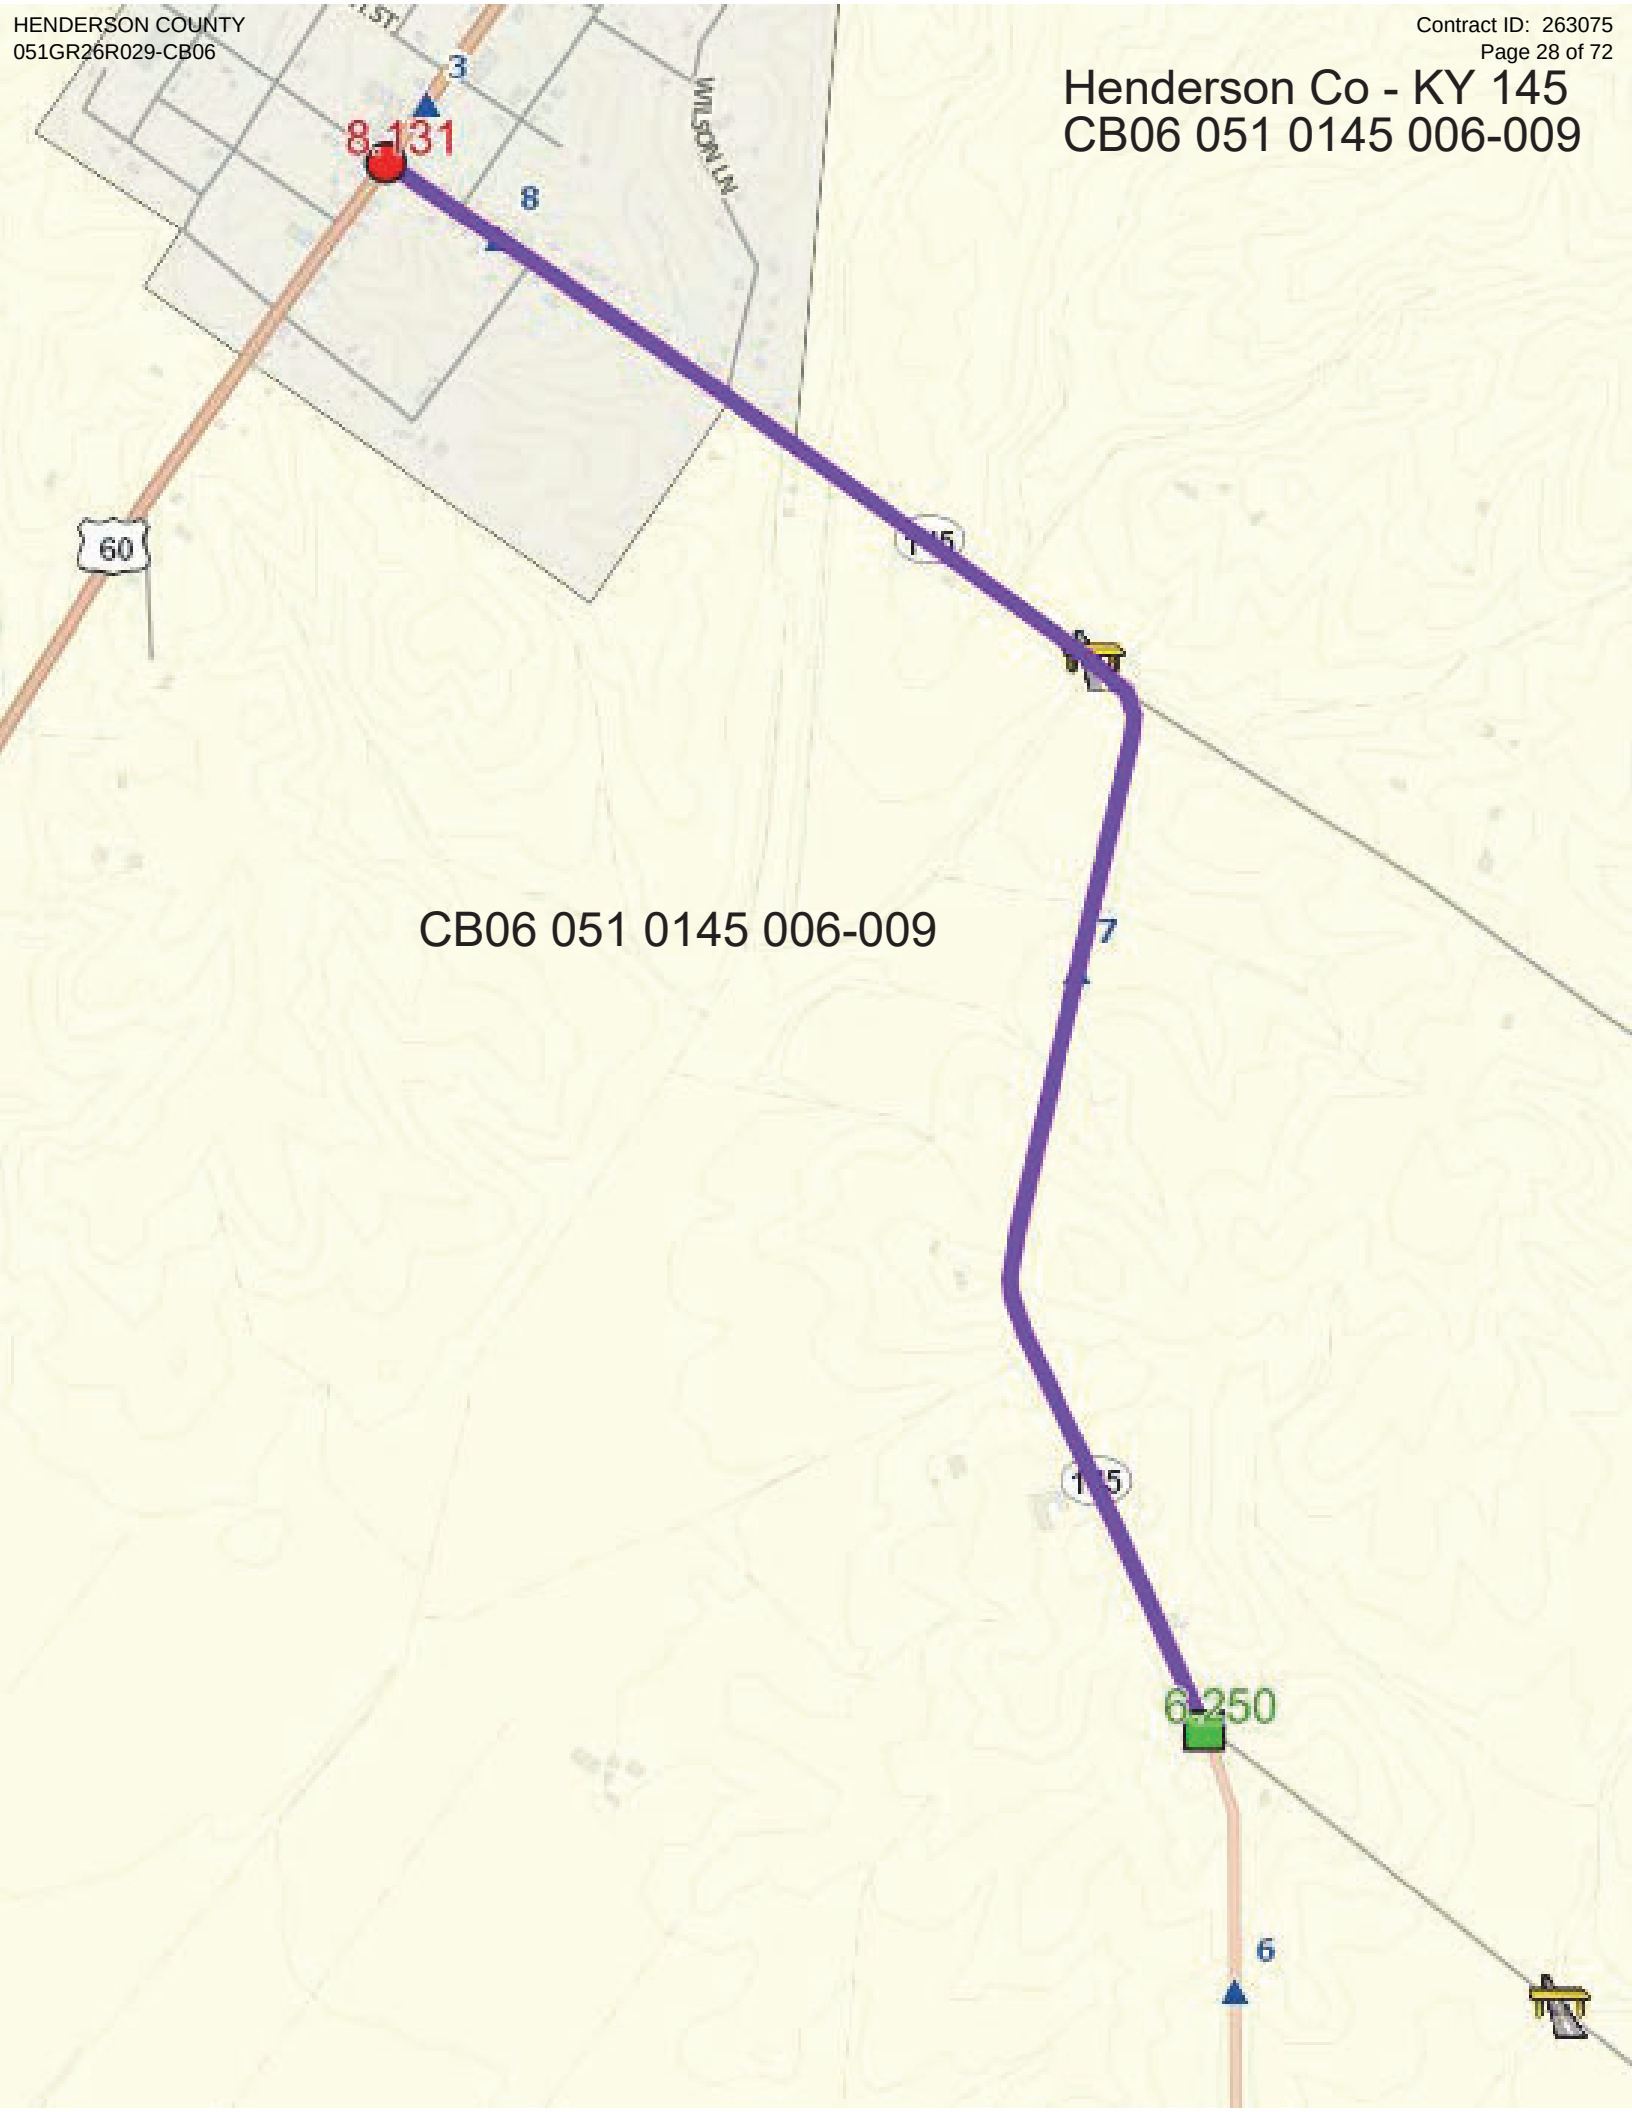

0.000
HENDERSON CO - KY 266
CB06 051 0266 000-002
CB06 051 0266 000-002
2.000
266

Henderson Co - KY 416
CB06 051 0416 002-006
1299
KY-1299
416
2.644
CB06 051 0416 002-005
283
4.976

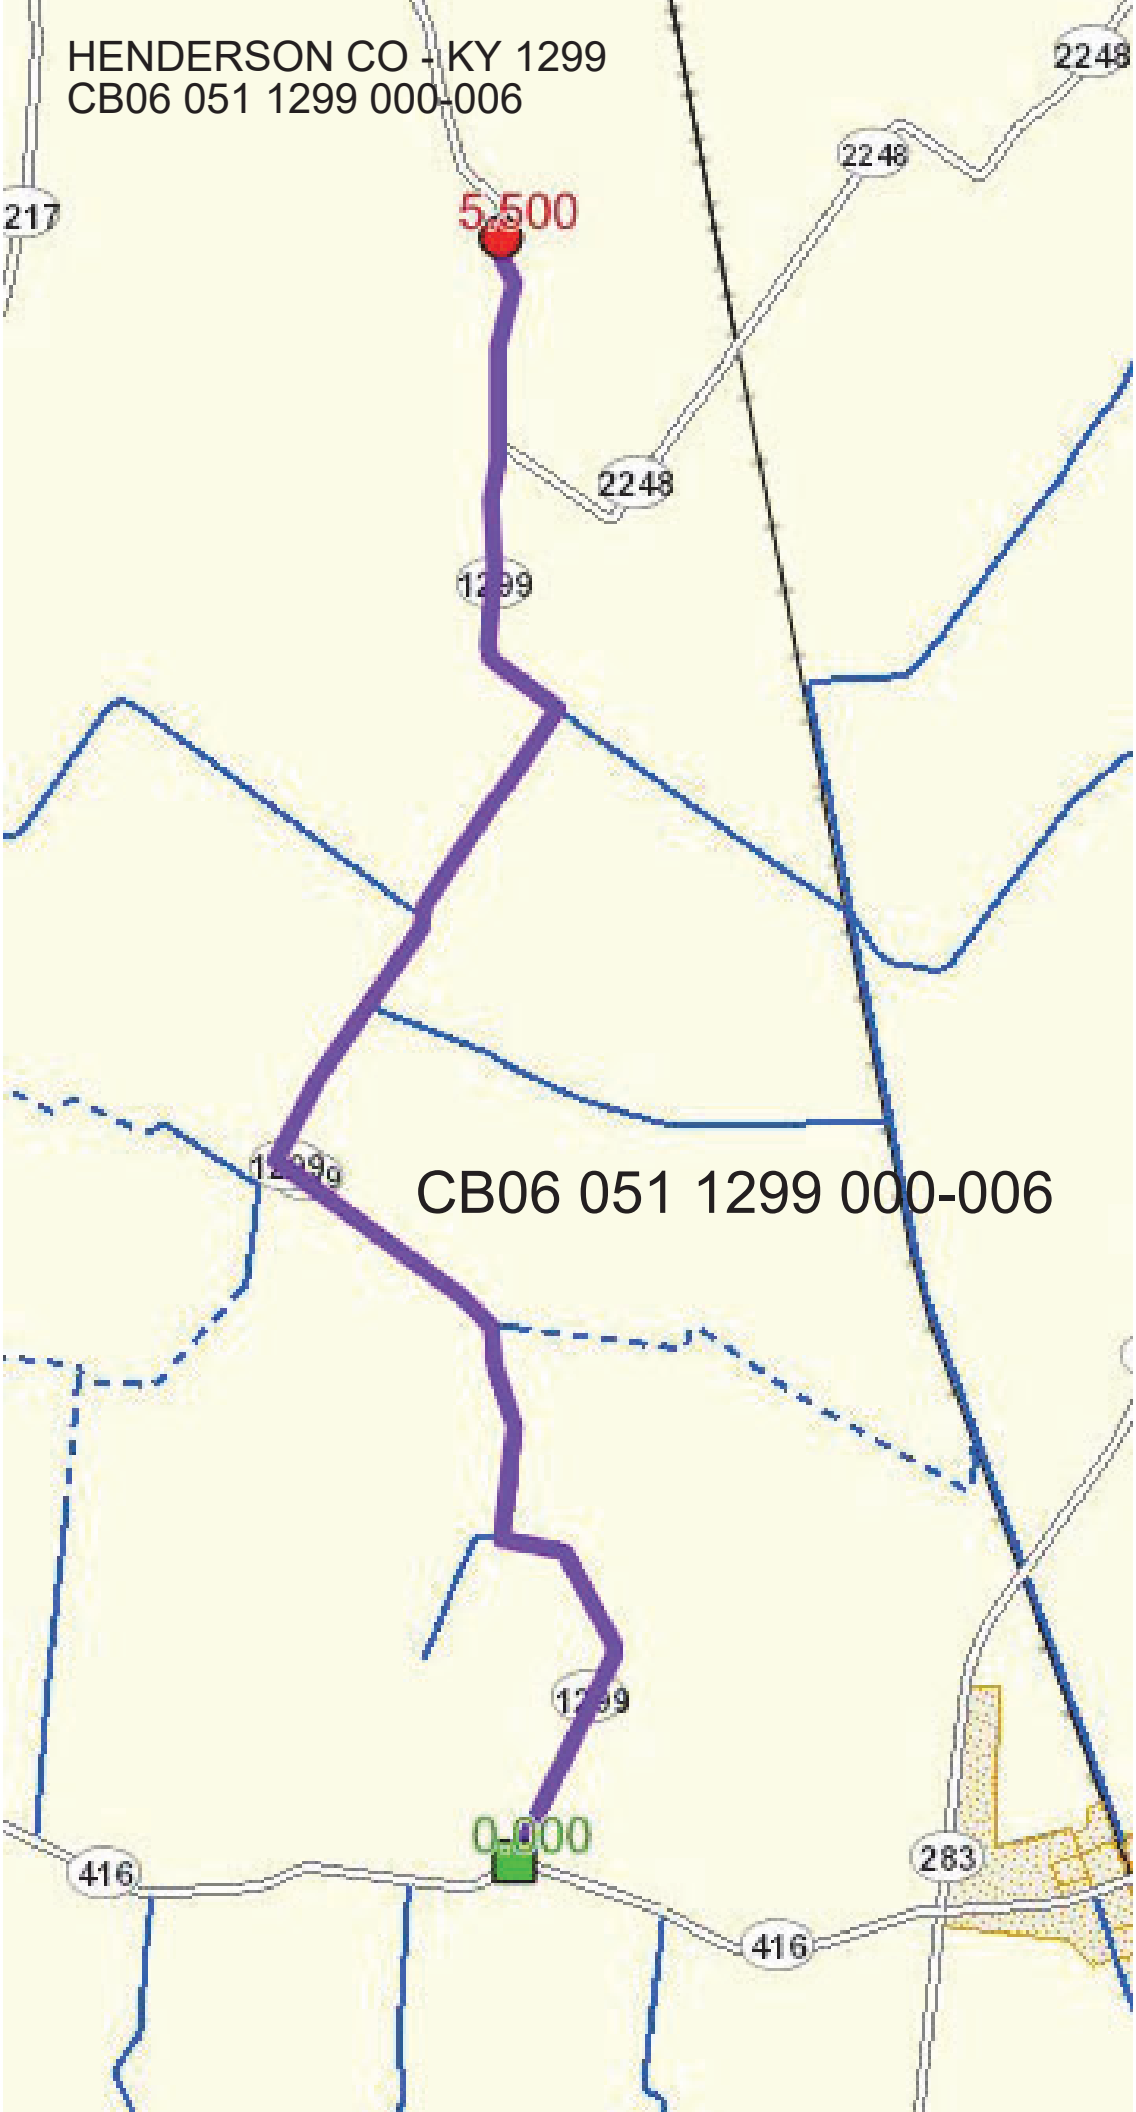
HENDERSON CO - KY 1299
CB06 051 1299 000-006
5.500
2248
2248
2248
217
1299
1299
CB06 051 1299 000-006
1299
0.000
416
416
283

MATERIAL SUMMARY

CONTRACT ID: 263075 **051GR26R029-CB06** **0205101362601**

KY 136 (KY 136) FROM BURBANK RD (CR 1327), EXTENDING EASTERLY TO MILL ST (CR 1335 A). ASPHALT RESURFACING, A DISTANCE OF 1.19 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0075	00001	DGA BASE	125.00	TON
0080	00301	CL2 ASPH SURF 0.38D PG64-22	815.00	TON
0085	00356	ASPHALT MATERIAL FOR TACK	6.00	TON
0090	02562	TEMPORARY SIGNS	210.00	SQFT
0095	02650	MAINTAIN & CONTROL TRAFFIC - (KY 136)	1.00	LS
0100	02676	MOBILIZATION FOR MILL & TEXT - (KY 136)	1.00	LS
0105	02677	ASPHALT PAVE MILLING & TEXTURING	110.00	TON
0110	06510	PAVE STRIPING-TEMP PAINT-4 IN	5,010.00	LF
0115	06514	PAVE STRIPING-PERM PAINT-4 IN	12,524.00	LF
0120	10020NS	FUEL ADJUSTMENT	1,269.00	DOLL
0125	10030NS	ASPHALT ADJUSTMENT	3,186.00	DOLL
0130	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 263075 **051GR26R029-CB06** **0205101452601**

KY 145 (KY 145) FROM J GIBSON RD (CR 1233), EXTENDING NORTHERLY TO US 60. ASPHALT RESURFACING, A DISTANCE OF 1.88 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0285	00001	DGA BASE	195.00	TON
0290	00190	LEVELING & WEDGING PG64-22	101.00	TON
0295	00301	CL2 ASPH SURF 0.38D PG64-22	1,335.00	TON
0300	00356	ASPHALT MATERIAL FOR TACK	10.00	TON
0305	02562	TEMPORARY SIGNS	230.00	SQFT
0310	02650	MAINTAIN & CONTROL TRAFFIC - (KY 145)	1.00	LS
0315	02676	MOBILIZATION FOR MILL & TEXT - (KY 145)	1.00	LS
0320	02677	ASPHALT PAVE MILLING & TEXTURING	40.00	TON
0325	02697	EDGELINE RUMBLE STRIPS	19,832.00	LF
0330	06510	PAVE STRIPING-TEMP PAINT-4 IN	7,933.00	LF
0335	06514	PAVE STRIPING-PERM PAINT-4 IN	19,832.00	LF
0340	10020NS	FUEL ADJUSTMENT	1,436.00	DOLL
0345	10030NS	ASPHALT ADJUSTMENT	5,614.00	DOLL
0350	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 263075 **051GR26R029-CB06** **0205102662601**

KY 266 (KY 266) FROM KY 136, EXTENDING SOUTH TOWARDS TRIGG-TURNER RD (CR 1144). ASPHALT RESURFACING, A DISTANCE OF 2 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0355	00001	DGA BASE	205.00	TON
0360	00190	LEVELING & WEDGING PG64-22	97.00	TON
0365	00301	CL2 ASPH SURF 0.38D PG64-22	1,295.00	TON
0370	00356	ASPHALT MATERIAL FOR TACK	9.00	TON
0375	02562	TEMPORARY SIGNS	190.00	SQFT
0380	02650	MAINTAIN & CONTROL TRAFFIC - (KY 266)	1.00	LS
0385	02676	MOBILIZATION FOR MILL & TEXT - (KY 266)	1.00	LS
0390	02677	ASPHALT PAVE MILLING & TEXTURING	30.00	TON
0395	02696	SHOULDER RUMBLE STRIPS	21,120.00	LF
0400	06510	PAVE STRIPING-TEMP PAINT-4 IN	8,450.00	LF
0405	06514	PAVE STRIPING-PERM PAINT-4 IN	21,120.00	LF
0410	10020NS	FUEL ADJUSTMENT	2,167.00	DOLL
0415	10030NS	ASPHALT ADJUSTMENT	5,442.00	DOLL
0420	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 263075 **051GR26R029-CB06** **0205104162605**

KY 416 (KY 416) FROM THOMASON RD (CR 1210), EXTENDING EASTERLY TO KY 283. ASPHALT RESURFACING, A DISTANCE OF 2.33 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0490	00001	DGA BASE	200.00	TON
0495	00301	CL2 ASPH SURF 0.38D PG64-22	1,660.00	TON
0500	00356	ASPHALT MATERIAL FOR TACK	21.00	TON
0505	02562	TEMPORARY SIGNS	210.00	SQFT
0510	02650	MAINTAIN & CONTROL TRAFFIC - (KY 416)	1.00	LS
0515	02677	ASPHALT PAVE MILLING & TEXTURING	150.00	TON
0520	02697	EDGELINE RUMBLE STRIPS	24,626.00	LF
0525	03240	BASE FAILURE REPAIR	650.00	SQYD
0530	06510	PAVE STRIPING-TEMP PAINT-4 IN	9,850.00	LF
0535	06514	PAVE STRIPING-PERM PAINT-4 IN	24,626.00	LF
0540	10020NS	FUEL ADJUSTMENT	2,584.00	DOLL
0545	10030NS	ASPHALT ADJUSTMENT	6,490.00	DOLL
0550	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 263075 **051GR26R029-CB06** **0205108112601**

KY 811 (KY 811) FROM 0.059 MILES EAST OF CARLINBURG RD Y (CR 1042), EXTENDING SOUTHERLY TO KY 3344. ASPHALT RESURFACING, A DISTANCE OF 2.27 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	230.00	TON
0010	00190	LEVELING & WEDGING PG64-22	110.00	TON
0015	00301	CL2 ASPH SURF 0.38D PG64-22	1,465.00	TON
0020	00356	ASPHALT MATERIAL FOR TACK	11.00	TON
0025	02562	TEMPORARY SIGNS	230.00	SQFT
0030	02650	MAINTAIN & CONTROL TRAFFIC - (KY 811)	1.00	LS
0035	02676	MOBILIZATION FOR MILL & TEXT - (KY 811)	1.00	LS
0040	02677	ASPHALT PAVE MILLING & TEXTURING	35.00	TON
0045	02697	EDGELINE RUMBLE STRIPS	23,918.00	LF
0050	06510	PAVE STRIPING-TEMP PAINT-4 IN	9,560.00	LF
0055	06514	PAVE STRIPING-PERM PAINT-4 IN	23,918.00	LF
0060	10020NS	FUEL ADJUSTMENT	2,452.00	DOLL
0065	10030NS	ASPHALT ADJUSTMENT	6,158.00	DOLL
0070	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 263075 **051GR26R029-CB06** **0205108122601**

CLAY STREET (KY 812) FROM WEST OF KY 2084, EXTENDING WEST TO ATKINSON ST (CS 1014). ASPHALT RESURFACING, A DISTANCE OF .49 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0135	00190	LEVELING & WEDGING PG64-22	30.00	TON
0140	00356	ASPHALT MATERIAL FOR TACK	3.00	TON
0145	02562	TEMPORARY SIGNS	270.00	SQFT
0150	02650	MAINTAIN & CONTROL TRAFFIC - (KY 812)	1.00	LS
0155	02676	MOBILIZATION FOR MILL & TEXT - (KY 812)	1.00	LS
0160	02677	ASPHALT PAVE MILLING & TEXTURING	245.00	TON
0165	03240	BASE FAILURE REPAIR	25.00	SQYD
0170	06510	PAVE STRIPING-TEMP PAINT-4 IN	2,049.00	LF
0175	06514	PAVE STRIPING-PERM PAINT-4 IN	5,122.00	LF
0180	06562	PAVE MARKING-THERMO R 6 FT	4.00	EACH
0185	06568	PAVE MARKING-THERMO STOP BAR-24IN	55.00	LF
0190	10020NS	FUEL ADJUSTMENT	1,012.00	DOLL
0195	10030NS	ASPHALT ADJUSTMENT	2,514.00	DOLL
0200	23266ES717	PAVE MARK TY 1 TAPE R/R X BUCKS-16 IN	84.00	LF
0205	23362ES403	CL2 ASPH SURF 0.50B PG64-22	620.00	TON
0210	23875NC	REMOVE THERMOPLASTIC ARROWS	6.00	EACH
0215	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 263075 **051GR26R029-CB06** **0205112992601**

KY 1299 (KY 1299) FROM KY 416, EXTENDING NORTHERLY TOWARDS KY 1217. ASPHALT RESURFACING, A DISTANCE OF 5.5 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0425	00001	DGA BASE	560.00	TON
0430	00190	LEVELING & WEDGING PG64-22	268.00	TON
0435	00301	CL2 ASPH SURF 0.38D PG64-22	3,550.00	TON
0440	00356	ASPHALT MATERIAL FOR TACK	25.00	TON
0445	02562	TEMPORARY SIGNS	290.00	SQFT
0450	02650	MAINTAIN & CONTROL TRAFFIC - (KY 1299)	1.00	LS
0455	02676	MOBILIZATION FOR MILL & TEXT - (KY 1299)	1.00	LS
0460	02677	ASPHALT PAVE MILLING & TEXTURING	35.00	TON
0465	06510	PAVE STRIPING-TEMP PAINT-4 IN	23,232.00	LF
0470	06514	PAVE STRIPING-PERM PAINT-4 IN	58,080.00	LF
0475	10020NS	FUEL ADJUSTMENT	5,943.00	DOLL
0480	10030NS	ASPHALT ADJUSTMENT	14,927.00	DOLL
0485	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 263075 **051GR26R029-CB06** **0205122532601**

KY 2253 (KY 2253) FROM KY 145, EXTENDING NORTHERLY TO US 41 A. ASPHALT RESURFACING, A DISTANCE OF 3.34 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0220	00001	DGA BASE	340.00	TON
0225	00190	LEVELING & WEDGING PG64-22	146.00	TON
0230	00301	CL2 ASPH SURF 0.38D PG64-22	1,945.00	TON
0235	00356	ASPHALT MATERIAL FOR TACK	19.00	TON
0240	02562	TEMPORARY SIGNS	210.00	SQFT
0245	02650	MAINTAIN & CONTROL TRAFFIC - (KY 2253)	1.00	LS
0250	02676	MOBILIZATION FOR MILL & TEXT - (KY 2253)	1.00	LS
0255	02677	ASPHALT PAVE MILLING & TEXTURING	35.00	TON
0260	06510	PAVE STRIPING-TEMP PAINT-4 IN	14,117.00	LF
0265	06514	PAVE STRIPING-PERM PAINT-4 IN	35,292.00	LF
0270	10020NS	FUEL ADJUSTMENT	2,091.00	DOLL
0275	10030NS	ASPHALT ADJUSTMENT	8,175.00	DOLL
0280	02569	DEMOBILIZATION	1.00	LS

Milling
Summary
CB06 051 0811 005-009

				Total	35
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
5.900	**Edge Key**	**100**	**20**	**0.5**	6.11111111
6.034	**Carlinburg Rd**	**60**	**15**	**0.5**	2.75
6.034	**Carlinburg Rd**	**40**	**40**	**0.5**	4.88888889
6.566	**Crooked Rd**	**40**	**16**	**0.5**	1.95555556
7.629	**Williams Keene Rd**	**35**	**7**	**0.5**	0.74861111
7.874	**Mudd Rd**	**57**	**10**	**0.5**	1.74166667
8.165	**Edge Key**	**100**	**40**	**0.5**	12.2222222
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Milling
Summary
CB06 051 0136 011-013

				Total	110
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
11.072	**Edge Key**	**100**	**18**	**0.5**	5.5
11.660	**Martin & Martin Rd**	**60**	**14**	**0.5**	2.56666667
11.774	**Grandpa Jones Rd**	**40**	**14**	**0.5**	1.71111111
11.938	**Cotton Ln**	**30**	**13**	**0.5**	1.19166667
12.176	**Curb & Gutter**	**440**	**33**	**1**	88.7333333
12.176	**Edge Key**	**100**	**31**	**0.5**	9.47222222
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Henderson County
THERMOPLASTIC INTERSECTION PAVEMENT MARKINGS SUMMARY
CB06 051 0812 007-008

MPT.	INTERSECTION	X-WALKS 6 INCH LF	STP BARS 24 INCH LF	ARROWS CURVE EA	ARROWS STR EA	ARROWS COMB EA	"ONLY" EA	"STOP" EA	CATRAXX 6 INCH LF	RAILROAD "R" 6 FOOT EA	RAILROAD CROSS BUCK 16" LF	NOTES
7.935	Atkinson St		15									
7.861	RR XING		20							2	42	
7.911	RR XING		20							2	42	
TOTAL		0	55	0	0	0	0	0	0	4	84	

Base Failure
Repair Summary
CB06 051 0812 007-008

			Total 25
Milepoint	**Length**	**Width**	**SQYD**
7.817	**40**	**5**	22.2222222
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0

Milling
Summary
CB06 051 0812 007-008

				Total	225
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
7.450	**Edge Key**	**150**	**24**	**0.75**	16.5
7.500	**Glover Dr**	**44**	**22**	**0.75**	4.43666667
7.553	**Sidewalk**	**310**	**28**	**1.5**	79.5666667
7.612	**Bridge End/Sidewalk Edge Key**	**205**	**25**	**1.5**	46.9791667
7.668	**Bridge End**	**150**	**24**	**0.75**	16.5
7.792	**Hicks St**	**29**	**17**	**0.75**	2.25958333
7.88	**Railroad Edge Key**	**150**	**29**	**0.75**	19.9375
7.89	**Railroad Edge Key**	**60**	**15**	**1.5**	8.25
7.901	**Curb & Gutter**	**130**	**25**	**1.5**	29.7916667
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Milling
Summary
CB06 051 2253 000-004

				Total	35

Milepoint	Comment	Length	Width	Avg Depth	Tons
0.000	KY 145 Begin Key	100	18	0.5	5.5
1.313	Bridge end	100	16	0.5	4.88888889
1.313	Bridge end	100	16	0.5	4.88888889
1.441	GH Sights Rd	54	8	0.5	1.32
3.199	J Royster Rd	32	12	0.5	1.17333333
3.199	J Royster Rd	28	8	0.5	0.68444444
3.229	Cottingham Rd	47	25	0.5	3.59027778
3.342	US 41A End Edge	100	30	0.5	9.16666667
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Milling
Summary
CB06 051 0145 006-009

				Total	40
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
6.253	**J Gibson Rd**	**100**	**22**	**0.5**	6.72222222
7.263	**Hughes-sights rd**	**150**	**10**	**0.5**	4.58333333
7.308	**Bridge End**	**100**	**22**	**0.5**	6.72222222
7.308	**Bridge End**	**100**	**22**	**0.5**	6.72222222
7.74	**Wilson Ln**	**59**	**20**	**0.5**	3.60555556
7.963	**Willet ST**	**33**	**15**	**0.5**	1.5125
8.047	**Hancock St**	**30**	**17**	**0.5**	1.55833333
8.131	**US 60 End Edge**	**100**	**22**	**0.5**	6.72222222
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Milling
Summary
CB06 051 0266 000-002

				Total	30
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
0.000	**Ky 136 Begin Key**	**100**	**22**	**0.5**	6.72222222
0.149	**Cooper-Copper Rd**	**75**	**10**	**0.5**	2.29166667
1.341	**Bridge End**	**100**	**20**	**0.5**	6.11111111
1.341	**Bridge End**	**100**	**20**	**0.5**	6.11111111
1.814	**Midway Rd**	**75**	**10**	**0.5**	2.29166667
2	**End edge key**	**100**	**20**	**0.5**	6.11111111
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Base Failure
Repair Summary
CB06 051 0416 002-005

		Total	650
Milepoint	**Length**	**Width**	**SQYD**
3.190	**97**	**7**	75.4444444
3.190	**80**	**7**	62.2222222
3.600	**195**	**20**	433.333333
3.81	**90**	**6**	60
4.105	**32**	**5**	17.7777778
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0
			0

Milling
Summary
CB06 051 0416 002-005

					Total 150
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
2.644	**edge key**	**100**	**20**	**0.5**	6.11111111
2.720	**culvert deck**	**41**	**20**	**1**	5.01111111
2.720	**culvert ends**	**200**	**20**	**0.5**	12.2222222
3.05	**guardrail**	**145**	**20**	**1**	17.7222222
3.05	**guardrail edge key**	**200**	**20**	**0.5**	12.2222222
3.1	**guardrail**	**145**	**20**	**1**	17.7222222
3.1	**guard rail edge key**	**200**	**20**	**0.5**	12.2222222
3.374	**WM Royster Rd**	**52**	**9**	**0.5**	1.43
3.7	**KY 1299**	**60**	**16**	**0.5**	2.93333333
4.105	**Spencer Thronberry Rd**	**40**	**10**	**0.5**	1.22222222
4.45	**culvert deck**	**55**	**23**	**1**	7.73055556
4.45	**culvert ends**	**200**	**23**	**0.5**	14.0555556
4.7	**culvert box**	**19**	**20**	**1**	2.32222222
4.7	**culvert ends**	**200**	**20**	**0.5**	12.2222222
3.7	**culvert deck**	**17**	**20**	**1**	2.07777778
3.7	**culvert ends**	**200**	**20**	**0.5**	12.2222222
4.976	**edge key**	**100**	**20**	**0.5**	6.11111111
					0
					0
					0
					0
					0
					0
					0
					0

Milling
Summary
CB06 051 1299 000-006

					Total 35
Milepoint	**Comment**	**Length**	**Width**	**Avg Depth**	**Tons**
0.000	**KY 416 Begin edge**	**100**	**20**	**0.5**	6.11111111
1.154	**Hunter Ln**	**36**	**10**	**0.5**	1.1
1.775	**Ed Otney Rd**	**45**	**14**	**0.5**	1.925
2.539	**Smith Denton Rd**	**47**	**30**	**0.5**	4.30833333
3.046	**Cherry Hill Rd**	**47**	**12**	**0.5**	1.72333333
3.35	**Meahl & Cates Rd**	**114**	**12**	**0.5**	4.18
4.053	**Busby Station Rd**	**88**	**10**	**0.5**	2.68888889
4.899	**KY 2248**	**51**	**25**	**0.5**	3.89583333
5.5	**end edge key**	**100**	**20**	**0.5**	6.11111111
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0
					0

Henderson County
TYPICAL SECTION
CB06 051 0811 005-009
MP's 5.9 to 8.165

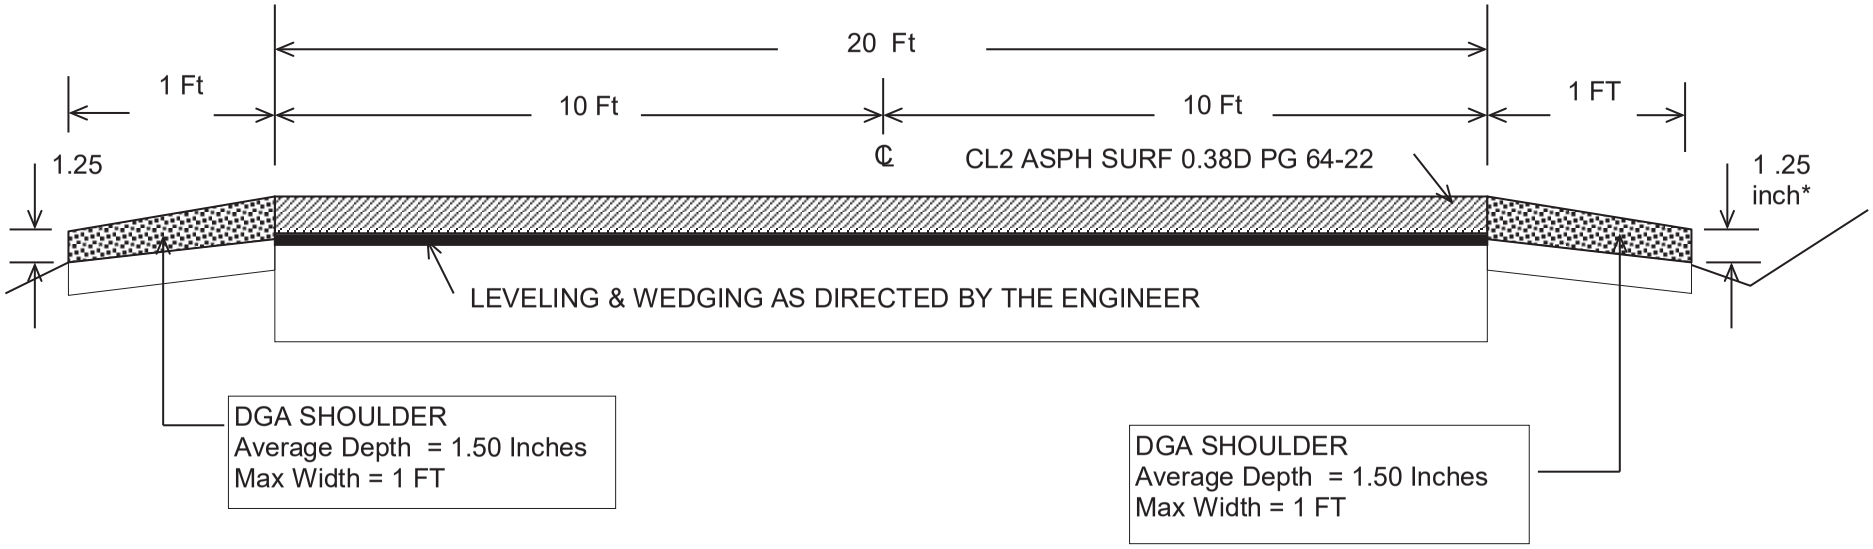

*** Where Existing Site Conditions Permit**

Henderson County
TYPICAL SECTION
CB06 051 0136 011-013
MP's 12.176 to 12.258

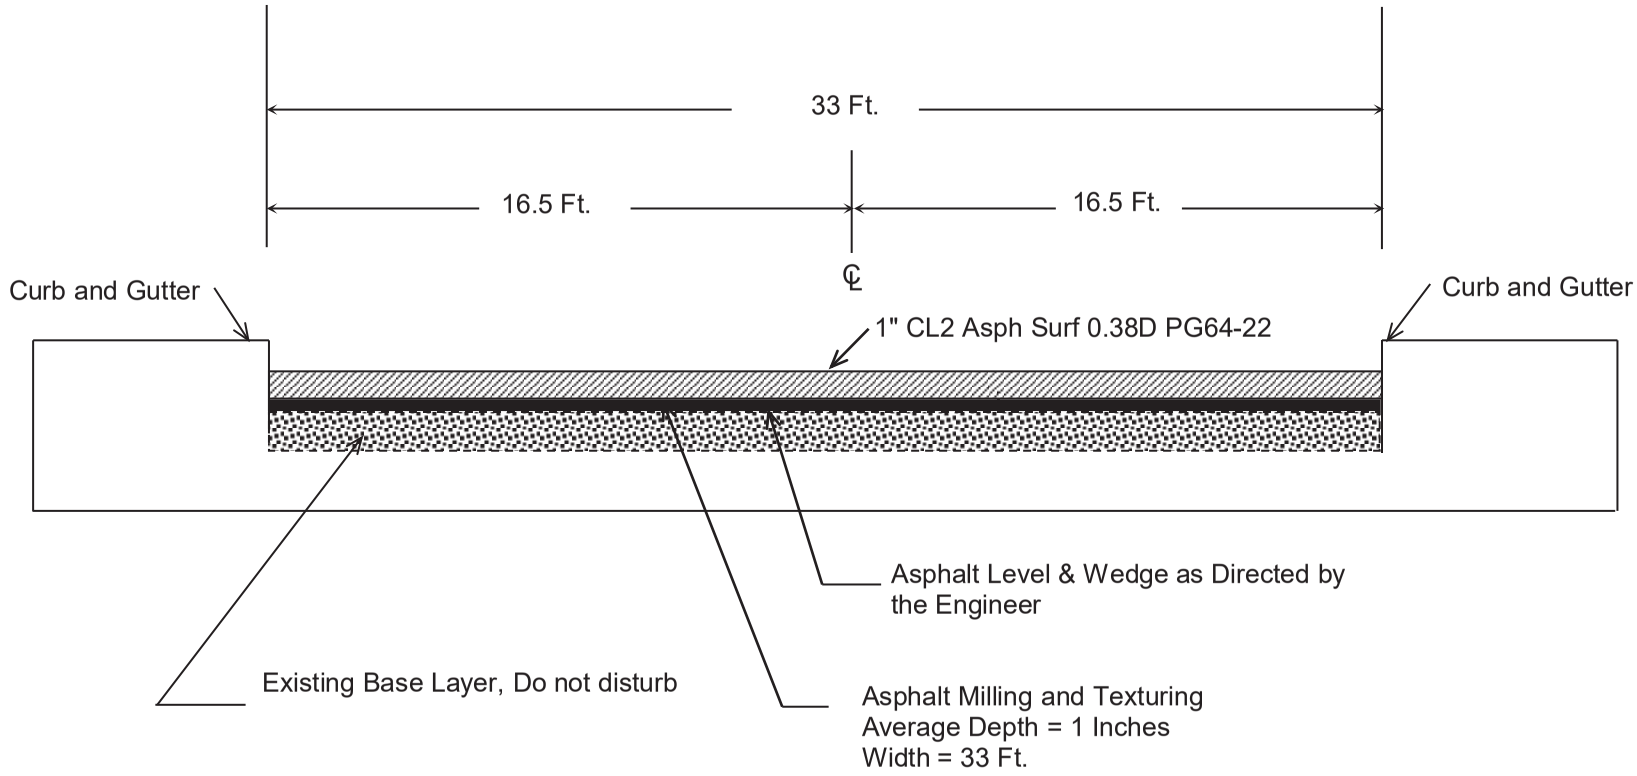

Henderson County
TYPICAL SECTION
CB06 051 0136 011-013
MP's 11.072 to 12.176

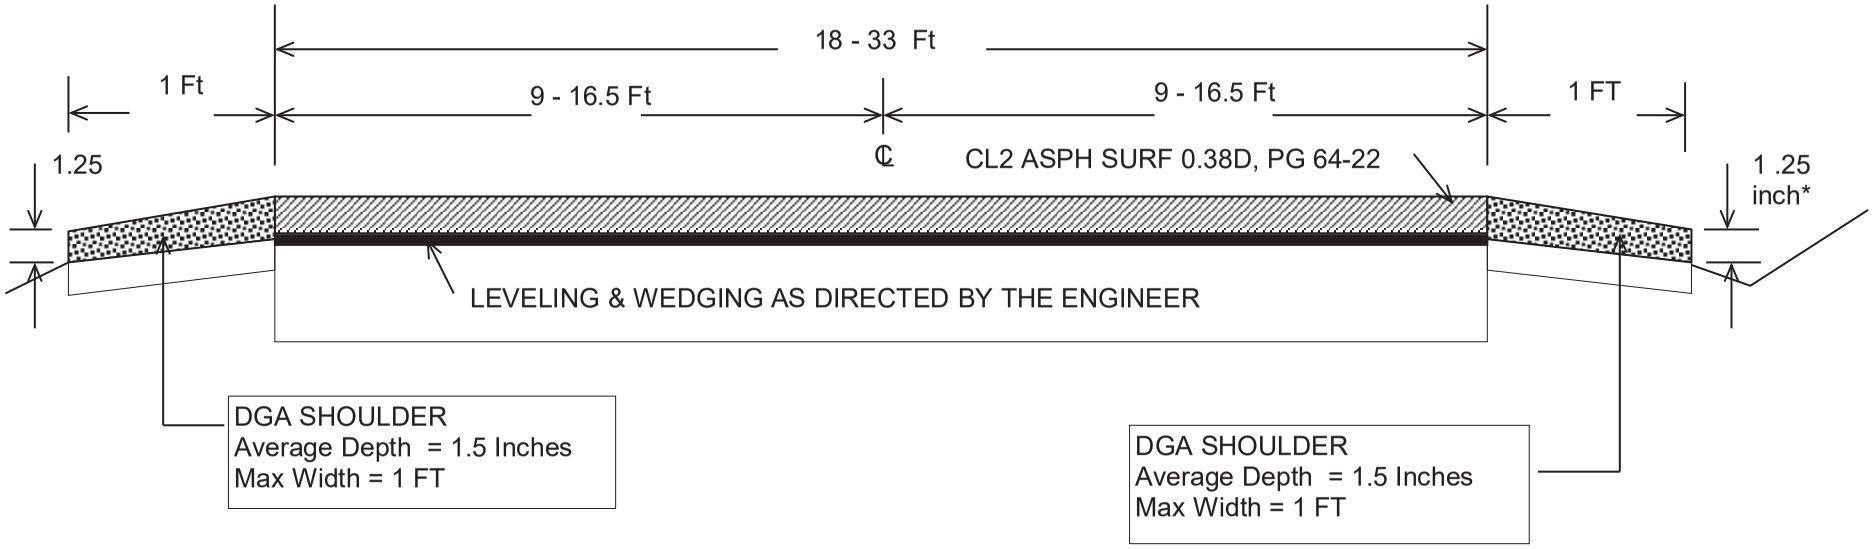

*** Where Existing Site Conditions Permit**

Henderson County
TYPICAL SECTION
CB06 051 0812 007-008
MP's 7.901 to 7.935

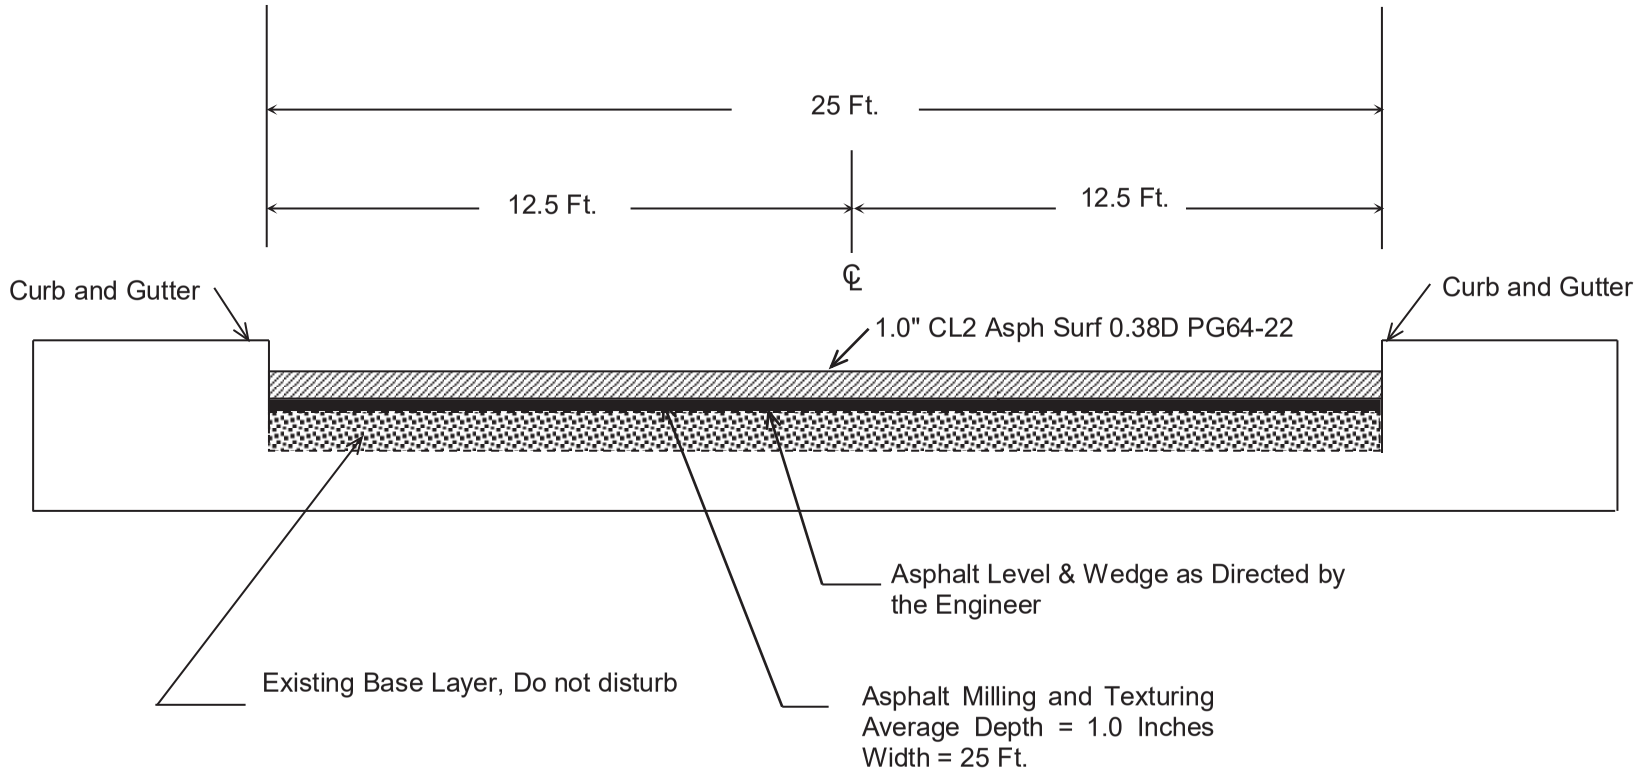

Henderson County
TYPICAL SECTION
CB06 051 0812 007-008
MP's 7.533 to 7.628

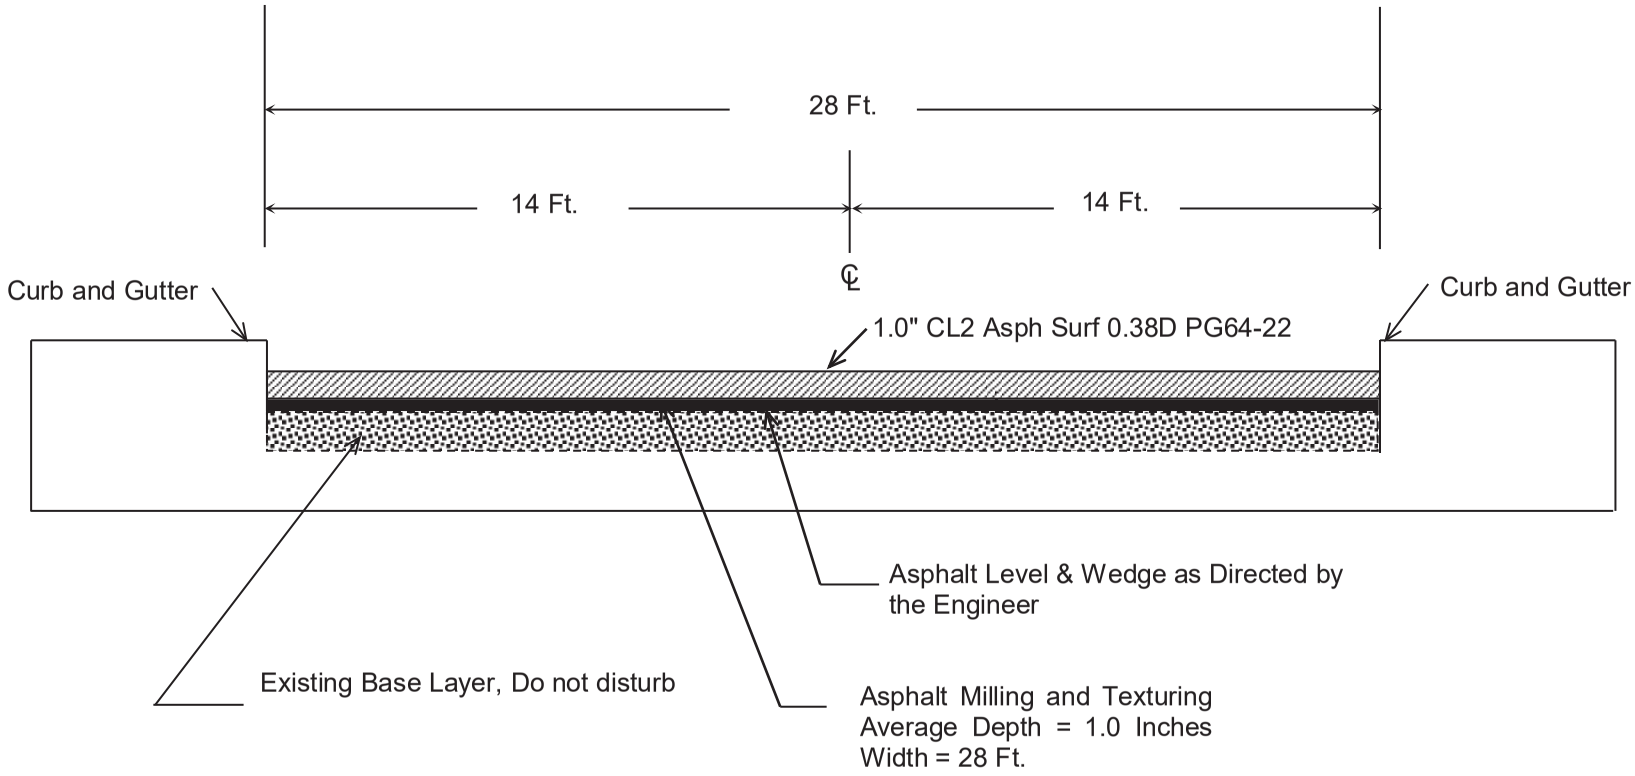

Henderson County
TYPICAL SECTION
CB06 051 0812 007-008
MP's 7.450 to 7.901

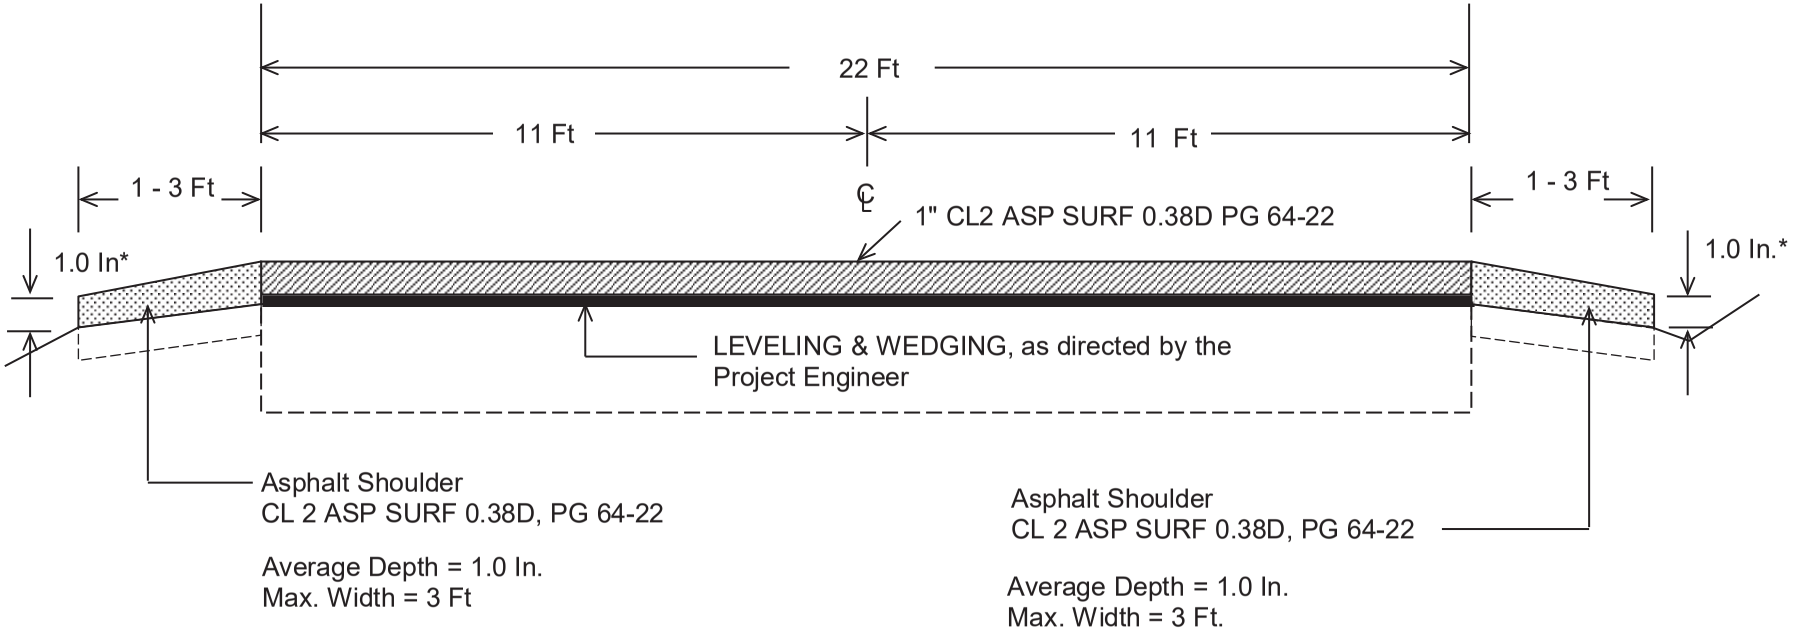

***Where Existing Site Conditions Permit**

TSPAVESURFACEshld
ASPH SHLD Typical

Henderson County
TYPICAL SECTION
CB06 051 2253 000-004
MP 0 to 3.342

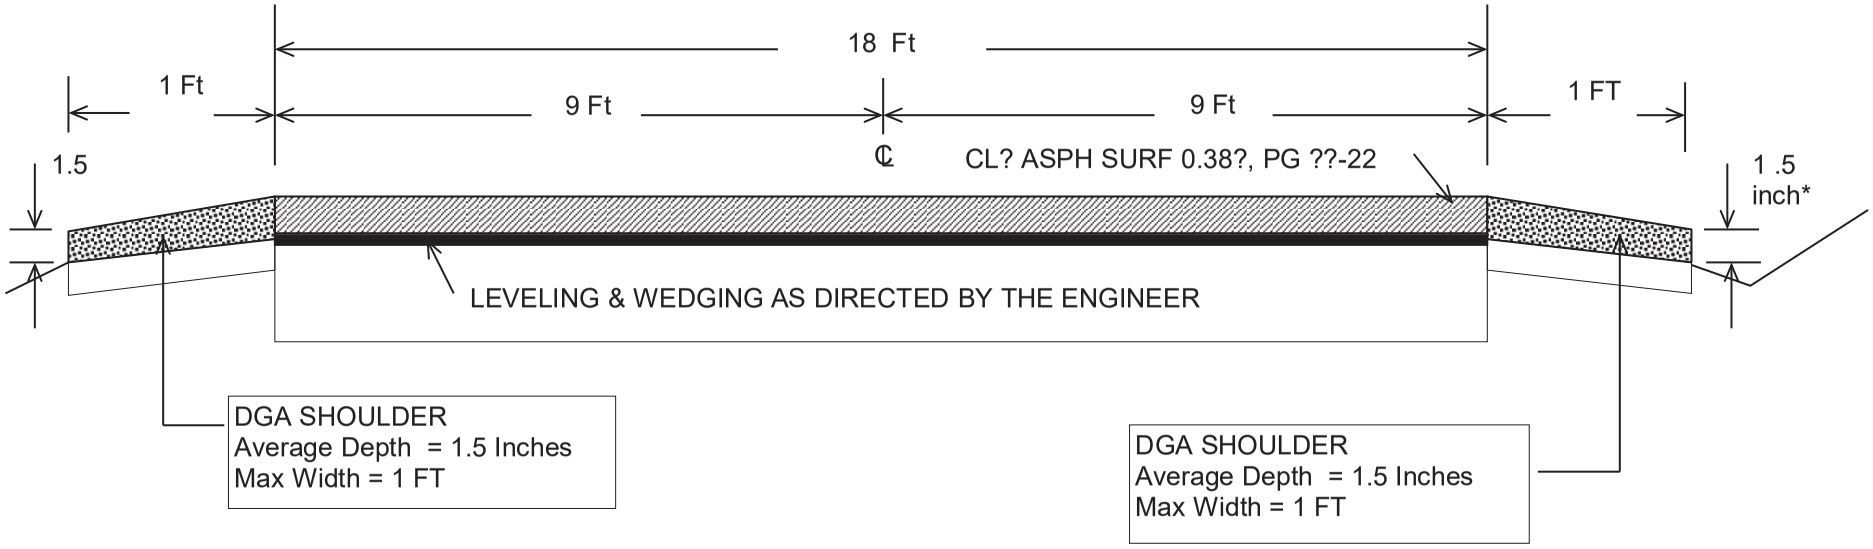

*** Where Existing Site Conditions Permit**

Henderson County
TYPICAL SECTION
CB06 051 0145 006-009
MP's 6.253 to 8.131

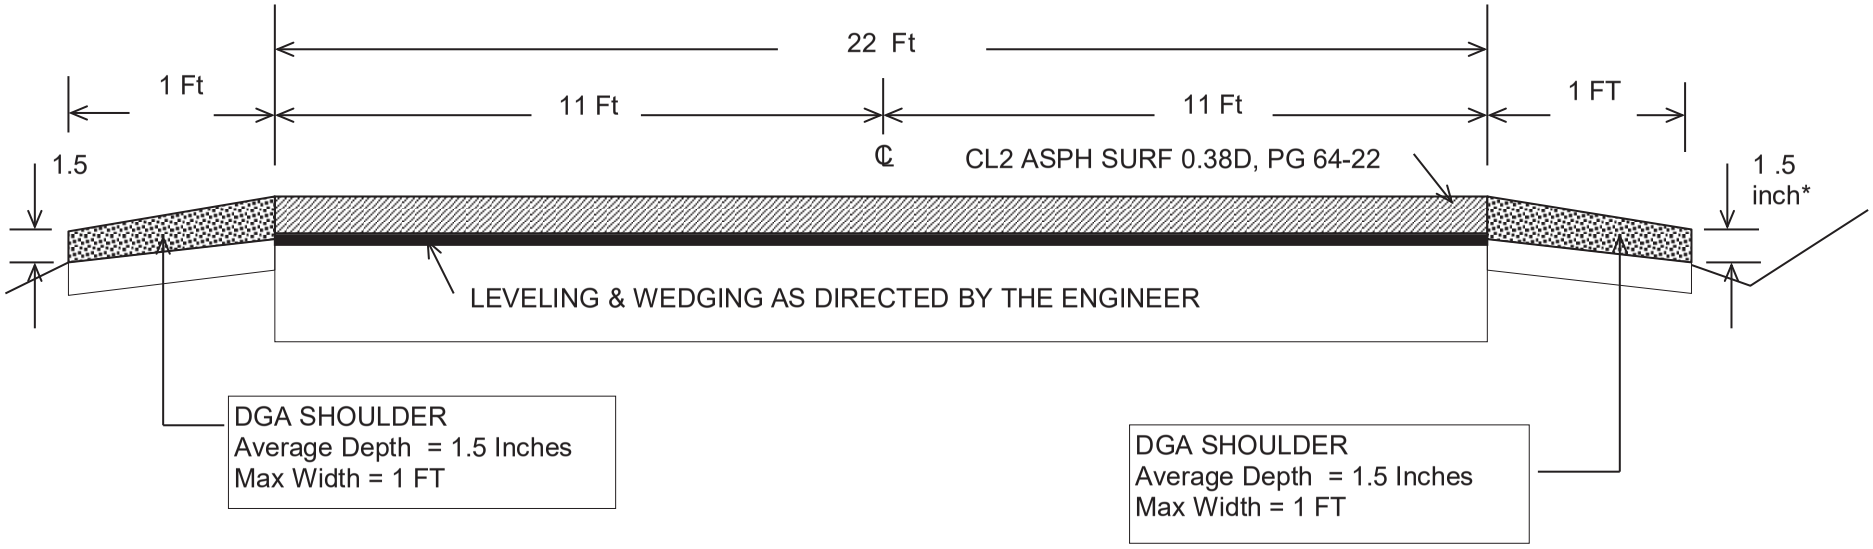

*** Where Existing Site Conditions Permit**

Henderson County
TYPICAL SECTION
CB6 051 0266 000-002
MP's 0 to 1.814

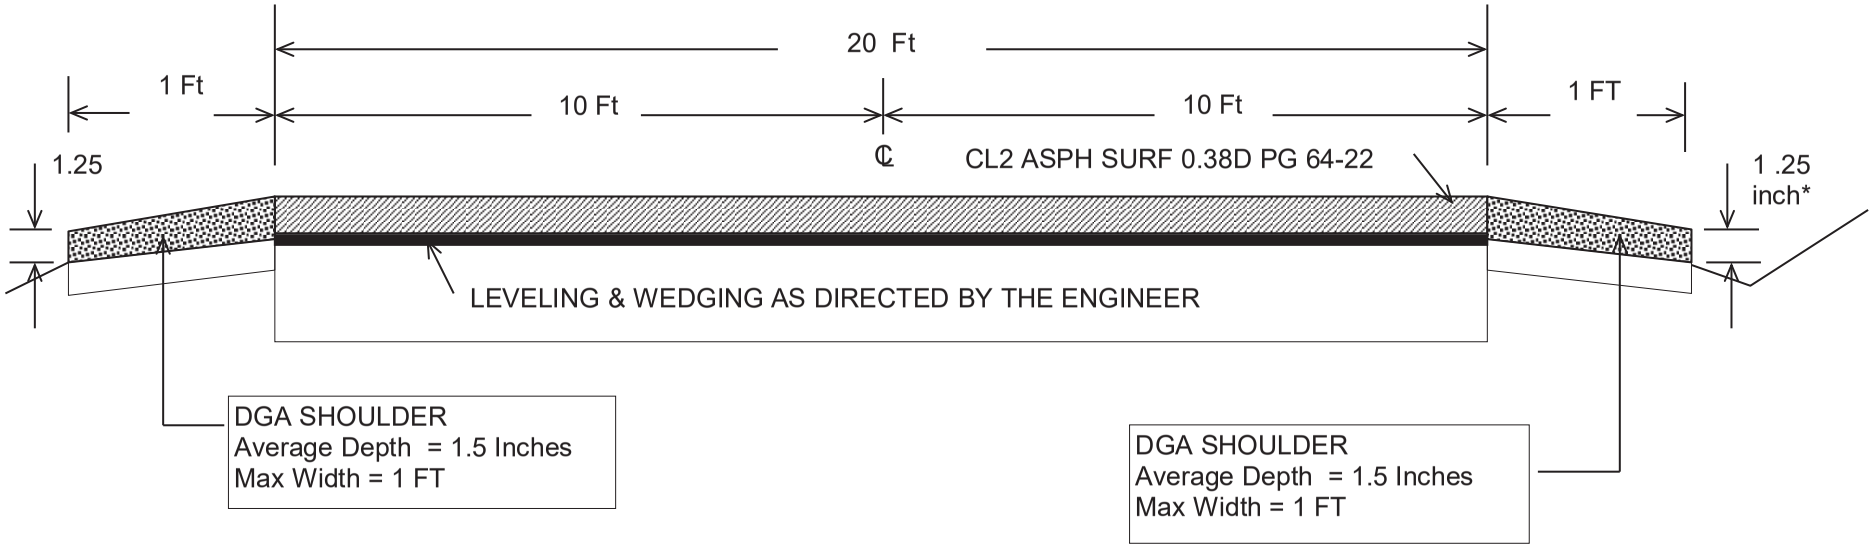

*** Where Existing Site Conditions Permit**

Henderson County
TYPICAL SECTION
CB06 051 0416 002 005
MP's 2.644 to 4.976

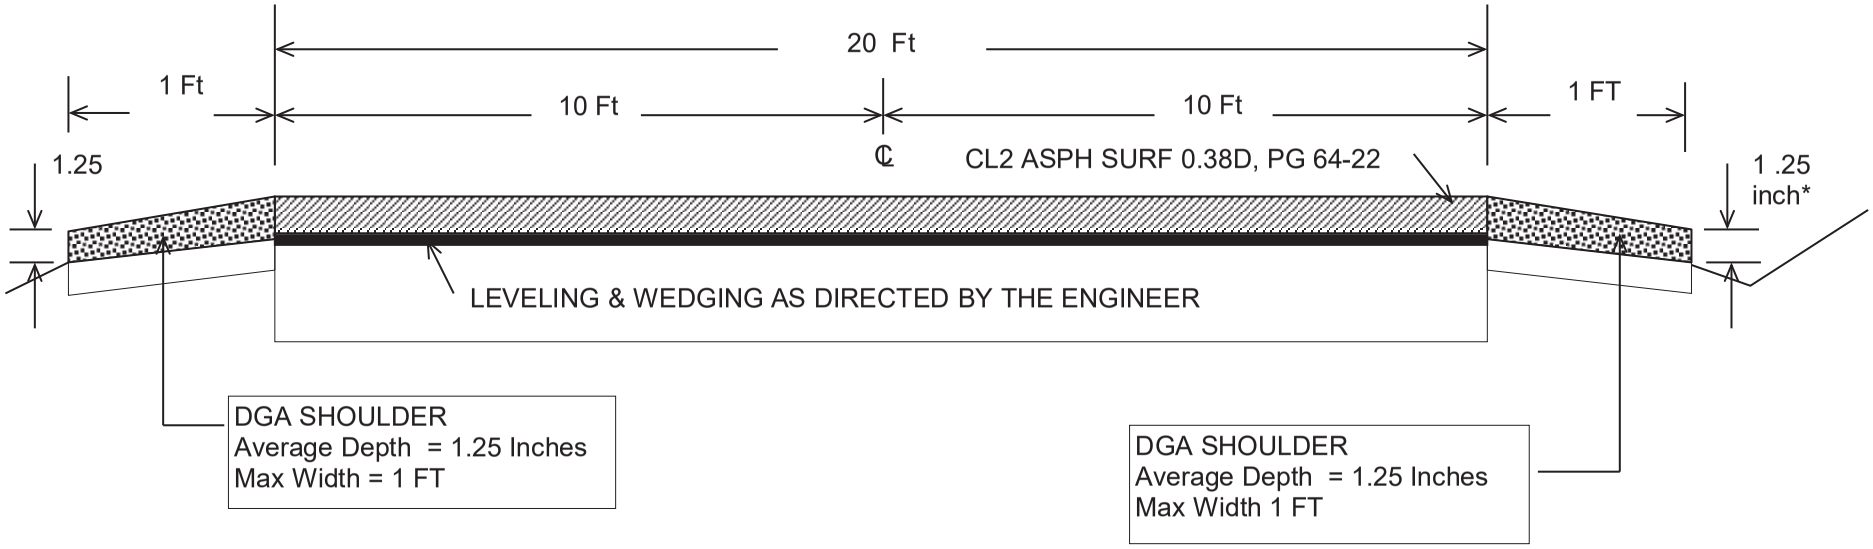

*** Where Existing Site Conditions Permit**

Henderson County
TYPICAL SECTION
CB06 051 1299 000-006
MP's 0 to 5.5

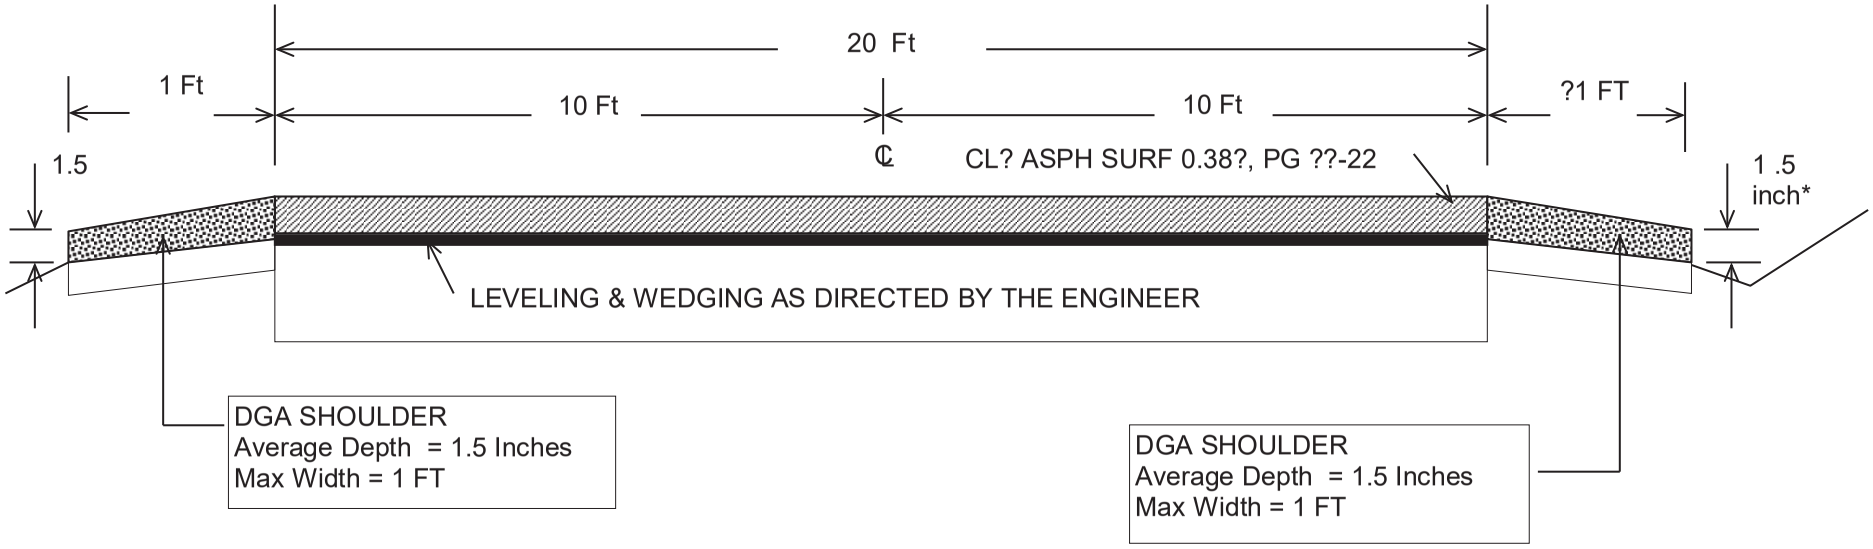

*** Where Existing Site Conditions Permit**

CONSTRUCTION DETAIL FOR BRIDGE WITHIN LIMITS OF PAVING PROJECT
CB06 051 0812 007-008

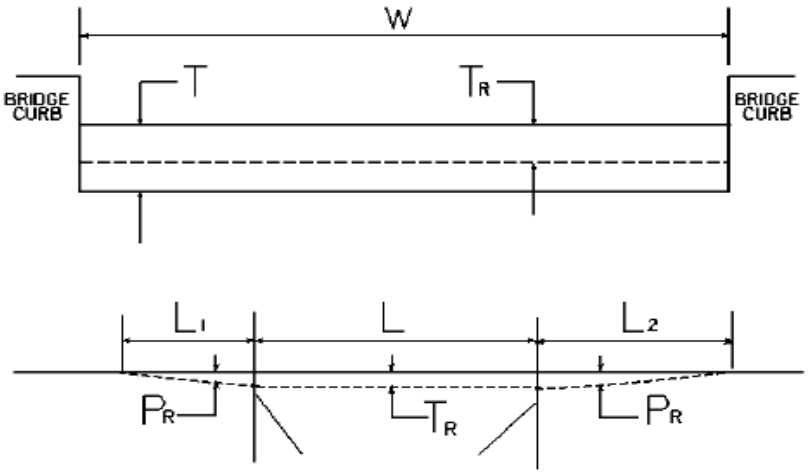

W = bridge width curb to curb **T** = thickness of existing bituminous overlay **L** = length of bridge

L_1 & L_2 = length of approach pavement to be removed

T_R = thickness to be removed and replaced on bridge **P_R** = thickness to be removed and replaced on pavement

Note: L_1 & L_2 lengths shall be determined by using a transition rate of 100 ft / inch of thickness

BRIDGE NO	MP	W (ft)	T (in)	L_1(ft)	L_2(ft)	T_R (in)	L (ft)	P_R (in)
051B00128N	7.660	22.80	0.00	150.00	150.00	0.00	97.00	0.75

CONSTRUCTION DETAIL FOR BRIDGE WITHIN LIMITS OF PAVING PROJECT
CB06 051 2253 000-004

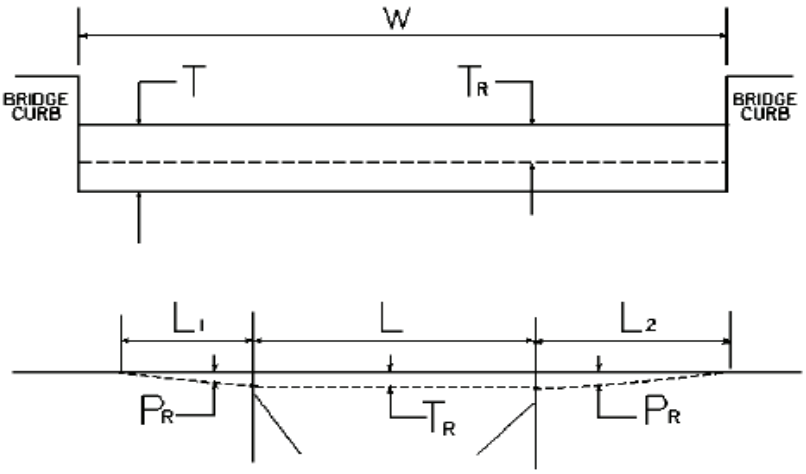

W = bridge width curb to curb **T** = thickness of existing bituminous overlay **L** = length of bridge

L_1 & L_2 = length of approach pavement to be removed

T_R = thickness to be removed and replaced on bridge **P_R** = thickness to be removed and replaced on pavement

Note: L_1 & L_2 lengths shall be determined by using a transition rate of 100 ft / inch of thickness

BRIDGE NO	MP	W (ft)	T (in)	L_1(ft)	L_2(ft)	T_R (in)	L (ft)	P_R (in)
051B00139N	1.310	14.70	1.00	100.00	100.00	1.00	50.00	0.50

CONSTRUCTION DETAIL FOR BRIDGE WITHIN LIMITS OF PAVING PROJECT
CB06 051 0145 006-009

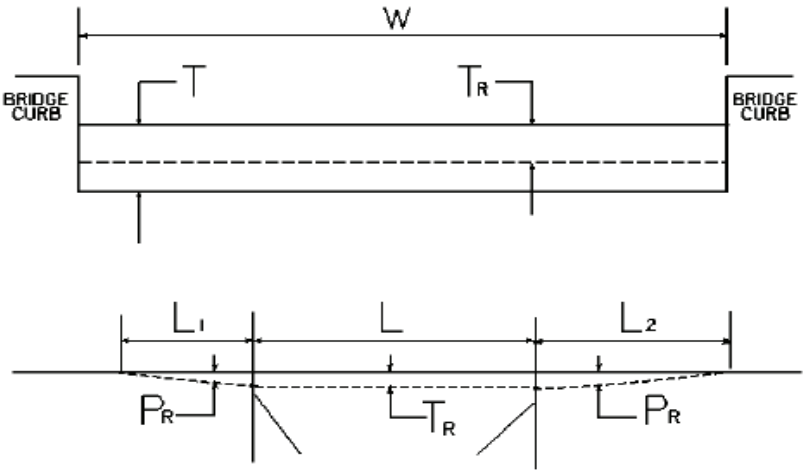

W = bridge width curb to curb **T** = thickness of existing bituminous overlay **L** = length of bridge

L_1 & L_2 = length of approach pavement to be removed

T_R = thickness to be removed and replaced on bridge **P_R** = thickness to be removed and replaced on pavement

Note: L_1 & L_2 lengths shall be determined by using a transition rate of 100 ft / inch of thickness

BRIDGE NO	MP	W (ft)	T (in)	L_1(ft)	L_2(ft)	T_R (in)	L (ft)	P_R (in)
051B00036N	7.300	22.20	1.00	100.00	100.00	1.00	38.10	0.50

CONSTRUCTION DETAIL FOR BRIDGE WITHIN LIMITS OF PAVING PROJECT
CB06 051 0266 000-002

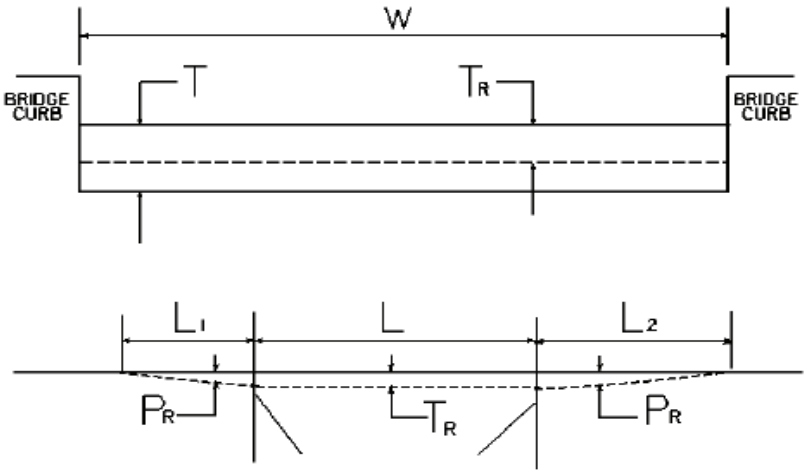

W = bridge width curb to curb **T** = thickness of existing bituminous overlay **L** = length of bridge

L_1 & L_2 = length of approach pavement to be removed

T_R = thickness to be removed and replaced on bridge **P_R** = thickness to be removed and replaced on pavement

Note: L_1 & L_2 lengths shall be determined by using a transition rate of 100 ft / inch of thickness

BRIDGE NO	MP	W (ft)	T (in)	L_1(ft)	L_2(ft)	T_R (in)	L (ft)	P_R (in)
051B00084N	1.340	22.30	0.00	100.00	100.00	0.00	36.10	0.50

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

STANDARD SPECIFICATIONS

Any reference in the plans or proposal to previous editions of the *Standard Specifications for Road and Bridge Construction* and *Standard Drawings* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2026* and *Standard Drawings, Edition of 2025.*

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting. The Supplemental Specifications can be found at the following link:
http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx

2025 STANDARD DRAWINGS THAT APPLY

ROADWAY

~GENERAL~

MISCELLANEOUS STANDARDS

MISCELLANEOUS STANDARDS PART 1……RGX-001-06

~PAVEMENT~

MEDIANS, CURBS, APPROACHES, ENTRANCES, ETC.

APPROACHES, ENTRANCES, AND MAILBOX TURNOUT……RPM-110-07

TRAFFIC

~TEMPORARY~

DEVICES

LANE CLOSURE TWO-LANE HIGHWAY ……..TTC-100-05

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS

LABOR AND WAGE REQUIREMENTS
APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS

I. Application
II. Nondiscrimination of Employees (KRS 344)

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

II. NONDISCRIMINATION OF EMPLOYEES

AN ACT OF THE KENTUCKY
GENERAL ASSEMBLY TO PREVENT
DISCRIMINATION IN EMPLOYMENT
KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administrating agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

EXECUTIVE BRANCH CODE OF ETHICS

The Executive Branch Code of Ethics created by Kentucky Revised Statutes (KRS) Chapter 11A, effective July 14, 1992, establishes the ethical standards that govern the conduct of all executive branch employees. The Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

A present or former public servant listed in KRS 11A.010(9)(a) to (g) shall not, within one (1) year following termination of his or her office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of one (1) year, he or she personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his or her tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

a) The date of leaving office or termination of employment; or
b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not to obtain private benefits.

If you have worked for the executive branch of state government within the past year, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 1025 Capital Center Drive, Suite 105, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: March 11, 2025

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address: **https://www.eProcurement.ky.gov**.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

EMPLOYEE RIGHTS
UNDER THE FAIR LABOR STANDARDS ACT

THE UNITED STATES DEPARTMENT OF LABOR WAGE AND HOUR DIVISION

FEDERAL MINIMUM WAGE
$7.25 PER HOUR
BEGINNING JULY 24, 2009

OVERTIME PAY

At least 1½ times your regular rate of pay for all hours worked over 40 in a workweek.

CHILD LABOR

An employee must be at least **16** years old to work in most non-farm jobs and at least **18** to work in non-farm jobs declared hazardous by the Secretary of Labor.

Youths **14** and **15** years old may work outside school hours in various non-manufacturing, non-mining, non-hazardous jobs under the following conditions:

No more than
- **3** hours on a school day or **18** hours in a school week;
- **8** hours on a non-school day or **40** hours in a non-school week.

Also, work may not begin before **7 a.m.** or end after **7 p.m.**, except from June 1 through Labor Day, when evening hours are extended to **9 p.m.** Different rules apply in agricultural employment.

TIP CREDIT

Employers of "tipped employees" must pay a cash wage of at least $2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee's tips combined with the employer's cash wage of at least $2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.

ENFORCEMENT

The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.

Employers may be assessed civil money penalties of up to $1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to $11,000 for each employee who is the subject of a violation of the Act's child labor provisions. In addition, a civil money penalty of up to $50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to $100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.

ADDITIONAL INFORMATION

- Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions.
- Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands.
- Some state laws provide greater employee protections; employers must comply with both.
- The law requires employers to display this poster where employees can readily see it.
- Employees under 20 years of age may be paid $4.25 per hour during their first 90 consecutive calendar days of employment with an employer.
- Certain full-time students, student learners, apprentices, and workers with disabilities may be paid less than the minimum wage under special certificates issued by the Department of Labor.

For additional information:

1-866-4-USWAGE

(1-866-487-9243) TTY: 1-877-889-5627

WHD U.S. Wage and Hour Division

WWW.WAGEHOUR.DOL.GOV

U.S. Department of Labor | Wage and Hour Division

WHD Publication 1088 (Revised July 2009)

PART IV

BID ITEMS

263075

PROPOSAL BID ITEMS

Report Date 10/27/26

263075

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	1,855.00	TON		$	
0020	00190		LEVELING & WEDGING PG64-22	752.00	TON		$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22	12,065.00	TON		$	
0040	00356		ASPHALT MATERIAL FOR TACK	104.00	TON		$	
0050	02562		TEMPORARY SIGNS	1,840.00	SQFT		$	
0060	02650		MAINTAIN & CONTROL TRAFFIC (KY 1299)	1.00	LS		$	
0070	02650		MAINTAIN & CONTROL TRAFFIC (KY 136)	1.00	LS		$	
0080	02650		MAINTAIN & CONTROL TRAFFIC (KY 145)	1.00	LS		$	
0090	02650		MAINTAIN & CONTROL TRAFFIC (KY 2253)	1.00	LS		$	
0100	02650		MAINTAIN & CONTROL TRAFFIC (KY 266)	1.00	LS		$	
0110	02650		MAINTAIN & CONTROL TRAFFIC (KY 416)	1.00	LS		$	
0120	02650		MAINTAIN & CONTROL TRAFFIC (KY 811)	1.00	LS		$	
0130	02650		MAINTAIN & CONTROL TRAFFIC (KY 812)	1.00	LS		$	
0140	02676		MOBILIZATION FOR MILL & TEXT (KY 1299)	1.00	LS		$	
0150	02676		MOBILIZATION FOR MILL & TEXT (KY 136)	1.00	LS		$	
0160	02676		MOBILIZATION FOR MILL & TEXT (KY 145)	1.00	LS		$	
0170	02676		MOBILIZATION FOR MILL & TEXT (KY 2253)	1.00	LS		$	
0180	02676		MOBILIZATION FOR MILL & TEXT (KY 266)	1.00	LS		$	
0190	02676		MOBILIZATION FOR MILL & TEXT (KY 811)	1.00	LS		$	
0200	02676		MOBILIZATION FOR MILL & TEXT (KY 812)	1.00	LS		$	
0210	02677		ASPHALT PAVE MILLING & TEXTURING	680.00	TON		$	
0220	02696		SHOULDER RUMBLE STRIPS	21,120.00	LF		$	
0230	02697		EDGELINE RUMBLE STRIPS	68,376.00	LF		$	
0240	03240		BASE FAILURE REPAIR	675.00	SQYD		$	
0250	06510		PAVE STRIPING-TEMP PAINT-4 IN	80,201.00	LF		$	
0260	06514		PAVE STRIPING-PERM PAINT-4 IN	200,514.00	LF		$	
0270	06562		PAVE MARKING-THERMO R 6 FT	4.00	EACH		$	
0280	06568		PAVE MARKING-THERMO STOP BAR-24IN	55.00	LF		$	
0290	10020NS		FUEL ADJUSTMENT	18,954.00	DOLL	$1.00	$	$18,954.00
0300	10030NS		ASPHALT ADJUSTMENT	52,506.00	DOLL	$1.00	$	$52,506.00
0310	23266ES717		PAVE MARK TY 1 TAPE R/R X BUCKS-16 IN	84.00	LF		$	
0320	23362ES403		CL2 ASPH SURF 0.50B PG64-22	620.00	TON		$	
0330	23875NC		REMOVE THERMOPLASTIC ARROWS	6.00	EACH		$	

PROPOSAL BID ITEMS

263075

Report Date 10/27/26

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0340	02569		DEMOBILIZATION	1.00	LS		$	