



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Rebecca Goodman
SECRETARY

September 8, 2026

CALL NO. 401
CONTRACT ID NO. 263039
ADDENDUM # 1

Subject: Menifee County, 083GR26R020-CB06
Letting September 24, 2026

- (1) Added - Special Notes - Pages 21A-21C of 41
 - (2) Revised - Site Map - Page 23 of 41
 - (3) Revised - Material Summary - Page 25 of 41
 - (4) Revised - Summary Sheets - Pages 28-29 of 41
 - (5) Revised - Proposal Bid Items - Page 41 of 41
- Removed Fuel Adjustment bid item

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

SPECIAL NOTE FOR BASE FAILURE REPAIR

Repair locations listed on the summary are approximate only. The Engineer will determine actual repair locations and dimensions at the time of construction. Prior to overall milling and/or leveling and wedging, excavate the designated base failure areas by milling to a depth 6-8 inches (see base failure summaries) below the existing asphalt pavement surface level. Dispose of the excavated materials at waste sites off the Right-of-Way obtained by the Contractor at no additional cost to the Department. See Special Note for Waste and Borrow.

Backfill the excavated areas with Class 2 Asphalt Base 1.00D PG64-22. Compact the asphalt base to the compaction required in Section 403.03.10. Seal the asphalt base with leveling and wedging. Perform all base failure repairs in such a manner that removal and replacement are completed on the same day. Do this work as one of the Contractor's first operations in order to allow further compaction by traffic. Do not mill or place new asphalt surface over repaired base failure areas until a minimum of 7 calendar days have elapsed after placement of the asphalt base. After a minimum of 7 calendar days and when the Engineer determines the base failure repair areas have sufficiently stabilized, begin milling and/or resurfacing operations. Prior to milling and/or constructing the new asphalt surface, level and wedge any settlement of the repair areas.

The bidder must draw conclusions as to the conditions encountered. The Department does not give any guarantee as to the accuracy of the data and will not consider any claim for additional compensation if the materials encountered that are not in accord with the classification shown.

Accept payment at the Contract unit prices per ton for Asphalt Milling and Texturing, Asphalt Base, and Leveling and Wedging as full compensation for all labor, materials, equipment, and incidentals for removing pavement and disposing of the materials, furnishing and placing asphalt base, leveling and wedging, and all other items necessary to complete the work according to these notes to the satisfaction of the Engineer.

1-3605 basefailurerepairmillinlaypayton
01/02/2012

CB06 083 1569 002-004

LONGITUDINAL EDGE KEY

MP 2.621, MP 2.855, MP 3.444, MP 3.771

Total linear feet = 204


CB06 083 3338 001-003

LONGITUDINAL EDGE KEYS

MP 1.095 (KY 3338), MP 1.256 Berryman Rd, MP 1.901 Allen Cope Rd., MP 1.945 Beck Yane Rd., MP 2.086 Jacquelynn Ln, MP 2.108 Firehouse

Total linear feet = 364

Menifee Co - KY 1569

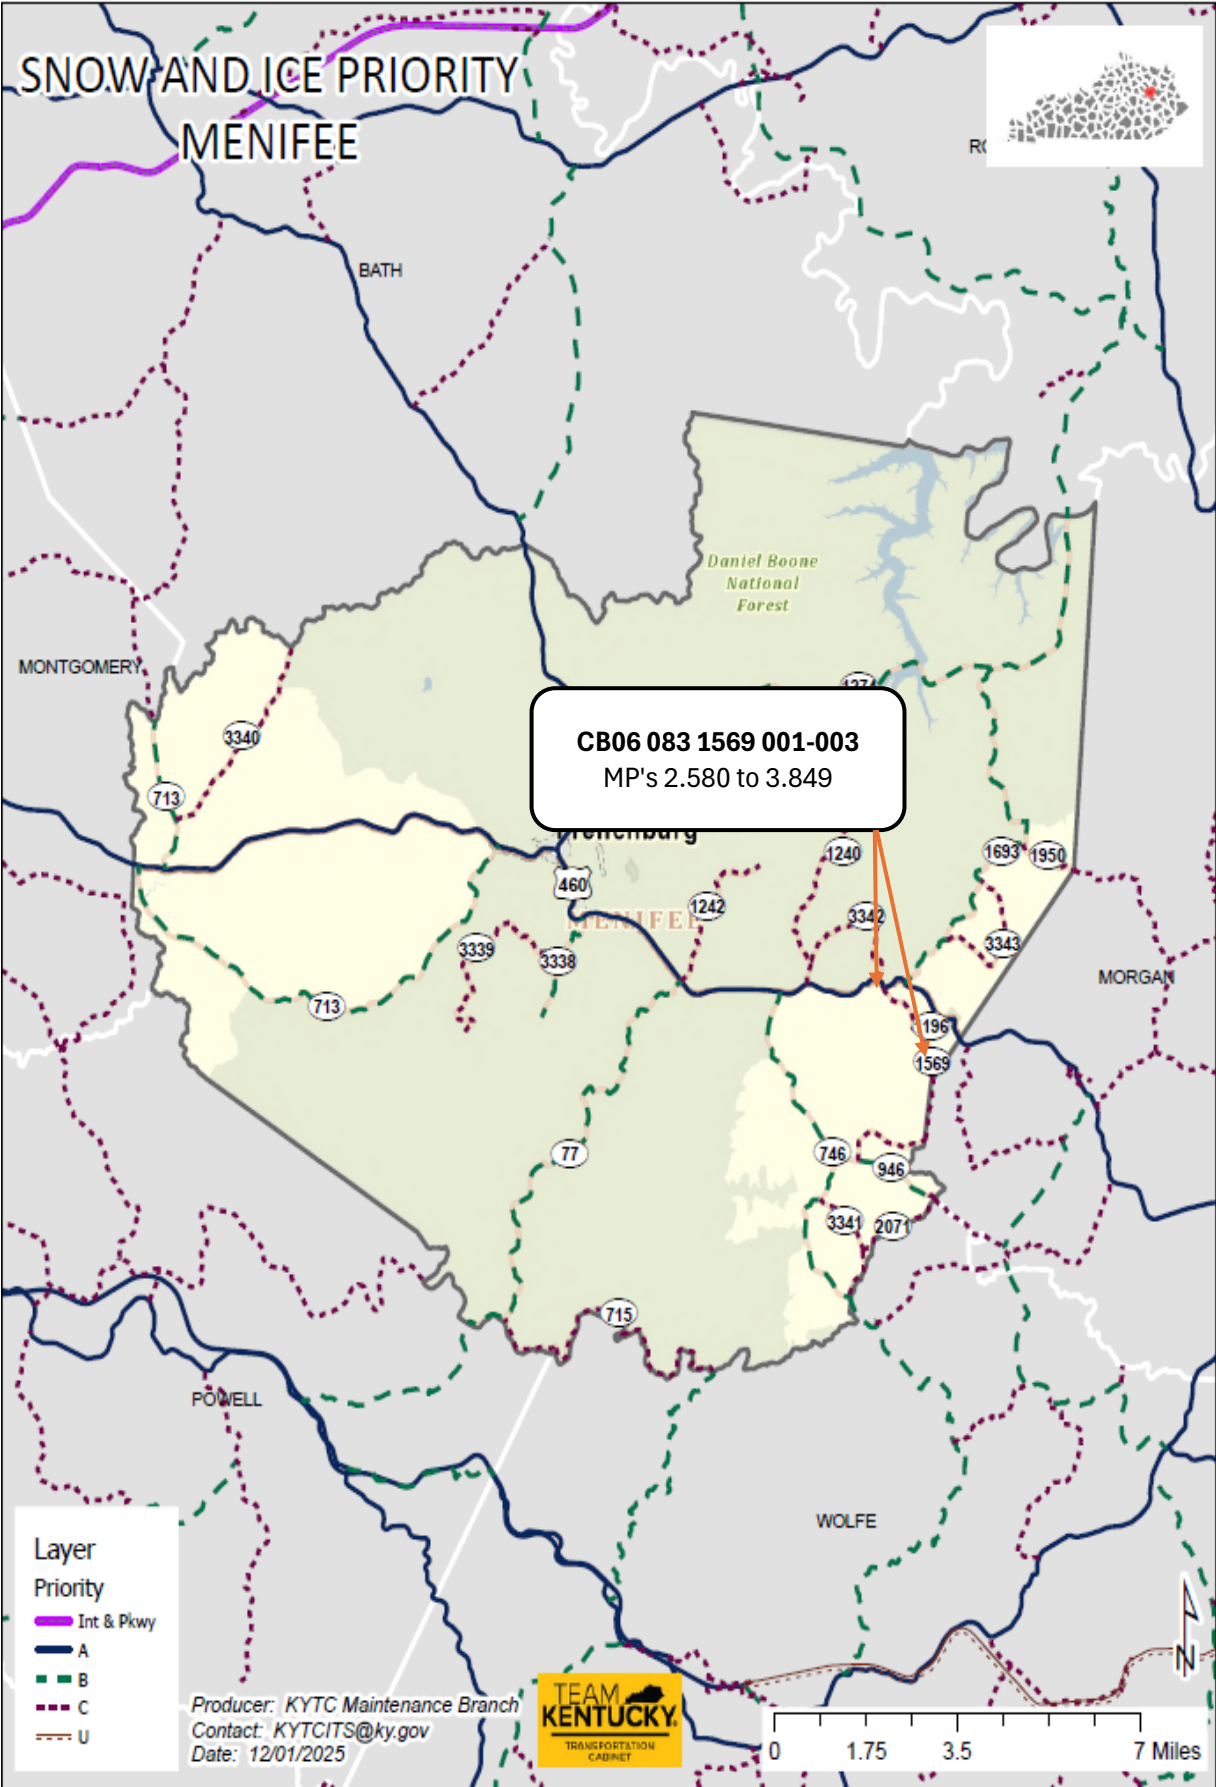

MATERIAL SUMMARY

CONTRACT ID: 263039 083GR26R020-CB06 1008315692601

KY 1569 (KY 1569) FROM LAWSON HILL RD (CR 1115) NORTH 0.443 MILES, EXTENDING NORTHERLY TO US 460 E. ASPHALT RESURFACING, A DISTANCE OF 1.27 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	90.00	TON
0010	00190	LEVELING & WEDGING PG64-22	120.00	TON
0015	00212	CL2 ASPH BASE 1.00D PG64-22	30.00	TON
0020	00301	CL2 ASPH SURF 0.38D PG64-22	850.00	TON
0025	02562	TEMPORARY SIGNS	170.00	SQFT
0030	02650	MAINTAIN & CONTROL TRAFFIC - (KY 1569)	1.00	LS
0035	02676	MOBILIZATION FOR MILL & TEXT - (KY 1569)	1.00	LS
0040	02677	ASPHALT PAVE MILLING & TEXTURING	50.00	TON
0045	06510	PAVE STRIPING-TEMP PAINT-4 IN	15,000.00	LF
0050	06514	PAVE STRIPING-PERM PAINT-4 IN	13,500.00	LF
0060	10030NS	ASPHALT ADJUSTMENT	3,792.00	DOLL
0065	21289ED	LONGITUDINAL EDGE KEY	204.00	LF
0070	24970EC	ASPHALT MATERIAL FOR TACK NON-TRACKING	8.00	TON
0075	02569	DEMOBILIZATION	1.00	LS

CONTRACT ID: 263039 083GR26R020-CB06 1008333382601

MCCAUSEY RIDGE RD (KY 3338) FROM KY 3339, EXTENDING NORTHERLY TO US 460E. ASPHALT RESURFACING, A DISTANCE OF 1.05 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0080	00001	DGA BASE	75.00	TON
0085	00190	LEVELING & WEDGING PG64-22	120.00	TON
0090	00212	CL2 ASPH BASE 1.00D PG64-22	75.00	TON
0095	00301	CL2 ASPH SURF 0.38D PG64-22	900.00	TON
0100	02562	TEMPORARY SIGNS	170.00	SQFT
0105	02650	MAINTAIN & CONTROL TRAFFIC - (KY 3338)	1.00	LS
0110	02676	MOBILIZATION FOR MILL & TEXT - (KY 3338)	1.00	LS
0115	02677	ASPHALT PAVE MILLING & TEXTURING	100.00	TON
0120	06510	PAVE STRIPING-TEMP PAINT-4 IN	14,000.00	LF
0125	06514	PAVE STRIPING-PERM PAINT-4 IN	12,000.00	LF
0135	10030NS	ASPHALT ADJUSTMENT	3,988.00	DOLL
0140	21289ED	LONGITUDINAL EDGE KEY	364.00	LF
0145	24970EC	ASPHALT MATERIAL FOR TACK NON-TRACKING	8.00	TON
0150	02569	DEMOBILIZATION	1.00	LS

Base Failure Summary Sheet

Project: CB06 083
3338 001-003

County: Meniffee

District: D10 - Jackson

Direction	Milepoint	Length (ft)	Width (ft)	Assumed Depth (in)	Total Sq. Yards	NoBid Item
East Bound	1.099	80	6	6	54	0
East Bound	2.100	225	6	6	150	0
				Total:	204	0

Milling Summary Sheet

Project: CB06 083
3338 001-003

County: Menifee

District: D10 - Jackson

Mile Point	Notes	Length	Width	Avg Depth	Tons
1.095	Edge Key	100	23	0.5	7
2.144	Edge key	100	29	0.5	8.9
				Total:	15.9

263039

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	165.00	TON		\$	
0020	00190		LEVELING & WEDGING PG64-22	240.00	TON		\$	
0030	00212		CL2 ASPH BASE 1.00D PG64-22	105.00	TON		\$	
0040	00301		CL2 ASPH SURF 0.38D PG64-22	1,750.00	TON		\$	
0050	02562		TEMPORARY SIGNS	340.00	SQFT		\$	
0060	02650		MAINTAIN & CONTROL TRAFFIC (KY 1569)	1.00	LS		\$	
0070	02650		MAINTAIN & CONTROL TRAFFIC (KY 3338)	1.00	LS		\$	
0080	02676		MOBILIZATION FOR MILL & TEXT (KY 1569)	1.00	LS		\$	
0090	02676		MOBILIZATION FOR MILL & TEXT (KY 3338)	1.00	LS		\$	
0100	02677		ASPHALT PAVE MILLING & TEXTURING	150.00	TON		\$	
0110	06510		PAVE STRIPING-TEMP PAINT-4 IN	29,000.00	LF		\$	
0120	06514		PAVE STRIPING-PERM PAINT-4 IN	25,500.00	LF		\$	
0140	10030NS		ASPHALT ADJUSTMENT	7,780.00	DOLL	\$1.00	\$	\$7,780.00
0150	21289ED		LONGITUDINAL EDGE KEY	568.00	LF		\$	
0160	24970EC		ASPHALT MATERIAL FOR TACK NON- TRACKING	16.00	TON		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0170	02569		DEMOBILIZATION	1.00	LS		\$	