



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Rebecca Goodman
SECRETARY

August 18, 2026

CALL NO. 401
CONTRACT ID NO. 262902
ADDENDUM # 2

Subject: Russell County, FE02 104 0127 B00002N
Letting August 20, 2026

- (1) Revised - Material Summary - Pages 24-25 of 48
- (2) Added - Drawing - Page 25a of 25
- (3) Revised - Proposal Bid Items - Pages 47-48 of 48

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

MATERIAL SUMMARY

CONTRACT ID: 262902 FE02 104 0127 B00002N MB10400802601

KY 80 (HIGHWAY 80) BRIDGE 104B00034N (KY 80) OVER GOOSE CREEK AT MILE POINT 09.45 BRIDGE DECK RESTORATION & WATERPROOFING.


Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	02562	TEMPORARY SIGNS	145.00	SQFT
0010	02650	MAINTAIN & CONTROL TRAFFIC	1.00	LS
0015	02653	LANE CLOSURE	2.00	EACH
0020	03304	BRIDGE OVERLAY APPROACH PAVEMENT	667.00	SQYD
0025	04933	TEMP SIGNAL 2 PHASE	1.00	EACH
0030	06514	PAVE STRIPING-PERM PAINT-4 IN	1,625.00	LF
0035	06549	PAVE STRIPING-TEMP REM TAPE-B	1,000.00	LF
0040	06550	PAVE STRIPING-TEMP REM TAPE-W	2,000.00	LF
0045	06551	PAVE STRIPING-TEMP REM TAPE-Y	2,000.00	LF
0050	08150	STEEL REINFORCEMENT	270.00	LB
0055	08504	EPOXY SAND SLURRY	76.30	SQYD
0060	08526	CONC CLASS M FULL DEPTH PATCH	3.60	CUYD
0065	08534	CONCRETE OVERLAY-LATEX	14.40	CUYD
0070	08549	BLAST CLEANING	346.30	SQYD
0075	08551	MACHINE PREP OF SLAB	343.40	SQYD
0080	24094EC	PARTIAL DEPTH PATCHING	7.20	CUYD
0085	24981EC	BRIDGE CLEANING - APPLIES TO 104B00034N	1.00	LS
0095	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 262902 FE02 104 0127 B00002N MB10401272601

US 127 (US BUSINESS 127) BRIDGE 104B00002N (US 127) OVER GREASY CREEK AT MILE POINT 00.21
BRIDGE DECK RESTORATION & WATERPROOFING.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	02562	TEMPORARY SIGNS	145.00	SQFT
0010	02650	MAINTAIN & CONTROL TRAFFIC	1.00	LS
0015	02653	LANE CLOSURE	2.00	EACH
0020	03294	EXPAN JOINT REPLACE 1 1/2 IN	96.00	LF
0025	03299	ARMORED EDGE FOR CONCRETE - (REVISED 8-18-26)	240.00	LF
0030	03304	BRIDGE OVERLAY APPROACH PAVEMENT	266.70	SQYD
0035	04933	TEMP SIGNAL 2 PHASE	1.00	EACH
0040	06514	PAVE STRIPING-PERM PAINT-4 IN	2,200.00	LF
0045	06549	PAVE STRIPING-TEMP REM TAPE-B	1,000.00	LF
0050	06550	PAVE STRIPING-TEMP REM TAPE-W	2,000.00	LF
0055	06551	PAVE STRIPING-TEMP REM TAPE-Y	2,000.00	LF
0060	08150	STEEL REINFORCEMENT	270.00	LB
0065	08504	EPOXY SAND SLURRY	324.10	SQYD
0070	08526	CONC CLASS M FULL DEPTH PATCH	24.40	CUYD
0075	08534	CONCRETE OVERLAY-LATEX	48.70	CUYD
0080	08549	BLAST CLEANING	594.10	SQYD
0085	08551	MACHINE PREP OF SLAB	1,166.70	SQYD
0090	24094EC	PARTIAL DEPTH PATCHING	24.40	CUYD
0095	24981EC	BRIDGE CLEANING - APPLIES TO 104B00002N	1.00	LS
0100	26232EC	CONCRETE COATING - APPLIES TO 104B00002N (REVISED 8-18-26)	1,152.00	SQFT
0105	02569	DEMOBILIZATION	1.00	LS
0110	40101	CONCRETE PATCHING - (ADDED 8-18-26)	1,500.00	SQFT

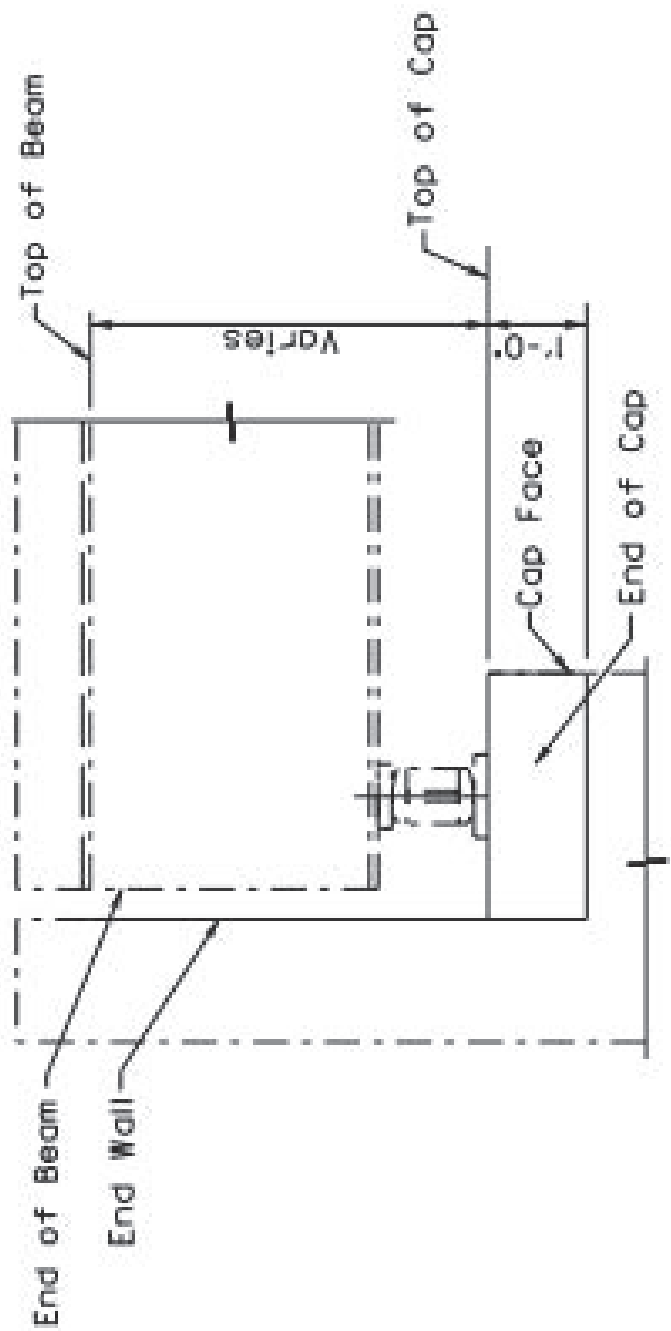

SECTION THROUGH END BENT CAP AND BEAM END

Front Face of End Wall, Top and Face of Cap the Entire Length of Cap including Cap Ends shall have debris removed pressure washed and have concrete coating applied as specified within the limits shown.

PROPOSAL BID ITEMS

Report Date 8/18/26

Page 1 of 2

262902

Section: 0001 - BRIDGE - 100B00034N

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	02562		TEMPORARY SIGNS	145.00	SQFT		\$	
0020	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0030	02653		LANE CLOSURE	2.00	EACH		\$	
0040	03304		BRIDGE OVERLAY APPROACH PAVEMENT	667.00	SQYD		\$	
0050	04933		TEMP SIGNAL 2 PHASE	1.00	EACH		\$	
0060	06514		PAVE STRIPING-PERM PAINT-4 IN	1,625.00	LF		\$	
0070	06549		PAVE STRIPING-TEMP REM TAPE-B	1,000.00	LF		\$	
0080	06550		PAVE STRIPING-TEMP REM TAPE-W	2,000.00	LF		\$	
0090	06551		PAVE STRIPING-TEMP REM TAPE-Y	2,000.00	LF		\$	
0100	08150		STEEL REINFORCEMENT	270.00	LB		\$	
0110	08504		EPOXY SAND SLURRY	76.30	SQYD		\$	
0120	08526		CONC CLASS M FULL DEPTH PATCH	3.60	CUYD		\$	
0130	08534		CONCRETE OVERLAY-LATEX	14.40	CUYD		\$	
0140	08549		BLAST CLEANING	346.30	SQYD		\$	
0150	08551		MACHINE PREP OF SLAB	343.40	SQYD		\$	
0160	24094EC		PARTIAL DEPTH PATCHING	7.20	CUYD		\$	
0170	24981EC		BRIDGE CLEANING APPLIES TO 104B00034N	1.00	LS		\$	

Section: 0002 - BRIDGE - 100B00002N

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0190	02562		TEMPORARY SIGNS	145.00	SQFT		\$	
0200	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0210	02653		LANE CLOSURE	2.00	EACH		\$	
0220	03294		EXPAN JOINT REPLACE 1 1/2 IN	96.00	LF		\$	
0230	03299		ARMORED EDGE FOR CONCRETE (REVISED 8-18-26)	240.00	LF		\$	
0240	03304		BRIDGE OVERLAY APPROACH PAVEMENT	266.70	SQYD		\$	
0245	40101		CONCRETE PATCHING (ADDED 8-18-26)	1,500.00	SQFT		\$	
0250	04933		TEMP SIGNAL 2 PHASE	1.00	EACH		\$	
0260	06514		PAVE STRIPING-PERM PAINT-4 IN	2,200.00	LF		\$	
0270	06549		PAVE STRIPING-TEMP REM TAPE-B	1,000.00	LF		\$	
0280	06550		PAVE STRIPING-TEMP REM TAPE-W	2,000.00	LF		\$	
0290	06551		PAVE STRIPING-TEMP REM TAPE-Y	2,000.00	LF		\$	
0300	08150		STEEL REINFORCEMENT	270.00	LB		\$	
0310	08504		EPOXY SAND SLURRY	324.10	SQYD		\$	
0320	08526		CONC CLASS M FULL DEPTH PATCH	24.40	CUYD		\$	
0330	08534		CONCRETE OVERLAY-LATEX	48.70	CUYD		\$	
0340	08549		BLAST CLEANING	594.10	SQYD		\$	
0350	08551		MACHINE PREP OF SLAB	1,166.70	SQYD		\$	
0360	24094EC		PARTIAL DEPTH PATCHING	24.40	CUYD		\$	

PROPOSAL BID ITEMS

Report Date 8/18/26

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0370	24981EC		BRIDGE CLEANING APPLIES TO 104B00002N	1.00	LS		\$	
0380	26232EC		CONCRETE COATING APPLIES TO 104B00002N (REVISED 8-18-26)	1,152.00	SQFT		\$	

Section: 0003 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0390	02569		DEMOBILIZATION	1.00	LS		\$	