

Andy Beshear Governor

Jim Gray Secretary

September 15, 2022

CALL NO. 402 CONTRACT ID NO. 224204 ADDENDUM # 1

Subject: OLDHAM-SHELBY COUNTIES, 121GR22T025-FD04 & FD05

Letting September 22, 2022

(1) Revised - Detail Sheet - Page 298 of 327

Proposal revisions are available at  $\frac{\text{http://transportation.ky.gov/Construction-}}{\text{Procurement/.}}$ 

If you have any questions, please contact us at 502-564-3500.

Sincerely,

Rachel Mills,

Rachel Mills, P.E.

Director


Division of Construction Procurement

Kachel Mille

RM:mr

Enclosures

## GUARDRAIL ON BRIDGE, CASE II GUARDRAIL ON TOP OF BRIDGE CURB

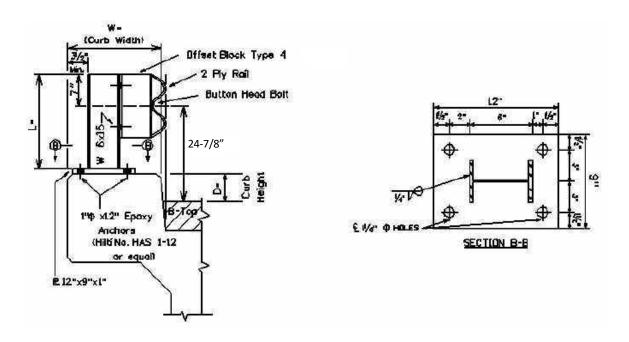

Bridge MP	D =	W=	L=	No. Posts	LF of 2 PLY Rail
1.914 (Oldham)	6"	12"	2'-1"	44	300

L = Length of Guardrail Post

D = Curb Height

W = Width of Bridge Curb

**Warrants:** When guardrail can be bolted to the top of the bridge curb and the curb width is 12 inches or greater, remove existing concrete and/or guardrail bridge rail and use Case II Bridge Guardrail.

## **NOTES:**

- 1. If the clear distance between the faces of the guardrail for the Case II guardrail is less than 22 feet, delete the offset block.
- 2. When Case II Guardrail is used <u>without</u> the offset block, use a Precast Concrete Bridge Block at the ends of the bridge which face opposing traffic. See detail drawing for Precast Concrete Bridge Block.