



COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET

transportation.ky.gov

Andy Beshear
GOVERNOR

Jim Gray
SECRETARY

June 8, 2022

CALL NO. 403
CONTRACT ID NO. 222395
ADDENDUM # 1

Subject: Lewis County, 068GR22P048-FD05
Letting June 23, 2022

- (1) Revised - Special Note Page 20 of 56
- (2) Revised- Material Summary Page 30 - 31 of 56
- (3) Revised - Summary Sheets Page 32 and 36 of 56
- (4) Revised - Typical Section Page 40 and 43 of 56
- (5) Revised - Proposal Bid Items Page 56 of 56

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

Rachel Mills,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:ce
Enclosures

SPECIAL NOTE FOR BASE FAILURE REPAIR

Repair locations listed on the summary are approximate only. The Engineer will determine actual repair locations and dimensions at the time of construction. Prior to overall milling and/or leveling and wedging, excavate the designated base failure areas by milling to a depth 6 inches below the existing asphalt pavement surface level. Dispose of the excavated materials at waste sites off the Right-of-Way obtained by the Contractor at no additional cost to the Department. See Special Note for Waste and Borrow.

Backfill the excavated areas with Class 2 Asphalt Base 1.00D PG64-22. Compact the asphalt base to the compaction required in Section 403.03.10. Seal the asphalt base with leveling and wedging. Perform all base failure repairs in such a manner that removal and replacement are completed on the same day. Do this work as one of the Contractor's first operations in order to allow further compaction by traffic. Do not mill or place new asphalt surface over repaired base failure areas until a minimum of 7 calendar days have elapsed after placement of the asphalt base. After a minimum of 7 calendar days and when the Engineer determines the base failure repair areas have sufficiently stabilized, begin milling and/or resurfacing operations. Prior to milling and/or constructing the new asphalt surface, level and wedge any settlement of the repair areas.

The bidder must draw conclusions as to the conditions encountered. The Department does not give any guarantee as to the accuracy of the data and will not consider any claim for additional compensation if the materials encountered that are not in accord with the classification shown.

Accept payment at the Contract unit prices per ton for Asphalt Milling and Texturing, Asphalt Base, and Leveling and Wedging as full compensation for all labor, materials, equipment, and incidentals for removing pavement and disposing of the materials, furnishing and placing asphalt base, leveling and wedging, and all other items necessary to complete the work according to these notes to the satisfaction of the Engineer.

1-3605 basefailurerepairmillinlaypayton
01/02/2012

MATERIAL SUMMARY

CONTRACT ID: 222395

068GR22P048-FD05

MP06800082301

VANCEBURG - GARRISON ROAD (KY 8) FROM KY 3037 EXTENDING EAST TO 350 FEET WEST OF BRADFORD LANE ASPHALT RESURFACING, A DISTANCE OF 4.55 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	550.00	TON
0010	00190	LEVELING & WEDGING PG64-22	800.00	TON
0015	00212	CL2 ASPH BASE 1.00D PG64-22	375.00	TON
0020	00301	CL2 ASPH SURF 0.38D PG64-22	4,780.00	TON
0025	02562	TEMPORARY SIGNS	300.00	SQFT
0030	02650	MAINTAIN & CONTROL TRAFFIC - (KY 8)	1.00	LS
0035	02676	MOBILIZATION FOR MILL & TEXT - (KY 8)	1.00	LS
0040	02677	ASPHALT PAVE MILLING & TEXTURING - (REVISED 6-8-22)	1,475.00	TON
0045	02697	EDGE LINE RUMBLE STRIPS	35,000.00	LF
0050	02720	SIDEWALK-4 IN CONCRETE	35.00	SQYD
0055	06510	PAVE STRIPING-TEMP PAINT-4 IN	25,000.00	LF
0060	06515	PAVE STRIPING-PERM PAINT-6 IN	98,000.00	LF
0065	06565	PAVE MARKING-THERMO X-WALK-6 IN	120.00	LF
0070	06568	PAVE MARKING-THERMO STOP BAR-24IN	36.00	LF
0075	06569	PAVE MARKING-THERMO CROSS-HATCH	150.00	SQFT
0080	06573	PAVE MARKING-THERMO STR ARROW	6.00	EACH
0085	06574	PAVE MARKING-THERMO CURV ARROW	14.00	EACH
0090	10020NS	FUEL ADJUSTMENT	8,500.00	DOLL
0095	10030NS	ASPHALT ADJUSTMENT	21,300.00	DOLL
0100	23158ES505	DETECTABLE WARNINGS - (NEW)	16.00	SQFT
0105	24970EC	ASPHALT MATERIAL FOR TACK NON-TRACKING	37.00	TON
0110	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 222395

068GR22P048-FD05


MP06800592301

FAIRLANE DRIVE (KY 59) FROM KY 9 EXTENDING NORTH TO KY 8 ASPHALT RESURFACING, A DISTANCE OF 1.07 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0115	00190	LEVELING & WEDGING PG64-22	135.00	TON
0120	00221	CL2 ASPH BASE 0.75D PG64-22	26.00	TON
0125	00301	CL2 ASPH SURF 0.38D PG64-22	925.00	TON
0130	02562	TEMPORARY SIGNS	200.00	SQFT
0135	02650	MAINTAIN & CONTROL TRAFFIC - (KY 59)	1.00	LS
0140	02676	MOBILIZATION FOR MILL & TEXT - (KY 59)	1.00	LS
0150	06510	PAVE STRIPING-TEMP PAINT-4 IN	12,500.00	LF
0155	06515	PAVE STRIPING-PERM PAINT-6 IN	23,000.00	LF
0160	06566	PAVE MARKING-THERMO X-WALK-12 IN	270.00	LF
0165	06568	PAVE MARKING-THERMO STOP BAR-24IN	54.00	LF
0170	06569	PAVE MARKING-THERMO CROSS-HATCH	150.00	SQFT
0175	06574	PAVE MARKING-THERMO CURV ARROW	2.00	EACH
0180	06575	PAVE MARKING-THERMO COMB ARROW	2.00	EACH
0185	22520EN	PAVE MARKING-THERMO YIELD BAR-36 IN	36.00	LF
0190	24970EC	ASPHALT MATERIAL FOR TACK NON-TRACKING	7.00	TON
0195	02569	DEMOBILIZATION	1.00	LS
0200	02677	ASPHALT PAVE MILLING & TEXTURING - (REVISED 6-8-22)	640.00	TON


TYPICAL SECTION

Lewis County
FD05-068-0008-012-018
MP 13.330-13.840

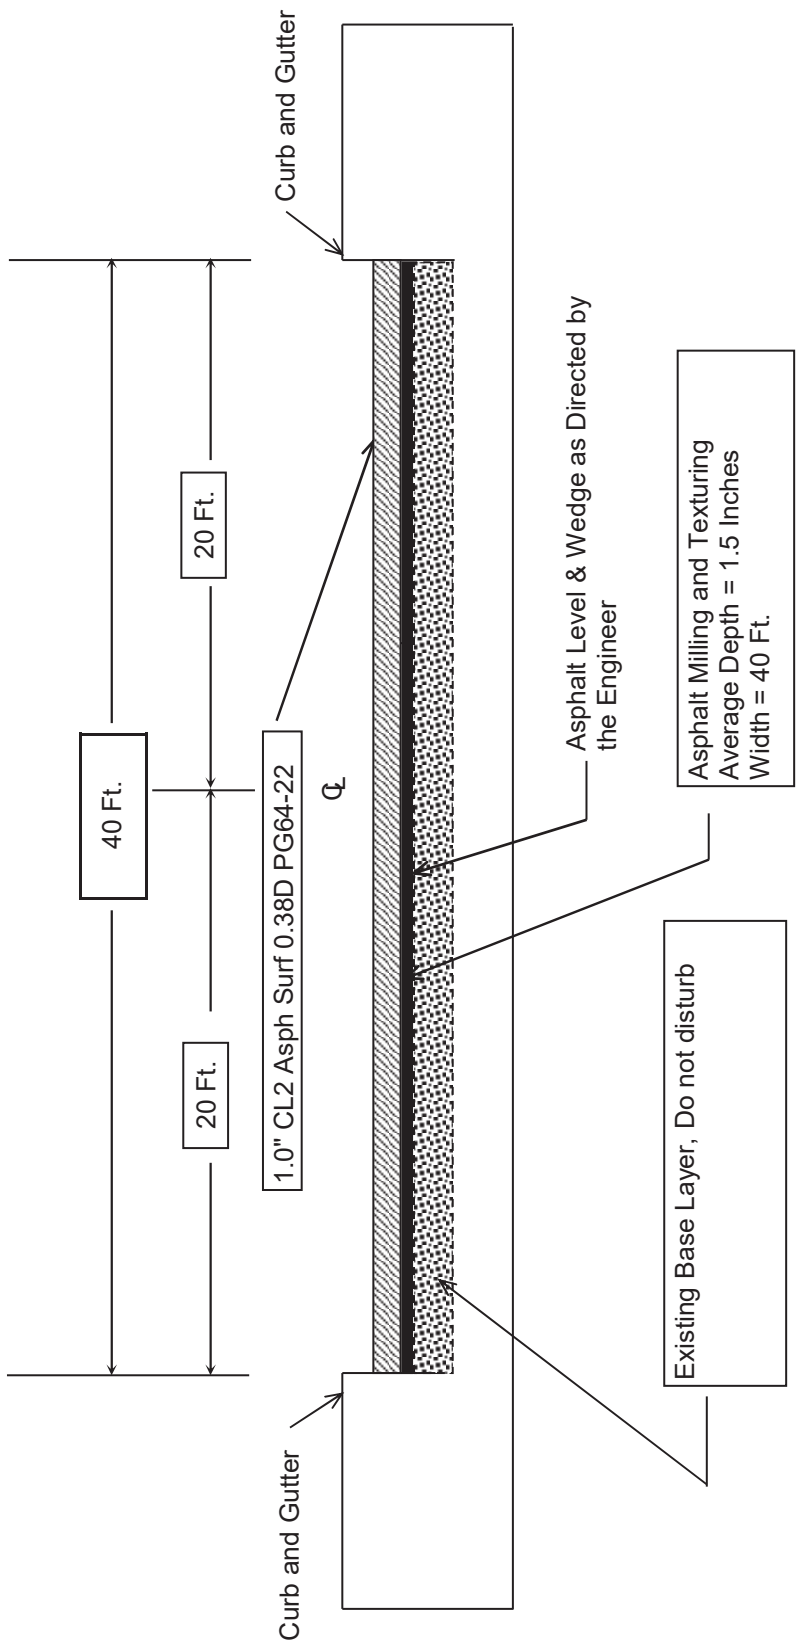

TYPICAL SECTION

Lewis County
FD05-068-0059-023-025
MP 23.863-24.266

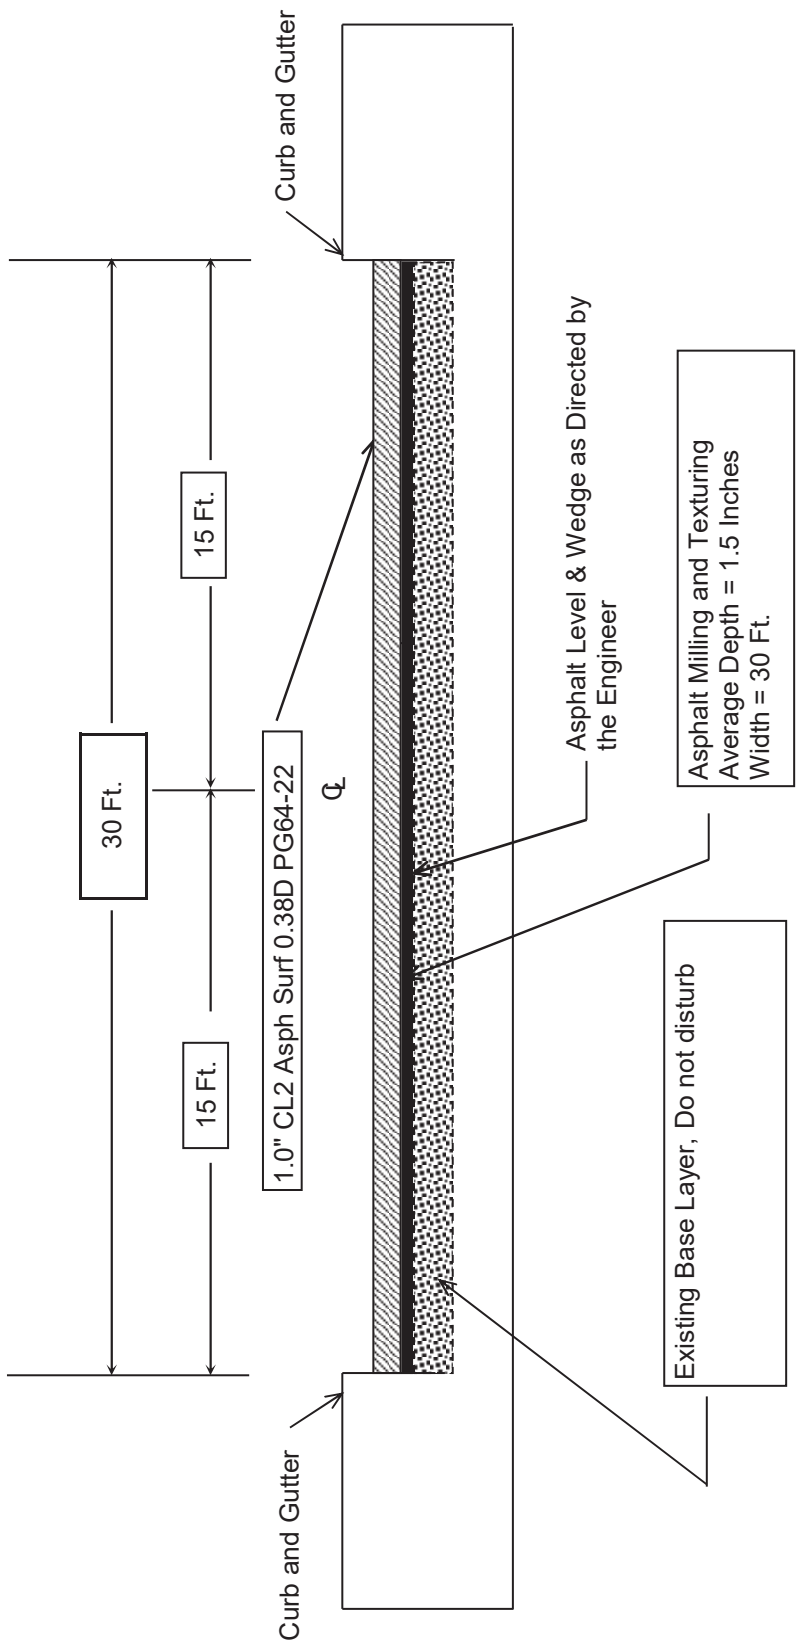

PROPOSAL BID ITEMS

Report Date 6/8/22

Page 1 of 1

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	550.00	TON		\$	
0020	00190		LEVELING & WEDGING PG64-22	935.00	TON		\$	
0030	00212		CL2 ASPH BASE 1.00D PG64-22	375.00	TON		\$	
0040	00221		CL2 ASPH BASE 0.75D PG64-22	26.00	TON		\$	
0050	00301		CL2 ASPH SURF 0.38D PG64-22	5,705.00	TON		\$	
0060	02562		TEMPORARY SIGNS	500.00	SQFT		\$	
0070	02650		MAINTAIN & CONTROL TRAFFIC (KY 8)	1.00	LS		\$	
0080	02650		MAINTAIN & CONTROL TRAFFIC (KY 59)	1.00	LS		\$	
0090	02676		MOBILIZATION FOR MILL & TEXT (KY 8)	1.00	LS		\$	
0100	02676		MOBILIZATION FOR MILL & TEXT (KY 59)	1.00	LS		\$	
0110	02677		ASPHALT PAVE MILLING & TEXTURING (REVISED 6-8-22)	2,115.00	TON		\$	
0120	02697		EDGE LINE RUMBLE STRIPS	35,000.00	LF		\$	
0130	02720		SIDEWALK-4 IN CONCRETE	35.00	SQYD		\$	
0140	06510		PAVE STRIPING-TEMP PAINT-4 IN	37,500.00	LF		\$	
0150	06515		PAVE STRIPING-PERM PAINT-6 IN	121,000.00	LF		\$	
0160	06565		PAVE MARKING-THERMO X-WALK-6 IN	120.00	LF		\$	
0170	06566		PAVE MARKING-THERMO X-WALK-12 IN	270.00	LF		\$	
0180	06568		PAVE MARKING-THERMO STOP BAR-24IN	90.00	LF		\$	
0190	06569		PAVE MARKING-THERMO CROSS-HATCH	300.00	SQFT		\$	
0200	06573		PAVE MARKING-THERMO STR ARROW	6.00	EACH		\$	
0210	06574		PAVE MARKING-THERMO CURV ARROW	16.00	EACH		\$	
0220	06575		PAVE MARKING-THERMO COMB ARROW	2.00	EACH		\$	
0230	10020NS		FUEL ADJUSTMENT	8,500.00	DOLL	\$1.00	\$	\$8,500.00
0240	10030NS		ASPHALT ADJUSTMENT	21,300.00	DOLL	\$1.00	\$	\$21,300.00
0250	22520EN		PAVE MARKING-THERMO YIELD BAR-36 IN	36.00	LF		\$	
0260	23158ES505		DETECTABLE WARNINGS (NEW)	16.00	SQFT		\$	
0270	24970EC		ASPHALT MATERIAL FOR TACK NON-TRACKING	44.00	TON		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0280	02569		DEMOBILIZATION	1.00	LS		\$	