



CALL NO. 407

CONTRACT ID. 242011

BELL - STATEWIDE COUNTIES

FED/STATE PROJECT NUMBER FE01 121 DW24 0110000

DESCRIPTION VARIOUS ROUTES IN DISTRICT 10 & 11

WORK TYPE WATERBOURNE PAINT STRIPING

PRIMARY COMPLETION DATE 8/15/2024

LETTING DATE: January 25,2024

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN STANDARD TIME January 25,2024. Bids will be publicly announced at 10:00 AM EASTERN STANDARD TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I	SCOPE OF WORK <ul style="list-style-type: none">PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGESCONTRACT NOTESSTATE CONTRACT NOTESNATIONAL HIGHWAYSPECIAL NOTE(S) APPLICABLE TO PROJECTCOORDINATION OF WORK WITH OTHER CONTRACTSTRAFFIC CONTROL PLANCONTRACT COMPLETION DATE AND LIQUIDATED DAMAGESSKETCH MAP(S)MATERIAL SUMMARYSUMMARY SHEET(S)DETAIL SHEET(S)
PART II	SPECIFICATIONS AND STANDARD DRAWINGS <ul style="list-style-type: none">STANDARD AND SUPPLEMENTAL SPECIFICATIONSSTANDARD DRAWINGS THAT APPLY
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS <ul style="list-style-type: none">LABOR AND WAGE REQUIREMENTSEXECUTIVE BRANCH CODE OF ETHICSKENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY / STATEPROJECT WAGE RATES / STATE FUNDED
PART IV	INSURANCE
PART V	BID ITEMS

PART I

SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 11

CONTRACT ID - 242011
FE01 121 DW24 0110000
COUNTY - BELL
PCN - MP00780192401
CPTL 007 8019 000-003

KINGDOM COME STATE PARK (MP 0.000) KINGDOM COME STATE PARK (MP 2.342)WATERBOURNE PAINT STRIPING
GEOGRAPHIC COORDINATES LATITUDE 37:02:01.00 LONGITUDE 83:49:31.00
ADT

COUNTY - VARIOUS
PCN - MP12100002411
121GR24P005-FE01 & C8XK

VARIOUS ROUTES IN DISTRICT 10 & 11 VARIOUS ROUTES IN DISTRICTS 10 & 11WATERBOURNE PAINT STRIPING
GEOGRAPHIC COORDINATES LATITUDE 37:02:01.00 LONGITUDE 83:49:31.00
ADT

COMPLETION DATE(S):

COMPLETED BY 08/15/2024	SPECIFIED COMPLETION DATE - ALL ITEMS IN CONTRACT
COMPLETED BY 06/01/2024	SPECIFIED COMPLETION DATE - PRIORITY ROUTES
5 WORKING Days	REMOVE STRIPING ERRORS AND SPILLS
15 CALENDAR Days	RESTRIPING ROUTES WITH FAILED RETROREFLECTIVITY

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by [KRS 14A.9-010](#) to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under [KRS 14A.9-030](#) unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in [KRS 14A.9-010](#), the foreign entity should identify the applicable exception. Foreign entity is defined within [KRS 14A.1-070](#).

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at <https://secure.kentucky.gov/sos/ftbr/welcome.aspx>.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/contract). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially

disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004.

BOYCOTT PROVISIONS

If applicable, the contractor represents that, pursuant to [KRS 45A.607](#), they are not currently engaged in, and will not for the duration of the contract engage in, the boycott of a person or an entity based in or doing business with a jurisdiction with which Kentucky can enjoy open trade. **Note:** The term Boycott does not include actions taken for bona fide business or economic reasons, or actions specifically required by federal or state law.

If applicable, the contractor verifies that, pursuant to KRS 41.480, they do not engage in, and will not for the duration of the contract engage in, in energy company boycotts as defined by KRS 41.472.

LOBBYING PROHIBITIONS

The contractor represents that they, and any subcontractor performing work under the contract, have not violated the agency restrictions contained in [KRS 11A.236](#) during the previous ten (10) years, and pledges to abide by the restrictions set forth in such statute for the duration of the contract awarded.

The contractor further represents that, pursuant to [KRS 45A.328](#), they have not procured an original, subsequent, or similar contract while employing an executive agency lobbyist who was convicted of a crime related to the original, subsequent, or similar contract within five (5) years of the conviction of the lobbyist.

October 4, 2023

1.0 BUY AMERICA REQUIREMENT.

Follow the “Buy America” provisions as required by 23 U.S.C. § 313 and 23 C.F.R. § 635.410. Except as expressly provided herein all manufacturing processes of steel or iron materials including but not limited to structural steel, guardrail materials, corrugated steel, culvert pipe, structural plate, prestressing strands, and steel reinforcing bars shall occur in the United States of America, including the application of:

- Coating,
- Galvanizing,
- Painting, and
- Other coating that protects or enhances the value of steel or iron products.

The following are exempt, unless processed or refined to include substantial amounts of steel or iron material, and may be used regardless of source in the domestic manufacturing process for steel or iron material:

- Pig iron,
- Processed, pelletized, and reduced iron ore material, or
- Processed alloys.

The Contractor shall submit a certification stating that all manufacturing processes involved with the production of steel or iron materials occurred in the United States.

Produce, mill, fabricate, and manufacture in the United States of America all aluminum components of bridges, tunnels, and large sign support systems, for which either shop fabrication, shop inspection, or certified mill test reports are required as the basis of acceptance by the Department.

Use foreign materials only under the following conditions:

- 1) When the materials are not permanently incorporated into the project; or
- 2) When the delivered cost of such materials used does not exceed 0.1 percent of the total Contract amount or \$2,500.00, whichever is greater.

The Contractor shall submit to the Engineer the origin and value of any foreign material used.

2.0 – BUILD AMERICA, BUY AMERICA (BABA)

Contractor shall comply with the Federal Highway Administration (FHWA) Buy America Requirement in 23 C.F.R. § 635.410 and all relevant provisions of the Build America, Buy America Act (BABA), contained within the Infrastructure Investment and Jobs Act, Pub. L. No. 117-58, §§ 70901-52 enacted November 15, 2021. The BABA requires iron, steel, manufactured products, and construction materials used in infrastructure projects funded by federal financial assistance to be produced in the United States. Comply with 2 C.F.R § 184.

BABA permits FHWA participation in the Contract only if domestic steel and iron will be used on the Project. To be considered domestic, all steel and iron used, and all products manufactured from steel and iron must be produced in the United States and all manufacturing processes, including application of a coating, for these materials must occur in the United States. Coating includes all processes that protect or enhance the value of the material to which the coating is applied. This requirement does not preclude a minimal use of foreign steel and iron materials, provided the cost of such materials does not exceed 0.1% of the total contract amount under the Contract or \$2,500.00 whichever is greater.

BABA permits FHWA participation in the Contract only if all “construction materials” as defined in the Act are made in the United States. The Buy America preference applies to the following construction materials

SPECIAL NOTE – BUY AMERICA REQUIREMENTS AND BUILD
AMERICA, BUY AMERICA (BABA) ACT

10/26/2023

incorporated into infrastructure projects: non-ferrous metals; plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables); glass (including optic glass); Fiber optic cable; optical fiber; lumber; engineered wood; and drywall. Contractor will be required to use construction materials produced in the United States on this Project. The Contractor shall submit a certification stating that all construction materials are certified to be BABA compliant.

Finally, BABA permits the continuation of FHWA's current general applicability waivers for manufactured products, raw materials, and ferryboat parts, but these waivers are subject to reevaluation, specifically the general applicability waiver for manufactured products.

The Contractor has completed and submitted, or shall complete and submit, to the Cabinet a Buy America/Build America, Buy America Certificate prior to the Cabinet issuing the notice to proceed, in the format below. After submittal, the Contractor is bound by its original certification.

A false certification is a criminal act in violation of 18 U.S.C. § 1001. The Contractor has the burden of proof to establish that it is in compliance.

At the Contractor's request, the Cabinet may, but is not obligated to, seek a waiver of Buy America requirements if grounds for the waiver exist under 23 C.F.R. § 635.410(c) or will comply with the applicable Buy America requirements if a waiver of those requirements is not available or not pursued by the Cabinet.

Please refer to the Federal Highway Administration's Buy America webpage for more information.

[Buy America - Construction Program Guide - Contract Administration - Construction - Federal Highway Administration \(dot.gov\)](#)

October 26, 2023 Letting

BUY AMERICA / BUILD AMERICA, BUY AMERICA (ACT) MATERIALS CERTIFICATE OF COMPLIANCE

The Contractor hereby certifies that it will comply with all relevant provisions of the Build America, Buy America Act, contained within the Infrastructure Investment and Jobs Act, Pub. L. NO. 117-58, §§ 70901-52, the requirements of 23 U.S.C. § 313, 23 C.F.R. § 635.410 and 2 C.F.R § 184.

Date Submitted:_____

Contractor:_____

Signature:_____

Printed Name:_____

Title:_____

NOTE: THIS CERTIFICATION IS IN ADDITION TO ANY AND ALL REQUIREMENTS OUTLINED IN THE CURRENT EDITION OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND/OR SPECIAL NOTES CONTAINED IN THE PROJECT PROPOSAL.

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

RECIPROCAL PREFERENCE TO BE GIVEN BY PUBLIC AGENCIES TO RESIDENT BIDDERS

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the electronic bidding software. Submittal of the Affidavit should be done along the bid in Bid Express.

April 30, 2018

NATIONAL HIGHWAY

Be advised that some routes in this project are on the NATIONAL HIGHWAY SYSTEM.

**SPECIAL NOTES FOR WATERBORNE PAINT STRIPING
AND DURABLE WATERBORNE PAINT STRIPING
2024 DISTRICT WIDE CONTRACT – DISTRICT 11**

DESCRIPTION

Except as specified herein, perform all work according to the Commonwealth of Kentucky, Transportation Cabinet, Department of Highways' 2019 Standard Specifications for Road and Bridge Construction; Supplemental Specifications; applicable Standard and Sepia Drawings; applicable Special Notes and Special Provisions; and Kentucky Methods; current editions. Section references are to the Standard Specifications.

SCOPE OF WORK

Furnish and apply durable waterborne striping paint for 6 inch lines on Interstate and Parkway Routes and waterborne striping paint for 4 inch and 6 inch lines on other routes, reflectorized with glass beads, to the sections of roadway provided in this Contract with an updated listing provided at the pre-construction meeting. This Contract is for the installation of centerlines, lane lines, edgelines, ramp lines, dotted lines and gore lines only. Gore line materials shall be the same as the mainline of the roadway. Special markings such as stop bars, crosswalks, cross-hatching, chevrons, railroad markings, etc. are not to be installed under this Contract.

Intersection approach markings such as the edgelines of large painted islands or edgelines on mountable medians may be included at the discretion of the Engineer provided they can be painted by the striping truck. Markings that would require application by equipment other than the striping truck are not to be installed under this Contract.

Retrace existing lines on the listed routes. The Department will pre-mark any section of roadway where there are no existing markings, old markings are no longer visible, or where the existing markings are to be changed. Do not place edge lines on any section of roadway where edgelines do not currently exist without written authorization from the Chief District Engineer. Use only one paint crew per route per county.

MATERIALS FOR WATERBORNE AND DURABLE WATERBORNE PAINT STRIPING

PAINT: Furnish paint materials for this project to meet the performance requirements detailed in Sections 842 and 846 of the Standard Specifications.

Submit initial samples for each paint formulation for approval prior to initiation of the striping operations. The Contractor's paint manufacturer may submit the initial sample directly to the Department. The Department will obtain subsequent samples of paint in accordance with the Materials Field Sampling Manual when striping operations are in progress. A minimum of one sample will be obtained per color, per truck, per week and shall represent the quantity of striping applied per week. Deductions for application of non-specification paint shall be assessed to the quantity of striping represented by the sample.

BEADS: Use sufficient beads to ensure the pavement marking material meets retroreflectivity requirements. The Department will evaluate beads as part of the installed pavement marking in accordance with Kentucky Method 202 or 203 as applicable. Testing of the coatings, gradation and quality of the product applied shall be the responsibility of the Contractor.

MATERIALS SAMPLING AND ACCEPTANCE

If two or more random samples obtained during striping operations fail to meet minimum compositional requirements, striping operations shall be discontinued at the discretion of the Engineer. In the event striping operations are discontinued, the Department will randomly sample and test each batch of paint the Contractor has in stock at the storage location.

For batches of paint that fail to meet the minimum compositional criteria, the stock material will be rejected. The Contractor will be required to remove all failing paint from his central storage location. Batches that are tested and found to be in compliance with the compositional requirements may be used. After the Department has sampled all of the material at the central storage area, sampling and testing will resume according to the Materials Field Sampling Manual as soon as striping operations resume.

A deduction in payment will be made for any paint used that fails to meet material requirements according to Sections 842 and 846 as applicable.

EQUIPMENT

Each striper shall be equipped with electrical foot counters. The counters shall individually tabulate the amount of footage applied by each striping gun on the carriage, whether solid or dashed. The counters shall be capable of measuring up to six digits and shall have a reset feature. The counters shall be calibrated in the presence of a Department representative to ensure an accurate measurement of the paint applied. Perform the calibration prior to starting striping operations and as necessary thereafter. When done, the Department's representative will record the calibrations on the Engineer's Daily Work Report (DWR).

Each striper shall be equipped with an accurate dashing mechanism, capable of being adjusted to retrace existing lane line, dotted lines, or centerline markings as directed by the Engineer. The striper shall also be equipped with a detection device that will automatically cutoff the paint guns when a raised or recessed pavement marker is detected in the pavement. The Contractor, at his own expense, shall **replace any pavement marker lens painted over; DO NOT attempt to clean.**

Equip each striper with a Data Logging System (DLS) that will record operational details during striping operations, store data, and generate and export reports on a daily basis to the manufacturer's secure server. Provide only DLS equipment certified by the manufacturer. Ensure the data is in Microsoft Excel format, or a comma or spaces delimited text file adequate for insertion into a computerized spreadsheet. The DLS shall monitor and report the quantities of paint and beads consumed in line and calculate, in real time, the gallons of paint per mile, average wet film thickness, and pounds of beads per gallon of paint for each line application. The DLS shall monitor and report the ambient temperature, pavement temperature, and paint temperature, and record the data at the beginning of each line application and at a minimum of one (1) mile increments during application. The DLS shall be capable of storing and supplying the necessary scaling and calibration parameters to the flow meters, and shall provide a means of adjusting the scaling factor as necessary. The DLS shall include a remote cab mounted display, which shall indicate in real time, pavement temperature, application rate of paint in gallons per mile, paint film thickness in mils, and application rate of beads in pounds per gallon. In addition, the Contractor's striper shall also be equipped with a calibrated measuring device for monitoring quantities of paint and beads consumed in line.

Export to the secure server a DLS report as raw data, and as an Excel spreadsheet containing the following information: route; the beginning and ending mile points; the beginning and ending coordinates determined by a Global Positioning System receiver with a 16 foot accuracy, and the direction of travel; line type, indicated as CL (Yellow Center Line Double-Solid, Mono- directional passing, or Bi-directional passing); EL (White Edge Line on all roads or Yellow Edge Line on Solid Median Multi-Lane Highways and Interstates); LL (Solid Yellow or White Lane Line to define turn or merge lanes); SK (Dashed Yellow or White Line 10'stripe/30'gap); GM (Gore Marking installed at 2x the Edge Line Width); DTLE (Dashed Yellow or White Line Extension 3'stripe/9'gap); line width; line color; direction of application (this must be indicated for each direction travelled i.e. must include a separate entry for both the North and South directions, cannot be one entry that says direction was North/South); weight of paint applied in pounds or number of strokes counted, appropriate scaling factors; paint film thickness in mils; paint application rate in gallons per mile; bead application rate in pounds per gallon; paint temperature obtained immediately after the heat exchanger; ambient temperature; pavement temperature; and vehicle speed in miles per hour. Report application and temperature data in one-mile increments for each line applied. Provide GPS mapping system that is capable of real time (within 20 minutes) tracking of material application rates, film thickness, beads pounds per gallon, vehicle speed, time, date, project numbers, operator manual data, and color coded alarms for film thickness. Film thickness alarms must have a tolerance of ± 0.5 mils.

Provide access to stored data on a secure password protected website. The Department reserves the right to obtain any and all raw data recorded by the DLS at any time during this Contract. The Engineer may require field verification of the DLS operation and calibration at any time to ensure the accuracy of the DLS data and output. If field personnel suspect that the DLS data and/or output are not accurate, the Engineer may direct additional checks be performed. The secure server shall allow the Department to be able to create a Daily Striping Report which automatically fills from the DLS's data. It shall auto-populate all fields shown on the attached DSR except for Route Type, Mobile, and Corrective Re-stripe. These fields will be drop downs to be chosen by the user. The route length shall be calculated from the GPS data and not the manually entered milepoints. The DSR shall compute the total striped line length in "Totals Summary" once the user picks the "Route Type."

Prior to starting striping operations, make all strippers available at a central location within Kentucky designated by the Department for inspection by the Department for compliance to Kentucky Method 64-267 and DLS requirements. Striping trucks that can fulfill the requirements of this method and these notes will be approved for use on this Contract. Striping trucks that have not been approved for use by Department personnel will not be allowed to stripe as part of this Contract. The Department reserves the right to perform random field verifications of striping equipment during this Contract.

The Engineer may require the Contractor to provide detailed operating instructions from the manufacturer of the striping equipment and/or the DLS if quality or reporting issues arise at any time during the Contract. The Contractor shall then be required to operate the striping equipment within the suggested operating guidelines of the manufacturer, with particular emphasis on the speed of the striping operation, or make other adjustments until the quality of the striping is satisfactory to the Engineer.

The Contractor shall provide a separate sweeping unit powerful enough to remove normal highway dirt and debris. This unit shall not be a part of the striper.

Provide the KYTC inspector the same form of direct communication with the paint striping crew as that used by the paint striping crew (CB Radio, 2-Way Radio, etc.). The Department will return the item to the Contractor upon completion of the Contract.

SURFACE PREPARATION

Prepare the pavement surface for the striping operation in accordance with Section 713.03.02. Sweep all pavement surfaces prior to striping and maintain the cleaning operation far enough in advance of the striping operation to prevent any dust from the cleaning operation from mixing with the paint. The sweeper must maintain contact with the roadway. When the Engineer determines abnormal amounts of debris or other material have accumulated beyond the capability of the required sweeping unit which will require shoveling or other means to remove, the Engineer will make arrangements,

prior to painting, to have the material removed by the Department or that section of roadway will be deleted from the Contract.

CONSTRUCTION

Except as specified herein, apply all striping according to Section 713.

QUALITY CONTROL (OC) and QUALITY ASSURANCE (OA)

The Contractor shall designate a Quality Control Coordinator (QCC) for the project who will be the contact person for any questions or concerns regarding the quality of the work performed under this Contract. The QCC shall:

- Hold current qualification from the Department as a Pavement Marking Inspection Technician;
- Plan and oversee the Contractor's evaluation of the lines applied on the project;
- Complete and submit Daily Striping Reports to the Engineer within 24 hours of completion of that days striping;
- Ensure that the DLS manufacturer submits electronic DLS raw data and Excel spreadsheets from the secure server by e-mail, at the e-mail addresses provided at the preconstruction meeting, to designated field personnel no later than the first working day following application of the pavement markings;
- Verify the electronic records are completed and received by the Engineer prior to the records being removed from the pavement marking equipment;
- Coordinate and review or Perform KM-202, for each section of striping and provide completed test reports (electronic copy) along with printouts from the handheld retroreflectometer to the Engineer within one (1) working day of completion (failure to provide the printouts will cause the Department to not accept that section and require corrective work in order to be eligible for the final 50% payment);
- Document all adjustments made to the application process to consistently produce the quality of line desired;
- Notify the Engineer of any changes in the striping work plan that are determined necessary;
- Inform and mobilize crews to complete restriping or corrective work (after notification by the Department);
- Supply the appropriate certifications for paint and the DLS to the Engineer assigned to the particular project at the time of sampling;
- Track the quantities of materials supplied by the Contractor's vendors and applied by the painting crew;
- Meet with the Engineer to discuss and/or conduct field reviews on the project throughout the execution of the Contract;
- Perform QC testing in accordance with KM-202 for each section of striping on zones selected by the Department based on KM-64-113 The Department will **NOT** provide advanced notice of the randomly selected zones to the Contractor

prior to the striping being placed, but will only provide the locations for each randomly selected zone on the day of the test. The Department's QA inspector will coordinate the date of the test with the Contractor's QCC.

At the Pre-construction Conference, the Contractor shall furnish the Department for approval a Quality Control Plan (QCP) that covers in detail the following items:

- The name, address, phone and fax numbers for the QCC;
- The names of individuals other than the QCC taking readings in accordance with KM-202 (these people shall hold qualification from the Department as Pavement Marking Inspection Technicians);
- An overall work plan which states the estimated starting and completion dates for the entire project, the number of crews to be used on the project and a general description of how the project will be completed;
- A description of the striping equipment to be used on the project, including make and model of each striper, minimum and maximum operating speeds, and type of instruments to be used to calibrate the flow of paint and beads;
- The frequency and method to be used to monitor application rates and quality of the line (specifically with regard to retroreflectivity, width, thickness, bead distribution, tracing accuracy, etc.);
- A list of paint(s) and bead(s) to be used in this Contract along with a statement from the paint manufacturer that indicates the recommended minimum and maximum application temperatures for ambient temperature, pavement temperature, paint temperature, and guidelines for any other environmental factors that would adversely affect the successful performance of the paint;
- The contact person, phone, e-mail and fax numbers for reporting claims for paint on vehicles;
- A description and product literature of the reflectometer to be used by the Contractor;
- A description, product literature, and manufacturer's certification of the DLS to be used by the Contractor;
- The manufacturer's sampling procedure for sampling paint from the tote.

Obtain the Engineer's acceptance of the Contractor's QCP prior to the start of work. The Department reserves the right to require the Contractor to make changes in the QCP to obtain the quality specified in the Contract.

After acceptance by the Department, the Contractor shall notify the Engineer in writing of any proposed change(s) to the QCP. Proposed changes are subject to acceptance by the Department.

The Department will perform Quality Assurance (QA) testing on (at least) one segment of each section of striping completed by the Contractor. QA testing is intended to verify the Contractor's QC test data. Upon receipt of the Contractor's QC test reports for each section, the QA Inspector will randomly select (at least) one segment for QA evaluation. The Department will **NOT** provide advance notice to the Contractor of the selected

segment. The Department will perform the test in accordance with KM-202 with the exception that QA testing will be conducted within the later of 30-60 calendar days after the striping application or 2 weeks of receipt of the Contractor's QC report.

The Department will base payment for each section evaluated in accordance with KM-202 on the Contractor's QC test results if the QC and QA mean values for each segment selected for QA testing differ by less than 10% of the QA mean value.

If a dispute should arise regarding the acceptability of the Contractor's QC test results the dispute resolution shall be conducted as follows:

1. If the retroreflectivity values obtained during the QA testing within a segment indicate a change in pay quantities (i.e. QC readings are passing and QA readings are failing) and the mean values differ by more than 10% of the QA mean value; additional testing will be required. Discard the original QC and QA test results for the section in question. The QA will randomly establish three new zones, in accordance with KM-113, in each segment within the section in question. The QC and QA will jointly evaluate each new zone within the section in accordance with KM-202 (with the exception of the evaluation period if greater than 60 days). The QC test results for each segment will be used for evaluation of the section if the QC and QA mean values for each segment differ by less than 10% of the QA mean value.
2. If the variance between QC and QA testing does not indicate a change in the pay quantities for the section (i.e. QC and QA readings are both passing) however, the QC mean values differ by more than 10% of the QA mean value, additional readings will not be required. Accept the QC test results for evaluation of the section. However, additional testing within the section in question should be conducted as soon as possible to determine the cause of the discrepancy. The Contractor and the Engineer shall document the resolution to the discrepancy.
3. If resolution to a dispute or variance of QC and QA test results cannot be achieved by the QC and QA, additional testing will be required. Discard the QC and QA test results for the section in question. Additional testing will be conducted by the QC, QA, and representatives of Central Office Division of Materials. Additional testing will be conducted within two weeks of receipt of a written request from the Engineer to the Division of Materials for each section in question. Three new zones, randomly selected in accordance with KM-113, will be established by the QA for each segment of the section in question. Each instrument to be used for testing will be calibrated in the presence of Central Office representatives prior to initiation of testing. The QC, QA and Central Office representatives will obtain readings for each new zone in accordance with KM-202 (with the exception of the evaluation period if greater than 60 days). The QC test results for each segment will be used for evaluation of the section if the QC mean values for each segment differ by less than 10% to the mean value obtained by Central Office. The QA test results for each segment will be used for evaluation of the section if the QC mean

values differ by more than 10% to the mean value obtained by Central Office and the QA mean value differs by less than 10% to the Central Office mean value. If neither the QC nor QA mean values meet these requirements, the Central Office mean value for each segment will be used to evaluate the section in question. These results will be final and the basis of payment for the section in question.

The Contractor shall incur all costs associated with additional testing performed by Department personnel for dispute resolution that does not result in the use of QC test data as the basis of payment. These costs will include the cost to maintain and control traffic.

The Department reserves the right to take over the QC portion of testing. In the event that the Department exercises this option, the Contractor will incur the cost of testing performed by the Department.

The Department reserves the right to evaluate retroreflectivity on designated routes, in whole or in part, in accordance with KM-203. The Department will identify routes or portions of routes to be evaluated in accordance with KM-203. The evaluation of a section in accordance with KM-203 will be conducted at the Departments expense.

The Department will require the Department's approved vendor performing retroreflectivity evaluation in accordance with KM-203 to successfully demonstrate compliance to his/her quality control procedures prior to collection of data for this Contract. The Department will select an appropriate test site for demonstration purposes and conduct joint evaluations of both yellow and white longitudinal markings within the test site using approved 30M geometry handheld instruments. The demonstration will be deemed successful if the mean average obtained by the approved vendor differs by less than 10% to the mean average obtained by the Department for each marking evaluated within the test site.

The Department will base payment for each section evaluated in accordance with KM-203 solely on the test results obtained by the Department's approved vendor. Completed test results submitted by the Department's approved vendor will be considered final and are not subject to dispute.

The Department will furnish the Contractor with a blank electronic copy of the Contractors Daily Striping Report (DSR). The Contractor shall complete and furnish this standard DSR to the Engineer's office the next calendar day for each crew for each color and width of line applied. The information on the DSR shall reflect the milepoints and quantities for striping completed for that day and for that crew. The Contractor shall also include with the DSR the certification for the paint used on that day's striping according to Section 842.05 and 846.05, as applicable.

Export DLS reports each calendar day to the manufacturer's secure server. Ensure that the DLS manufacturer submits electronic DLS raw data and Excel spreadsheets from the secure server by e-mail, at the e-mail addresses provided at the preconstruction meeting, to the designated field personnel no later than the first working day following application

of the pavement markings. Verify the electronic records are completed and received by the Engineer prior to the records being removed from the pavement marking equipment.

APPLICATION OF STRIPING

Roadways shall be marked with 4", 6", 8" and 12" lines as indicated in the summaries and/or as directed by the Engineer. The four-inch line shall be not less than four inches nor more than five inches in width. The six-inch line shall be not less than six inches nor more than seven inches in width. The centerline of all newly applied lines shall be within one inch of the centerline of the existing stripe. Mark all State Primary six (6) inch striping using Durable Waterborne Paint meeting the requirements of Section 846, except as specified herein. Mark all other routes using Waterborne Paint meeting the requirements of Section 842, except as specified herein. Apply gore lines at twice the width of the normal line width on that portion of roadway. **DO NOT APPLY PAINT OVER EXISTING THERMOPLASTIC STRIPING.** All lines shall have distinct, clean edges with proper bead distribution across the entire width and length of the line.

Passing zones and lane lines shall be installed as a 10' segment of paint with a 30' gap. The length of the 10' segment shall not be less than 10' nor longer than 10 feet 6 inches. The stripe- gap cycle shall be not less than 39 feet 6 inches and no longer than 40 feet 6 inches.

Apply paint, in a single pass, in accordance with the application rates in Section 713.03.03. Contrary to Section 713.03.03, the Contractor may apply beads at any application rate that meets the retroreflectivity requirements of Section 713.03.05.

The Contractor shall be responsible for protecting the painted line from traffic until dry in order to eliminate tracking. Retroreflectivity readings will be taken on zones with substantial amounts of tracking and the readings will be used in the calculation of payment. If the Engineer directs or the Contractor elects to use additional traffic control devices beyond what is specified in the TRAFFIC CONTROL PLAN, or other methods to control tracking, the additional cost shall be incidental to the bid item "Maintain and Control Traffic".

If the Engineer determines that the quality of the striping applied by the Contractor is unsatisfactory with regard to retroreflectivity, bead distribution, paint thickness, overspray, accuracy of retracing, line width, consistency, tracking, etc., the Engineer may stop the striping operation immediately until the Contractor can demonstrate that the problem has been corrected. If it is determined by the Engineer that the striping is not applied at the specified application rate, restriping will be required.

CLEANING OF APPLIED STRIPING

The Contractor has the option to clean accumulated debris from affected route prior to performing QC testing. Cleaning is defined as a single pass using the broom truck to remove accumulated debris from the affected striping. Notify the Engineer 48 hours prior to performing the cleaning operations.

MARKING REMOVAL

The Contractor shall be responsible for all necessary cleanup of any paint or other material that is spilled onto the pavement or elsewhere as a result of his operations and for correcting any striping error (including tracking and rain damage) that the Engineer determines removal to be required. Contrary to Section 713.03.04, remove all striping errors or paint spills by water blasting only (see attached note) at no additional cost to the Department. This removal process shall be performed in a manner that shall not be detrimental to the pavement. Upon notification of a striping error or paint spill by the Engineer, the Contractor shall be required to begin the process of correcting the striping error or paint spill within five (5) working days and shall work continuously to complete the corrective work prior to striping any other section of roadway included in this Contract.

Prior to retracing, the Engineer will notify the Contractor if existing striping errors need to be removed. Contrary to Section 713.03.04, remove all existing striping errors by water blasting only (see attached note). The Department will measure and pay for water blasting removal of existing stripes directed by the Engineer in linear feet.

PAINT ON VEHICLES

The Contractor shall be responsible for addressing disputes with the public regarding paint on vehicles that occur as a result of his operations. All complaints from the public shall be addressed in a timely manner and the Contractor must demonstrate a “good faith” attempt to resolve disputes to the satisfaction of the citizen. However, the Contractor shall have the right to dispute fault and refuse settlement in cases where the Contractor feels that paint on the vehicle was a result of negligence on the part of the citizen. Unresolved disputes involving paint on vehicles shall be handled through the legal system. The Department shall not be held responsible for paint on vehicles under any circumstances.

RETROREFLECTIVITY REQUIREMENTS

The minimum retroreflectivity requirements shall be in accordance with Section 713.03.05A of the Standard Specifications.

Restriping will be required for striping that fails to meet to meet the minimum retroreflectivity requirements. The provisions for restriping are described in the section of the Contract entitled MEASUREMENT AND PAYMENT. Complete the restriping within 15 calendar days after notification by the Engineer except that restriping will be suspended after **October 15, 2024** until the following spring at the discretion of the Engineer. All restriping not completed by **October 15, 2024** will be restriped at the Engineer's discretion as a priority route in the spring of 2024 and completed by **June 1, 2025**. All aspects of this specification shall apply to lines that are repainted due to failure to meet the requirements of the specifications, including the retroreflectivity requirements.

SCHEDULING

At the Pre-construction conference, the Engineer may provide the Contractor with a list of Priority Routes (not to exceed 10 percent of the total project estimate) which are to be striped prior to **June 1, 2024**. The painting of all scheduled routes shall be completed by **August 15, 2024**.

The Contractor shall coordinate the daily striping schedule, one week in advance, with the Engineer. Unless approved by the Engineer, complete all striping in a county, for that type of paint, before starting striping for that type of paint in another county (for this Contract there are 4 types of paint striping: 4" yellow, 4" white" 6" yellow, and 6" white). The Contractor shall ensure that once striping begins on a section that ALL striping on that section must be completed within two (2) weeks. Failure to comply with this requirement will result in withholding of pay estimates.

The Engineer may eliminate any route from the schedule at any time prior to striping if it is determined that the route does not require retracing. Also, the Engineer may add additional routes to be striped. The Contractor shall be notified of added routes prior to July 1, 2024.

CONTRACT COMPLETION AND LIQUIDATED DAMAGES

All priority routes shall be striped by **June 1, 2024**. Contrary to the Standard Specifications, no time extension will be granted for failure to complete striping of these priority routes by the **June 1, 2024** milestone completion date. Liquidated damages in the amount specified in Section 108.09 of the Standard Specifications will be assessed for each day that any priority route remains unstriped after **June 1, 2024**.

Sections that are required to be re-striped due to failure to meet retroreflectivity requirements must be completed within 15 calendar days after notification by the Engineer. The Department will assess Liquidated Damages in the amount specified in Section 108.09 of the Standard Specifications for each day beyond the 15 calendar days that the restriping is not completed and shall accrue until **October 15, 2024**. Failure to

complete all necessary corrective work by the **October 15, 2024** deadline will result in no additional payment for the stripe beyond the 50% that was initially paid for the installation of the stripe and payment will be based upon the Payment Schedule. At the Engineer's discretion, necessary corrective work not completed by the **October 15, 2024** deadline may be required to be restriped in the spring of 2025 as a priority route with a completion date of **June 1, 2025**. Any re-stripe required by the Engineer that is not completed by **June 1, 2025** shall accrue liquidated damages until **October 15, 2025**.

All routes that are required to be striped under this Contract shall be completed by **August 15, 2024**. Contrary to the Standard Specifications, no time extension will be granted. Liquidated damages will apply in accordance with Section 108.09 of the Standard Specifications for failure to complete the striping by August 15, 2024. Liquidated damages will accrue until October 15, 2024; no striping shall be performed after this date.

Remove all striping errors and spills within five (5) working days after notification by the Engineer. Liquidated damages, in the amount specified in Section 108.09 of the Standard Specifications, shall apply for each day beyond the five (5) working days that the Contractor has not begun to correct the striping error/spill or continuously work to complete the corrective work.

The Department will apply all Liquidated Damages accumulatively.

RE-TESTING OF FAILURES

The Department's costs associated with re-testing of striping failures for Kentucky Method 203 shall be reimbursed to the Department by the Contractor. The reimbursement shall include mobilization of the Department's mobile striping vendor's mobile testing machine as well as the current per mile rate for the mobile striping according to the Cabinet's Master Agreement.

MEASUREMENT AND PAYMENT

STRIPING: The Department will measure the paint striping of each type in linear miles of paint stripe. The Department will measure the quantity at twice the rate for a 4-inch line when an 8- inch line is applied or twice the rate for a 6-inch line when a 12-inch line is applied.

The Department will pay 50% of the Contract Unit Bid price for the applicable bid items after application of all striping to a particular section of roadway. Contrary to Section 104.02.02, the overrun and underrun formula shall not apply to this Contract. The remaining payment will be made based upon the following procedure and the Payment Schedule:

1. Each section of striping will be evaluated in accordance with KM-202 or KM-203, as applicable, and the QC/QA testing specified herein, for the purpose of evaluating retroreflectivity.
2. If a Section is accepted in accordance with the appropriate Kentucky Methods, the Department will make final payment according to the Payment Schedule listed below.
3. If a section is not accepted in accordance with the appropriate Kentucky Methods, restripe the entire section within fifteen (15) calendar days after notification by the Engineer subject to the same requirements as the original striping at no additional cost to the Department. If the restriped Section is accepted in accordance with the appropriate Kentucky Methods, the Department will make final payment according to the following Payment Schedule. If the section is not restriped by October 15, 2024, the Department will not make final payment and restriping may be required in the spring of 2025 where the corrective will become a priority route and re-striping must be completed by June 1, 2025. If the Engineer does not require re-striping to be completed in the spring of 2025, the Contractor shall accept the deduction in payment for the section that has been determined to be unacceptable.

Payment Schedule

	Initial Payment	Final Payment	Total Payment
Section is Accepted	50%	50%	100%
Section is Not Accepted	50%	0%	50%

QUALITY CONTROL: The Department will measure and pay the quantity as one lump sum. The Department will not measure the QCP, the DLS, any actions and personnel required to carry out the QCP, any testing, any testing equipment, or any other work necessary to perform the specified QC/QA procedures for payment, but will consider them incidental to this item of work.

MAINTAIN AND CONTROL TRAFFIC: See Traffic Control Plan.

LAW ENFORCEMENT OFFICER: See Traffic Control Plan.

WATER BLASTING EXISTING STRIPE: See Special Note for Water Blasting Existing Stripe.

SPECIAL NOTE FOR CENTERLINE & EDGELINE RUMBLE STRIPES

Be advised there may be some centerline and edgeline rumble stripes to be retraced. Place centerline and edgeline rumble stripes according to Standard Drawings TPR-100 through TPR-130. Notify the Engineer if questions arise regarding the striping patterns. If necessary, the Engineer will obtain guidance from the District Traffic Engineer and/or the Division of Traffic.

SPECIAL NOTE FOR WATER BLASTING EXISTING STRIPE

This Special Note will apply where indicated on the plans or in the proposal. Section references herein are to the Department’s 2012 Standard Specifications for Road and Bridge Construction.

1.0 DESCRIPTION. Remove pavement striping, temporary or permanent, from asphalt or concrete pavement using ultra-high pressure water.

2.0 MATERIALS AND EQUIPMENT.

2.1 Truck Mounted Ultra-high Pressure Pump and Water Tank. Use a truck having a separate hydrostatic transmission capable of speed increments of ±1 foot per minute at operator’s discretion. Use a pump capable of delivering a minimum of 30,000 psi to a bumper mounted deck containing an operator controlled rotating manifold that is speed variable up to at least 3,000 rpm and accepts interchangeable waterjet nozzles. Provide all necessary waterjet nozzle setups and patterns to ensure clean sufficient removal. Ensure the deck’s discharge directs the water and removal material in a manner that is not hazardous to vehicles or pedestrians.

2.2 Water. Conform to Section 803.

3.0 CONSTRUCTION. Before starting work, provide the Engineer with a contractor work history of 2 projects where striping removal was completed acceptably for a similar type of pavement. If no history is available, complete 1,000 linear feet of striping removal and obtain the Engineer’s approval before continuing.

Conduct striping removal under lane closures meeting the conditions of the MUTCD and Kentucky Standard Drawings and Specifications. Waterblast to remove temporary or permanent striping completely as the Engineer directs. Do not damage the pavement in any way and protect all joint seals. If damage is observed, stop the removal process until the operator can make changes and demonstrate acceptable striping removal. Repair any damage to the pavement. Vacuum all marking material and removal debris concurrently with the blasting operation.

4.0 MEASUREMENT. The Department will measure the quantity in linear feet. When the removal area’s width exceeds 8 inches and a second pass is required, the Department will measure the length of the additional pass for Payment. The Department will not measure for payment additional passes for widths of 8 inches or less or passes to further eradicate markings. The Department will not measure repair of damaged pavement for payment and will consider it incidental to this item of work.

5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
22664EN	Water Blasting Existing Stripe	Linear Foot

The Department will consider payment as full compensation for all work required under this note.

October 30, 2012

SPECIAL NOTE FOR PROJECTS TO BE RESTRIPE IN 2023 & 2024

Be advised that some projects listed herein may be scheduled for resurfacing in 2024. The Engineer may delete the striping on these routes from this Contract.

Be advised that some projects listed herein were scheduled for resurfacing or restriping in 2023, but may have been canceled or postponed. The Engineer may add the striping on canceled routes to this Contract.

RETROREFLECTOMETER

Furnish two (2) new LTL3500 Retroreflectometers or equal:

DELTA - a part of FORCE Technology
Venlighedsvej 4
2970 Horsham
Denmark
Tel. +45 43 25 14 00
roadsensors@forcetechnology.com
roadsensors.com

The retroreflectometers shall include the following options: Marking temperature, Road Icon references, Latitude/Longitude format: Decimal degrees, Data presentation in Google Earth, Nighttime color (x,y) for RL measurements (white & yellow), Macro and overview cameras, External printer, Qd, Daylight contrast (requires Qd).

Deliver the Retroreflectometers to the Engineer at the District 11 District Office, 602 Railroad Avenue, Manchester, KY 40902, within 2 weeks of striping operations beginning on the project.



Specification for Retroreflectometer for determining the coefficient of retroreflected luminance (R_L) and the luminance coefficient under diffuse illumination (Q_d) of pavement markings

LTL3500 retroreflectometer

1. MEASUREMENT PARAMETERS AND FEATURES:

1.1. Geometry: The retroreflectometer (instrument) shall be constructed to simulate the driver observation angle found at a 30-meter distance from the marking and in accordance with ASTM E 1710.

- Entrance angle of 88.76 degrees
- Observation angle of 1.05 degrees

and in accordance with EN 1436

- 1.1.3. Entrance angle of 1.24 degrees
- 1.1.4. Observation angle of 2.29 degrees

1.2. Compliance with standards:

LTL3500 comply with the following standards

- EN 1436 (R_L , Q_d ; Dry, wet and continuous wetting; Nighttime Chromaticity colors (x,y)
- ASTM D6628 (Color of pavement markings)
- ASTM E1710 (R_L dry)
- ASTM E2177 (R_L wet)
- ASTM E2302 (Q_d)
- ASTM E2367 (Nighttime chromaticity of pavement markings)
- ASTM E 2832 (R_L continuous wetting)

1.3. Illumination and Detection: The instrument shall utilize a system response illuminant type 'A' and CIE observer sensitivity according to ASTM E 1710 and EN 1436. The instrument is equipped with a long-life illumination system based of LED.

1.4. Working Range: The instrument shall measure retroreflection of road markings and shall have a working range of 0 to 4.000 $\text{mcd} \cdot \text{lx}^{-1} \cdot \text{m}^{-2}$ for R_L and 0 to 318 $\text{mcd} \cdot \text{lx}^{-1} \cdot \text{m}^{-2}$ for Q_d .

1.5. Marking Types & Conditions: The instrument shall be capable of measuring retroreflectivity on planar (flat) and profiled (textured) markings under dry conditions, wet conditions and under continuous wetting. The instrument shall be capable of automatic compensating for stray light allowing for full daylight measurements.

1.6. Depth Ability - Profile Markings: The instrument shall have a depth ability which enables the instrument to accurately measure profiled road / pavement markings in accordance with R_L profile height / depth of up to 0.6 inch / 15 mm.

1.7. Measurement Fields: The instrument shall utilize an illumination field that is wholly contained within the observation field. The instrument shall measure the retroreflectance of an area of 7.1 inch / 180 mm in length by 2.0 inch / 50 mm in width.



1.8. Measurement: The instrument measurement shall include the following data: Retroreflectivity (R_L & Q_d , Q_d optional); date and time; series ID; user ID; Temperature and humidity; Road icon reference; GNSS, coordinates of measurement location (optional); Nighttime chromaticity coordinates (x, y) (optional); Orientation and tilt (optional).

1.9. Nighttime Chromaticity Coordinates (x, y): The instrument shall be able to measure measures nighttime retroreflected color – CIE chromaticity for white and yellow markings according to EN1436, ASTM D6628 and ASTM E 2367. The instrument is calibrated to measure white and yellow Marking color coordinates correctly.

1.10. Positioning Data: The instrument shall include the following as a minimum to qualify itself as GNSS capable (GPS, Galileo, GLONASS, BeiDou satellite systems, optional):

- Latitude / longitude: Decimal degrees
- Datum: WGS 84
- The coordinates of the location of the instrument shall be recorded with each measurement of retroreflection.
- The instrument will measure, display, and record, along with the position coordinates, the number of satellites used to determine such coordinates for each reading.
- The GNSS receiver must receive all operational power from an internal supply source.
- The GNSS receiver shall be contained wholly within the retroreflectometer housing.
- The accuracy of the GNSS data under optimal conditions shall be 6.5 ft. / 2.0m CEP (Circular Error Probability).

1.11. Additional measurement support features:

The following additional features can be offered with LTL3500:

- Macro camera (optional) for close-up pictures of the measurement location
- Overhead camera (optional) for overview pictures of the markings measured.
- Instrument orientation and tilt (optional)
- External printer (optional) for on-location documentation of measurement results
- Daylight contrast
- IR based marking temperature
- Pass/fail indicator for R_L and Q_d
- External printer

2. CALIBRATION / ACCURACY:

2.1. Traceable Calibration: The instrument shall be supplied with a R_L master calibration assembly, which is made up of a plate and a calibrated ceramic reflection standard. The calibrated reflection standard must be traceable to an accredited national standards laboratory through an ISO17025 certified testing and calibration laboratory. A DANAK accredited calibration certificate shall be supplied with the traceable calibration reflection standard.

2.2. Calibration Standards Q_d : The instrument shall be supplied with a Q_d calibration marking for Q_d verification and calibration if required.

2.3. Stray Light Compensation: The instrument shall actively detect and compensate for the normal level of stray light present as part of each retroreflectivity measurement.

2.4. Color Correction: The instrument shall be internally color corrected to allow retroreflection measurement of white and yellow markings without requiring recalibration using colored reflection standards.



2.5. Repeatability: The repeatability of measurements taken with the instrument shall be within $\pm 2\%$.

2.6. Reproducibility: The reproducibility of measurements taken with the instrument or other similar instruments shall be within $\pm 5\%$.

3. CONSTRUCTION:

3.1. Basic Construction: The instrument is constructed with an internal aluminum frame to which the illumination and observation sources shall be mounted in order to maintain a fixed geometry. The instrument has an external shell made of impact resistant polymer material.

3.2. Portability: The instrument is completely self-contained and powered by a replaceable battery.

3.3. Dimensions & weight: The instrument's physical dimensions is:

- Length: 18.0 inch / 470 mm
- Width: 5.9 inch / 150 mm
- Height: 11.0 inch / 280 mm

The instrument fully equipped has a weight of 5.6 kg / 12.3 lbs.

3.4. Power Source: The instrument is powered by a rechargeable and replaceable Li-Ion battery. The instrument make use of a 12 V / 3.0 Ah professional Bosch battery.

3.5. Display: The instrument comes with a 5.0" high brightness color touch display, which is clearly visible in daylight and during sunshine. The display has a resolution of 800 x 480 pixel. The display functions are supported by 3 rugged activity buttons.

3.6. Macro camera & overhead camera (optional): The instrument can be equipped with a macro camera for close-up pictures of the markings showing the glass bead spread, numbers and embedment. The instrument can be equipped with an overhead camera which will allow a picture of the road markings being measured. Pictures taken with the cameras can be linked to the measurement. The cameras used has a resolution of 5 Mega Pixels (2592 x 1944 pixels).

3.7. Operating and storage range, humidity: The instrument can function within the following temperature range:

- Operation: 0°C to +60°C / +32°F to +140°F
- Storage: -10°C to +60°C / +14°F to +140°F

It is recommended that the instrument is being stored below +30°C / +86°F to conserve the battery best possible.

It is recommended to operate the instrument at relative humidity levels below 85% to ensure there is no condensation on the window underneath the instrument where light passes during measurement.

The instrument can be operated in altitudes up to 4.000 m / 13.000 feet.

3.8. Electronics Shielding: The instrument complies with EN 301-489-19 V2.1.1 (2019-04) and FCC-47 CFR part 15B (class B) to eliminate external electromagnetic interference with its performance and block internal electromagnetic radiation.

3.9. Safety: The instrument complies with IEC 61010-1:2010, AMD1:2016; EN 61010-1:2010 +A1:2019 in respect to safe use of the instrument.



3.10. Optics: The optics of the instrument is fixed within the aluminum frame, totally enclosed and protected by a sealed glass window.

3.11. Display Shield: The instrument is provided with a retractable shield that will protect the display when the unit is not in use. The shield shall be fabricated from polymer in such a manner as to cover the display into its furthest extent.

4. USE AND CONTROL:

4.1. Keyboard Panel: Use of the instrument is through a color touch display and three activity buttons / navigation buttons.

4.2. Multi-lingual: The instrument can display menus and readings in many languages, for example but not limited to: English, French, German, Italian, Polish, Russian and Spanish. Additional languages can be added over time.

4.3. Timing: The instrument has the capability to make combined R_L and Qd measurements simultaneous and in less than 1 second.

4.4. Data Storage: The instrument utilizes internal non-volatile 8 GB memory for storing measurement data. The GNSS data (optional) shall be stored internally along with each retroreflectivity measurement and support information. Each stored measurement must be identifiable by way of a series identifier and a user identifier.

4.5. Data Output: The instrument is equipped with a USB port and Wi-Fi interface to allow for easy transfer of data and diagnostics. The instrument is prepared for IOT. The GNSS data (optional) shall be linked to the individual measurements. Measurement data shall be presented in Excel and on Google Earth if GNSS is installed (optional)

4.6. Internal Error Detection: The instrument must indicate on the display and data log whenever detectable errors exist, such as excessive stray light, low battery or incorrect calibration.

4.7. GNSS Fix (optional): The instrument shall during normal use advise the operator if the GNSS fails to have a fix when a reading is taken. The operator will be given the options of a) taking the measurement anyway, b) not taking the measurement.

5. EQUIPMENT:

5.1. Standard Accessories: The instrument will be delivered complete with:

- Hardcase transportation box
- Quick guide
- Battery and battery charger
- Calibrated R_L accredited calibration standard
- Qd verification and calibration marking (if Qd has been purchased)
- USB memory stick for data transfer.

User manual and other support material is available via www.roadsensor.com under “Retroreflectometer products” and “LTL3500”.



5.2. Optional Accessories: The instrument will come as a base unit model able to measure R_L . LTL3500 can be added one or more of the following options:

- Qd measurement.
- GNSS positioning
- Nighttime chromaticity coordinates (x,y)
- Macro and overview camera
- Orientation (compass, instrument tilt)
- External printer

6. TECHNICAL SUPPORT & SERVICE:

6.1. Training: The manufacturer and/or authorized representative will be able to provide training and/or technical service as required by the purchaser or his appointed representative either via instruction video, on-location presence or via Internet.

6.2. Instrument Services: The manufacturer must offer a factory certified maintenance program for regular service checks to verify instrument performance as well a repair service. These services can be carried out either by DELTA or by one of our certified service operators.

7. REGULATORY COMPLIANCE:

EU:

Radio: EN 303-413 V1.1.1:2017

EMC: EN 301-489-19 V2.1.1 (2019-04)

Safety: IEC 61010-1:2010, AMD1:2016; EN 61010-1:2010+A1:2019

USA:

FCC: 47 CFR Part 15B (class B)

Canada:

ICES-003:2016 (Class B)

8. WARRANTY:

The instrument shall be warranted for a period of two years against defective parts and workmanship.

LTL3500

Specifications



Optical specifications

Field of measurement:

- Width: 50 mm / 2 inch
- Hight: 180 mm / 7.1 inch

Illumination angle R_L EN 1436: 1.24°
Illumination angle R_L ASTM E 1710: 88.76°
Observation angle R_L EN 1436: 2.29°
Observation angle R_L ASTM E 1710: 1.05°
Illumination angle Qd: Diffuse
Illumination angular spread:
• Horisontal: / Vertical: 0.33 / 0.17°
Observation angular spread: ±0.17°
Equivalent observations distance: 30 m

R_L range (mcd·m⁻²·lx⁻¹) 0 - 4000
Qd range (mcd·m⁻²·lx⁻¹) 0 – 318

Instrument dimensions

Length: 470 mm / 18.0 inch
Width: 150 mm / 5.9 inch
Height: 280 mm / 11.0 inch
Weight: 5.6 kg / 12.3 lbs

Construction

Structural parts: Aluminum
Housing: Polymer
Keyboard: Silicone rubber & touch screen

Display

- 5" high brightness color touch display
- Resolution 800 x 480 pixels

Macro camera, overhead camera

- Macro camera for close-up pictures of markings
- Overhead camera for overview of markings
- Resolution 5 megapixels (2592 x 1944 pixels)

Regulatory compliance

EU:
Radio: EN 303-413 V1.1.1:2017
EMC: EN 301-489-19 V2.1.1 (2019-04)
Safety: IEC 61010-1:2010, AMD1:2016; EN 61010-1:2010+A1:2019

USA:
FCC: 47 CFR Part 15B (class B)

Canada:
ICES-003:2016 (Class B)

Electrical characteristics

Power supply:
Battery: Rechargeable and replaceable Li-Ion 12V 3.0 Ah
Charging time: Approx. 1 hour 15 min.
External chargers:
• 230 V / 50 Hz
• 120 V / 60 Hz

Data

Data memory: 8 GB
Data transfer: USB 2.0, Wi-Fi
Typical repeatability: +/- 2%
Typical reproducibility: +/- 5%

Environmental specification

Temperature:
• Operating: 0°C to +60°C / 32°F to 140°F
• Storage: -10°C to +60°C / 14°F to 140°F
• Humidity: 20 - 85%, non-condensing
• Altitude: 4000 m / 13.000 feet

Timing

Measurement time: <1 sec.

Standards

EN 1436 (R_L & Qd), ASTM E1710 (R_L), ASTM E2177 (R_L wet), ASTM E2302 (Qd), ASTM E2367 (night colors), ASTM 2832 (continuous wetting)

General features

- Simultaneous R_L and Qd for dry & wet markings
- R_L for continuous wetting
- Measurement time less than 1 sec for both R_L and Qd
- Measures R_L on profiled markings up to 15 mm / 0.6 inch
- Ambient temperature and humidity
- Memory capacity 8GB
- Multi-lingual
- Average calculation
- Easy-readable color touch LED display with 3 buttons
- Long-life illumination system
- USB memory stick
- Wi-Fi prepared
- Power supply, standard Bosch professional battery
- Shows and stores date, time, air temperature, and humidity
- Facility for entering and storing road ID, user ID and other measurement related data
- Data presentation in Excel
- Stray light compensated
- Single handed operation, user-friendly
- "Time for Service" indicator
- Calibration reminder
- Wet timer
- Pass-fail Indicator

Optional features

- Qd
- Daylight contrast (requires Qd)
- Marking temperature
- Road Icon references
- GNSS positioning
 - Latitude / Longitude format: Decimal degrees
 - Datum: WGS 84
- Data presentation in Google Earth
- Nighttime color (x,y) for R_L measurements (white & yellow)
- Color Box reading
- Macro and overview cameras
- Orientation (compass, instrument tilt)
- Wi-Fi API & Web App (SW feature under development)
- User defined data linked to measurement (3rd party equipment)
- Add note to measurement
- External printer

Standard delivery

- LTL3500 Retroreflectometer
- Hard-case transportation box
- R_L calibration standard with DANAK certificate
- Qd calibration / verification marking (if Qd is ordered)
- Battery charger
- Quick guide
- USB memory stick

Downloads

User manual to be downloaded from www.roadsensors.com under 'Products' and 'User manuals':

Warranty

2 years

R&TTE Declaration of Conformity (DoC) and US Attestation of Conformity (AoC) can be supplied by DELTA upon request or viewed on: roadsensors.madebydelta.com/technical-background/certification Specifications may be changed without notice.



COORDINATION OF WORK WITH OTHERS

Be advised, the Department may issue permits for work on the Department's right of way adjacent to or within the limits of this project. See Sections 107.06 and 107.14. The Engineer will coordinate the work of the Contractor and the permit holders.

Be advised, there may be an active project(s) adjacent to or within this project. The Engineer will coordinate the work of the Contractors. See Section 105.06.

Be advised the Department may be performing work adjacent to or within this project. The Engineer will coordinate the Department's operations with the Contractor's work. See Section 105.11.

The Department will not grant any time extension or monetary consideration, and will not consider any claims if the Contractor's forces are delayed in their operations.

TRAFFIC CONTROL PLAN DURABLE WATERBORNE AND WATERBORNE PAINT STRIPING

1. Maintain and Control Traffic in accordance with the Standard Specifications for Road and Bridge Construction, Supplemental Specification, Standard and Sepia Drawings, and the MUTCD, current editions.
2. Contrary to Section 112, include all items necessary to maintain and control traffic in the lump sum bid item “Maintain and Control Traffic”. The Department will measure and pay only the bid items listed; consider all other work and necessary items to be incidental to the listed bid items. The Department will measure and pay “Maintain and Control Traffic” as one lump sum.
3. Maintain possession of all temporary traffic control items, devices, materials, and incidentals, unless otherwise specified in the proposal, when no longer needed.
4. If the Contractor desires to deviate from the traffic control scheme outlined in the Standard Drawings, prepare an alternate plan and present it in writing to the Engineer. Do not use the alternate plan until reviewed and approved by the District Engineer and the Divisions of Construction, Maintenance, and Traffic Operations.
5. Provide for the Contractor’s vehicles to always move with and not across or against the flow of traffic. Do not allow vehicles to make U-turns at any location. Do not allow the striper to stop and back down the road or ramps to stripe gore lines and turn lanes. Require vehicles to enter or leave work areas in a manner that will not be hazardous to, or interfere with, normal traffic flow. **If approved in advance by the Engineer, the contractor may use rolling road blocks to stripe intersections, not to exceed five (5) minutes duration, allowing the paint truck and broom to back up and paint the entire intersection.** Do not allow vehicles to park or stop within the right-of-way except within work areas designated by the Engineer. Do not allow personal vehicles to park within the right-of-way except in specific areas designated by the Engineer.
6. Do not allow the paint supply truck to operate as one of the traffic control vehicles shown on the Standard Drawings. If one of the required traffic control vehicles experiences mechanical problems or for some other reason is not available to remain in position as shown in the traffic control scheme, cease the striping operation until all required vehicles are in place.
7. Do not perform striping operations on any roadway during the peak times of the day, holiday periods, or special events as determined by the Engineer.
8. On two-lane, two-way highways, make provisions to the satisfaction of the Engineer to periodically allow traffic to safely pass the train of vehicles in the striping operation. **When painting center lines release traffic at least every two (2) miles.**

Traffic Control Plan
Durable Waterborne & Waterborne Paint Striping
Page 2 of 2

9. In low speed, urban situations, the Engineer may permit the Contractor to delete the intermediate trail vehicle between the striper and the final trail vehicle shown on the Standard Drawings.
10. If requested by the Contractor, the Engineer may approve Law Enforcement Officer Police Support on Interstate highways when striping operations are taking place. If the Contractor requests Law Enforcement Officer Police Support on other than Interstate Highways, provide written justification for the Engineer's approval. If approved, provide two (2) police support units for each lane closure, each unit consisting of an off-duty law enforcement officer from any police agency having lawful jurisdiction and a police car equipped with externally mounted flashing blue lights. Place the police support unit at locations determined by the Engineer. The Department will measure and pay for each approved individual police support unit on a per hour basis for the officer with the police vehicle.

CONTRACT COMPLETION DATE AND LIQUIDATED DAMAGES

All priority routes shall be striped by **June 1, 2024**. Contrary to the Standard Specifications, no time extension will be granted for failure to complete striping of these priority routes by the **June 1, 2024** milestone completion date. Liquidated damages in the amount specified in Section 108.09 of the Standard Specifications will be assessed for each day that any priority route remains unstriped after **June 1, 2024**.

Sections that are required to be re-striped due to failure to meet retroreflectivity requirements must be completed within 15 calendar days after notification by the Engineer. The Department will assess Liquidated Damages in the amount specified in Section 108.09 of the Standard Specifications for each day beyond the 15 calendar days that the restriping is not completed and shall accrue until **October 15, 2024**. Failure to complete all necessary corrective work by the **October 15, 2025** deadline will result in no additional payment for the stripe beyond the 50% that was initially paid for the installation of the stripe and payment will be based upon the Payment Schedule. At the Engineer's discretion, necessary corrective work not completed by the **October 15, 2024** deadline may be required to be restriped in the spring of 2025 as a priority route with a completion date of **June 1, 2025**. Any re-stripe required by the Engineer that is not completed by **June 1, 2025** shall accrue liquidated damages until **October 15, 2025**.


All routes that are required to be striped under this Contract shall be completed by **August 15, 2024**. Contrary to the Standard Specifications, no time extension will be granted. Liquidated damages will apply in accordance with Section 108.09 of the Standard Specifications for failure to complete the striping by August 15, 2024. Liquidated damages will accrue until October 15, 2024; no striping shall be performed after this date.

Remove all striping errors and spills within five (5) working days after notification by the Engineer. Liquidated damages, in the amount specified in Section 108.09 of the Standard Specifications, shall apply for each day beyond the five (5) working days that the Contractor has not begun to correct the striping error/spill or continuously work to complete the corrective work.

The Department will apply all Liquidated Damages accumulatively.



Highway District Map

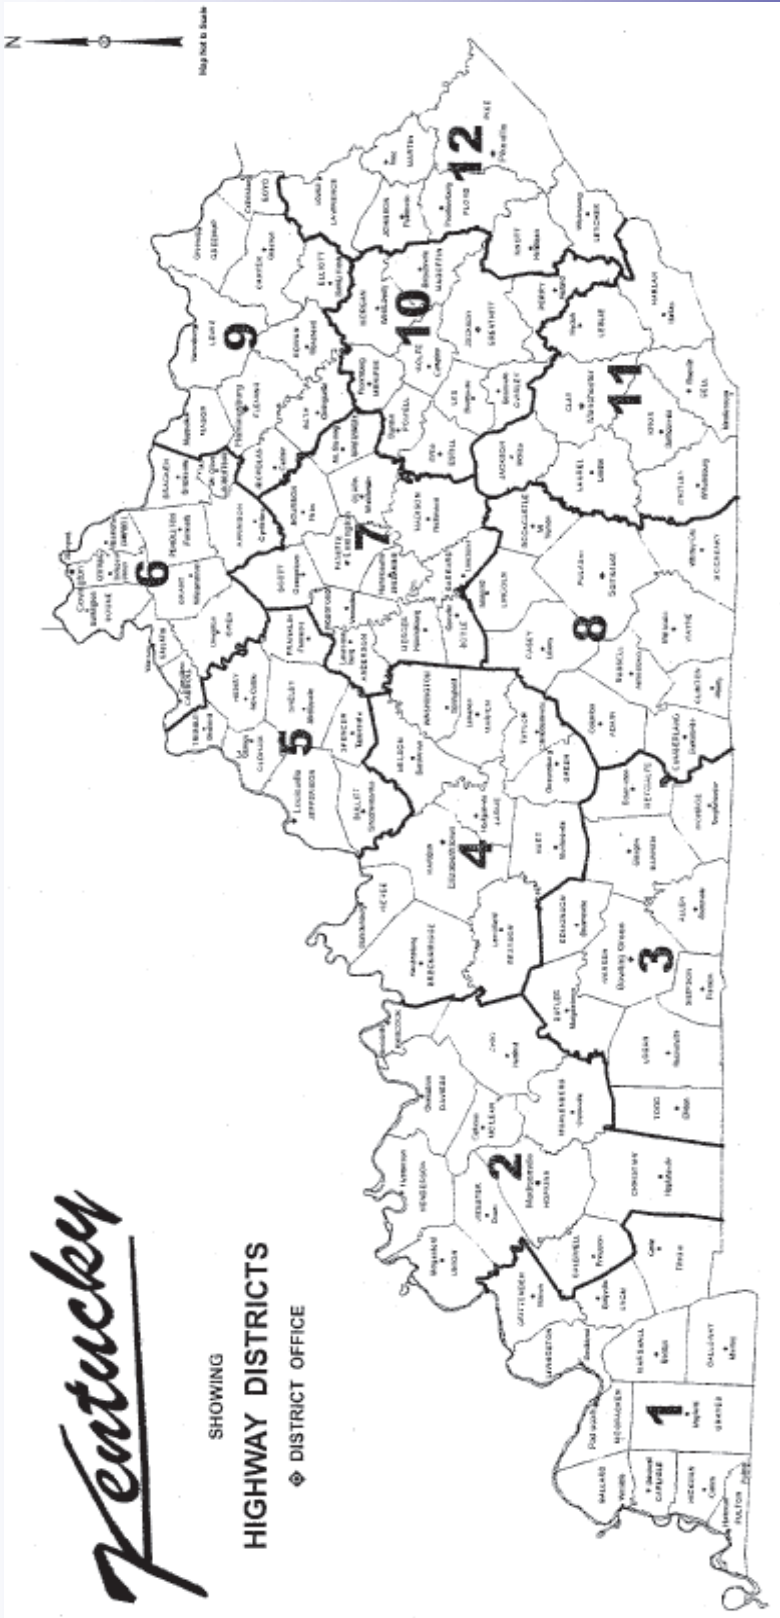

MATERIAL SUMMARY

CONTRACT ID: 242011

FE01 121 DW24 0110000

MP00780192401

KINGDOM COME STATE PARK KINGDOM COME STATE PARK WATERBOURNE PAINT STRIPING.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0150	06520	PAVE STRIPING-WB PAINT-4 IN W - KINGDOM COE STATE PARK	1.70	MILE
0155	06521	PAVE STRIPING-WB PAINT-4 IN Y - KINGDOM COE STATE PARK	4.66	MILE
0160	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 242011

FE01 121 DW24 0110000

MP12100002411

VARIOUS ROUTES IN DISTRICT 10 & 11 VARIOUS ROUTES IN DISTRICTS 10 & 11 WATERBOURNE PAINT STRIPING.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	02572	QUALITY CONTROL	1.00	LS
0010	02650	MAINTAIN & CONTROL TRAFFIC	1.00	LS
0015	20411ED	LAW ENFORCEMENT OFFICER	50.00	HOURL
0020	22664EN	WATER BLASTING EXISTING STRIPE	500.00	LF
0025	23138EN	RETROREFLECTOMETER	2.00	EACH
0030	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	20.88	MILE
0035	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	152.33	MILE
0040	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	13.66	MILE
0045	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	93.38	MILE
0050	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	80.54	MILE
0055	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	146.12	MILE
0060	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	11.36	MILE
0065	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	188.60	MILE
0070	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	24.38	MILE
0075	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	163.93	MILE
0080	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	2.08	MILE
0085	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	210.03	MILE
0090	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	28.71	MILE
0095	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	142.39	MILE
0100	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	8.79	MILE
0105	06520	PAVE STRIPING-WB PAINT-4 IN W - RS ROUTES	.64	MILE
0110	06521	PAVE STRIPING-WB PAINT-4 IN Y - RS ROUTES	119.12	MILE
0115	06520	PAVE STRIPING-WB PAINT-4 IN W - MP ROUTES	809.55	MILE
0120	06521	PAVE STRIPING-WB PAINT-4 IN Y - MP ROUTES	965.60	MILE
0125	06522	PAVE STRIPING-WB PAINT-6 IN W - MP ROUTES	6.80	MILE
0130	06523	PAVE STRIPING-WB PAINT-6 IN Y - MP ROUTES	65.74	MILE
0135	23140EN	DURABLE WATERBORNE MARKING-6 IN W - MP ROUTES	344.30	MILE
0140	23141EN	DURABLE WATERBORNE MARKING-6 IN Y - MP ROUTES	303.85	MILE
0145	02569	DEMOBILIZATION	1.00	LS

District 11 Durable Waterborne Paint Striping Contract - 2024
Interstate/Parkway/State Primary Systems - 6" lines

County	Route	Begin	End	Roadway length	6" Yellow Miles	6" White Miles	Comments
Bell	US 119	0.000	15.880	15.880	33.348	34.936	
Clay	Hal Rogers Pkwy	10.593	35.929	25.336	3.060	3.740	
Clay	US 421	16.915	17.345	0.430	0.860	1.075	
Clay	US 421	17.345	18.027	0.682	1.705	1.705	
Clay	US 421	18.027	20.207	2.180	5.450	4.360	
Clay	US 421	20.207	20.481	0.274	0.493	0.548	
Clay	US 421	24.047	32.824	8.777	15.799	17.554	
Clay	KY 80	7.350	7.537	0.187	0.337	0.513	
Harlan	US 119	0.000	13.213	13.213	23.783	29.069	
Harlan	US 119	13.213	20.200	6.987	9.782	15.371	
Harlan	US 119	26.000	33.950	7.950	11.130	17.490	
Harlan	US 421	0.000	3.520	3.520	6.336	7.392	
Harlan	US 421	7.188	7.278	0.090	0.162	0.189	
Harlan	US 421	14.103	17.107	3.004	7.510	7.576	
Harlan	US 421	21.061	22.700	1.639	3.114	3.278	
Harlan	US 421	23.000	26.888	3.888	7.387	7.776	
Harlan	KY 160	0.000	10.740	10.740	21.480	21.480	
Harlan	KY 160	10.740	11.036	0.296	0.740		
Jackson	US 421	0.000	3.600	3.600	6.480	7.200	
Jackson	US 421	7.900	8.006	0.106	0.191	0.212	
Jackson	US 421	12.770	14.799	2.029	3.652	4.058	
Jackson	US 421	16.849	21.445	4.596	8.273	9.192	
Jackson	KY 30	5.950	9.121	3.171	5.708	6.976	
Knox	KY 312	0.000	1.313	1.313	3.283	2.626	
Laurel	I-75 Ramps				2.600	6.500	Exits 29 and 49 (ONLY)
Laurel	HR 9006	8.831	10.593	1.762	3.524	3.577	
Laurel	Hal Rogers Pkwy	0.000	1.036	1.036	2.072	2.072	
Laurel	KY 30	0.000	4.000	4.000	10.400	9.200	
Laurel	KY 30	4.000	9.566	5.566	10.019	11.689	
Laurel	KY 80	0.000	4.445	4.445	8.001	10.224	
Laurel	KY 80	4.445	10.470	6.025	6.025	7.531	WEST BOUND ONLY
Laurel	KY 80	11.000	11.211	0.211	0.422	0.528	
Laurel	KY 192	18.253	18.350	0.097	0.281	0.305	
Laurel	KY 192	20.420	22.041	1.621	3.728	4.053	

District 11 Durable Waterborne Paint Striping Contract - 2024
Interstate/Parkway/State Primary Systems - 6" lines

County	Route	Begin	End	Roadway length	6" Yellow Miles	6" White Miles	Comments
Leslie	US 421	0.000	2.916	2.916	5.249	5.832	
Leslie	US 421	7.195	22.513	15.318	27.572	30.636	
Leslie	KY 118	0.000	3.524	3.524	7.048	8.105	
Whitley	US 25W	0.000	12.422	12.422	19.875	24.844	
Whitley	US 25W	13.507	14.362	0.855	1.368	1.710	
Whitley	US 25W	15.510	16.370	0.860	1.376	1.720	
Whitley	US 25W	24.681	25.041	0.360	0.576	0.720	
Whitley	US 25W	26.150	26.168	0.018	0.029	0.036	
Whitley	US 25W	33.362	33.464	0.102	0.184	0.255	
Whitley	US 25W	34.464	33.763	-0.701	0.598	0.598	
Whitley	US 25W	32.427	33.801	1.374	1.870	2.104	NORTH BOUND ONLY
Whitley	KY 90	0.000	8.328	8.328	0.094	0.065	
Whitley	KY 90	0.000	8.328	8.328	9.986	6.935	
Whitley	KY 90 S	0.000	0.318	0.318	0.572	0.398	
Whitley	KY 312	2.542	2.632	0.090	0.320	0.348	
TOTALS =				198.763	303.851	344.298	

NOTES 1. 6" LINES - DURABLE WATERBORNE STRIPING - SECTION 846.

2. ESTIMATED QUANTITIES ONLY. RE-TRACE AS DIRECTED BY THE ENGINEER.

3. THE DEPARTMENT WILL MEASURE AND PAY ONLY ACTUAL QUANTITIES RE-TRACED.

District 11 Waterborne Paint Striping Contract - 2024
State Secondary & Unclassified Routes 4" Lines

County	Route	Begin	End	Roadway Miles	4" Yellow Miles	4" White Miles	Comments
Bell	KY 66	0.000	18.424	18.424	9.970	9.970	
Bell	KY 74	11.291	13.340	2.049	4.098		MP & RS Route
Bell	KY 74	13.340	16.753	3.413	7.167	7.850	MP & RS Route
Bell	KY 92	0.000	11.160	11.160	14.400	16.000	
Bell	KY 92	0.000	11.160	11.160	5.688	6.320	Pavement
Bell	KY 190	0.000	4.098	4.098	8.196		
Bell	KY 190	11.174	21.573	10.399	20.798	20.798	
Bell	KY 221	0.000	12.633	12.633	22.739	25.266	
Bell	KY 441	4.257	4.897	0.640	1.600	0.870	MP & RS Route
Bell	KY 987	4.576	13.371	8.795	17.590		MP & RS Route
Bell	KY 2079	0.000	3.212	3.212	6.424	1.924	
Bell	KY 2396	0.000	0.492	0.492	0.984	0.984	
Bell	KY 2398	0.000	0.631	0.631	1.262		
Bell	KY 2401	0.000	1.136	1.136	2.613		
Bell	KY 2402	0.000	1.392	1.392	2.784		
Bell	KY 3151	0.000	0.524	0.524	1.048		
Bell	KY 3492	0.000	0.585	0.585	1.170		
Clay	US 421	5.110	16.915	11.805	21.249	23.610	
Clay	KY 11	0.000	26.623	26.623	47.921	53.246	
Clay	KY 66	0.000	32.900	32.900	59.220	65.800	
Clay	KY 66 C	0.000	0.177	0.177	0.354	0.354	
Clay	KY 80	0.000	7.350	7.350	13.230	14.700	
Clay	KY 80	7.350	7.537	0.187	0.337	0.513	
Clay	KY 873	0.000	3.952	3.952	7.114	6.717	
Clay	KY 2438	0.000	0.185	0.185	0.370		
Clay	KY 2440	0.000	0.057	0.057	0.114		Omit from Bridge St. (0.057) to
Clay	KY 2440	0.215	0.574	0.359	0.718		Lawyer St. (0.262) - too narrow.
Clay	KY 2467	0.000	3.931	3.931	7.862		
Clay	KY 3479	0.000	0.251	0.251	0.502	0.320	
Clay	KY 3560	0.000	1.364	1.364	2.728		
Harlan	KY 38	0.100	8.504	8.404	15.127	16.808	
Harlan	KY 38	8.504	29.474	20.970	41.940	38.106	
Harlan	KY 160	0.000	10.740	10.740	21.480	21.480	
Harlan	KY 160	10.740	11.036	0.296	0.740		
Harlan	KY 160	11.036	11.846	0.810	1.620		
Harlan	KY 160	11.846	14.584	2.738	5.476	5.476	
Harlan	KY 221	0.000	21.560	21.560	38.808	43.120	
Harlan	KY 221	21.560	26.767	5.207	10.414		
Harlan	KY 413	0.000	5.022	5.022	10.044		
Harlan	KY 3001	0.000	6.960	6.960	13.920	13.920	
Harlan	KY 3099	0.000	1.697	1.697		3.394	
Harlan	KY 3463	0.000	1.641	5.022	1.674	1.608	

District 11 Waterborne Paint Striping Contract - 2024
State Secondary & Unclassified Routes 4" Lines

County	Route	Begin	End	Roadway Miles	4" Yellow Miles	4" White Miles	Comments
Jackson	KY 30 C	0.000	0.214	0.214	0.428	0.428	
Jackson	KY 89	18.632	28.482	9.850	17.730	6.536	MP & RS Route
Jackson	KY 290	0.000	8.850	8.850	15.930	17.700	
Jackson	KY 3443	0.000	2.580	2.580	5.160		
Jackson	KY 3629	0.000	0.600	0.600	1.200	1.200	
Jackson	KY 3630	0.000	12.523	12.523	22.541	25.046	
Knox	KY 6	9.494	13.571	4.077	7.339	7.836	
Knox	KY 6	14.214	14.733	0.519	0.934	0.000	
Knox	KY 11	0.000	10.108	10.108	18.194	0.268	
Knox	KY 11	10.108	22.694	12.586	22.655	25.172	
Knox	KY 225	11.955	15.019	3.064	5.515	6.128	MP & RS Route
Knox	KY 229	0.000	8.572	8.572	15.430	17.144	
Knox	KY 312	0.000	1.313	1.313	3.283	2.626	
Knox	KY 830	0.000	3.755	3.755	6.759		MP & RS Route
Knox	KY 830	3.755	4.469	0.714	1.285	1.428	MP & RS Route
Knox	KY 1487	0.000	1.176	1.176	2.705		
Knox	KY 2413	0.000	0.198	0.198	0.396		
Knox	KY 2419	0.000	0.384	0.384	0.768		
Knox	KY 2420	0.000	0.376	0.376	0.752		
Knox	KY 2421	0.000	1.125	1.125	2.250		
Knox	KY 2423	0.000	0.949	0.949	1.898		
Knox	KY 3606	0.000	1.286	1.286	2.315	2.572	
Laurel	US 25	0.000	9.028	9.028	3.240	3.960	
Laurel	US 25	0.000	9.028	9.028	12.200	14.912	
Laurel	US 25	9.028	13.621	4.593	10.564	11.942	
Laurel	KY 80	11.211	15.210	3.999	7.198	7.998	
Laurel	KY 80	19.827	24.927	5.100	9.180	10.200	
Laurel	KY 192	0.000	3.981	3.981	7.166	7.962	
Laurel	KY 192	12.590	18.253	5.663	10.148	11.276	
Laurel	KY 229	0.000	12.211	12.211	13.522	15.024	DO NOT STRIPE MINI- ROUNDAABOUT
Laurel	KY 229	0.000	12.211	12.211	7.882	8.758	DO NOT STRIPE MINI- ROUNDAABOUT
Laurel	KY 354	0.000	1.106	1.106	2.212		
Laurel	KY 363	0.000	3.462	3.462	6.924	6.924	
Laurel	KY 363	7.096	7.368	0.272		0.680	Edge Line & Turn Lane at Wyan Pine
Laurel	KY 363	3.462	11.105	7.643	16.050	1.434	

**District 11 Waterborne Paint Striping Contract - 2024
State Secondary & Unclassified Routes 4" Lines**

County	Route	Begin	End	Roadway Miles	4" Yellow Miles	4" White Miles	Comments
Laurel	KY 490	0.000	6.140	6.140	12.280	12.280	MP & RS Route
Laurel	KY 770	0.000	1.243	1.243	2.237	2.486	
Laurel	KY 830	0.000	0.222	0.222	0.444		MP & RS Route
Laurel	KY 909	0.000	0.431	0.431	0.214	0.214	
Laurel	KY 909	0.431	1.067	0.636	1.145	1.272	
Laurel	KY 1006	5.364	6.899	1.535	3.070	1.030	MP & RS Route
Laurel	KY 1193	0.000	3.556	3.556	7.112	7.112	
Laurel	KY 2392	0.000	2.217	2.217	4.434		
Laurel	KY 3094	0.000	3.174	3.174	5.713	6.348	
Leslie	US 421	22.513	35.300	12.787	23.017	25.574	
Leslie	KY 66	0.000	2.755	2.755	5.510	5.510	
Leslie	KY 80	0.000	9.719	9.719	17.494	19.438	
Leslie	KY 221	0.000	1.753	1.753	3.506		
Leslie	KY 699	0.000	15.993	15.993	25.680	25.680	
Leslie	KY 1850	0.000	4.940	4.940	9.880		
Leslie	KY 3424	0.000	1.193	1.193	2.386		MP & RS Route
Whitley	KY 6	0.753	1.647	0.894	1.609	0.167	
Whitley	KY 26	3.400	14.319	10.919	19.654	21.838	
Whitley	KY 92	0.000	4.606	4.606	8.291	10.133	
Whitley	KY 92	4.606	9.230	4.624	8.323	10.173	
Whitley	KY 92	9.230	10.713	1.483	2.052	2.280	DO NOT STRIPE BRIDGE
Whitley	KY 92	10.400	10.713	0.313	0.563	0.626	DO NOT STRIPE BRIDGE
Whitley	KY 92	15.962	32.777	16.815	30.267	33.630	
Whitley	KY 296	0.000	1.158	1.158	2.316	0.290	
Whitley	KY 296	1.158	2.075	0.917	1.834	0.229	Originally striped in Thermo
Whitley	KY 296	1.700	2.035	0.335	0.670	0.670	Originally striped in Thermo
Whitley	KY 312	0.000	2.542	2.542	5.084		
Whitley	KY 727	0.000	3.790	3.790	7.580		DO NOT STRIPE ROUNDABOUT
Whitley	KY 727	3.790	4.580	0.790		1.580	One Way Sections
Whitley	KY 1193	0.000	7.933	7.933	15.866	6.678	
Whitley	KY 1259	0.000	4.192	4.192	8.384		
Whitley	KY 1804	0.000	5.577	5.577	11.154		
Whitley	KY 2386	0.000	0.776	0.776	1.746		
	KY 2989	0.000	1.416	1.416	2.832		
TOTAL =				569.800	965.595	809.545	

NOTES 1. 4" LINES - WATERBORNE STRIPING - SECTION 842.

2. ESTIMATED QUANTITIES ONLY. RE-TRACE AS DIRECTED BY THE ENGINEER.

3. THE DEPARTMENT WILL MEASURE AND PAY ONLY ACTUAL QUANTITIES RE-TRACED.

**District 11 Waterborne Paint Striping Contract - 2024
State Secondary & Unclassified Routes - 6" Lines**

County	Route	Begin	End	Roadway Miles	6" Yellow Miles	6" White Miles	Comments
Bell	KY 2129	0.000	1.094	1.094	2.188	2.188	
Clay	US 421	0.000	5.110	5.110	9.198	10.220	
Clay	KY 66	32.900	33.179	0.279	0.502	0.558	
Jackson	KY 89	15.638	18.632	2.994	5.389		
Laurel	KY 80	15.210	19.827	4.617	8.311	9.234	
Laurel	KY 192	3.981	12.590	8.609	15.496	17.218	
Laurel	KY 312	4.063	7.179	3.116	6.232	0.358	MP & RS Route
Leslie	KY 699	0.000	15.993	15.993	6.306	0.000	
Whitley	KY 6	0.000	0.753	0.753	1.355	0.741	
Whitley	KY 11	0.000	2.579	2.579	4.642	5.158	
Whitley	KY 26	0.000	14.319	14.319	6.120	6.800	
TOTAL =				59.463	65.740	52.475	

- NOTES 1. 6" LINES - WATERBORNE STRIPING - SECTION 842.**
2. ESTIMATED QUANTITIES ONLY. RE-TRACE AS DIRECTED BY THE ENGINEER.
3. THE DEPARTMENT WILL MEASURE AND PAY ONLY ACTUAL QUANTITIES RE-TRACED.

District 11 Waterborne Paint Striping Contract - 2024
4 inch Lines Rural Secondary Routes

County	Route	Begin	End	Roadway Length	Yellow Miles	White Miles	Comments
Bell	KY 72	0.000	3.371	3.371	6.068	6.742	
Bell	KY 74	0.000	11.291	11.291	22.582		MP & RS Route
Bell	KY 217	0.000	8.789	8.789	17.578		
Bell	KY 225	0.000	1.378	1.378		2.756	
Bell	KY 441	0.000	4.257	4.257	7.663		MP & RS Route
Bell	KY 516	0.000	1.305	1.305	2.349		
Bell	KY 535	0.000	0.600	0.600	1.200		
Bell	KY 987	13.371	19.355	5.984	11.968		MP & RS Route
Bell	KY 988	0.000	1.701	1.701	3.402		
Bell	KY 1534	0.000	5.840	5.840	11.680		
Bell	KY 1595	0.000	1.486	1.486	2.972		
Bell	KY 1599	0.000	0.871	0.871	1.742		
Bell	KY 2011	0.000	9.006	9.006	18.012		
Bell	KY 2013	0.000	1.996	1.996	0.100	3.892	
Bell	KY 2014	0.000	4.173	4.173	8.346	1.136	
Bell	KY 2015	0.000	2.827	2.827	5.654	4.758	
Bell	KY 2077	0.000	0.800	0.800		1.600	
Bell	KY 2133	0.000	0.814	0.814	1.628		
Bell	KY 2394	0.000	0.636	0.636	1.272		
Bell	KY 3482	0.000	1.410	1.410	2.820		
Bell	KY 3483	0.000	0.800	0.800	1.600		
Bell	KY 3484	0.000	3.567	3.567	7.134		
Bell	KY 3485	0.000	4.554	4.554	9.108		
Bell	KY 3486	0.000	3.728	3.728	7.456		
TOTAL =				81.184	152.333	20.884	
Clay	KY 149	0.000	10.640	10.640	21.280		
Clay	KY 484	0.000	1.652	1.652	3.304		
Clay	KY 577	0.000	11.903	11.903	21.425		
Clay	KY 687	14.074	15.168	1.094	1.969		
Clay	KY 1350	0.000	6.097	6.097	12.194		
Clay	KY 1524	13.000	16.462	3.462	6.924		
Clay	KY 1999	0.000	1.592	1.592	0.866	2.318	
Clay	KY 2000	0.000	9.092	9.092	11.124	7.060	
Clay	KY 2076	0.000	0.915	0.915	1.830		
Clay	KY 2432	0.000	1.177	1.177	2.354		
Clay	KY 3472	0.000	3.229	3.229	6.781	3.406	
Clay	KY 3473	0.000	1.121	1.121	2.242		
Clay	KY 3480	0.000	0.438	0.438	0.876	0.876	
Clay	KY 3481	0.000	0.104	0.104	0.208		
TOTAL =				52.516	93.378	13.660	

District 11 Waterborne Paint Striping Contract - 2024
4 inch Lines Rural Secondary Routes

County	Route	Begin	End	Roadway Length	Yellow Miles	White Miles	Comments
Harlan	KY 72	0.000	2.175	2.175	4.350	4.350	
Harlan	KY 72	2.175	5.151	2.976	5.952		
Harlan	KY 72	5.151	10.913	5.762	11.524	11.524	
Harlan	KY 72	10.913	11.773	0.860	1.720		DO NOT STRIPE ROUNDABOUT
Harlan	KY 72	11.821	12.229	0.408	0.816		DO NOT STRIPE ROUNDABOUT
Harlan	KY 72	12.229	13.275	1.046	2.092	2.092	
Harlan	KY 72	13.275	13.395	0.120	0.000		
Harlan	KY 179	7.580	7.993	0.413	0.826	0.826	
Harlan	KY 215	0.000	5.636	5.636	11.272		
Harlan	KY 215	0.000	0.044	0.044	0.044	0.200	One Way
Harlan	KY 219	0.000	5.141	5.141	10.282		
Harlan	KY 510	0.000	2.269	2.269	4.538		
Harlan	KY 568	0.000	3.268	3.268	6.536		
Harlan	KY 840	0.000	2.811	2.811		5.622	
Harlan	KY 840	2.811	4.311	1.500	3.000	2.464	
Harlan	KY 840	4.311	6.009	1.698	3.396	3.396	
Harlan	KY 987	0.000	19.422	19.422	38.844	1.486	
Harlan	KY 991	0.000	1.475	1.475		2.950	
Harlan	KY 1137	0.000	2.064	2.064	4.128		
Harlan	KY 1138	0.000	1.793	1.793	3.586	0.532	
Harlan	KY 1254	0.000	1.246	1.246	2.492	0.510	
Harlan	KY 1556	0.000	2.052	2.052		4.104	
Harlan	KY 1601	0.846	2.427	1.581	3.162	1.692	
Harlan	KY 1780	0.000	2.214	2.214	0.408	4.208	
Harlan	KY 1926	0.000	0.596	0.596	1.192		
Harlan	KY 2006	0.000	5.083	5.083	10.166		
Harlan	KY 2007	0.000	0.721	0.721	1.442	1.036	
Harlan	KY 2007	0.721	3.319	2.598		5.196	
Harlan	KY 2008	0.000	1.396	1.396	2.792		
Harlan	KY 2009	0.000	2.726	2.726	5.452	2.900	
Harlan	KY 2010	0.000	5.418	5.418	0.314	10.522	
Harlan	KY 2074	0.000	0.600	0.600		0.250	
Harlan	KY 3448	0.000	0.593	0.593		1.186	
Harlan	KY 3449	0.000	1.976	1.976	3.952	1.814	
Harlan	KY 3452	0.000	0.898	0.898		1.796	
Harlan	KY 3453	0.000	0.921	0.921	1.842		
Harlan	KY 3458	0.000	0.774	0.774		0.900	
Harlan	KY 3460	0.000	0.370	0.370		0.740	
Harlan	KY 3462	0.000	0.735	0.735		0.858	
Harlan	KY 3464	0.000	0.982	0.982		1.964	
Harlan	KY 3466	0.000	2.326	2.326		4.652	
Harlan	KY 3467	0.000	0.385	0.385		0.770	
TOTAL =				97.072	146.120	80.540	

District 11 Waterborne Paint Striping Contract - 2024
4 inch Lines Rural Secondary Routes

County	Route	Begin	End	Roadway Length	Yellow Miles	White Miles	Comments
Jackson	KY 89	5.681	15.638	9.957	19.914	11.362	MP & RS Route
Jackson	KY 577	0.000	11.197	11.197	22.394		
Jackson	KY 578	0.000	7.202	7.202	14.404		
Jackson	KY 1071	0.000	6.712	6.712	13.424		
Jackson	KY 1209	0.000	3.891	3.891	7.782		
Jackson	KY 1709	0.000	3.980	3.980	7.960		
Jackson	KY 1912	0.000	0.120	0.120	0.240		
Jackson	KY 1955	0.000	7.691	7.691	15.382		
Jackson	KY 2002	0.000	5.300	5.300	10.600		
Jackson	KY 2003	0.000	6.578	6.578	13.156		
Jackson	KY 2004	0.000	14.230	14.230	28.460		
Jackson	KY 3444	0.000	1.110	1.110	2.220		
Jackson	KY 3445	0.000	5.170	5.170	10.340		
Jackson	KY 3446	0.000	6.081	6.081	12.162		
Jackson	KY 3447	0.000	5.080	5.080	10.160		
TOTAL =				94.299	188.598	11.362	
Knox	KY 223	0.000	16.774	16.774	30.193		
Knox	KY 225	0.000	11.955	11.955	21.519		MP & RS Route
Knox	KY 233	0.000	1.500	1.500	2.700		
Knox	KY 830	4.469	7.745	3.276	5.897		MP & RS Route
Knox	KY 1304	0.000	6.110	6.110	12.220	3.600	
Knox	KY 1304	6.110	13.061	6.951	13.902		
Knox	KY 1527	0.000	2.403	2.403	4.806		
Knox	KY 1530	0.000	2.603	2.603	5.206		
Knox	KY 1629	0.000	4.058	4.058	8.116	5.798	
Knox	KY 1803	0.000	5.738	5.738	11.476		
Knox	KY 1809	0.000	6.313	6.313	12.626		
Knox	KY 2406	0.000	0.095	0.095	0.068	0.190	
Knox	KY 2409	0.000	0.251	0.251	0.502		
Knox	KY 2414	0.000	0.183	0.183	0.366		
Knox	KY 3153	0.000	0.373	0.373	0.746		
Knox	KY 3436	0.000	5.539	5.539	11.078		
Knox	KY 3437	0.000	1.746	1.746	0.510	2.982	
Knox	KY 3438	0.000	3.752	3.752		7.504	
Knox	KY 3439	0.000	4.582	4.582	9.164	0.105	
Knox	KY 3440	0.000	2.579	2.579	5.158		
Knox	KY 3441	0.000	3.440	3.440	4.838	2.042	
Knox	KY 3442	0.000	2.498	2.498	2.836	2.160	
TOTAL =				92.719	163.927	24.381	

District 11 Waterborne Paint Striping Contract - 2024
4 inch Lines Rural Secondary Routes

County	Route	Begin	End	Roadway Length	Yellow Miles	White Miles	Comments
Laurel	KY 233	0.000	0.668	0.668	1.336		
Laurel	KY 312	0.000	4.063	4.063	8.126		MP & RS Route
Laurel	KY 488	0.000	2.076	2.076	4.152		
Laurel	KY 490	6.140	11.509	5.369	10.738		MP & RS Route
Laurel	KY 521	0.000	2.898	2.898	5.796		
Laurel	KY 552	0.000	8.165	8.165	14.697	0.317	
Laurel	KY 578	0.000	10.148	10.148	20.296		
Laurel	KY 586	0.000	4.613	4.613	9.226		
Laurel	KY 687	0.000	0.238	0.238	0.428		
Laurel	KY 830	0.222	12.652	12.430	24.860		MP & RS Route
Laurel	KY 1006	0.000	4.904	4.904	9.808	0.528	MP & RS Route
Laurel	KY 1006	4.904	5.364	0.460	0.920	0.920	MP & RS Route
Laurel	KY 1023	0.000	2.968	2.968	5.342		
Laurel	KY 1189	0.000	6.518	6.518	13.036		
Laurel	KY 1228	0.000	2.876	2.876	5.752		
Laurel	KY 1305	0.000	6.514	6.514	13.028		
Laurel	KY 1394	0.000	2.634	2.634	5.268		
Laurel	KY 1803	0.000	9.245	9.245	18.490		
Laurel	KY 1810	0.000	3.246	3.246	6.492		
Laurel	KY 3431	0.000	2.959	2.959	5.918		
Laurel	KY 3432	0.000	3.450	3.450	6.900	0.310	
Laurel	KY 3434	0.000	3.560	3.560	7.174		
Laurel	KY 3497	0.000	6.123	6.123	12.246		
TOTAL =				106.125	210.030	2.076	
Leslie	KY 257	0.000	11.030	11.030	22.060		
Leslie	KY 406	0.000	2.916	2.916	5.832		
Leslie	KY 1482	0.000	7.460	7.460	14.920		
Leslie	KY 1780	0.000	5.166	5.166	2.860	7.472	
Leslie	KY 1780	5.166	14.299	9.133	18.266		
Leslie	KY 1807	0.000	3.613	3.613	7.226		
Leslie	KY 2008	0.000	2.535	2.535	1.150	3.920	
Leslie	KY 2008	2.535	8.638	6.103	4.350	3.586	Check pavement conditions. May omit due to truck haulage.
Leslie	KY 2009	0.000	15.302	15.302	30.604		Check pavement conditions. May omit due to truck haulage.
Leslie	KY 2057	0.000	3.115	3.115	5.200		
Leslie	KY 2058	0.000	4.841	4.841		9.682	
Leslie	KY 3424	1.193	5.337	4.144	8.288		MP & RS Route
Leslie	KY 3426	0.000	1.151	1.151		2.302	
Leslie	KY 3427	0.000	4.462	4.462	7.176	1.748	
Leslie	KY 3427	4.462	11.693	7.231	14.462		
TOTAL =				88.202	142.394	28.710	
Perry	KY 484	0.000	4.397	4.397	8.794		District 10
TOTAL =				4.397	8.794		

**District 11 Waterborne Paint Striping Contract - 2024
4 inch Lines Rural Secondary Routes**

County	Route	Begin	End	Roadway Length	Yellow Miles	White Miles	Comments
Whitley	KY 204	0.000	11.749	11.749	23.498		MP & RS Route
Whitley	KY 478	0.000	7.705	7.705	15.410		
Whitley	KY 511	0.000	7.331	7.331	14.662		
Whitley	KY 679	0.000	0.510	0.510	1.020		
Whitley	KY 904	0.000	13.331	13.331	26.662	0.638	
Whitley	KY 1418	0.000	1.524	1.524	3.048		
Whitley	KY 1595	0.000	4.587	4.587	9.174		
Whitley	KY 1673	0.000	1.509	1.509	3.018		
Whitley	KY 1809	0.000	1.436	1.436	2.872		
Whitley	KY 2995	0.000	0.952	0.952	1.436		
Whitley	KY 2996	0.000	4.288	4.288	8.576		
Whitley	KY 3423	0.000	4.870	4.870	9.740		
TOTAL =				59.792	119.116	0.638	

NOTES 1. 4" LINES - WATERBORNE STRIPING - SECTION 842.

2. ESTIMATED QUANTITIES ONLY. RE-TRACE AS DIRECTED BY THE ENGINEER.

3. THE DEPARTMENT WILL MEASURE AND PAY ONLY ACTUAL QUANTITIES RE-TRACED.


District 11 Waterborne Paint Striping Contract - 2024
4" Lines - State Park Routes

County	Park	Begin	End	Roadway Length	Yellow Miles	White Miles	Comments
Bell	Kingdom Come	0.000	2.342	2.342	4.659	1.704	
TOTAL =					4.659	1.704	

- NOTES 1. 4" LINES - WATERBORNE STRIPING - SECTION 842.
2. ESTIMATED QUANTITIES ONLY. RE-TRACE AS DIRECTED BY THE ENGINEER.
3. THE DEPARTMENT WILL MEASURE AND PAY ONLY ACTUAL QUANTITIES RE-TRACED.

DETAIL 6 INCH TO 4 INCH TRANSITION

PREFERRED METHOD TO OBTAIN 6" WIDTH FOR VARIOUS STRIPING SCENARIOS

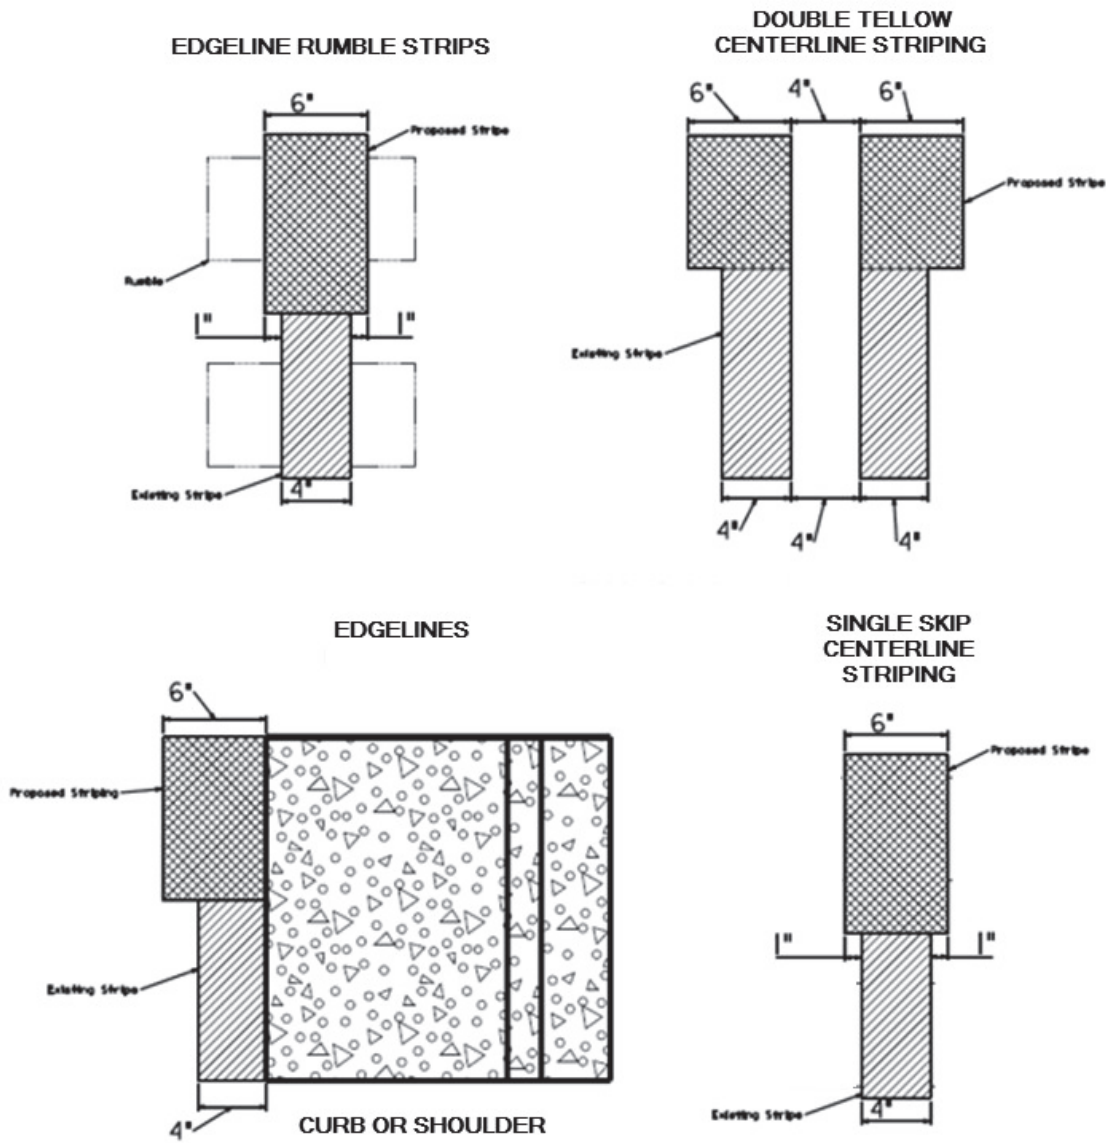

Contractor & District Information		
DISTRICT	2	CONTRACTOR
CONTACT		
PROJECT TYPE:	District Wide Striping	
FUNDING STRIP:		
CONTRACT ID:		
APPLICATION DATE:		
APPLICATION TYPE:	Permanent	
FIRST DAY TO TEST:		
LAST DAY TO TEST:		
SECTION STATUS:	ACCEPT AT 50% PAY	

[illegible]

Materials		Comments	Totals Summary							
			Striped Line Length (Miles)		MP 4" W	MP 4" Y	MP 6" W	MP 6" Y		
Yellow WB Traffic Paint	▶								RS 4" W	RS 4" Y
White WB Traffic Paint	▶									

Beads		

To request measurement of retroreflectivity in accordance with KIM203, please email all correspondence to brandi.mitchell@ky.gov. Please notify Central Office at least two (2) weeks in advance of when mobile testing is needed.

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

STANDARD SPECIFICATIONS

Any reference in the plans or proposal to previous editions of the *Standard Specifications for Road and Bridge Construction* and *Standard Drawings* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2019* and *Standard Drawings, Edition of 2020*.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting. The Supplemental Specifications can be found at the following link:
<http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx>

2020 KENTUCKY STANDARD DRAWINGS

CURVE WIDENING AND SUPERELEVATION TRANSITIONS	RGS-001-07
SUPERELEVATION FOR MULTILANE PAVEMENT	RGS-002-06
MISCELLANEOUS STANDARDS	RGX-001-06
APPROACHES, ENTRANCES, AND MAIL BOX TURNOUT	RPM-110-07
PAVEMENT MARKER ARRANGEMENTS MULTI-LANE ROADWAYS	TPM-100-03
PAVEMENT MARKER ARRANGEMENTS MULTI-LANE ROADWAYS	TPM-105-03
PAVEMENT MARKER ARRANGEMENTS MULTI-LANE ROADWAYS	TPM-110-03
PAVEMENT MARKER ARRANGEMENTS TWO-LANE TWO-WAY ROADWAYS	TPM-115-03
PAVEMENT MARKER ARRANGEMENT TWO-LANE TO FOUR-LANE TRANSITIONS	TPM-120-03
PAVEMENT MARKER ARRANGEMTEN ESIT GORE AND OFF-RAMP.....	TPM125-03
PAVEMENT MARKER ARRANGEMTEN FOR PARALLEL DECELERATION LANE.....	TPM-126
PAVEMENT MARKER ARRANGEMTEN ON-RAMP W/ TAPERED ACCELERATION LANE	TPM-130-03
PAVEMENT MARKER ARRANGEMTEN ON-RAMP W/ PARALLLEL ACCELERATION LANE....	TPM135-03
PAVEMENT MARKER ARRANGEMTEN TWO-WAY, LEFT TURN LANE	TPM-140-04
PAVEMENT MARKER ARRANGEMENT CHANNELIZED INTERSECTION.....	TPM-145-03
PAVEMENT STRIPING DETAILS FOR TWO LANE TWO WAY ROADWAYS	TPM-175
TYPICAL ENTRANCE RAMP MARKINGS	TPM-200
TYPICAL EXIT RAMP MARKINGS PAGE 1	TPM-201
TYPICAL EXIT RAMP MARKINGS PAGE 2.....	TPM 202
TYPICAL MARKINGS AT SIGNALIZED INTERSECTIONS	TPM-203
TYPICAL MARKINGS FOR GORE AREAS	TPM-204
TYPICAL MARKINGS FOR ISLANDS AND MEDIANS	TPM-205
TYPICAL MARKINGS FOR TURN LANES PAGE 1	TPM-206
TYPICAL MARKINGS FOR TURN LANES PAGE 2	TPM-207
CENTERLINE RUMBLE STRIPS PLACEMENT DETAILS	TPR-100
CENTERLINE RUMBLE STRIPS 4 INCH STRIPING	TPR-105
CENTERLINE RUMBLE STRIPS 6 INCH STRIPING	TPR-110
SHOULDER & EDGELINE RUMBLE STRIPS PLACEMENT DETAILS	TPR-115
EDGELINE RUMBLE STRIP DETAILS TWO LANE ROADWAYS	TPR-120
SHOULDER RUMBLE STRIP DETAILS TWO LANE ROADWAYS	TPR-125
RUMBLE STRIP DETAILS MULTI LANE ROADWAYS & RAMPS	TPR-130
PAVEMENT CONDITION WARNING SIGNS.....	TTD-125-03
MOBILE OPERATION FOR PAINT STRIPING CASE I	TTS-100-02
MOBILE OPERATION FOR PAINT STRIPING CASE II.....	TTS-105-02
MOBILE OPERATION FOR PAINT STRIPING CASE III.....	TTS-110-02
MOBILE OPERATION FOR PAINT STRIPING CASE IV	TTS-115-02
MOBILE OPERATION FOR DURABLE STRIPING CASE I	TTS-120-02
MOBILE OPERATION FOR DURABLE STRIPING CASE II	TTS-125-02
MOBILE OPERATION FOR DURABLE STRIPING CASE III.....	TTS-130-02
MOBILE OPERATION FOR DURABLE STRIPING CASE IV	TTS-135-02

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

**TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS**

**LABOR AND WAGE REQUIREMENTS
APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS**

- I. Application
- II. Nondiscrimination of Employees (KRS 344)

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

II. NONDISCRIMINATION OF EMPLOYEES

**AN ACT OF THE KENTUCKY
GENERAL ASSEMBLY TO PREVENT
DISCRIMINATION IN EMPLOYMENT
KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972**

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

No present or former public servant shall, within six (6) months following termination of his office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 1025 Capital Center Drive, Suite 104, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: May 23, 2022

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address:
<https://www.eProcurement.ky.gov>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

EMPLOYEE RIGHTS

UNDER THE FAIR LABOR STANDARDS ACT

THE UNITED STATES DEPARTMENT OF LABOR WAGE AND HOUR DIVISION

FEDERAL MINIMUM WAGE

\$7.25 PER HOUR

BEGINNING JULY 24, 2009

- OVERTIME PAY**

At least 1½ times your regular rate of pay for all hours worked over 40 in a workweek.
- CHILD LABOR**

An employee must be at least **16** years old to work in most non-farm jobs and at least **18** to work in non-farm jobs declared hazardous by the Secretary of Labor.

Youths **14** and **15** years old may work outside school hours in various non-manufacturing, non-mining, non-hazardous jobs under the following conditions:

No more than

 - **3** hours on a school day or **18** hours in a school week;
 - **8** hours on a non-school day or **40** hours in a non-school week.

Also, work may not begin before **7 a.m.** or end after **7 p.m.**, except from June 1 through Labor Day, when evening hours are extended to **9 p.m.** Different rules apply in agricultural employment.
- TIP CREDIT**

Employers of “tipped employees” must pay a cash wage of at least \$2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee’s tips combined with the employer’s cash wage of at least \$2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.
- ENFORCEMENT**

The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.

Employers may be assessed civil money penalties of up to \$1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to \$11,000 for each employee who is the subject of a violation of the Act’s child labor provisions. In addition, a civil money penalty of up to \$50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to \$100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.
- ADDITIONAL INFORMATION**
 - Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions.
 - Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands.
 - Some state laws provide greater employee protections; employers must comply with both.
 - The law requires employers to display this poster where employees can readily see it.
 - Employees under 20 years of age may be paid \$4.25 per hour during their first 90 consecutive calendar days of employment with an employer.
 - Certain full-time students, student learners, apprentices, and workers with disabilities may be paid less than the minimum wage under special certificates issued by the Department of Labor.



For additional information:

1-866-4-USWAGE
(1-866-487-9243) TTY: 1-877-889-5627

WWW.WAGEHOUR.DOL.GOV



U.S. Wage and Hour Division

PART IV

INSURANCE

Refer to
Kentucky Standard Specifications for Road and Bridge Construction,
current edition

PART V

BID ITEMS

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	02572		QUALITY CONTROL	1.00	LS		\$	
0020	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0030	06520		PAVE STRIPING-WB PAINT-4 IN W KINGDOM COE STATE PARK	1.70	MILE		\$	
0040	06520		PAVE STRIPING-WB PAINT-4 IN W MP ROUTES	809.55	MILE		\$	
0050	06520		PAVE STRIPING-WB PAINT-4 IN W RS ROUTES	182.25	MILE		\$	
0060	06521		PAVE STRIPING-WB PAINT-4 IN Y KINGDOM COE STATE PARK	4.66	MILE		\$	
0070	06521		PAVE STRIPING-WB PAINT-4 IN Y MP ROUTES	965.60	MILE		\$	
0080	06521		PAVE STRIPING-WB PAINT-4 IN Y RS ROUTES	1,224.69	MILE		\$	
0090	06522		PAVE STRIPING-WB PAINT-6 IN W MP ROUTES	6.80	MILE		\$	
0100	06523		PAVE STRIPING-WB PAINT-6 IN Y MP ROUTES	65.74	MILE		\$	
0110	20411ED		LAW ENFORCEMENT OFFICER	50.00	HOUR		\$	
0120	22664EN		WATER BLASTING EXISTING STRIPE	500.00	LF		\$	
0130	23138EN		RETROREFLECTOMETER	2.00	EACH		\$	
0140	23140EN		DURABLE WATERBORNE MARKING-6 IN W MP ROUTES	344.30	MILE		\$	
0150	23141EN		DURABLE WATERBORNE MARKING-6 IN Y MP ROUTES	303.85	MILE		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0160	02569		DEMOBILIZATION	1.00	LS		\$	