



Andy Beshear  
GOVERNOR

## TRANSPORTATION CABINET

200 Mero Street  
Frankfort, Kentucky 40601

Jim Gray  
SECRETARY

May 19, 2025

CALL NO. 408  
CONTRACT ID NO. 252198  
ADDENDUM # 1

Subject: Kenton-Boone Counties, 121GR25P048 - FD05, FE01, & FD04  
Letting May 22, 2025

- (1) Revised - Notes - Pages 43, 44 & 46 of 165
- (2) Revised - Material Summary - Pages 89-94 of 165
- (3) Revised - Proposal Bid Items - Pages 162-165 of 165

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.


Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:mr  
Enclosures

BOONE CO. US 25 ~m.p. 11.31  
~LAT/LONG N 39.00539, W 84.61716  
STATION G39



SITE LOCATION IS APPROXIMATE AND WILL BE DETERMINED IN THE FIELD AND APPROVED BY DIVISION OF PLANNING PERSONNEL PRIOR TO ANY CONSTRUCTION.

ALL LOOPS SHALL BE 6'X6' SQUARE AND SHALL BE INSTALLED 16' FROM LEADING EDGE TO LEADING EDGE AS SHOWN. PIEZOELECTRIC SENSORS (PIEZOS) SHALL BE INSTALLED 5' FROM THE EDGE OF LOOPS WITH THE EDGE OF EACH PIEZO FLUSH WITH THE EDGE OF THE CORRESPONDING DRIVING LANE. LOOPS AND PIEZOS SHALL BE INSTALLED SPLICE-FREE TO THE CABINET AND A MINIMUM OF 2' OF WIRE FOR EACH SENSOR SHALL BE COILED INSIDE EACH JUNCTION BOX AND CABINET. ALL LOOPS AND PIEZOS SHALL BE LABELED IN ALL JUNCTION BOXES AND CABINET. DIVISION OF PLANNING PERSONNEL WILL CONNECT THE LOOPS AND PIEZOS INSIDE THE CABINET.

REMOVE AND REPLACE THREE (3) NARROW SECTIONS OF SIDEWALK TO ROUTE CONDUIT TO TYPE A JUNCTION BOX.

INSTALL ONE (1) 1 1/4" CONDUIT FROM EACH SAW SLOT TO NEAREST JUNCTION BOX.


INSTALL ONE (1) TYPE A JUNCTION BOX (JB A1).

INSTALL ONE (1) 20"X20"X8" CABINET MOUNTED TO TWO (2) WOOD POSTS.

TRANSFER WIRING HARNESSES AND TERMINAL STRIPS FROM OLD CABINET TO THE NEW ONE AND REMOVE EX. CABINET, WIRE, CONDUIT, POST AND DISPOSE OF OFF THE PROJECT.

CODED NOTE:

- ① INSTALL ONE (1) 2" CONDUIT.

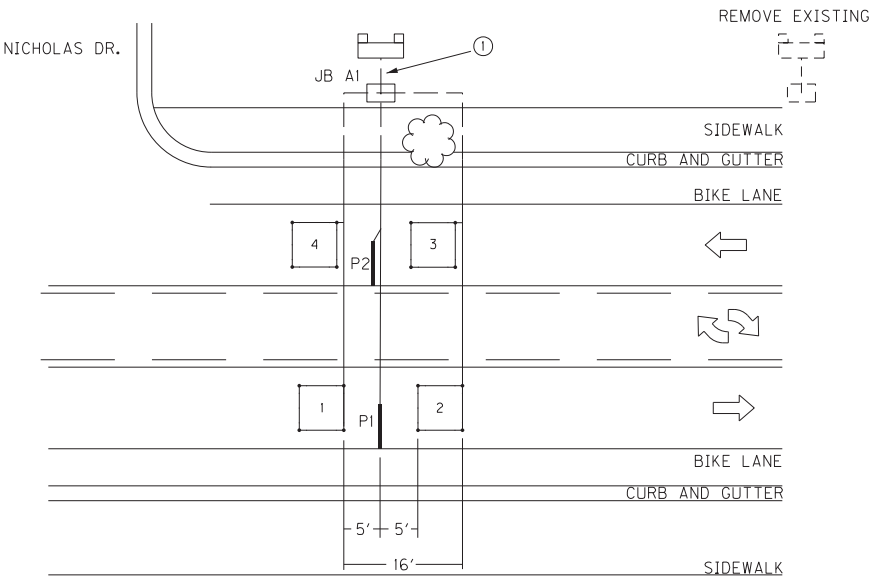

SCALE 1"=20'

KENTON CO. US 25 m.p. 5.88  
~LAT/LONG N 39.01480, W 84.60402  
STATION G42



SITE LOCATION IS APPROXIMATE AND WILL BE DETERMINED IN THE FIELD AND APPROVED BY DIVISION OF PLANNING PERSONNEL PRIOR TO ANY CONSTRUCTION.

ALL LOOPS SHALL BE 6'X6' SQUARE AND SHALL BE INSTALLED 16' FROM LEADING EDGE TO LEADING EDGE AS SHOWN. PIEZOELECTRIC SENSORS (PIEZOS) SHALL BE INSTALLED 5' FROM THE EDGE OF LOOPS WITH THE EDGE OF EACH PIEZO FLUSH WITH THE EDGE OF THE CORRESPONDING DRIVING LANE. LOOPS AND PIEZOS SHALL BE INSTALLED SPLICE-FREE TO THE CABINET. A MINIMUM OF 2' OF WIRE FOR EACH SENSOR SHALL BE COILED INSIDE EACH JUNCTION BOX AND A MINIMUM OF 4' OF WIRE FOR EACH SENSOR SHALL BE COILED INSIDE THE CABINET. ALL LOOPS AND PIEZOS SHALL BE LABELED IN ALL JUNCTION BOXES AND CABINET. DIVISION OF PLANNING PERSONNEL WILL CONNECT THE LOOPS AND PIEZOS INSIDE THE CABINET.

REMOVE AND REPLACE THREE (3) SLENDER SECTIONS OF SIDEWALK (AVOIDING DECORATIVE BRICK) TO INSTALL 1 1/4" CONDUIT TO THE TYPE A JUNCTION BOX.

INSTALL ONE (1) 1 1/4" CONDUIT FROM EACH SAW SLOT TO NEAREST JUNCTION BOX.


INSTALL ONE (1) TYPE A JUNCTION BOX (JB A1).

INSTALL ONE (1) 20"x20"x8" GALVANIZED STEEL CABINET ON TWO (2) WOOD POSTS.

TRANSFER WIRING HARNESSES AND TERMINAL STRIPS FROM OLD CABINET TO THE NEW ONE AND REMOVE THE OLD EXISTING EQUIPMENT AND DISPOSE OF OFF THE PROJECT.


CODED NOTES:

① INSTALL ONE (1) 2" CONDUIT.

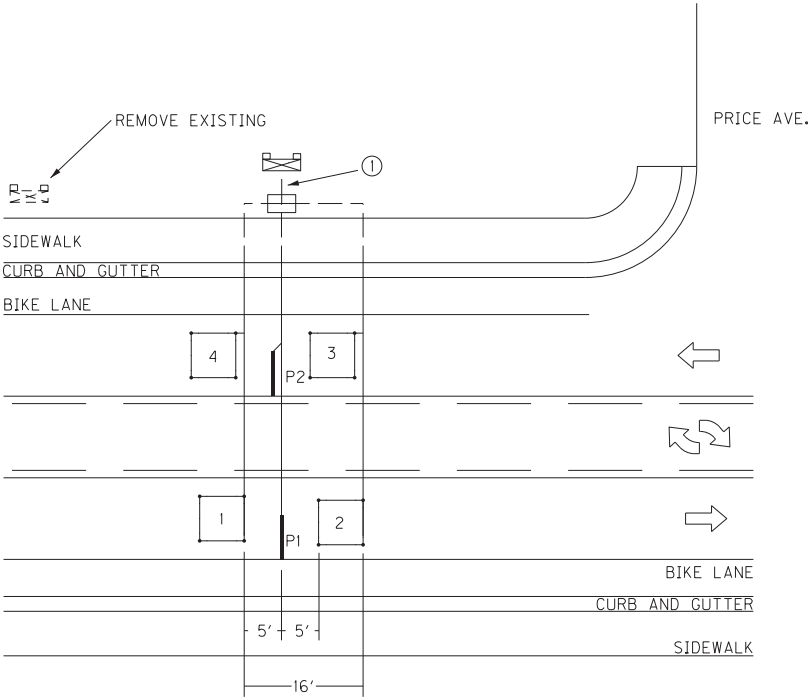

SCALE 1"=20'

BOONE CO. US 42 ~m.p. 14.26  
~LAT/LONG N 38.98834, W 84.63895  
STATION K46 EB




SITE LOCATION IS APPROXIMATE AND WILL BE DETERMINED IN THE FIELD AND APPROVED BY DIVISION OF PLANNING PERSONNEL PRIOR TO ANY CONSTRUCTION.

ALL LOOPS SHALL BE 6'X6' SQUARE. LOOPS SHALL BE INSTALLED SPLICE-FREE TO THE CABINET AND A MINIMUM OF 2' OF WIRE FOR EACH SENSOR SHALL BE COILED AND LABELED INSIDE THE CABINET. DIVISION OF PLANNING PERSONNEL WILL CONNECT THE LOOPS INSIDE THE CABINET.

INSTALL ONE (1) 10"x8"x4" CABINET MOUNTED TO ONE (1) WOOD POST.

INSTALL ONE (1) 1 1/4" CONDUIT FROM SAW SLOT TO 10"x8"x4" CABINET.

REMOVE AND REPLACE ONE (1) SECTION OF SIDEWALK TO INSTALL CONDUIT FROM SAW SLOT TO THE CABINET.

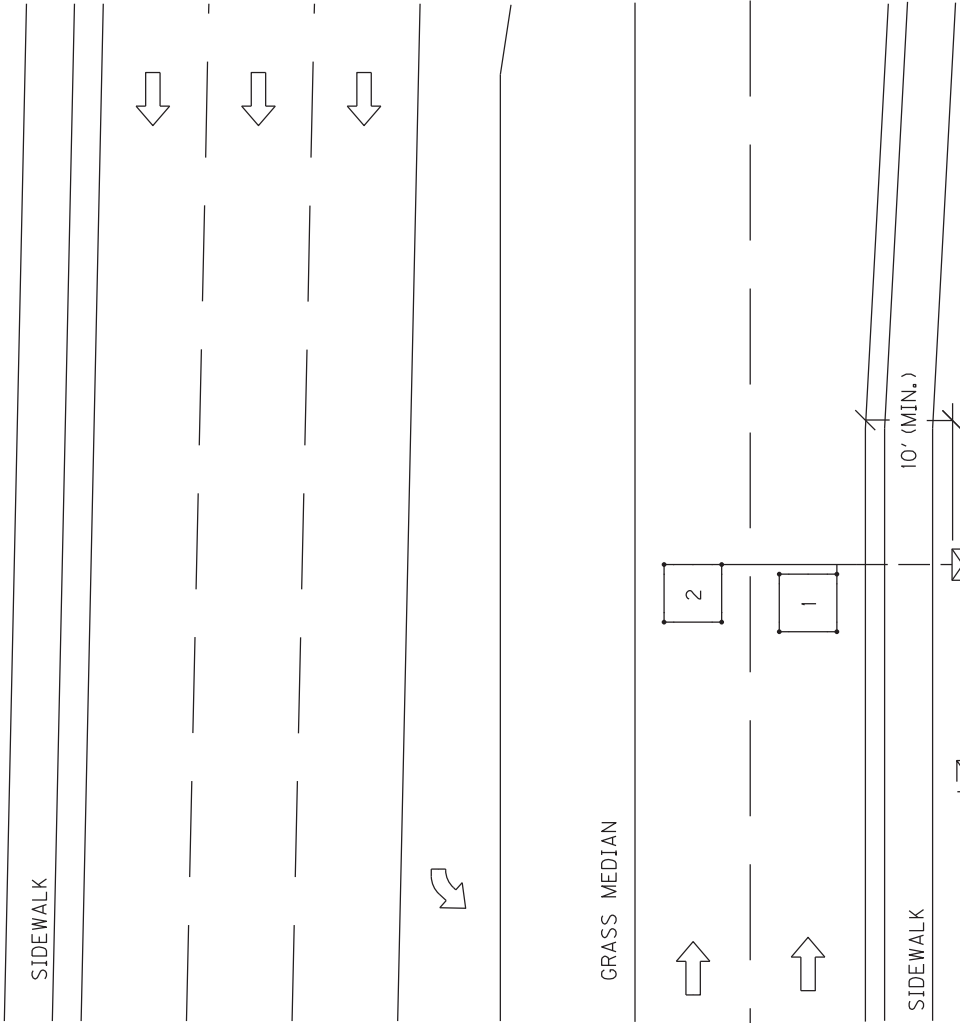

REMOVE EX. 10'x8'x4' CABINET AND DISPOSE OF OFF THE PROJECT

MATERIAL SUMMARY

CONTRACT ID: 252198

121GR25P048 - FD05, FE01, & FD04

MP00800252501

DIXIE HIGHWAY (US 25) BEGINNING 175 FEET NORTH OF DORTHA AVENUE EXTENDING NORTH TO THE BOONE/KENTON COUNTY LINE ASPHALT RESURFACING, A DISTANCE OF .5 MILES.

| Project Line No | Bid Code   | DESCRIPTION                                                                  | Quantity  | Unit |
|-----------------|------------|------------------------------------------------------------------------------|-----------|------|
| 0170            | 00190      | LEVELING & WEDGING PG64-22                                                   | 47.00     | TON  |
| 0175            | 00356      | ASPHALT MATERIAL FOR TACK                                                    | 7.00      | TON  |
| 0180            | 00388      | CL3 ASPH SURF 0.38B PG64-22                                                  | 1,090.00  | TON  |
| 0185            | 02562      | TEMPORARY SIGNS                                                              | 270.00    | SQFT |
| 0190            | 02650      | MAINTAIN & CONTROL TRAFFIC - (BOONE US 25) (FD05)                            | 1.00      | LS   |
| 0195            | 02671      | PORTABLE CHANGEABLE MESSAGE SIGN                                             | 3.00      | EACH |
| 0200            | 02676      | MOBILIZATION FOR MILL & TEXT - (BOONE US 25) (FD05)                          | 1.00      | LS   |
| 0205            | 02677      | ASPHALT PAVE MILLING & TEXTURING                                             | 1,090.00  | TON  |
| 0210            | 02720      | SIDEWALK-4 IN CONCRETE                                                       | 96.00     | SQYD |
| 0215            | 02775      | ARROW PANEL                                                                  | 2.00      | EACH |
| 0220            | 03240      | BASE FAILURE REPAIR                                                          | 285.00    | SQYD |
| 0225            | 04793      | CONDUIT-1 1/4 IN - (PLANNING LOOPS)(BOONE US 25) - REVISED 5-19-25           | 60.00     | LF   |
| 0230            | 04795      | CONDUIT-2 IN - (PLANNING LOOPS)(BOONE US 25)                                 | 10.00     | LF   |
| 0235            | 04820      | TRENCHING AND BACKFILLING - (PLANNING LOOPS) (BOONE US 25) - REVISED 5-19-25 | 55.00     | LF   |
| 0240            | 04829      | PIEZOELECTRIC SENSOR - (PLANNING LOOPS)(BOONE US 25) - REVISED 5-19-25       | 2.00      | EACH |
| 0245            | 04830      | LOOP WIRE - (PLANNING LOOPS)(BOONE US 25) - REVISED 5-19-25                  | 900.00    | LF   |
| 0250            | 04895      | LOOP SAW SLOT AND FILL - (PLANNING LOOPS) (BOONE US 25) - REVISED 5-19-25    | 220.00    | LF   |
| 0255            | 04960      | REMOVE AND REPLACE SIDEWALK - (PLANNING LOOPS)(BOONE US 25)                  | 3.00      | SQYD |
| 0260            | 06510      | PAVE STRIPING-TEMP PAINT-4 IN                                                | 13,850.00 | LF   |
| 0265            | 06542      | PAVE STRIPING-THERMO-6 IN W                                                  | 7,568.00  | LF   |
| 0270            | 06543      | PAVE STRIPING-THERMO-6 IN Y                                                  | 6,278.00  | LF   |
| 0275            | 06565      | PAVE MARKING-THERMO X-WALK-6 IN                                              | 1,188.00  | LF   |
| 0280            | 06568      | PAVE MARKING-THERMO STOP BAR-24IN                                            | 235.00    | LF   |
| 0285            | 06569      | PAVE MARKING-THERMO CROSS-HATCH                                              | 596.00    | SQFT |
| 0290            | 06573      | PAVE MARKING-THERMO STR ARROW                                                | 2.00      | EACH |
| 0295            | 06574      | PAVE MARKING-THERMO CURV ARROW                                               | 26.00     | EACH |
| 0300            | 06575      | PAVE MARKING-THERMO COMB ARROW                                               | 13.00     | EACH |
| 0305            | 06598      | PAVEMENT MARKING REMOVAL                                                     | 223.00    | SQFT |
| 0310            | 10020NS    | FUEL ADJUSTMENT                                                              | 1,781.00  | DOLL |
| 0315            | 10030NS    | ASPHALT ADJUSTMENT                                                           | 4,473.00  | DOLL |
| 0320            | 20099ES842 | PAVE MARK TEMP PAINT STOP BAR                                                | 235.00    | LF   |
| 0325            | 20100ES842 | PAVE MARK TEMP PAINT LINE ARROW                                              | 39.00     | EACH |
| 0330            | 20359NN    | GALVANIZED STEEL CABINET - (PLANNING LOOPS) (BOONE US 25)                    | 1.00      | EACH |
| 0335            | 20360ES818 | WOOD POST - (PLANNING LOOPS)(BOONE US 25)                                    | 2.00      | EACH |
| 0340            | 20391NS835 | ELECTRICAL JUNCTION BOX TYPE A - (PLANNING LOOPS)(BOONE US 25)               | 1.00      | EACH |

MATERIAL SUMMARY

| Project Line No | Bid Code   | DESCRIPTION                                            | Quantity | Unit |
|-----------------|------------|--------------------------------------------------------|----------|------|
| 0345            | 20782NS714 | PAVE MARKING THERMO-BIKE                               | 12.00    | EACH |
| 0350            | 23158ES505 | DETECTABLE WARNINGS - (NEW)                            | 181.00   | SQFT |
| 0355            | 24386EC    | PAVE MARKING THERMO-BIKE LANE ARROW                    | 12.00    | EACH |
| 0360            | 24683ED    | PAVE MARKING-THERMO DOTTED LANE EXTEN - (12 INCH)      | 323.00   | LF   |
| 0365            | 24683ED    | PAVE MARKING-THERMO DOTTED LANE EXTEN - (6 INCH)       | 213.00   | LF   |
| 0370            | 26119EC    | INSTALL RADAR PRESENCE DETECTOR TYPE A                 | 5.00     | EACH |
| 0375            | 26228EC    | ELECTRONIC DELIVERY MGMT SYSTEM - (BOONE US 25) (FD05) | 1.00     | LS   |
| 0380            | 02569      | DEMOBILIZATION                                         | 1.00     | LS   |

CONTRACT ID: 252198                      121GR25P048 - FD05, FE01, & FD04                      MP00800252502

DIXIE HIGHWAY (US 25) BEGINNING 175 FEET NORTH OF DORTHA AVENUE EXTENDING NORTH TO THE BOONE/KENTON COUNTY LINE SIDEWALK CONSTRUCTION, A DISTANCE OF .5 MILES.

| Project Line No | Bid Code   | DESCRIPTION                                       | Quantity | Unit |
|-----------------|------------|---------------------------------------------------|----------|------|
| 0385            | 02562      | TEMPORARY SIGNS                                   | 60.00    | SQFT |
| 0390            | 02650      | MAINTAIN & CONTROL TRAFFIC - (BOONE US 25) (FE01) | 1.00     | LS   |
| 0395            | 02671      | PORTABLE CHANGEABLE MESSAGE SIGN                  | 3.00     | EACH |
| 0400            | 02720      | SIDEWALK-4 IN CONCRETE                            | 74.00    | SQYD |
| 0405            | 03302      | REPAIR CONCRETE CURB                              | 6.00     | LF   |
| 0410            | 20904ED    | RECONSTRUCT CURB BOX INLET - (TOP PHASE ONLY)     | 3.00     | EACH |
| 0415            | 23158ES505 | DETECTABLE WARNINGS - (NEW)                       | 28.00    | SQFT |
| 0420            | 02569      | DEMOBILIZATION                                    | 1.00     | LS   |

CONTRACT ID: 252198                      121GR25P048 - FD05, FE01, & FD04                      MP00800252503

DIXIE HIGHWAY (US 25) BEGINNING 175 FEET NORTH OF DORTHA AVENUE EXTENDING NORTH TO THE BOONE/KENTON COUNTY LINE SIGNS-LIGHTING-SIGNALS, A DISTANCE OF .5 MILES.

| Project Line No | Bid Code   | DESCRIPTION                  | Quantity | Unit |
|-----------------|------------|------------------------------|----------|------|
| 0425            | 06406      | SBM ALUM SHEET SIGNS .080 IN | 30.00    | SQFT |
| 0430            | 06472      | INSTALL SPAN MOUNTED SIGN    | 4.00     | EACH |
| 0435            | 21373ND    | REMOVE SIGN                  | 3.00     | EACH |
| 0440            | 20188NS835 | INSTALL LED SIGNAL-3 SECTION | 1.00     | EACH |
| 0445            | 24955ED    | REMOVE SIGNAL EQUIPMENT      | 1.00     | EACH |

# MATERIAL SUMMARY

**CONTRACT ID: 252198**

**121GR25P048 - FD05, FE01, & FD04**

**MP00800422501**

UNION - FLORENCE ROAD (US 42) BEGINNING 110 FEET EAST OF EWING BOULEVARD EXTENDING EAST TO US 25/MAIN STREET ASPHALT RESURFACING, A DISTANCE OF .78 MILES.

| Project Line No | Bid Code   | DESCRIPTION                                                        | Quantity  | Unit |
|-----------------|------------|--------------------------------------------------------------------|-----------|------|
| 0710            | 00307      | CL2 ASPH SURF 0.38B PG64-22                                        | 1,980.00  | TON  |
| 0715            | 00356      | ASPHALT MATERIAL FOR TACK                                          | 12.00     | TON  |
| 0720            | 02562      | TEMPORARY SIGNS                                                    | 390.00    | SQFT |
| 0725            | 02650      | MAINTAIN & CONTROL TRAFFIC - (BOONE US 42) (FD05)                  | 1.00      | LS   |
| 0730            | 02671      | PORTABLE CHANGEABLE MESSAGE SIGN                                   | 2.00      | EACH |
| 0735            | 02676      | MOBILIZATION FOR MILL & TEXT - (BOONE US 42) (FD05)                | 1.00      | LS   |
| 0740            | 02677      | ASPHALT PAVE MILLING & TEXTURING                                   | 1,980.00  | TON  |
| 0745            | 02775      | ARROW PANEL                                                        | 2.00      | EACH |
| 0750            | 03240      | BASE FAILURE REPAIR                                                | 40.00     | SQYD |
| 0755            | 04793      | CONDUIT-1 1/4 IN - (PLANNING LOOPS)(BOONE US 42)                   | 40.00     | LF   |
| 0760            | 04820      | TRENCHING AND BACKFILLING - (PLANNING LOOPS) (BOONE US 42)         | 25.00     | LF   |
| 0765            | 04830      | LOOP WIRE - (PLANNING LOOPS)(BOONE US 42)                          | 1,800.00  | LF   |
| 0770            | 04895      | LOOP SAW SLOT AND FILL - (PLANNING LOOPS) (BOONE US 42)            | 335.00    | LF   |
| 0775            | 04960      | REMOVE AND REPLACE SIDEWALK - (PLANNING LOOPS)(BOONE US 42)        | 3.00      | SQYD |
| 0780            | 06510      | PAVE STRIPING-TEMP PAINT-4 IN                                      | 22,500.00 | LF   |
| 0785            | 06542      | PAVE STRIPING-THERMO-6 IN W                                        | 10,500.00 | LF   |
| 0790            | 06543      | PAVE STRIPING-THERMO-6 IN Y                                        | 10,500.00 | LF   |
| 0795            | 06565      | PAVE MARKING-THERMO X-WALK-6 IN                                    | 1,544.00  | LF   |
| 0800            | 06568      | PAVE MARKING-THERMO STOP BAR-24IN                                  | 174.00    | LF   |
| 0805            | 06574      | PAVE MARKING-THERMO CURV ARROW                                     | 15.00     | EACH |
| 0810            | 06600      | REMOVE PAVEMENT MARKER TYPE V                                      | 312.00    | EACH |
| 0815            | 10020NS    | FUEL ADJUSTMENT                                                    | 3,066.00  | DOLL |
| 0820            | 10030NS    | ASPHALT ADJUSTMENT                                                 | 7,702.00  | DOLL |
| 0825            | 20100ES842 | PAVE MARK TEMP PAINT LINE ARROW                                    | 15.00     | EACH |
| 0830            | 20360ES818 | WOOD POST - (PLANNING LOOPS)(BOONE US 42)                          | 3.00      | EACH |
| 0835            | 20468EC    | ELECTRICAL JUNCTION BOX-10 X 8 X 4 - (PLANNING LOOPS)(BOONE US 42) | 3.00      | EACH |
| 0840            | 23010EN    | PAVE MARK TEMP PAINT STOP BAR-24 IN                                | 174.00    | LF   |
| 0845            | 26119EC    | INSTALL RADAR PRESENCE DETECTOR TYPE A                             | 4.00      | EACH |
| 0850            | 26228EC    | ELECTRONIC DELIVERY MGMT SYSTEM - (BOONE US 42) (FD05)             | 1.00      | LS   |
| 0855            | 02569      | DEMOBILIZATION                                                     | 1.00      | LS   |

## MATERIAL SUMMARY

**CONTRACT ID: 252198**

**121GR25P048 - FD05, FE01, & FD04**

**MP05900252502**

DIXIE HIGHWAY (US 25) BEGINNING AT THE PAVEMENT JOINT 375 FEET NORTH OF MARIAN DRIVE  
EXTENDING NORTH TO KY 371 ASPHALT RESURFACING, A DISTANCE OF .51 MILES.

| Project Line No | Bid Code   | DESCRIPTION                                                          | Quantity  | Unit |
|-----------------|------------|----------------------------------------------------------------------|-----------|------|
| 0005            | 00356      | ASPHALT MATERIAL FOR TACK                                            | 8.00      | TON  |
| 0010            | 02562      | TEMPORARY SIGNS                                                      | 390.00    | SQFT |
| 0015            | 02650      | MAINTAIN & CONTROL TRAFFIC - (KENTON US 25 MP 8-9) (FD05)            | 1.00      | LS   |
| 0020            | 02671      | PORTABLE CHANGEABLE MESSAGE SIGN                                     | 2.00      | EACH |
| 0025            | 02676      | MOBILIZATION FOR MILL & TEXT - (KENTON US 25 MP 8-9) (FD05)          | 1.00      | LS   |
| 0030            | 02677      | ASPHALT PAVE MILLING & TEXTURING                                     | 1,200.00  | TON  |
| 0035            | 02775      | ARROW PANEL                                                          | 2.00      | EACH |
| 0040            | 03240      | BASE FAILURE REPAIR                                                  | 25.00     | SQYD |
| 0045            | 04793      | CONDUIT-1 1/4 IN - (PLANNING LOOPS)(KENTON MP 8-9)                   | 15.00     | LF   |
| 0050            | 04820      | TRENCHING AND BACKFILLING - (PLANNING LOOPS) (KENTON MP 8-9)         | 10.00     | LF   |
| 0055            | 04830      | LOOP WIRE - (PLANNING LOOPS)(KENTON MP 8-9)                          | 800.00    | LF   |
| 0060            | 04895      | LOOP SAW SLOT AND FILL - (PLANNING LOOPS) (KENTON MP 8-9)            | 160.00    | LF   |
| 0065            | 04960      | REMOVE AND REPLACE SIDEWALK - (PLANNING LOOPS)(KENTON MP 8-9)        | 2.00      | SQYD |
| 0070            | 06510      | PAVE STRIPING-TEMP PAINT-4 IN                                        | 18,058.00 | LF   |
| 0075            | 06542      | PAVE STRIPING-THERMO-6 IN W                                          | 7,000.00  | LF   |
| 0080            | 06543      | PAVE STRIPING-THERMO-6 IN Y                                          | 9,800.00  | LF   |
| 0085            | 06565      | PAVE MARKING-THERMO X-WALK-6 IN                                      | 1,258.00  | LF   |
| 0090            | 06568      | PAVE MARKING-THERMO STOP BAR-24IN                                    | 294.00    | LF   |
| 0095            | 06574      | PAVE MARKING-THERMO CURV ARROW                                       | 19.00     | EACH |
| 0100            | 06575      | PAVE MARKING-THERMO COMB ARROW                                       | 1.00      | EACH |
| 0105            | 06576      | PAVE MARKING-THERMO ONLY                                             | 3.00      | EACH |
| 0110            | 06600      | REMOVE PAVEMENT MARKER TYPE V                                        | 120.00    | EACH |
| 0115            | 10020NS    | FUEL ADJUSTMENT                                                      | 1,868.00  | DOLL |
| 0120            | 10030NS    | ASPHALT ADJUSTMENT                                                   | 4,692.00  | DOLL |
| 0125            | 20100ES842 | PAVE MARK TEMP PAINT LINE ARROW                                      | 20.00     | EACH |
| 0130            | 20360ES818 | WOOD POST - (PLANNING LOOPS)(KENTON MP 8-9)                          | 1.00      | EACH |
| 0135            | 20468EC    | ELECTRICAL JUNCTION BOX-10 X 8 X 4 - (PLANNING LOOPS)(KENTON MP 8-9) | 1.00      | EACH |
| 0140            | 23010EN    | PAVE MARK TEMP PAINT STOP BAR-24 IN                                  | 294.00    | LF   |
| 0145            | 24683ED    | PAVE MARKING-THERMO DOTTED LANE EXTEN                                | 120.00    | LF   |
| 0150            | 24685EC    | CL2 ASPH SURF 0.38A PG64-22                                          | 1,200.00  | TON  |
| 0155            | 26119EC    | INSTALL RADAR PRESENCE DETECTOR TYPE A                               | 14.00     | EACH |
| 0160            | 26228EC    | ELECTRONIC DELIVERY MGMT SYSTEM - (KENTON US 25 MP 8-9) (FD05)       | 1.00      | LS   |
| 0165            | 02569      | DEMOBILIZATION                                                       | 1.00      | LS   |

**CONTRACT ID: 252198**

**121GR25P048 - FD05, FE01, & FD04**

**MP05900252503**

## MATERIAL SUMMARY

DIXIE HIGHWAY (US 25) BEGINNING AT THE BOONE/KENTON COUNTY LINE EXTENDING NORTH TO FOREST LAWN CEMETERY ASPHALT RESURFACING, A DISTANCE OF 1.28 MILES.

| Project Line No | Bid Code   | DESCRIPTION                                                                 | Quantity  | Unit |
|-----------------|------------|-----------------------------------------------------------------------------|-----------|------|
| 0450            | 00190      | LEVELING & WEDGING PG64-22                                                  | 94.00     | TON  |
| 0455            | 00356      | ASPHALT MATERIAL FOR TACK                                                   | 16.00     | TON  |
| 0460            | 02562      | TEMPORARY SIGNS                                                             | 370.00    | SQFT |
| 0465            | 02650      | MAINTAIN & CONTROL TRAFFIC - (KENTON US 25 MP 4-7) (FD05)                   | 1.00      | LS   |
| 0470            | 02671      | PORTABLE CHANGEABLE MESSAGE SIGN                                            | 3.00      | EACH |
| 0475            | 02676      | MOBILIZATION FOR MILL & TEXT - (KENTON US 25 MP 4-7) (FD05)                 | 1.00      | LS   |
| 0480            | 02677      | ASPHALT PAVE MILLING & TEXTURING                                            | 2,340.00  | TON  |
| 0485            | 02775      | ARROW PANEL                                                                 | 2.00      | EACH |
| 0490            | 03240      | BASE FAILURE REPAIR                                                         | 478.00    | SQYD |
| 0495            | 04793      | CONDUIT-1 1/4 IN - (PLANNING LOOPS)(KENTON MP 4-7)                          | 60.00     | LF   |
| 0500            | 04795      | CONDUIT-2 IN - (PLANNING LOOPS)(KENTON MP 4-7)                              | 10.00     | LF   |
| 0505            | 04820      | TRENCHING AND BACKFILLING - (PLANNING LOOPS) (KENTON MP 4-7)                | 65.00     | LF   |
| 0510            | 04829      | PIEZOELECTRIC SENSOR - (PLANNING LOOPS) (KENTON MP 4-7) - REVISED 5-19-25   | 2.00      | EACH |
| 0515            | 04830      | LOOP WIRE - (PLANNING LOOPS)(KENTON MP 4-7) - REVISED 5-19-25               | 900.00    | LF   |
| 0520            | 04895      | LOOP SAW SLOT AND FILL - (PLANNING LOOPS) (KENTON MP 4-7) - REVISED 5-19-25 | 220.00    | LF   |
| 0525            | 04960      | REMOVE AND REPLACE SIDEWALK - (PLANNING LOOPS)(KENTON MP 4-7)               | 3.00      | SQYD |
| 0530            | 06510      | PAVE STRIPING-TEMP PAINT-4 IN                                               | 29,240.00 | LF   |
| 0535            | 06542      | PAVE STRIPING-THERMO-6 IN W                                                 | 14,484.00 | LF   |
| 0540            | 06543      | PAVE STRIPING-THERMO-6 IN Y                                                 | 14,756.00 | LF   |
| 0545            | 06565      | PAVE MARKING-THERMO X-WALK-6 IN                                             | 2,702.00  | LF   |
| 0550            | 06568      | PAVE MARKING-THERMO STOP BAR-24IN                                           | 755.00    | LF   |
| 0555            | 06569      | PAVE MARKING-THERMO CROSS-HATCH                                             | 242.00    | SQFT |
| 0560            | 06573      | PAVE MARKING-THERMO STR ARROW                                               | 7.00      | EACH |
| 0565            | 06574      | PAVE MARKING-THERMO CURV ARROW                                              | 54.00     | EACH |
| 0570            | 06575      | PAVE MARKING-THERMO COMB ARROW                                              | 22.00     | EACH |
| 0575            | 06576      | PAVE MARKING-THERMO ONLY                                                    | 2.00      | EACH |
| 0580            | 10020NS    | FUEL ADJUSTMENT                                                             | 3,810.00  | DOLL |
| 0585            | 10030NS    | ASPHALT ADJUSTMENT                                                          | 9,571.00  | DOLL |
| 0590            | 20099ES842 | PAVE MARK TEMP PAINT STOP BAR                                               | 755.00    | LF   |
| 0595            | 20100ES842 | PAVE MARK TEMP PAINT LINE ARROW                                             | 83.00     | EACH |
| 0600            | 20359NN    | GALVANIZED STEEL CABINET - (PLANNING LOOPS) (KENTON MP 4-7)                 | 1.00      | EACH |
| 0605            | 20360ES818 | WOOD POST - (PLANNING LOOPS)(KENTON MP 4-7)                                 | 2.00      | EACH |
| 0610            | 20391NS835 | ELECTRICAL JUNCTION BOX TYPE A - (PLANNING LOOPS)(KENTON MP 4-7)            | 1.00      | EACH |
| 0615            | 20782NS714 | PAVE MARKING THERMO-BIKE                                                    | 36.00     | EACH |
| 0620            | 22906ES403 | CL3 ASPH SURF 0.38A PG64-22                                                 | 2,340.00  | TON  |
| 0625            | 24386EC    | PAVE MARKING THERMO-BIKE LANE ARROW                                         | 36.00     | EACH |
| 0630            | 24683ED    | PAVE MARKING-THERMO DOTTED LANE EXTEN - (12 INCH)                           | 142.00    | LF   |

MATERIAL SUMMARY

| Project Line No | Bid Code | DESCRIPTION                                                    | Quantity | Unit |
|-----------------|----------|----------------------------------------------------------------|----------|------|
| 0635            | 24683ED  | PAVE MARKING-THERMO DOTTED LANE EXTEN - (6 INCH)               | 342.00   | LF   |
| 0640            | 26119EC  | INSTALL RADAR PRESENCE DETECTOR TYPE A                         | 23.00    | EACH |
| 0645            | 26228EC  | ELECTRONIC DELIVERY MGMT SYSTEM - (KENTON US 25 MP 4-7) (FD05) | 1.00     | LS   |
| 0650            | 02569    | DEMOBILIZATION                                                 | 1.00     | LS   |

CONTRACT ID: 252198                      121GR25P048 - FD05, FE01, & FD04                      MP05900252504

DIXIE HIGHWAY (US 25) BEGINNING AT THE BOONE/KENTON COUNTY LINE EXTENDING NORTH TO FOREST LAWN CEMETERY SIDEWALK CONSTRUCTION, A DISTANCE OF 1.28 MILES.

| Project Line No | Bid Code | DESCRIPTION                                               | Quantity | Unit |
|-----------------|----------|-----------------------------------------------------------|----------|------|
| 0655            | 02562    | TEMPORARY SIGNS                                           | 60.00    | SQFT |
| 0660            | 02650    | MAINTAIN & CONTROL TRAFFIC - (KENTON US 25 MP 4-7) (FE01) | 1.00     | LS   |
| 0665            | 02671    | PORTABLE CHANGEABLE MESSAGE SIGN                          | 3.00     | EACH |
| 0670            | 03302    | REPAIR CONCRETE CURB                                      | 20.00    | LF   |
| 0675            | 20904ED  | RECONSTRUCT CURB BOX INLET - (TOP PHASE ONLY)             | 2.00     | EACH |
| 0680            | 02569    | DEMOBILIZATION                                            | 1.00     | LS   |

CONTRACT ID: 252198                      121GR25P048 - FD05, FE01, & FD04                      MP05900252505

DIXIE HIGHWAY (US 25) BEGINNING AT THE BOONE/KENTON COUNTY LINE EXTENDING NORTH TO FOREST LAWN CEMETERY SIGNS-LIGHTING-SIGNALS, A DISTANCE OF 1.28 MILES.

| Project Line No | Bid Code   | DESCRIPTION                  | Quantity | Unit |
|-----------------|------------|------------------------------|----------|------|
| 0685            | 06406      | SBM ALUM SHEET SIGNS .080 IN | 16.50    | SQFT |
| 0690            | 06472      | INSTALL SPAN MOUNTED SIGN    | 2.00     | EACH |
| 0695            | 21373ND    | REMOVE SIGN                  | 1.00     | EACH |
| 0700            | 20188NS835 | INSTALL LED SIGNAL-3 SECTION | 9.00     | EACH |
| 0705            | 24955ED    | REMOVE SIGNAL EQUIPMENT      | 2.00     | EACH |

252198

PROPOSAL BID ITEMS

Report Date 5/19/25

Page 1 of 4

Section: 0001 - PAVING

| LINE | BID CODE | ALT | DESCRIPTION                                                                     | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|----------|-----|---------------------------------------------------------------------------------|----------|------|-----------|----|--------|
| 0010 | 00190    |     | LEVELING & WEDGING PG64-22                                                      | 141.00   | TON  |           | \$ |        |
| 0020 | 00307    |     | CL2 ASPH SURF 0.38B PG64-22                                                     | 1,980.00 | TON  |           | \$ |        |
| 0030 | 00356    |     | ASPHALT MATERIAL FOR TACK                                                       | 43.00    | TON  |           | \$ |        |
| 0040 | 00388    |     | CL3 ASPH SURF 0.38B PG64-22                                                     | 1,090.00 | TON  |           | \$ |        |
| 0050 | 02562    |     | TEMPORARY SIGNS                                                                 | 1,420.00 | SQFT |           | \$ |        |
| 0060 | 02650    |     | MAINTAIN & CONTROL TRAFFIC<br>(BOONE US 25) (FD05)                              | 1.00     | LS   |           | \$ |        |
| 0070 | 02650    |     | MAINTAIN & CONTROL TRAFFIC<br>(BOONE US 42) (FD05)                              | 1.00     | LS   |           | \$ |        |
| 0080 | 02650    |     | MAINTAIN & CONTROL TRAFFIC<br>(KENTON US 25 MP 4-7) (FD05)                      | 1.00     | LS   |           | \$ |        |
| 0090 | 02650    |     | MAINTAIN & CONTROL TRAFFIC<br>(KENTON US 25 MP 8-9) (FD05)                      | 1.00     | LS   |           | \$ |        |
| 0100 | 02671    |     | PORTABLE CHANGEABLE MESSAGE SIGN                                                | 10.00    | EACH |           | \$ |        |
| 0110 | 02676    |     | MOBILIZATION FOR MILL & TEXT<br>(BOONE US 25) (FD05)                            | 1.00     | LS   |           | \$ |        |
| 0120 | 02676    |     | MOBILIZATION FOR MILL & TEXT<br>(BOONE US 42) (FD05)                            | 1.00     | LS   |           | \$ |        |
| 0130 | 02676    |     | MOBILIZATION FOR MILL & TEXT<br>(KENTON US 25 MP 4-7) (FD05)                    | 1.00     | LS   |           | \$ |        |
| 0140 | 02676    |     | MOBILIZATION FOR MILL & TEXT<br>(KENTON US 25 MP 8-9) (FD05)                    | 1.00     | LS   |           | \$ |        |
| 0150 | 02677    |     | ASPHALT PAVE MILLING & TEXTURING                                                | 6,610.00 | TON  |           | \$ |        |
| 0160 | 02720    |     | SIDEWALK-4 IN CONCRETE                                                          | 96.00    | SQYD |           | \$ |        |
| 0170 | 02775    |     | ARROW PANEL                                                                     | 8.00     | EACH |           | \$ |        |
| 0180 | 03240    |     | BASE FAILURE REPAIR                                                             | 828.00   | SQYD |           | \$ |        |
| 0190 | 04793    |     | CONDUIT-1 1/4 IN<br>(PLANNING LOOPS)(BOONE US 25) -<br>REVISED 5-19-25          | 60.00    | LF   |           | \$ |        |
| 0200 | 04793    |     | CONDUIT-1 1/4 IN<br>(PLANNING LOOPS)(BOONE US 42)                               | 40.00    | LF   |           | \$ |        |
| 0210 | 04793    |     | CONDUIT-1 1/4 IN<br>(PLANNING LOOPS)(KENTON MP 4-7)                             | 60.00    | LF   |           | \$ |        |
| 0220 | 04793    |     | CONDUIT-1 1/4 IN<br>(PLANNING LOOPS)(KENTON MP 8-9)                             | 15.00    | LF   |           | \$ |        |
| 0230 | 04795    |     | CONDUIT-2 IN<br>(PLANNING LOOPS)(BOONE US 25)                                   | 10.00    | LF   |           | \$ |        |
| 0240 | 04795    |     | CONDUIT-2 IN<br>(PLANNING LOOPS)(KENTON MP 4-7)                                 | 10.00    | LF   |           | \$ |        |
| 0250 | 04820    |     | TRENCHING AND BACKFILLING<br>(PLANNING LOOPS)(BOONE US 25) -<br>REVISED 5-19-25 | 55.00    | LF   |           | \$ |        |
| 0260 | 04820    |     | TRENCHING AND BACKFILLING<br>(PLANNING LOOPS)(BOONE US 42)                      | 25.00    | LF   |           | \$ |        |
| 0270 | 04820    |     | TRENCHING AND BACKFILLING<br>(PLANNING LOOPS)(KENTON MP 4-7)                    | 65.00    | LF   |           | \$ |        |
| 0280 | 04820    |     | TRENCHING AND BACKFILLING<br>(PLANNING LOOPS)(KENTON MP 8-9)                    | 10.00    | LF   |           | \$ |        |
| 0290 | 04829    |     | PIEZOELECTRIC SENSOR<br>(PLANNING LOOPS)(BOONE US 25) -<br>REVISED 5-19-25      | 2.00     | EACH |           | \$ |        |

## PROPOSAL BID ITEMS

252198

Page 2 of 4

Report Date 5/19/25

| LINE | BID CODE   | ALT | DESCRIPTION                                                                    | QUANTITY  | UNIT | UNIT PRIC | FP | AMOUNT      |
|------|------------|-----|--------------------------------------------------------------------------------|-----------|------|-----------|----|-------------|
| 0300 | 04829      |     | PIEZOELECTRIC SENSOR<br>(PLANNING LOOPS)(KENTON MP 4-7) -<br>REVISED 5-19-25   | 2.00      | EACH |           | \$ |             |
| 0310 | 04830      |     | LOOP WIRE<br>(PLANNING LOOPS)(BOONE US 25) -<br>REVISED 5-19-25                | 900.00    | LF   |           | \$ |             |
| 0320 | 04830      |     | LOOP WIRE<br>(PLANNING LOOPS)(BOONE US 42)                                     | 1,800.00  | LF   |           | \$ |             |
| 0330 | 04830      |     | LOOP WIRE<br>(PLANNING LOOPS)(KENTON MP 4-7) -<br>REVISED 5-19-25              | 900.00    | LF   |           | \$ |             |
| 0340 | 04830      |     | LOOP WIRE<br>(PLANNING LOOPS)(KENTON MP 8-9)                                   | 800.00    | LF   |           | \$ |             |
| 0350 | 04895      |     | LOOP SAW SLOT AND FILL<br>(PLANNING LOOPS)(BOONE US 25) -<br>REVISED 5-19-25   | 220.00    | LF   |           | \$ |             |
| 0360 | 04895      |     | LOOP SAW SLOT AND FILL<br>(PLANNING LOOPS)(BOONE US 42)                        | 335.00    | LF   |           | \$ |             |
| 0370 | 04895      |     | LOOP SAW SLOT AND FILL<br>(PLANNING LOOPS)(KENTON MP 4-7) -<br>REVISED 5-19-25 | 220.00    | LF   |           | \$ |             |
| 0380 | 04895      |     | LOOP SAW SLOT AND FILL<br>(PLANNING LOOPS)(KENTON MP 8-9)                      | 160.00    | LF   |           | \$ |             |
| 0390 | 04960      |     | REMOVE AND REPLACE SIDEWALK<br>(PLANNING LOOPS)(BOONE US 25)                   | 3.00      | SQYD |           | \$ |             |
| 0400 | 04960      |     | REMOVE AND REPLACE SIDEWALK<br>(PLANNING LOOPS)(BOONE US 42)                   | 3.00      | SQYD |           | \$ |             |
| 0410 | 04960      |     | REMOVE AND REPLACE SIDEWALK<br>(PLANNING LOOPS)(KENTON MP 4-7)                 | 3.00      | SQYD |           | \$ |             |
| 0420 | 04960      |     | REMOVE AND REPLACE SIDEWALK<br>(PLANNING LOOPS)(KENTON MP 8-9)                 | 2.00      | SQYD |           | \$ |             |
| 0430 | 06510      |     | PAVE STRIPING-TEMP PAINT-4 IN                                                  | 83,648.00 | LF   |           | \$ |             |
| 0440 | 06542      |     | PAVE STRIPING-THERMO-6 IN W                                                    | 39,552.00 | LF   |           | \$ |             |
| 0450 | 06543      |     | PAVE STRIPING-THERMO-6 IN Y                                                    | 41,334.00 | LF   |           | \$ |             |
| 0460 | 06565      |     | PAVE MARKING-THERMO X-WALK-6 IN                                                | 6,692.00  | LF   |           | \$ |             |
| 0470 | 06568      |     | PAVE MARKING-THERMO STOP BAR-24IN                                              | 1,458.00  | LF   |           | \$ |             |
| 0480 | 06569      |     | PAVE MARKING-THERMO CROSS-HATCH                                                | 838.00    | SQFT |           | \$ |             |
| 0490 | 06573      |     | PAVE MARKING-THERMO STR ARROW                                                  | 9.00      | EACH |           | \$ |             |
| 0500 | 06574      |     | PAVE MARKING-THERMO CURV ARROW                                                 | 114.00    | EACH |           | \$ |             |
| 0510 | 06575      |     | PAVE MARKING-THERMO COMB ARROW                                                 | 36.00     | EACH |           | \$ |             |
| 0520 | 06576      |     | PAVE MARKING-THERMO ONLY                                                       | 5.00      | EACH |           | \$ |             |
| 0530 | 06598      |     | PAVEMENT MARKING REMOVAL                                                       | 223.00    | SQFT |           | \$ |             |
| 0540 | 06600      |     | REMOVE PAVEMENT MARKER TYPE V                                                  | 432.00    | EACH |           | \$ |             |
| 0550 | 10020NS    |     | FUEL ADJUSTMENT                                                                | 10,525.00 | DOLL | \$1.00    | \$ | \$10,525.00 |
| 0560 | 10030NS    |     | ASPHALT ADJUSTMENT                                                             | 26,438.00 | DOLL | \$1.00    | \$ | \$26,438.00 |
| 0570 | 20099ES842 |     | PAVE MARK TEMP PAINT STOP BAR                                                  | 990.00    | LF   |           | \$ |             |
| 0580 | 20100ES842 |     | PAVE MARK TEMP PAINT LINE ARROW                                                | 157.00    | EACH |           | \$ |             |
| 0590 | 20359NN    |     | GALVANIZED STEEL CABINET<br>(PLANNING LOOPS)(BOONE US 25)                      | 1.00      | EACH |           | \$ |             |
| 0600 | 20359NN    |     | GALVANIZED STEEL CABINET<br>(PLANNING LOOPS)(KENTON MP 4-7)                    | 1.00      | EACH |           | \$ |             |
| 0610 | 20360ES818 |     | WOOD POST<br>(PLANNING LOOPS)(BOONE US 25)                                     | 2.00      | EACH |           | \$ |             |
| 0620 | 20360ES818 |     | WOOD POST<br>(PLANNING LOOPS)(BOONE US 42)                                     | 3.00      | EACH |           | \$ |             |

252198

PROPOSAL BID ITEMS

Page 3 of 4

Report Date 5/19/25

| LINE | BID CODE   | ALT | DESCRIPTION                                                           | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|------------|-----|-----------------------------------------------------------------------|----------|------|-----------|----|--------|
| 0630 | 20360ES818 |     | WOOD POST<br>(PLANNING LOOPS)(KENTON MP 4-7)                          | 2.00     | EACH |           | \$ |        |
| 0640 | 20360ES818 |     | WOOD POST<br>(PLANNING LOOPS)(KENTON MP 8-9)                          | 1.00     | EACH |           | \$ |        |
| 0650 | 20391NS835 |     | ELECTRICAL JUNCTION BOX TYPE A<br>(PLANNING LOOPS)(BOONE US 25)       | 1.00     | EACH |           | \$ |        |
| 0660 | 20391NS835 |     | ELECTRICAL JUNCTION BOX TYPE A<br>(PLANNING LOOPS)(KENTON MP 4-7)     | 1.00     | EACH |           | \$ |        |
| 0670 | 20468EC    |     | ELECTRICAL JUNCTION BOX-10 X 8 X 4<br>(PLANNING LOOPS)(BOONE US 42)   | 3.00     | EACH |           | \$ |        |
| 0680 | 20468EC    |     | ELECTRICAL JUNCTION BOX-10 X 8 X 4<br>(PLANNING LOOPS)(KENTON MP 8-9) | 1.00     | EACH |           | \$ |        |
| 0690 | 20782NS714 |     | PAVE MARKING THERMO-BIKE                                              | 48.00    | EACH |           | \$ |        |
| 0700 | 22906ES403 |     | CL3 ASPH SURF 0.38A PG64-22                                           | 2,340.00 | TON  |           | \$ |        |
| 0710 | 23010EN    |     | PAVE MARK TEMP PAINT STOP BAR-24 IN                                   | 468.00   | LF   |           | \$ |        |
| 0720 | 23158ES505 |     | DETECTABLE WARNINGS<br>(NEW)                                          | 181.00   | SQFT |           | \$ |        |
| 0730 | 24386EC    |     | PAVE MARKING THERMO-BIKE LANE<br>ARROW                                | 48.00    | EACH |           | \$ |        |
| 0740 | 24683ED    |     | PAVE MARKING-THERMO DOTTED LANE<br>EXTEN                              | 120.00   | LF   |           | \$ |        |
| 0750 | 24683ED    |     | PAVE MARKING-THERMO DOTTED LANE<br>EXTEN<br>(12 INCH)                 | 465.00   | LF   |           | \$ |        |
| 0760 | 24683ED    |     | PAVE MARKING-THERMO DOTTED LANE<br>EXTEN<br>(6 INCH)                  | 555.00   | LF   |           | \$ |        |
| 0770 | 24685EC    |     | CL2 ASPH SURF 0.38A PG64-22                                           | 1,200.00 | TON  |           | \$ |        |
| 0780 | 26119EC    |     | INSTALL RADAR PRESENCE DETECTOR<br>TYPE A                             | 46.00    | EACH |           | \$ |        |
| 0790 | 26228EC    |     | ELECTRONIC DELIVERY MGMT SYSTEM<br>(BOONE US 25) (FD05)               | 1.00     | LS   |           | \$ |        |
| 0800 | 26228EC    |     | ELECTRONIC DELIVERY MGMT SYSTEM<br>(BOONE US 42) (FD05)               | 1.00     | LS   |           | \$ |        |
| 0810 | 26228EC    |     | ELECTRONIC DELIVERY MGMT SYSTEM<br>(KENTON US 25 MP 4-7) (FD05)       | 1.00     | LS   |           | \$ |        |
| 0820 | 26228EC    |     | ELECTRONIC DELIVERY MGMT SYSTEM<br>(KENTON US 25 MP 8-9) (FD05)       | 1.00     | LS   |           | \$ |        |

Section: 0002 - ROADWAY

| LINE | BID CODE   | ALT | DESCRIPTION                                                | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|------------|-----|------------------------------------------------------------|----------|------|-----------|----|--------|
| 0830 | 02562      |     | TEMPORARY SIGNS                                            | 120.00   | SQFT |           | \$ |        |
| 0840 | 02650      |     | MAINTAIN & CONTROL TRAFFIC<br>(BOONE US 25) (FE01)         | 1.00     | LS   |           | \$ |        |
| 0850 | 02650      |     | MAINTAIN & CONTROL TRAFFIC<br>(KENTON US 25 MP 4-7) (FE01) | 1.00     | LS   |           | \$ |        |
| 0860 | 02671      |     | PORTABLE CHANGEABLE MESSAGE SIGN                           | 6.00     | EACH |           | \$ |        |
| 0870 | 02720      |     | SIDEWALK-4 IN CONCRETE                                     | 74.00    | SQYD |           | \$ |        |
| 0880 | 03302      |     | REPAIR CONCRETE CURB                                       | 26.00    | LF   |           | \$ |        |
| 0890 | 20904ED    |     | RECONSTRUCT CURB BOX INLET<br>(TOP PHASE ONLY)             | 5.00     | EACH |           | \$ |        |
| 0900 | 23158ES505 |     | DETECTABLE WARNINGS<br>(NEW)                               | 28.00    | SQFT |           | \$ |        |

Section: 0003 - SIGNING

| LINE | BID CODE | ALT | DESCRIPTION                  | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|----------|-----|------------------------------|----------|------|-----------|----|--------|
| 0910 | 06406    |     | SBM ALUM SHEET SIGNS .080 IN | 46.50    | SQFT |           | \$ |        |
| 0920 | 06472    |     | INSTALL SPAN MOUNTED SIGN    | 6.00     | EACH |           | \$ |        |
| 0930 | 21373ND  |     | REMOVE SIGN                  | 4.00     | EACH |           | \$ |        |

Section: 0004 - SIGNALIZATION

| LINE | BID CODE   | ALT | DESCRIPTION                  | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|------------|-----|------------------------------|----------|------|-----------|----|--------|
| 0940 | 20188NS835 |     | INSTALL LED SIGNAL-3 SECTION | 10.00    | EACH |           | \$ |        |
| 0950 | 24955ED    |     | REMOVE SIGNAL EQUIPMENT      | 3.00     | EACH |           | \$ |        |

Section: 0005 - DEMOBILIZATION

| LINE | BID CODE | ALT | DESCRIPTION    | QUANTITY | UNIT | UNIT PRIC | FP | AMOUNT |
|------|----------|-----|----------------|----------|------|-----------|----|--------|
| 0960 | 02569    |     | DEMOBILIZATION | 1.00     | LS   |           | \$ |        |