


NOTES

- ① SEE PLANS FOR SIZE, LOCATION AND PAYMENT FOR RACEWAY WHEN REQUIRED.
- ② FABRIC WRAPPED BACKFILL DRAIN, (ONE PER WEEP HOLE).
3. ALL WALLS AND SLABS ARE 8" THICK UNLESS OTHERWISE SHOWN.
- ④ MEDIAN BARRIER WALL MAY BE CAST-IN-PLACE, FIXED OR SLIP-FORMED, CONTRACTOR'S OPTION.
5. WALL REINFORCEMENT IS DETAILED FOR CAST-IN-PLACE WALLS. FOR SLIP-FORMED WALLS SEE CURRENT STANDARD DRAWING RDB-231 FOR STEEL DETAIL.

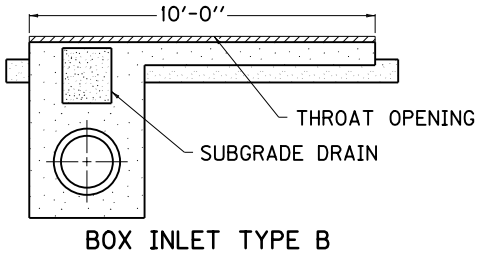

KENTUCKY
DEPARTMENT OF HIGHWAYS

CONCRETE MEDIAN
BARRIER BOX INLET

STANDARD DRAWING NO. RDB-230-08

SUBMITTED: *David Kott* 11-21-07
DIRECTOR DIVISION OF DESIGN DATE

APPROVED: *November Mathews* 11-21-07
STATE HIGHWAY ENGINEER DATE